

Tender Notification for

**Survey, Design, Supply, Installation, Testing and
Commissioning including Civil Works of 66/11 kV AIS Grid
substation with 2 PTRs on Single point responsibility basis
at Goyla Khurd, New Delhi**

NIT NO CMC/BR/21-22/RB/KG/936 DT 24.07.2021

Due Date for Submission: 13.08.2021 1530HRS

BSES RAJDHANI POWER LTD (BRPL)

Corporate Identification Number: **U74899DL2001PLC111527**

Telephone Number: +91 11 3009 9999

Fax Number: +91 11 2641 9833

Website: www.bsesdelhi.com

Table of Contents

Section No.	Description
Section-I	Request for Quotation
Section-II	Instruction to Bidders
Section-III	Special Terms & Condition of Contracts
Section-IV	General Terms and Condition –Supply
Section-V	Price format- Supply
Section-VI	General Terms and Condition –Erection, Testing & Commissioning
Section-VII	Price format- Erection, Testing & Commissioning
Section-VIII	General Terms and Condition –Civil
Section-IX	Price format- Civil
Section-X	Grand Summary of the Quoted Price
Section-XI	Vendor Code of Conduct
Annexure-I	Technical Specifications

SECTION – I: REQUEST FOR QUOTATION

1.00 Event Information

BRPL invites sealed tenders in 2 envelopes for following scope of work:

Sl. No.	Description	Estimated Cost (Rs.)	Qty.	Delivery & Installation at
1	Survey, Design, Supply, Installation, Testing and Commissioning including Civil Works of 66/11 kV AIS Grid substation with 2 PTRs on Single point responsibility basis at Goyla Khurd, New Delhi	22 Crores	As per BOQ Attached	Delhi, Sites

The bidder must qualify the requirements as specified in clause 2.0 stated below.

All envelopes shall be duly super scribed "Survey Survey, Design, Supply, Installation, Testing and Commissioning including Civil Works of 66/11 kV AIS Grid substation with 2 PTRs on Single point responsibility basis at Goyla Khurd, New Delhi NIT NO CMC/BR/21-22/RB/KG/936"

- 1.01 The schedule of specifications with detail terms & conditions can be obtained from address given below against submission of non-refundable demand draft of **Rs.1180/-** drawn in favour of BSES Rajdhani Power Ltd, payable at Delhi. The tender documents & detail terms and conditions can also be downloaded from the website "**www.bsesdelhi.com --> Tenders --> BSES Rajdhani Power Ltd --> Open Tenders**".

In case tender papers are downloaded from the above website, then the bidder has to enclose a demand draft covering the cost of bid documents.

- 1.02 Bids will be received up to 13/08/2021 1530 HRS at the address given at 3.01 below. Part A of the Bid shall be opened on 13/08/2021 1600 HRS.

Part B of the Bid will be opened in case of Techno-Commercially qualified Bidders and the date of opening of same shall be intimated in due course. It is the sole responsibility of the bidder to ensure that the bid documents reach this office on or before the last date.

- 1.03 BSES Rajdhani Power Ltd reserves the right to accept/reject any or all Tenders without assigning any reason thereof in the event of following

- I. Earnest Money Deposit (EMD) of value **Rs 22,00,000/-** is not deposited in shape of Demand Draft/Pay Order/Banker's Cheque /Bank Guarantee drawn in favour of BSES Rajdhani Power Ltd, payable at Delhi.
- II. The offer does not contain prices indicating break-up towards all taxes & duties in prescribed format
- III. Complete Technical details are not enclosed.
- IV. Tender is received after due date and time.
- V. Technical offer contains any prices
- VI. Prices are not FIRM and subject to Price Variation

2.0 Qualification Criteria:-

Technical

The prospective bidder must qualify all of the following requirements to participate in the bidding process and bidder who meets following requirements will be considered as successful bidder and BRPL has a right to disqualify those bidders who do not meet these requirements.

- a. The bidder must have designed, supplied, installed and commissioned Grid substations of 66 kV or higher rating including civil works on turnkey basis in Five (5) years from date of Bid opening. The list of such installations shall be furnished as per format attached in Schedule-I (List of Installations) of Technical Specification.
- b. Bidder shall procure major equipments from the approved vendor list of BRPL as per technical specifications.
- c. The bidder should have qualified technical & dedicated QA personnel at various stages of manufacture & testing. Documentary evidence in support of QR to be provided.
- d. Bidder shall submit the performance certificates for 1 year satisfactory performance from 2 reputed companies for executed jobs.
- e. The bidder must furnish valid Type Test Certificate carried out at CPRI/ERDA for all major equipment. The Test certificate should not be more than five years old.
In case type test reports are older than five (5) years from the date of bid opening, bidder shall submit the undertaking that- "since the last type test, the product has not undergone any change in design and the material used and the dimensions of the product are the same as the one on which the type test was conducted".
Non submission of type test reports will lead to rejection of the offer. In any case, Type test report older than ten (10) years shall not be acceptable and bid is liable for rejection.
- f. The bidder should have established field quality assurance system & safety organization designed to achieve high level of reliability at various stage of field services required for successful erection, testing, & commissioning. Documentary evidence in support of QR to be provided.

Financial:

- a. Bidder must have average annual turnover of minimum Rs 50 Crores during last Three (3) financial years i.e. FY 17-18, 18-19 and 19-20, duly certified CA certificate to be submitted. Balance Sheet of 3 financial years also to be provided.
- b. The bidder shall submit a "NO LITIGATION" certificate as per attached format.
- c. The Bidder should possess valid Electrical contractor license issued by competent statutory agency to undertake work in Delhi/NCR. In case bidder is not having this license, Bidder has to give the undertaking that it will be obtained by them before the start of the work at site where copy of valid license shall be submitted to BRPL before the award of the PO.
- d. The bidder must possess valid ISO 9001:2000 certification
- e. An undertaking (self-certificate) that the bidder has not been blacklisted/debarred by any central/state government institution including electricity boards.
- f. The bidder must have valid PAN No., GST No., in addition to other statutory compliances. The bidder must submit the copy of registrations and submit an undertaking that the bidder shall comply with all the statutory compliances as per the applicable laws/rules etc. before the start of the work.

Note: All reference dates shall be taken as the date of technical bid opening

Notwithstanding anything stated above, BRPL reserves the right to assess bidder's capability to perform the contract, assess the capability and installed capacity of the Bidder for carrying out the supplies, should the circumstances warrant such assessment in the overall interest of the purchaser. BRPL also reserves the right to evaluate the bidder based on performance of past supplies/projects executed in BRPL. In this regard the decision of the purchaser is final.

3.00 **Bidding and Award Process**

Bidders are requested to submit their offer strictly in line with this tender document. **NO DEVIATION IS ACCEPTABLE.** BRPL shall response to the clarifications raised by various bidders and the will be distributed to all participating bidders through website.

3.01 **BID SUBMISSION**

The bidders are required to submit the bids in 2 (two) parts to the following address

**Head of Department
Contracts & Material Department
BSES Rajdhani Power Ltd
1st Floor, C Block
BSES Bhawan, Nehru Place
New Delhi 110019**

PART A: TECHNICAL **BID** comprising of following (1 original + 1 copy)

- EMD in prescribed format
- Non-refundable demand draft for Rs 1180/- in case the forms are downloaded from website
- Documentary evidence in support of qualifying criteria
- Technical Details / Filled in GTP/Type test report etc
- Qualified Manpower available & Organization Chart
- Testing Facilities
- Copies of Orders, Execution /Performance Certificate & Other Documents to support the QC as per clause 2.0
- Original Tender documents duly stamped & signed on each page as token of acceptance
- Acceptance to Commercial Terms and Conditions viz Delivery schedule/period, Payment terms, PBG etc

PART B: FINANCIAL **BID** comprising of (1 original only)

- Price strictly in the Format enclosed indicating Break up of basic price, taxes & duties, transportation etc

3.02 **TIME SCHEDULE**

The bidders should complete the following within the dates specified as under:

S. No.	Steps	Date
1	Date of sale of bid documents	24.07.2021
2	Pre-Bid meeting	02.08.2021 1430 HRS
3	Pre-Bid meeting link	https://bsesbrpl.webex.com/meet/rakesh.bansal
4	Last date of Queries, if any	06.08.2021
5	Last date of receipt of bid documents	13.08.2021 1530HRS
6	Date & time of opening of tender – Part A	13.08.2021 1600HRS

This is a two part bid process. Bidders are to submit the bids in 2(two) parts

Both these parts should be furnished in separate sealed covers super scribing NIT no. DUE DATE OF SUBMISSION, with particulars as **PART-A TECHNICAL BID & COMMERCIAL TERMS & CONDITIONS** and **Part-B FINANCIAL BID** and these sealed envelopes should again be placed in another sealed cover which shall be submitted before the due date & time specified.

Part – A: Technical Bid should not contain any cost information whatsoever and shall be submitted within the due date.

PART B: This envelope will be opened after techno-commercial evaluation and only of the qualified bidders.

REVERSE AUCTION: Purchaser reserves the right to use **REVERSE AUCTION** through SAP-SRM as an optional tool as an integral part of the entire tendering process. All techno-commercially qualified bidders shall participate in this event

Notwithstanding anything stated above, the Purchaser reserves the right to assess bidder's capability to perform the contract, should the circumstances warrant such assessment in the overall interest of the purchaser. In this regard the decision of the purchaser is final.

In case RA is not concluded/conducted for any reasons, a "final no regret" financial bid in a sealed envelope will be called for from all qualified bidders

BIDS RECEIVED AFTER DUE DATE AND TIME SHALL BE LIABLE TO REJECTION

4.00 Award Decision

4.01 Purchaser intends to award the business on a lowest bid basis, so suppliers are encouraged to submit the bid competitively. The decision to place purchase order/LOI solely depends on purchaser on the cost competitiveness across multiple lots, quality, delivery and bidder's capacity, in addition to other factors that Purchaser may deem relevant.

4.02 In the event of your bid being selected by purchaser (and / or its affiliates) and you subsequent DEFAULT on your bid; you will be required to pay purchaser (and / or its affiliates) an amount equal to the difference in your bid and the next lowest bid on the quantity declared in NIT/RFQ.

4.03 In case any supplier is found unsatisfactory during the delivery process, the award will be cancelled and BRPL reserves the right to award other suppliers who are found fit.

4.04 Qty Variation: The purchaser reserves the rights to vary the quantity by (+/-) 30% of the tender quantity.

5.00 **Market Integrity**

We have a fair and competitive marketplace. The rules for bidders are outlined in the Terms & Conditions. Bidders must agree to these rules prior to participating. In addition to other remedies available, we reserves the right to exclude a bidder from participating in future markets due to the bidder's violation of any of the rules or obligations contained in the Terms & Condition. A bidder who violates the marketplace rules or engages in behavior that disrupts the fair execution of the marketplace shall be restricted from bidding for a length of time, depending upon the seriousness of the violation. Examples of violations include, but are not limited to:

- Failure to honor prices submitted to the marketplace.
- Breach of the terms of the published in Request for Quotation/NIT.

6.00 **Confidentiality**

All information contained in this RFQ is confidential and shall not be disclosed, published or advertised in any manner without written authorization from BRPL. This includes all bidding information submitted.

All RFQ documents remain the property of BRPL and all bidders are required to return these documents to BRPL upon request.

Bidders who do not honor these confidentiality provisions will be excluded from participating in future bidding events.

7.00 **Contact Information**

Technical or Commercial clarifications, if any, as regards this RFQ shall be sought in writing and sent by mail to following address. The same shall not be communicated through phone.

	Technical	Commercial
Contact Person	Mr. Sheshadri Krishnapura(HOD-TSG)	Mr. Pankaj Goyal
Address	BSES Rajdhani Power Ltd , 2 nd Floor, B Block, BSES Bhawan, Nehru Place, New Delhi 110019	BSES Rajdhani Power Ltd , 1 st Floor, C Block, BSES Bhawan, Nehru Place, New Delhi 110019
Email	sheshadri.krishnapura@relianceada.com abhinav.r.srivastava@relianceada.com	pankaj.goyal@relianceada.com kumar.ga.gaurav@relianceada.com

SECTION – II: INSTRUCTION TO BIDDERS

1.00 GENERAL

BSES Rajdhani Power Ltd, hereinafter referred to as "The Company " are desirous of awarding work for "Survey, Design, Supply, Installation, Testing and Commissioning including Civil Works of 66/11 kV AIS Grid substation with 2 PTRs on Single point responsibility basis at Goyla Khurd, New Delhi".

2.00 SCOPE OF WORK

The scope of the work is as per BOQ in the tender.

3.00 DISCLAIMER

This Document includes statements, which reflect various assumptions, which may or may not be correct .Each Bidder shall conduct its own estimation and analysis and should check the accuracy, reliability and completeness of the information in this Document and obtain independent advice from appropriate sources in their own interest.

Neither Purchaser nor its employees will have any liability whatsoever to any Bidder or any other person under the law or contract, the principles of restitution or unjust enrichment or otherwise for any loss, expense or damage whatsoever which may arise from or be incurred or suffered in connection with anything contained in this Document, any matter deemed to form part of this Document, provision of Services and any other information supplied by or on behalf of Purchaser or its employees, or otherwise arising in any way from the selection process for the Supply.

Though adequate care has been taken while issuing the Bid document, the Bidder should satisfy itself that Documents are complete in all respects. Intimation of any discrepancy shall be given to this office immediately.

This Document and the information contained herein are Strictly Confidential and are for the use of only the person(s) to whom it is issued. It may not be copied or distributed by the recipient to third parties (other than in confidence to the recipient's professional advisors).

4.00 COST OF BIDDING

The Bidder shall bear all cost associated with the preparation and submission of its Bid and the company will be in no case be responsible or liable for those costs.

5.00 BIDDING DOCUMENTS

The Scope of Work, Bidding Procedures and Contract Terms are described in the Bidding Documents. In addition to the covering letter accompanying Bidding Documents, the Bidding Documents include:

Request for Quotation (RFQ) - Section - I
Instructions to Bidders (ITB) - Section - II
Special Terms & Conditions of Contract (SCC) - Section –III
General Terms and Condition Supply (GCC-Supply) - Section –IV

Price Format Supply- Section V
General Terms and Condition Erection, Testing & Commissioning (GCC-ETC) - Section –VI
Price Format Erection, Testing & Commissioning - Section VII
General Terms and Condition –Civil - Section VIII
Price format- Civil – Section IX
Grand Summary of the Quoted Price – Section X
Vendor Code of Conduct - Section XI
Technical Specifications - Annexure I

The Bidder is expected to examine the Bidding Documents, including all Instructions, Forms, Terms and Specifications. Failure to furnish all information required by the Bidding Documents or submission of a Bid not substantially responsive to the Bidding Documents in every respect will may result in the rejection of the Bid.

6.00 AMENDMENT OF BIDDING DOCUMENTS

At any time prior to the deadline for submission of Bids, the Company may for any reasons, whether at its own initiative or in response to a clarification requested by a prospective Bidder, modify the Bidding Documents by amendment.

The Amendment shall be part of the Bidding Documents, pursuant to Clause 5.00, and it will be notified in web site www.bsesdelhi.com, and will be binding on them.

In order to afford prospective Bidders reasonable time in which to take the Amendment into account in preparing their Bids, the Company may, at its discretion, extend the deadline for the submission of Bids. The same shall be published as a corrigendum in website www.bsesdelhi.com.

Purchaser shall reserve the rights to following

- extend due date of submission
- modify tender document in part/whole
- cancel the entire tender

Bidders are requested to visit website regularly for any modification/clarification/ corrigendum/addendum of the bid documents

7.00 LANGUAGE OF BID

The Bid prepared by the Bidder, and all correspondence and documents relating to the Bid exchanged by the Bidder and the Purchaser shall be written in the English Language. Any printed literature furnished by the Bidder may be written in another Language, provided that this literature is accompanied by English translation, in which case, for purposes of interpretation of the Bid, the English translation shall govern.

8.00 DOCUMENTS COMPRISING THE BID

The Bid prepared and submitted by the Bidder shall comprise the following components:

- Bid Form, Price & other Schedules (STRICTLY AS PER FORMAT) and Technical Data Sheets completed in accordance with Technical Specification
- All the Bids must be accompanied with the required EMD as mentioned in the Section-I against each tender.
- Tender documents duly stamped and signed on each page by authorized signatory

9.00 BID FORM

9.01 The Bidder shall submit one "Original" and one "Copy" of the Un-priced Bid Form, Price Schedules & Technical Data Sheets duly filled in as per attached specification/BOM etc enclosed.

9.02 EMD

The bidder shall furnish, as part of its bid, an EMD amounting as specified in the RFQ. The EMD is required to protect the Purchaser against the risk of Bidder's conduct which would warrant forfeiture.

The EMD shall be denominated in any of the following form:

- (a) Banker's Cheque / Demand Draft/Pay Order drawn in favour of BSES Rajdhani Power Ltd, payable at Delhi.
- (b) Bank Guarantee valid for One hundred Twenty (120) days after due date of submission or amended due date of submission drawn in favour of BSES Rajdhani Power Ltd, BSES Bhawan, Nehru Place, New Delhi 110019

The EMD may be forfeited in case of:

- (a) The Bidder withdraws its bid during the period of specified bid validity

OR

- (b) In the case of a successful Bidder, if the Bidder does not
 - (i) Accept the Purchase Order/ Work Order, or
 - (ii) Furnish the required performance security BG.

10.00 BID PRICES

10.01 Bidders shall quote for the entire Scope of Supply/Work with a break-up of prices for individual items and Taxes & Duties. The total Bid Price shall also cover all the Supplier's obligations mentioned in or reasonably to be inferred from the Bidding Documents in respect of Design, Supply, Transportation to site, Erection, testing & commissioning all in accordance with the requirement of Bidding Documents The Bidder shall complete the appropriate Price Schedules included herein, stating the Unit Price for each item & total Price with taxes, duties & freight upto destination.

10.02 The prices offered shall be inclusive of all costs as well as Duties, Taxes and Levies paid or payable during execution of the supply work, breakup of price constituents, should be there. The Bidder is required, at his expense, to obtain all the information he may require to enable him to submit his tender including necessary visits to the site to ascertain the local conditions, procurement of necessary materials, labour, etc., requirements of the local/government/public authorities in such matters.

10.03 Prices quoted by the Bidder shall be "**Firm**" and not subject to any price adjustment during the performance of the Contract. **A Bid submitted with an adjustable price/ Price Variation Clause will be treated as non-responsive and rejected.**

11.00 BID CURRENCIES

Prices shall be quoted in Indian Rupees Only.

12.00 PERIOD OF VALIDITY OF BIDS

12.01 Bids shall remain valid for 120 days from the due date of submission of the Bid & subsequent corrigendum/amendment/extension of due date of submission.

12.02 Notwithstanding Clause 12.01 above, the Purchaser may solicit the Bidder's consent to an extension of the Period of Bid Validity. The request and the responses thereto shall be made in writing and sent by post/courier.

13.00 ALTERNATIVE BIDS

Bidders shall submit Bids, which comply with the Bidding Documents. Alternative Bids will not be considered. The attention of Bidders is drawn to the provisions regarding the rejection of Bids in the terms and conditions, which are not substantially responsive to the requirements of the Bidding Documents.

14.00 FORMAT AND SIGNING OF BID

14.01 The original Bid Form and accompanying documents, clearly marked "Original Bid" and "copy" must be received by the Purchaser at the date, time and place specified pursuant to Clauses 15.0 and 16.0. In the event of any discrepancy between the original and the copy, the original shall govern.

14.02 The original and copies of the Bid shall be typed or written in indelible ink and shall be signed by the Bidder or a person or persons duly authorized to sign on behalf of the Bidder. **Such authorization shall be indicated by written Power-of-Authority accompanying the Bid.**

14.03 The Bid shall contain no interlineations, erasures or overwriting except as necessary to correct errors made by the Bidder, in which case such corrections shall be initialed by the person or persons signing the Bid.

15.00 SEALING AND MARKING OF BIDS

15.01 Bid submission: One original & one Copy (hard copies) of all the Bid Documents shall be sealed and submitted to the Purchaser before the closing time for submission of the bid.

15.02 The Technical Documents and the EMD shall be enclosed in a sealed envelope and the said envelope shall be super scribed with —"Technical & EMD". The price bid shall be inside another sealed envelope with super scribed "Financial Bid ". Both these envelopes shall be sealed inside another big envelope. All the envelopes should bear the Name and Address of the Bidder and marking for the Original and Copy. The envelopes should be super scribed with —"Tender Notice No. & Due date of opening".

15.03 The Bidder has the option of sending the Bids in person. Bids submitted by Email/Telex/Telegram /Fax will be rejected. No request from any Bidder to the Purchaser to collect the proposals from Courier/Airlines/Cargo Agents etc shall be entertained by the Purchaser.

16.00 DEADLINE FOR SUBMISSION OF BIDS

16.01 The original Bid, together with the required copies, must be received by the Purchaser at the address specified earlier.

16.02 The Purchaser may, at its discretion, extend the deadline for the submission of Bids by amending the Bidding Documents, in which case all rights and obligations of the Purchaser and Bidders previously subject to the

deadline will thereafter be subject to the deadline as extended.

17.00 **ONE BID PER BIDDER**

Each Bidder shall submit only one Bid by itself. **No Joint Venture is acceptable.** A Bidder who submits or participates in more than one Bid will cause all those Bids to be rejected.

18.00 **LATE BIDS**

Any Bid received by the Purchaser after the deadline for submission of Bids prescribed by the Purchaser, pursuant to Clause 16.0, will be declared "Late" and shall be rejected and returned unopened to the Bidder.

19.00 **MODIFICATIONS AND WITHDRAWAL OF BIDS**

19.01 The Bidder is not allowed to modify or withdraw its Bid after the Bid's submission.

20.00 **PROCESS TO BE CONFIDENTIAL**

Information relating to the examination, clarification, evaluation and comparison of Bids and recommendations for the award of a contract shall not be disclosed to Bidders or any other persons not officially concerned with such process. Any effort by a Bidder to influence the Purchaser's processing of Bids or award decisions may result in the rejection of the Bidder's Bid.

21.00 **CLARIFICATION OF BIDS**

To assist in the examination, evaluation and comparison of Bids, the Purchaser may, at its discretion, ask the Bidder for a clarification of its Bid. All responses to requests for clarification shall be in writing and no change in the price or substance of the Bid shall be sought, offered or permitted.

22.0 **PRELIMINARY EXAMINATION OF BIDS / RESPONSIVENESS**

22.01 Purchaser will examine the Bids to determine whether they are complete, whether any computational errors have been made, whether required sureties have been furnished, whether the documents have been properly signed, and whether the Bids are generally in order. Purchaser may ask for submission of original documents in order to verify the documents submitted in support of qualification criteria.

22.02 Arithmetical errors will be rectified on the following basis. If there is a discrepancy between the unit price and the total price per item that is obtained by multiplying the unit price and quantity, the unit price shall prevail and the total price per item will be corrected. If there is a discrepancy between the Total Amount and the sum of the total price per item, the sum of the total price per item shall prevail and the Total Amount will be corrected.

22.03 Prior to the detailed evaluation, Purchaser will determine the substantial responsiveness of each Bid to the Bidding Documents including production capability and acceptable quality of the Goods offered. A substantially responsive Bid is one, which conforms to all the terms and conditions of the Bidding Documents without material deviation.

22.04 Bid determined as not substantially responsive will be rejected by the purchaser and/or the Purchaser and may not subsequently be made responsive by the Bidder by correction of the non - conformity.

23.00 **EVALUATION AND COMPARISON OF BIDS**

The evaluation of Bids shall be done based on the delivered cost competitiveness basis.

- 23.01 The evaluation of the Bids shall be a stage-wise procedure. The following stages are identified for evaluation purposes: In the first stage, the Bids would be subjected to a responsiveness check. The Technical Proposals and the Conditional ties of the Bidders would be evaluated.
- 23.02 Subsequently, the Financial Proposals along with Supplementary Financial Proposals, if any, of Bidders with Techno-commercially Acceptable Bids shall be considered for final evaluation.
- 23.03 The Purchaser's evaluation of a Bid will take into account, in addition to the Bid price, the following factors, in the manner and to the extent indicated in this Clause:
- Delivery Schedule
 - Conformance to Qualifying Criteria
 - Deviations from Bidding Documents

Bidders shall base their Bid price on the terms and conditions specified in the Bidding Documents.

The cost of all quantifiable deviations and omissions from the specification, terms and conditions specified in Bidding Documents shall be evaluated. The Purchaser will make its own assessment of the cost of any deviation for the purpose of ensuring fair comparison of Bids.

- 23.04 Any adjustments in price, which result from the above procedures, shall be added for the purposes of comparative evaluation only to arrive at an "Evaluated Bid Price". Bid Prices quoted by Bidders shall remain unaltered.

24.00 **CONTACTING THE PURCHASER**

- 24.01 If any Bidder wishes to contact the Purchaser on any matter related to the Bid, from the time of Bid opening to the time of contract award, the same shall be done in writing only.
- 24.02 Any effort by a Bidder to influence the Purchaser and/or in the Purchaser's decisions in respect of Bid evaluation, Bid comparison or Contract Award, will result in the rejection of the Bidder's Bid.

25.00 **THE PURCHASER 'S RIGHT TO ACCEPT ANY BID AND TO REJECT ANY OR ALL BIDS**

The Purchaser reserves the right to accept or reject any Bid and to annul the Bidding process and reject all Bids at any time prior to award of Contract, without thereby incurring any liability to the affected Bidder or Bidders or any obligation to inform the affected Bidder or Bidders of the grounds for the Purchaser's action.

26.00 **AWARD OF CONTRACT**

- 26.01 The Purchaser will award the Contract to the successful Bidder whose Bid has been determined to be the lowest-evaluated responsive Bid, provided further that the Bidder has been determined to be qualified to satisfactorily perform the Contract. Purchaser reserves the right to award order to other bidders in the tender, provided it is required for timely execution of project & provided he agrees to come to the lowest rate.
- 26.02 The Purchaser intends to issue separate Purchase/Work Orders viz
- a) Purchase Order for Supply
 - b) Work Order for Installation, Testing & Commissioning

27.00 **THE PURCHASER 'S RIGHT TO VARY QUANTITIES**

The Purchaser reserves the right to vary the quantity i.e. increase or decrease the numbers/quantities without any change in terms and conditions during the execution of the Order.

28.00 LETTER OF INTENT/ NOTIFICATION OF AWARD

The letter of intent/ Notification of Award shall be issued to the successful Bidder whose bids have been considered responsive, techno-commercially acceptable and evaluated to be the lowest (L1). The successful Bidder shall be required to furnish a letter of acceptance within 7 days of issue of the letter of intent /Notification of Award by Purchaser. The date of LOI/PO shall be treated as Start date of work.

29.00 CONTRACT PERFORMANCE BANK GAURANTEE

Within 15 days of the receipt of Notification of Award/ Letter of Intent/PO from the Purchaser, the successful Bidder shall furnish the Performance Bank Guarantee towards faithful performance of Contract for an amount of 10% (Ten percent) of the Contract Price. The Performance Bond shall be valid up to completion period/handing over, whichever is earlier plus 3 months claim period. Upon submission of the performance security, the EMD shall be released. 2 (two) nos. separate CPBG's shall be submitted against Supply, ETC.

30.00 CORRUPT OR FRADULENT PRACTICES

30.01 The Company requires that the Bidders observe the highest standard of ethics during the procurement and execution of the Project. In pursuance of this policy, the Company:

(a) Defines, for the purposes of this provision, the terms set forth below as follows:

"Corrupt practice" means behavior on the part of officials in the public or private sectors by which they improperly and unlawfully enrich themselves and/or those close to them, or induce others to do so, by misusing the position in which they are placed, and it includes the offering, giving, receiving, or soliciting of anything of value to influence the action of any such official in the procurement process or in contract execution; and

"Fraudulent practice" means a misrepresentation of facts in order to influence a award process or the execution of a contract to the detriment of the Company, and includes collusive practice among Bidders (prior to or after Bid submission) designed to establish Bid prices at artificial non -competitive levels and to deprive the Company of the benefits of free and open competition.

(b) Will reject a proposal for award if it determines that the Bidder recommended for award has engaged in corrupt or fraudulent practices in competing for the contract in question ;

(c) Will declare a firm ineligible, either indefinitely or for a stated period of time, to be awarded a contract if it at any time determines that the firm has engaged in corrupt or fraudulent practices in competing for, or in executing, a contract.

30.02 Furthermore, Bidders shall be aware of the provision stated in the Terms and Conditions of Contract.

31.00 COMPLETION PERIOD

08 Months from the date of PO

01 months: Engineering - Drawing submission & approval and release of civil drawings to site for construction

04 months: Civil Construction at Site and Electrical equipment Manufacturing

03 months: Erection, Testing and Commissioning of electrical equipment and related accessories and handing over

Section III

SPECIAL TERMS AND CONDITIONS OF CONTRACT

- 1.1. Bidders are requested to visit the site to understand the scope of work, site conditions and requirements prior to Bidding. Hence, no price/time escalation shall be admissible on these accounts.
- 1.2. The scope of this tender includes supply , survey , design , engineering , manufacturer , shop testing , inspection , packing , dispatch , loading , unloading and storage at site, storage and construction insurance , assembly , erection , structural , complete pre-commissioning checks , testing and commissioning at site , obtaining statutory clearance & certification from state electrical inspector and handing over of Grid to owner on single point responsibility basis.
- 1.3. The scope includes supply of all barricading, free issued materials (including installation, transportation, loading & unloading), dewatering, watch and ward and transportation of scrap (generated at Site), balance free-issued material, dismantled material from site to BRPL store including loading & unloading and no additional charges shall be paid against these activities. Used barricading material will be taken back by bidder soon after job is handed over or as directed by BRPL Engineer-In-Charge (E-I-C). No additional cost for these items will be paid to the Bidder. Any leakage, pilferage and damage of the material shall be in vendor's scope.
- 1.4. Joints & Terminations installation shall only be done by OEM. No additional cost for this item will be paid to the Bidder. Contractor to provide all support to the Jointers for doing Joints & Terminations of Joint Kits.
- 1.5. Prices for all the activities shall be FIRM till the actual completion of the job. Statutory variation will be allowed for direct supplies only wherever breakup of Taxes & Duties are available in Price Bid. In case bidder has not submitted any price breakup, no variation on account of statutory variation shall be paid extra by BRPL.
- 1.6. There will be no price escalation given to bidder even if there is delay in the project due to ROW permission.
- 1.7. Permission from road owning agencies & statutory clearance for road cutting shall be taken by Bidder. The Bidder shall follow-up with local authorities and other connected persons that may require carrying out the job under this work order.
- 1.8. Electrical Inspector Clearance fees shall be in Bidder's scope. The related fees, payments and pursuance work shall be in scope of Bidder only.
- 1.9. Bidder has to submit the technical parameters with details of Spares for each rating with catalogue, reference codes etc.
- 1.10. Wherever BRPL specifications are not available relevant IS/IEC to be followed. All Drawings mentioned in the Tender Specification and other required for the completeness of the tender shall be submitted. Drawing submission process shall not be deemed complete if all the requirements are not complied during the submission of the same.
- 1.11. The bidder should have own testing equipment's/they have to provide like IR Tester, Hi Pot Test Kit, Earth Tester, etc with Calibration Certificates for testing.

- 1.12. The Bidder should have own Safety equipment like Neon Tester, Portable Earth, Earthing discharge rod etc. along with Calibration Certificates of all the equipment.
- 1.13. The Bidder should have all major tools and tackles required for installation, testing & commissioning works.
- 1.14. Bidder has to submit the item wise price bifurcation in bid. Un-priced copy must be attached with the Part A. Reverse Auction will be carried out on Lump sum Basis/Total Landed Cost i.e. Supply + ETC+ Civil.
- 1.15. Any other material not specifically mentioned above but required for successful commissioning and operation is in the scope of bidder. Prior approval shall be taken from central engineering department before execution. Commercial approval shall be taken from C&M Department before execution.
- 1.16. Successful bidder has to adhere to the statutory compliance.
- 1.17. Successful Bidder has to depute the safety officer and quality officer separately at site for whole duration and they have to submit the safety report and quality report to BRPL E-I-C on weekly basis.
- 1.18. Successful bidder has to send the weekly progress report to BRPL EIC.
- 1.19. In case of any major deviation, deletion or addition which bidder may feel is relevant to this project & for its safe operation and completion of works; Bidder may clearly highlight and communicate the same to the purchaser with his bid.
- 1.20. Necessary Statutory Clearances from CEI of Delhi & any other authority for energizing shall be in the scope of this tender.
- 1.21. After commissioning of the complete system and final approval of Electrical Inspector & Compliance to punch points observed to the satisfaction of Projects as per statutory requirements, system shall be handed over to BRPL.

1.22. Guarantee period/Defect Liability period:

The Guarantee Period will be equipment/service/work specific and shall be as specified in the Technical Specifications for the equipment/material/service/work and where Technical specifications are not part of contract documents or guarantee period is not specified in the Technical specifications, the guarantee period shall be as per the Special Terms and Conditions of the Contract. In case of no mention of the guarantee period in Technical specifications, Defect liability period will be 24 Months from the Date of Commissioning or 30 months from the date of delivery of final lot of supplies made, whichever is later.

If during the defects liability period any materials / items are found to be defective, these shall be replaced or rectified by the bidder at his own cost within 30 days from the date of receipt of intimation

1.23. Failure during Guarantee Period:

If the equipment and material supplied/service or work rendered under the contract fails to perform its due, rated & intended quality performance, during the Guarantee period, the bidder is liable to undertake repair/rectify/replace the equipment and material supplied/service or work rendered under the contract within time frame as specified below at bidder's cost to make the equipment and material supplied/service or work rendered under the contract of performing its due, rated and intended quality performance. If bidder fails to repair/rectify/replace the equipment or material supplied/service or work rendered under the contract, failed in Guarantee Period, purchaser will be at liberty to get the same done at bidder's risks and costs and recover all

such expenses plus the purchaser own charges (@ 15% of expenses incurred), from the bidder or from the "Performance Bank Guarantee" as the case may be.

If during the Warranty/ Guarantee period some parts of the supplies are replaced owing to the defects/ damages under the Warranty, the Warranty period for such replaced parts shall be until the expiry of twelve months from the date of such replacement or renewal or until the end of original Guarantee period, whichever is later.

- a) Service Engineer Availability to Attend, Identify & Restore Defects (Minor) of materials/Equipment's under Guarantee Period within 48 Working Hours (Exclusion of Material Support Cases)
- b) Spare Material Delivery for rectification of defect (Major) Under Guarantee Period within Two Weeks. Bidder must keep Requisite Inventory of Critical Spares & Other Equipments Covered in Guarantee Period to Restore Equipment within Two Weeks.
- c) In Case Of Complete Replacement of material, within a Period of 4 Weeks.

Note: BRPL is in the business of Power distribution and is committed to providing reliable and continuous power supply to its customers. In case of any fault in the system, BRPL's top most priority is to rectify the fault and restore the system as soon as possible and maintain the supply.

If during the defect liability period any fault occurs in the system due to faulty materials, design or workmanship, BRPL shall intimate the vendor of such occurrence for taking immediate corrective action.

However, if the situation, in BRPL's sole discretion warrants an emergency restoration, it reserves the right to take immediate action for identifying the fault and restoring the system with available resources & materials or with help from any other third party agency under intimation to the Vendor. All costs of replacement, substitution, shipping, labour and other related expenses including taxes and levies incurred in connection with the restoration of fault plus 15% of expenses incurred as administrative overheads shall be for the account of Vendor. BRPL will charge the vendor for the costs incurred for fault restoration or may set off such costs against any amounts payable by BRPL to the Vendor or deduct from the PBG submitted by the Vendor. Vendor shall pay BRPL the amount within 30 days.

Root cause analysis of the fault shall be done jointly by BRPL's CES & O&M teams and Vendor. In case the fault is due to any reason other than faulty materials, design or workmanship, Vendor shall be exempted from any further action or Cost.

- 1.24. All the bay equipment (i.e- LA, CT, PT, Disc Insulator, String, Suspension Insulator, Bushing etc.) shall be Polymeric type in the place of porcelain with creepage 31mm/kV. Rest of the parameter to be followed as per tech spec.

1.25. PROJECT INFORMATION & COMPLETION

The contractor shall be fully responsible to complete the project in time. It is desired that the project should be completed as per the schedule from the date of LOI or purchase order whichever is earlier. The detailed completion schedule shall be prepared by vendor and shall be submitted at the time of detailed engineering for approval. Vendor has to submit the progress report fortnightly with this tender/as asked by the Purchaser.

1.26. PROJECT IMPLEMENTATION & EXECUTION CONTROL

The bidders are requested to submit the following along with the bid, about the project implementation & execution methodology.

- a) Write up/overview of project Plan
- b) Implementation Methodology
- c) Project Organization Chart for Representatives, Project Office & site office teams along with the functions.
- d) Bar Chart & Network Diagram (with critical path) for various activities to achieve scheduled completion.

SECTION IV

GENERAL TERMS AND CONDITIONS - SUPPLY

- 1.01** All the Bids shall be prepared and submitted in accordance with these instructions.
- 1.02** Bidder shall bear all costs associated with the preparation and delivery of its Bid, and the Purchaser will in no case shall be responsible or liable for these costs.
- 1.03** The Bid should be submitted by the Bidder in whose name the bid document has been issued and under no circumstances it shall be transferred /sold to the other party.
- 1.04** The Purchaser reserves the right to request for any additional information and also reserves the right to reject the proposal of any Bidder, if in the opinion of the Purchaser, the data in support of RFQ requirement is incomplete.
- 1.05** The Bidder is expected to examine all instructions, forms, terms & conditions and specifications in the Bid Documents. Failure to furnish all information required in the Bid Documents or submission of a Bid not substantially responsive to the Bid Documents in every respect may result in rejection of the Bid. However, the Purchaser's decision in regard to the responsiveness and rejection of bids shall be final and binding without any obligation, financial or otherwise, on the Purchaser.
- 2.0 Definition of Terms**
- 2.01** "Purchaser" shall mean BSES Rajdhani Power Limited, on whose behalf this bid enquiry is issued by its authorized representative / officers.
- 2.02** "Bidder" shall mean the firm who quotes against this bid enquiry issued by the Purchaser. "Supplier" or "Supplier" shall mean the successful Bidder and/or Bidders whose bid has been accepted by the Purchaser and on whom the "Letter of Acceptance" is placed by the Purchaser and shall include his heirs, legal representatives, successors and permitted assigns wherever the context so admits.
- 2.03** "Supply" shall mean the Scope of Contract as described.
- 2.04** "Specification" shall mean collectively all the terms and stipulations contained in those portions of this bid document known as RFQ, Commercial Terms & Condition, Instructions to Bidders, Technical Specifications and the Amendments, Revisions, Deletions or Additions, as may be made by the Purchaser from time to time.
- 2.05** "Letter of Acceptance" shall mean the official notice issued by the Purchaser notifying the Supplier that his proposal has been accepted and it shall include amendments thereto, if any, issued by the Purchaser. The "Letter of Acceptance" issued by the Purchaser shall be binding on the "Supplier" The date of Letter of Acceptance shall be taken as the effective date of the commencement of contract.
- 2.06** "Month" shall mean the calendar month and "Day" shall mean the calendar day.
- 2.07** "Codes and Standards" shall mean all the applicable codes and standards as indicated in the Specification.
- 2.08** "Offer Sheet" shall mean Bidder's firm offer submitted to BRPL in accordance with the specification.

- 2.09** "Contract" shall mean the "Letter of Acceptance/Purchase Order" issued by the Purchaser.
- 2.10** "Contract Price" shall mean the price referred to in the "Letter of Acceptance/Purchase Order".
- 2.11** "Contract Period" shall mean the period during which the "Contract" shall be executed as agreed between the Supplier and the Purchaser in the Contract inclusive of extended contract period for reason beyond the control of the Supplier and/or Purchaser due to force majeure.
- 2.12** "Acceptance" shall mean and deemed to include one or more of the following as will be stipulated in the specification:
- a) The written acceptance of material by the inspector at suppliers works to ship the materials.
 - b) Acceptance of material at Purchaser site stores after its receipt and due inspection/ testing and release of material acceptance voucher.
 - c) Where the scope of the contract includes supplying, acceptance shall mean issue of necessary equipment / material takeover receipt after installation & commissioning and final acceptance.

3.0 Contract Documents & Priority

Contract Documents: The terms and conditions of the contract shall consist solely of these RFQ conditions and the offer sheet. The several documents forming the Contract are to be taken as mutually explanatory of one another, but in case of ambiguities or discrepancies, the same shall be explained and adjusted by the Purchaser, who shall thereupon issue to the Contractor, instructions thereon. In such event, unless otherwise provided in the Contract, the priority of the documents forming the Contract shall be as follows:

1. Any amendments to Contract
2. Commercial Terms & Conditions of the Contract
3. Clarifications/addendum/corrigendum to Tender
4. Terms & Conditions of the Tender

4.0 Scope of Supply -General

- 4.01** The "Scope of Supply" shall be on the basis of Bidder's responsibility, completely covering the obligations, responsibility and supplies provided in this Bid enquiry whether implicit or explicit.
- 4.02** Bidder shall have to quote for the Bill of quantities as listed elsewhere.
- 4.03** All relevant drawings, data and instruction manuals.

5.0 Quality Assurance and Inspection

- 5.01** Immediately on award of contract, the bidder shall prepare detailed quality assurance plan/test procedure identifying the various stages of manufacture, quality checks performed at each stage, raw material inspection and the Customer hold points. The document shall also furnish details of method of checking, inspection and acceptance standards / values and get the approval of Purchaser before proceeding with manufacturing. However, Purchaser shall have right to review the inspection reports, quality checks and results of suppliers in house inspection department which are not Customer hold points and the supplier shall comply with the remarks made by purchaser or his representative on such reviews with regards to further testing, rectification or rejection, etc. In case of standard items, BRPL shall forward the standard QAP which is to be followed by vendor during manufacturing.
- 5.02** Witness and Hold points are critical steps in manufacturing, inspection and testing where the supplier is obliged to notify the Purchaser in advance so that it may be witnessed by the Purchaser. Final inspection is a mandatory hold point. The supplier can proceed with the work past a hold point only after clearance by purchaser or a witness waiver letter from BRPL.

- 5.03 The performance of waiver of QA activity by Purchaser at any stage of manufacturing does not relieve the supplier of any obligation to perform in accordance with and meet all the requirements of the procurement documents and also all the codes & reference documents mentioned in the procurement document nor shall it preclude subsequent rejection by the purchaser.
- 5.04 On completion of manufacturing the items can only be dispatched after receipt of dispatch instructions issued by the Purchaser.
- 5.05 All in-house testing and inspection shall be done without any extra cost. The in-house inspection shall be carried out in presence of BRPL/BRPL authorized third party inspection agency. Cost of Futile/abortive visit(s) shall be debited from the invoices
- 5.06 Purchaser reserves the right to send any material being supplied to any recognized laboratory for testing, wherever necessary and the cost of testing shall be borne by the Bidder. In case the material is found not in order with the technical requirement / specification, the charges along with any other penalty which may be levied is to be borne by the bidder. To avoid any complaint the supplier is advised to send his representative to the stores to see that the material sent for testing is being sealed in the presence of bidder's representative.

6.0 Packing, Packing List & Marking

- 6.01 **Packing:** Supplier shall pack or shall cause to be packed all Commodities in crates/boxes/drums/containers/cartons and otherwise in such a manner as shall be reasonably suitable for shipment by road or rail to BRPL, Delhi/New Delhi stores/site without undue risk of damage in transit.
- 6.02 **Packing List:** The contents of each package shall be itemized on a detailed list showing the exact weight, extreme outside dimensions (length, width & weight) of each container/box/drum/carton, Item SAP Code, PO No & date. One copy of the packing list shall be enclosed in each package delivered.

7.01 Price basis for supply of materials

Bidder has to quote their prices on Landed Cost Basis and quote separate price for each item.

FIRM prices for supply to BRPL Delhi/New Delhi stores inclusive of packing, forwarding, loading at manufacturer's premises, payment of all taxes, GST, Freight, any other local charges etc.

The above supply prices shall also include unloading at BRPL Delhi/New Delhi stores/site.

Transit insurance will be arranged by bidder.

8.0 Terms of payment and billing – SUPPLY

- a) 10% advance against submission of BG of equivalent amount valid up to completion period/handing over , whichever is earlier plus 3 months claim period. In case of delay, the BG shall be extended suitably.
- b) 75% pro-rata of supply value shall be payable against R/A bills for supply of equipment and materials within 30 days against receipt of material at site and submission of following documents duly certified by BRPL Project-in-charge:
- i. Consignee copy of LR
 - ii. Detailed invoice showing commodity description, qty, unit & total price,
 - iii. Original certificate issued by BRPL confirming receipt of material at site & acceptance

- iv. Dispatch clearance & inspection report issued by the inspection authority
- v. Packing List, Test Reports
- vi. Guarantee Certificate.

- c) 10% pro-rata after installation/erection of equipment duly certified by BRPL Project-in-charge
- d) 5% pro-rata after completion of successful acceptance testing, commissioning and Handing Over of the entire Installation and duly certified by BRPL Project-in-charge and submission of PBG of 10% of contract value valid up to Defect Liability period i.e. 24 months from the date of Handing over of entire Installation Plus 3 months towards Claim period.

9.0 Price Validity

- 9.01 All bids submitted shall remain valid, firm and subject to unconditional acceptance by BRPL Delhi for 120 days from the due date of submission & subsequent corrigendum/amendment/extension of due date of submission. For awarded suppliers/contractors, the prices shall remain valid and firm till contract completion.

10.0 Performance Guarantee

- 10.01 Bank guarantee shall be drawn in favour of "BSES Rajdhani Power Ltd" as applicable. The performance Bank guarantee shall be in the format as specified by BRPL.
- 10.02 Contract performance bank guarantee of total 10% of the contract price shall be submitted within 15 days of award of contract with the validity till completion of the contract period.
- 10.03 Contractor shall submit the performance bank guarantee equivalent to the 10% of the contract value at the time of claiming the last payment as per clause no. 8.0(C) (Terms of payment and billing – SUPPLY), with the validity of the bank guarantee till Defect Liability Period plus 3 months towards Claim period.

11.0 Forfeiture

- 11.01 Each Performance Bond established under Clause 10.0 shall contain a statement that it shall be automatically and unconditionally forfeited without recourse and payable against the presentation by BRPL of this Performance Bond, to the relevant bank referred to above, together with a simple statement that supplier has failed to comply with any term or condition set forth in the Contract.
- 11.02 Each Performance BG established under will be automatically and unconditionally forfeited without recourse if BRPL at its sole discretion determines that supplier has failed to comply with any term or condition set forth in the contract.

12.0 Release

All Performance Bonds will be released without interest within seven (7) days from the last date up to which the Performance Bond has to be kept valid (as defined in Clause 10.0) except for the case set forth in Clause 21.0.

13.0 Guarantee of Performance

The bidder shall stand guarantee that the equipment and material supplied/service or work rendered under the contract is free from design, manufacturing, material, construction, erection & installation and workmanship & quality defects and is capable of its due, rated and intended quality performance, as an integrated product

delivered under the contract for a specific period termed as Guarantee Period. The bidder should also guarantee that the equipment/material is new and unused except for the usage required for the tests and checks required as part of quality assurance.

14.0 Guarantee Period/Defects Liability Period

The Guarantee Period will be equipment/service/work specific and shall be as specified in the Technical Specifications for the equipment/material/service/work and where Technical specifications are not part of contract documents or guarantee period is not specified in the Technical specifications, the guarantee period shall be as per the Special Terms and Conditions of the Contract. In case of no mention of the guarantee period in Technical specifications, Defect liability period will be 24 Months from the Date of Commissioning or 30 months from the date of delivery of final lot of supplies made, whichever is later.

If during the defects liability period any materials / items are found to be defective, these shall be replaced or rectified by the bidder at his own cost within 30 days from the date of receipt of intimation.

Cost of repairs on failure in Guarantee Period:

The cost of repairs/rectification /replacement, apart from the actual cost of repairs/rectification/replacement is also inclusive of all bidder costs of required transportation, site inspection /mobilization/dismantling and re-installation costs as applicable, to be borne by the bidder. The bidder has to ensure that the interruption in the usage of intended purpose of the equipment is minimized to the maximum extent In lieu of the time taken for repairs/rectification/replacement.

15.0 Latent Defect:

Hidden defects in manufacturing or design of the product supplied and which could not be identified by the tests conducted but later manifested during operation of the equipment are termed as latent defects. Bidder shall further be responsible for 'free replacement' for another period of FIVE years from the end of the guarantee period for any 'Latent Defects' if noticed and reported by the Purchaser.

16.0 Support beyond the Guarantee Period

The Bidder shall ensure availability of spares and necessary support for a period of at least 10 years post completion of guarantee period of equipment /technology supplied against this contract. BRPL shall be duly intimated by the Vendor of End of Life Support for the product /technology supplied at least 12 months in advance.

17.0 Return, Replacement or Substitution

BRPL shall give Supplier notice of any defective Commodity promptly after becoming aware thereof. BRPL may at its discretion elect to return defective Commodities to Supplier for replacement, free of charge to BRPL, or may reject such Commodities and purchase the same or similar Commodities from any third party. In the latter case BRPL shall furnish proof to Supplier of the cost of such substitute purchase. In either case, all costs of any replacement, substitution, shipping, labour and other related expenses incurred in connection with the return and replacement or for the substitute purchase of a Commodity hereunder should be for the account of Supplier. BRPL may set off such costs against any amounts payable by BRPL to Supplier. Supplier shall reimburse BRPL for the amount, if any, by which the price of a substitute Commodity exceeds the price for such Commodity as quoted in the Bid.

18.0 Effective Date of Commencement of Contract:

The date of the issuance of the Letter of Acceptance/Purchase Order shall be treated as the effective date of the commencement of Contract.

19.0 Time – The Essence of Contract

The time and the date of completion of the "Supply" as stipulated in the Letter Of Acceptance / Purchase order issued to the Supplier shall be deemed to be the essence of the "Contract". The Supply has to be completed not later than the aforesaid Schedule and date of completion of supply.

20.0 The Laws and Jurisdiction of Contract:

The laws applicable to this Contract shall be the Laws in force in India. To the best of their ability, the parties hereto shall endeavor to resolve amicably between themselves all disputes arising in connection with this work order. If the same remain unresolved within thirty (30) days of the matter being raised by either party, either party may refer the dispute for adjudication by arbitration. The arbitration shall be undertaken by the sole arbitrator jointly appointed by the parties. In case the parties fail to arrive at consensus to appoint the sole arbitrator, either party may approach the Court for appointing an arbitrator under Section 11 of the Arbitration and Conciliation Act, 1996 and the award of the said sole arbitrator, shall be final and binding upon the parties. The arbitration proceeding shall be conducted in accordance with this provisions of the Indian Arbitration & Conciliation Act, 1996 (as amended up to date) and the venue of such arbitration shall be the city of New Delhi only. The Arbitration shall be conducted in English language only. The courts at Delhi shall have the exclusive jurisdiction over the subject matter of Arbitration/dispute. The cost of the Arbitration shall be equally shared by the parties as per directions of the Sole Arbitrator.

21.0 Events of Default

21.01 Events of Default. Each of the following events or occurrences shall constitute an event of default ("Event of Default") under the Contract:

- (a) Supplier fails or refuses to pay any amounts due under the Contract;
- (b) Supplier fails or refuses to deliver Commodities conforming to this RFQ/ specifications, or fails to deliver Commodities within the period specified in P.O. or any extension thereof
- (c) Supplier becomes insolvent or unable to pay its debts when due, or commits any act of bankruptcy, such as filing any petition in any bankruptcy, winding-up or reorganization proceeding, or acknowledges in writing its insolvency or inability to pay its debts; or the Supplier's creditors file any petition relating to bankruptcy of Supplier;
- (d) Supplier otherwise fails or refuses to perform or observe any term or condition of the Contract and such failure is not remediable or, if remediable, continues for a period of 30 days after receipt by the Supplier of notice of such failure from BRPL.

22.0 Consequences of Default

- (a) If an Event of Default shall occur and be continuing, BRPL may forthwith terminate the Contract by written notice.

(b) In the event of an Event of Default, BRPL may, without prejudice to any other right granted to it by law, or the Contract, take any or all of the following actions;

(i) present to Bank for forfeiture to the relevant bank the Performance Bond;

(ii) Purchase the same or similar Commodities from any third party; and/or

(iii) Recover any losses and/or additional expenses BRPL may incur as a result of Supplier's default.

23.0 Liquidated Damages

23.01 If supply of items / equipment is delayed beyond the supply schedule as stipulated in LOI/PO, then the Supplier shall be liable to pay the Purchaser for delay a sum of 0.5% (half percent) of the total price for every week of delay or part thereof for undelivered units.

23.02 The total amount for delay under the contract will be subject to a maximum of ten percent (10%) of the total contract value.

23.03 The Purchaser may, without prejudice to any method of recovery, deduct the amount for such damages from any amount due or which may become due to the Supplier or from the Performance Bond or file a claim against the supplier. The levy payment or deduction of such damages shall not relieve the Contractor from his obligation to complete the Supply on time or from any other part of his obligation and liabilities under the Contract. Once the maximum is reached, the Company reserves the right for termination of contract without any liabilities to the Company.

In the event of an extension of time being granted by the EIC, in writing for the Completion of the works, this clause shall be applicable after the expiry of such an extended period.

24.0 Statutory variation in Taxes and Duties

The total order value shall remain **FIRM** within stipulated delivery period and shall not be adjusted on account of any price increase/variations in commodities & raw materials. However Statutory Taxes, duties and Levies imposed by Competent Authorities by way of fresh notification(s) within the stipulated delivery period shall be borne by BRPL on submission of necessary documents claiming such variation. The variation will be applicable only on such value wherever price breakup of same is submitted by vendor/available in PO/WO

25.0 Force Majeure

25.01 General

An "Event of Force Majeure" shall mean any event or circumstance not within the reasonable control directly or indirectly, of the Party affected, but only if and to the extent that:

(i) Such event or circumstance materially and adversely affects the ability of the affected Party to perform its obligations under this Contract, and the affected Party has taken all reasonable precautions, due care and reasonable alternative measures in order to prevent or avoid the effect of such event on the affected party's ability to perform its obligations under this Contract and to mitigate the consequences thereof.

- (ii) For the avoidance of doubt, if such event or circumstance would not have materially and adversely affected the performance of the affected party had such affected party followed good industry practice, such event or circumstance shall not constitute force majeure.
- (iii) Such event is not the direct or indirect result of the failure of such Party to perform any of its obligations under this Contract.
- (iv) Such Party has given the other Party prompt notice describing such events, the effect thereof and the actions being taken in order to comply with above clause.

25.02 Specific Events of Force Majeure subject to the provisions of above clause, Events of Force Majeure shall include only the following to the extent that they or their consequences satisfy the above requirements:

- (i) The following events and circumstances:
 - a) Effect of any natural element or other acts of God, including but not limited to storm, flood, earthquake, lightning, cyclone, landslides or other natural disasters.
 - b) Explosions or fires
- (ii) War declared by the Government of India, provided that the ports at Mumbai are declared as a war zone.
- (iii) Dangers of navigation, perils of the sea.

25.03 Notice of Events of Force Majeure If a force majeure event prevents a party from performing any obligations under the Contract in part or in full that party shall:

- i) Immediately notify the other party in writing of the force majeure events within 7(seven) working days of the occurrence of the force majeure event
- ii) Be entitled to suspend performance of the obligation under the Contract which is affected by force majeure event for the duration of the force majeure event.
- iii) Use all reasonable efforts to resume full performance of the obligation as soon as practicable
- iv) Keep the other party informed of all such efforts to resume full performance of the obligation on a regular basis.
- v) Provide prompt notice of the resumption of full performance or obligation to the other party.

25.04 Mitigation of Events of Force Majeure Each Party shall:

- (i) Make all reasonable efforts to prevent and reduce to a minimum and mitigate the effect of any delay occasioned by an Event of Force Majeure including recourse to alternate methods of satisfying its obligations under the Contract;
- (ii) Use its best efforts to ensure resumption of normal performance after the termination of any Event of Force Majeure and shall perform its obligations to the maximum extent practicable as agreed between the Parties; and
- (iii) Keep the other Party informed at regular intervals of the circumstances concerning the event of Force Majeure, with best estimates as to its likely continuation and what measures or contingency planning it is taking to mitigate and or terminate the Event of Force Majeure.

25.05 Burden of Proof In the event that the Parties are unable in good faith to agree that a Force Majeure event has occurred to an affected party, the parties shall resolve their dispute in accordance with the provisions of this Agreement. The burden of proof as to whether or not a force Majeure event has occurred shall be upon the party claiming that the force majeure event has occurred and that it is the affected party.

25.06 Termination for Certain Events of Force Majeure. If any obligation of any Party under the Contract is or is reasonably expected to be delayed or prevented by a Force Majeure event for a continuous period of more than 3 months, the Parties shall promptly discuss in good faith how to proceed with a view to reaching a solution on mutually agreed basis. If a solution on mutually agreed basis cannot be arrived at within a period of 30 days after the expiry of the period of three months, the Contract shall be terminated after the said period of 30 days and neither Party shall be liable to the other for any consequences arising on account of such termination.

- 25.07 The Purchaser may terminate the contract after giving 7(seven) days notice if any of following occurs:
- a) Contractor fails to complete execution of works within the approved schedule of works, terms and conditions
 - b) In case the contractor commits any Act of Insolvency, or adjudged insolvent
 - c) Has abandoned the contract
 - d) Has failed to commence work or has suspended the progress of works
 - e) Has failed to proceed the works with due diligence and failed to make such due progress
- 25.08 Limitation of Force Majeure event. The Supplier shall not be relieved of any obligation under the Contract solely because cost of performance is increased, whether as a consequence of adverse economic consequences or otherwise.
- 25.09 Extension of Contract Period due to Force Majeure event The Contract period may be extended by mutual agreement of Parties by way of an adjustment on account of any period during which an obligation of either Party is suspended due to a Force Majeure event.
- 25.10 Effect of Events of Force Majeure. Except as otherwise provided herein or may further be agreed between the Parties, either Party shall be excused from performance and neither Party shall be construed to be in default in respect of any obligations hereunder, for so long as failure to perform such obligations shall be due to an event of Force Majeure."

26.0 Transfer and Sub-Letting

The Supplier shall not sublet, transfer, assign or otherwise part with the Contract or any part thereof, either directly or indirectly, without prior written permission of the Purchaser.

27.0 Recoveries

When ever under this contract any money is recoverable from and payable by the bidder, the purchaser shall be entitled to recover such sum by appropriating in part or in whole by deducting any sum due to which any time thereafter may become due from the supplier in this or any other contract. Should the sum be not sufficient to cover the full amount recoverable the bidder shall pay to the purchaser on demand the remaining balance.

28.0 Waiver

Failure to enforce any condition herein contained shall not operate as a waiver of the condition itself or any subsequent breach thereof.

29.0 Indemnification

Notwithstanding contrary to anything contained in this RFQ, Supplier shall at his costs and risks make good any loss or damage to the property of the Purchaser and/or the other Supplier engaged by the Purchaser and/or the employees of the Purchaser and/or employees of the other Supplier engaged by the Purchaser whatsoever arising out of the negligence of the Supplier while performing the obligations under this contract.

30.0 Documentation:

The Bidder's shall procure all equipment from BRPL approved sources as per attached specifications. The Bidder's shall submit 5 copies of Material/Type Test Certificates, O&M Manuals, and Approved & As-built drawings. The Bidder's shall ensure for the strict compliance to the specifications and Field Quality Procedures issued by BRPL Engineer in-charge.

31.0 Commissioning Spares

Commissioning Spares shall be deemed to be included in the quoted prices

32.0 Limitation on Liability

Notwithstanding anything to the contrary in the Purchase Order but subject to clause 33 Consequential Damages, the aggregate liability of either Party to the other Party in respect of all claims for Liabilities arising under the Purchase Order shall not exceed the aggregate value of the Purchase Order(s) under which the Liabilities arose except that such limitation shall not apply to the Contractor's indemnification obligations in accordance with clause 29 Indemnification herein.

33.0 Consequential Damages

Notwithstanding anything to the contrary in the Purchase Order, except for breach of obligations under Non-disclosure and except as expressly provided in a Purchase Order, in no event, as a result of breach of contract or breach of warranty or otherwise, shall either Party hereto or either Party's Affiliates or sub Contractors, be liable under the Purchase Order to the other Party for any consequential, special, indirect, exemplary or incidental damages, and/or for any lost profits, goodwill or revenues of such Party, howsoever arising, before or after Acceptance of the Goods and whether or not such damages are foreseeable.

SECTION V

PRICE FORMAT – SUPPLY

66/11kV Goyla Khurd SS with 2 PTR with provision of 3rd PTR_Supply

S.No.	Item Description	Qty	UOM	Basic (Rs)	Freight (Rs)	GST (Rs)	Unit Landed (Rs)	Total Landed Cost (Rs)
1	66/11KV 31.5 MVA Power Transformer including NIFPS	2	Set					
2	AL Pipe bus bar	1	Lot					
3	66kV 3 Pole SF6 circuit Breaker along with support structures	8	Nos					
4	66kV Current Transformer	24	Nos					
5	66kV Potential Transformer	6	Nos					
6	66kV CVT	12	Nos					
7	Horizontally Rotating double break motorized isolators with one earth switch	16	Nos					
8	Horizontally rotating double break motorized isolator with 2 earth switch	2	Nos					
9	Horizontally rotating double break motorized Tendem isolator without earth switch	7	Nos					
10	Bay Marshaling Kiosk	8	Nos					
11	Galvanized lattice type Gantry Structure with tower and Beam including Civil Work	1	Lot					
12	String bus with Quad zebra ACSR conductor for bus coupler and jumpering	1	Lot					
13	Double and single suspension tension string Hardware assembly for Quad Zebra	1	Lot					
14	Support Structure for all equipments including post insulators	1	Lot					
15	Station aux Transformer 11/0.433kV 400kVA	1	No					
16	66kV Control Relay Panel							
16a	66kV Control Relay Panel Line Feeder	4	Set					
16b	66kV Control Relay Panel Transformer Feeder	3	Set					
16c	66kV Control Relay Panel Bus coupler Feeder	1	Set					
17	220V Li-Ion Battery bank	1	Set					
18	DCDB with battery charger	1	Nos					
19	ACDB	1	Nos					

20	11kV APFC 4 Stage, 7.2 MVAR capacitor bank with motorized isolator	2	Sets					
21	11kV APFC 2 Stage, 3.6 MVAR capacitor bank with motorized isolator	2	Sets					
22	66kV single phase gapless metal oxide surge arrester	21	Nos					
23	66kV Bus Post Insulator including civil work	1	Lot					
24	Cable Mounting Structure including civil work	4	Set					
25	LA Mounting Structure including civil work	21	Nos					
26	SCADA RTU	1	Set					
27	11kV VCB switchgear with numerical protective relays(as per SLD)		Set					
27a	11kV VCB switchgear with numerical protective relays(as per Tender SLD)- Incoming	4	Set					
27b	11kV VCB switchgear with numerical protective relays(as per Tender SLD)- Buscoupler	2	Set					
27c	11kV VCB switchgear with numerical protective relays(as per Tender SLD)- outgoing	30	Set					
27d	11kV VCB switchgear with numerical protective relays(as per Tender SLD)- Station Transformer	1	Set					
27e	11kV VCB switchgear with numerical protective relays(as per Tender SLD)- Capacitor (7.2 MVAR = 0.9 MVar + 1.8 MVar + 1.8 MVar +2.7 MVar)	2	Set					
27f	11kV VCB switchgear with numerical protective relays(as per Tender SLD)- Capacitor (3.6 MVAR = 0.9 MVAR + 2.7 MVAR)	2	Set					
27g	11kV VCB switchgear Bus PT with riser with numerical protective relays(as per SLD)	2	Set					
27h	11kV VCB switchgear Bus PT Panel with numerical protective relays(as per SLD)	2	Set					
27i	Earthing trucks for 11KV Panels -Bus Earthing Truck	2	Set					
27j	Earthing trucks for 11KV Panels -Cable Earthing Truck	2	Set					
28	Grounding and earthing of entire substation including earthing of transformer fence and capacitor bank fence	1	Set					
29	High mast 16M for Lighting cum Lightning	4	Nos					

	Protection							
30	Indoor LED lighting system including emergency lighting	1	Lot					
31	Air conditioning for complete substation building except Toilet and Pantry	1	Lot					
32	Exhaust and Ventillation for Toilet, Pantry	1	Lot					
33	Fire detection and alarm system for building	1	Lot					
34	Building and outdoor lightning protection system	1	Lot					
35	Control cables							
A	6CX4Sqmm	2000	Mtr					
B	6CX2.5Sqmm	8000	Mtr					
C	10CX2.5Sqmm	8000	Mtr					
36	LT power cable including terminations and Glands							
A	2CX10Sqmm	1000	Mtr					
B	4CX10Sqmm	1000	Mtr					
C	4CX300Sqmm	100	Mtr					
D	2CX2.5Sqmm	1200	Mtr					
E	4CX95Sqmm	100	Mtr					
37	11kV Power cable termination kits along with Glands qty							
A	11KV 3CX400Sqmm I/D cable termination	14	Nos					
B	11KV 1CX1000Sqmm I/D cable termination	39	Nos					
38	Spacers,Connectors, C- Wedge Connectors and Clamps with 10% Spare as per requirement	1	Lot					
39	Cable trays as per requirement	1	Lot					
40	Cabling between equipments and RTU as per requirement	1	Lot					
41	Control Cable Terminations and Glands as per requirement	1	Lot					
42	Fire Extinguisher as per spec	1	Lot					
43	Outdoor LED Lighting including street lighting with poles as per spec	1	Lot					
44	Line current differential relay for remote location as per spec	4	Nos					
45	Video Surveilence system as per spec	1	Set					
46	Spares, Maintenance tools & tackles (as per specs)	1	Lot					
47	Cable entry sealing as per requirement	1	lot					

48	Cable Mounting Structure for 11 kV Cables from Transformer	3	Set					
49	Fire Suppression System of 11KV Panels	1	lot					
50	IT Requirements as per spec/BOQ	1	Lot					
51	Merging unit for installing process bus including all accessories	1	Lot					

BOQ shall be read in conjunction with the Tender Document & General Design Criteria

Appendix- I

COMMERCIAL TERMS AND CONDITIONS - SUPPLY

Sl No	Item Description	AS PER BRPL	BIDDER'S CONFIRMATION
1	Validity	120 days from the due date of submission or amended due date of submission	
2	Price basis	a) Firm , FOR Delhi store basis. Prices shall be inclusive of all taxes & duties, freight up to Delhi stores. b) Unloading at stores - in vendor's scope c) Transit insurance in Bidder scope	
3	Payment terms	a. 10% advance against submission of BG of equivalent amount valid up to completion period/handing over, whichever is earlier plus 3 months claim period. In case of delay, the BG shall be extended suitably. b. 75 % against R/A bills within 30 days against receipt of material at site. c. 10% pro-rata after installation/erection of equipment d. 5% pro-rata after completion of successful acceptance testing, commissioning and Handing Over of the entire Installation and duly certified by BRPL Project-in-charge and submission of BG of 10% of contract value valid up to Defect Liability period i.e. 24 months from the date of Handing over of entire Installation Plus 3 months towards Claim period	
4	Completion time	08 months from date of LOI/Order	
5	Defect Liability period	24 months from the date of Handing over of entire Installation.	
6	Liquidated damages	0.5% of total price for every week delay subject to maximum of 10% of total contract value	
7	Contract Performance Bank Guarantee	10% (Ten percent) of the Contract Price valid up to completion period/handing over.	
8	Performance Bank Guarantee	10% (Ten percent) of the Contract Price valid up to Defect Liability Period plus 3 months towards claim period.	

SECTION VI

GENERAL TERMS & CONDITIONS - ERECTION, TESTING & COMMISSIONING

1. DEFINITIONS and INTERPRETATION

The following terms shall have the following meanings:

1.1 "Company": means BSES Rajdhani Power Ltd, a company incorporated under the Companies Act 1956 and having its office at BSES Bhawan, Nehru Place, New Delhi 110 019, which expression shall include its authorized representatives, agents, successors and assigns.

1.2 "Contractor": shall mean the successful Bidder / vendor to whom the contract has been awarded

1.3 "Rate": The unit rates for the work to be carried out at site shall be as per finalized unit rates through tender. The finalized rates shall be firm for the entire duration of work to be carried out by the Contractor under the work order and are not subject to escalation for any reason whatsoever.

1.4. Contract Specification: The terms "Contract Specification" shall mean the Technical specification of the work as agreed by you and description of work as detailed in Annexure-I enclosed herewith and all such particulars mentioned directly/referred to or implied as such in the contract.

1.5 SITE: The terms "Site" shall mean the working location in BRPL area. Under this tender, working location shall be as mentioned elsewhere.

1.6 ENGINEER IN CHARGE: "Engineer In-charge" means the Company's authorized representative for the purpose of carrying out the work.

2. EXAMINATION OF SITE AND LOCAL CONDITIONS:

The contractor is deemed to have visited the site of the work and ascertained therefore all site conditions and information pertaining to his work. The company shall not accept any claim whatsoever arising out of the difficult site/terrain/local conditions, if any.

3. LANGUAGE AND MEASUREMENT:

The Contract issued to the contractor by the company and all correspondence and documents relating to the Contract placed on the Bidder shall be written in English language.

Metric System shall be followed for all dimension, units etc.

4. SCOPE OF WORK:

The scope includes survey , design , engineering , manufacture , shop testing ,inspection , packing , dispatch , loading, unloading and storage at site, storage and construction insurance , assembly , erection ,structural , complete pre-commissioning checks , testing and commissioning at site , obtaining statutory clearance & certification from state electrical inspector, Municipal Corporation department (if required), Fire Officer (if required), Horticulture department (if required), and handing over to owner after successful testing & Commissioning of 66/11 kV AIS Substation at Goyla Khurd, New Delhi, BRPL on single point responsibility basis. Schedule of work shall be as per BOQ attached herewith.

After completion of E/T/C work of the scheme, Bidder has to obtain the Electrical Inspectorate's Clearance from the Electrical Inspector of Delhi Govt. Electrical Inspector Clearance fees shall be in Bidder's scope. The related fees, payments and pursuance work shall be in scope of Bidder only.

Bidder shall arrange any permission like road cutting clearance, if required, etc from the Delhi Civic authorities. The Bidder shall follow-up with local authorities and other connected persons that may be required to carry out the job under this work order.

All the labour, cranes, tool and tackles, and technical supervision etc. are including in your scope of work. Adequate number of engineers, supervisors and laborers shall be posted at site and the list of the same along with certificate of Qualification of technical staff should be submitted by the Bidder to the Engineer In Charge for checking the adequacy immediately (within seven days) after award of contract.

The Bidder shall also make his own arrangement for the accommodation/conveyance requirements for its staff at site. Company will be provided at site the adequate open space for Bidder's site store for storing the materials, tools, tackles etc. The entire Bidder's storage will be within the site premises. All the incoming and outgoing materials, equipment, tools, tackles and any other items related to said work shall be entered into the register kept for this purpose and shall be in the custody of Bidder, however company does not hold any responsibility for any loss or damage of Bidder's material etc.

All loading/unloading, of materials at work-site shall be Bidder's responsibility. Involvement of Crane/Hydra/Tractor/Trailer for this type of work shall be in your scope. Adequate weather protection shall be provided by the Bidder to keep the materials safe from sun & rain by providing covered storage space as well as using tarpaulins.

The Bidder at his own shall arrange Water and Electricity Power at his cost.

Special Instruction:-

- a. All Erection tools and tackles and testing equipment shall be available with Bidder in event of order.
- b. Penalty clause shall be incorporated in case any of workmen of Bidder is found violating safety protocol as per GCC-ETC LD Clause no 15.

Any additional work beyond the scope enumerated in the work order above shall be carried out as per the instructions of Engineer-In Charge. The company shall not entertain any claim or increase in the Work Order value due to execution of such additional work if the same is not approved by Engineer in Charge.

5. RATES:

The rates finalized for this order shall be firm for the entire duration of work carried out by the Bidder under the order and are not subject to any variation and escalation for any reason whatsoever.

The cost of insurance during loading/unloading of materials/ equipments during its storage and handling/erection at site for installation is included in the Bidder's scope and value shall be included in the unit rates finalized.

The unit rates finalized is also inclusive of barricading and watch & ward during execution and no separate charges shall be paid for the same.

6. TAXES AND DUTIES:

Prices are inclusive of all taxes and duties including GST as applicable. However, IT as per applicable rate will be deducted from your bills as Tax Deduction at Source (TDS).

The total order value shall remain **FIRM** within stipulated delivery period and shall not be adjusted on account of any price increase/variations in labour. However Statutory Taxes, duties and Levies imposed by Competent Authorities by way of fresh notification(s) within the stipulated delivery period shall be borne by BRPL on submission of necessary documents claiming such variation. The variation will be applicable only on such value wherever price breakup of same is submitted by vendor/available in PO/WO.

7. TERMS OF PAYMENT (Erection, Testing & Commissioning)

Payment shall be made as under:

(i) 10% mobilization advance against submission of Advance Bank Guarantee of equivalent amount valid up to completion period/ handing over, whichever is earlier plus 3 months claim period. In case of delay, the BG shall be extended suitably.

ii) 75% pro-rata of total installation value shall be payable against R/A bills payable within 45 days after installation / erection of material at site duly certified by Engineer in charge.

iii) 10% pro-rata of total installation value shall be payable against R/A bills payable within 30 days after testing & commissioning of material at site.

iv) 5% of contract value payable after completion of successful acceptance testing, commissioning and handing over of complete systems duly certified by Engineer in charge, submission of Electrical Inspector Clearance Certificate & submission of Performance Bank Guarantee of 10% of contract value valid up to defect liability period i.e. 24 months from the date of Handing over of entire Installation Plus 3 months towards Claim period.

All the Bank guarantees shall be submitted as per Company's format (Appendix I) and from any scheduled Bank approved by Company.

Company shall make payments of the bills either; By crossed cheque or by electronic transfer directly to Bidder's designated bank account.

8. Guarantee of Performance

The bidder shall stand guarantee that the equipment and material supplied/service or work rendered under the contract is free from design, manufacturing, material, construction, erection & installation and workmanship & quality defects and is capable of its due, rated and intended quality performance, as an integrated product delivered under the contract for a specific period termed as Guarantee Period. The bidder should also guarantee that the equipment/material is new and unused except for the usage required for the tests and checks required as part of quality assurance.

9. Guarantee period/Defect Liability period:

The Guarantee Period will be equipment/service/work specific and shall be as specified in the Technical Specifications for the equipment/material/service/work and where Technical specifications are not part of contract documents or guarantee period is not specified in the Technical specifications, the guarantee period shall be as per the Special Terms and Conditions of the Contract. In case of no mention of the guarantee period in Technical specifications, Defect liability period will be 24 Months from the Date of Commissioning or 30 months from the date of delivery of final lot of supplies made, whichever is later.

If during the defects liability period any materials / items are found to be defective, these shall be replaced or rectified by the bidder at his own cost within 30 days from the date of receipt of intimation.

10. Performance Guarantee

10.01 Bank guarantee shall be drawn in favour of "BSES Rajdhani Power Ltd" as applicable. The performance Bank guarantee shall be in the format as specified by BRPL.

10.02 Contract performance bank guarantee of total 10% of the contract price shall be submitted within 15 days of award of contract with the validity till completion of the contract period.

10.03 Bidder shall submit the performance bank guarantee equivalent to the 10% of the contract value at the time of claiming the last payment as per clause no. 7.0 (iii) (TERMS OF PAYMENT (Erection, Testing & Commissioning)), with the validity of the bank guarantee till Defect Liability Period i.e. 24 months from the date of Handing over of entire Installation plus 3 months.

11. COMPLETION PERIOD

You are required to mobilize your manpower and Tools & Tackles and furnish a list of equipments to be used for erection and commence the execution activity as per instructions of Engineer In-charge. The entire Erection, Testing & Commissioning work should be completed within 08 months from the date of issue of LOI/WO. The detailed schedule and milestone completion dates would be as per the contract schedules given from time to time by Engineer In-charge at site. You shall submit a weekly progress report to Engineer In charge.

12. CLEANLINESS

All debris shall be removed and disposed of at assigned areas on daily basis. Surplus excavated earth shall be disposed of in an approved manner. In short, you shall be fully responsible for keeping the work site clean at all times. In case of non- compliance, company shall get the same done at Bidder's risk and costs.

13. COMMISSIONING & ACCEPTANCE TEST:

After completion of the work, the Bidder shall conduct trial run/ operation in the presence of Engineer In charge. During such trial run the system shall be operated under the supervision of the Bidder. If any rectification/modification required during this period the Bidder shall do all necessary measures.

On satisfactory completion of above, the system shall be deemed to have energized and placed in commercial operation. The Engineer-in-Charge will issue an acceptance certificate.

14. WORK COMPLETION CERTIFICATION, HANDING OVER.

The work carried out by the Bidder under this order has to be certified by Engineer In-charge for satisfactory completion of work allotted to the Bidder with respect to specifications / Field Quality Procedures as per applicable standards. In case of modification/correction to be carried out, Bidder shall carry out the said modifications/correction without additional cost. The Bidder shall remain in close contact with Engineer In-Charge at site to report the general findings of the fieldwork during the initial as well as later stage of the work at site.

The Bidder shall be solely responsible for any shortage or damage of materials issued to them handling of and / or in storage and erection at site and cost of the same will be recovered from the Bidder as certified by Engineer In-Charge. Bidder must submit a periodical material reconciliation statement in the approval format with every Running Bill raise by him or end of every month whichever is earlier. The Bidder shall maintain an accurate and exhaustive record detailing

out the list of all items received by him for the purpose of erection and keep such record open for the inspection of the company.

15. PENALTY AND LIQUIDATED DAMAGES

15.1 Penalty: A penalty of 2.5% of bill amount shall be levied in each case of non-compliance of safety practices and site cleanliness.

15.2 Liquidated Damages: In the event of any delay in completion of the work beyond the stipulated time given by in order due to reasons solely attributable to the Bidder, the Bidder shall pay to the Company liquidated damages.

If the Bidder failed perform the services within the time period specified in the order, the Company shall, without prejudice to its other remedies under the contract, deduct liquidated damages a sum equivalent to 0.5 % of the total order value for each week or part there of delay until the actual date of completion up to a maximum deduction of 10% of total order value. The levy payment or deduction of such damages shall not relieve the Bidder from his obligation to complete the Works on time or from any other part of his obligation and liabilities under the Contract. Once the maximum is reached, the Company reserves the right for termination of contract without any liabilities to the Company.

In the event of an extension of time being granted by the EIC, in writing for the Completion of the works, this clause shall be applicable after the expiry of such an extended period.

Engineer In charge should specifically mention the amount of LD levied on the bill of Bidder.

18. SAFETY REGULATIONS & SAFETY CODE:

The Bidder shall indemnify the Company from any consequence arising due to Bidder's failure in respect to safety compliance.

First Aid facilities at easily accessible place shall be provided by the Bidder at his own cost as per provisions of Labor act or as advised by the Company wherever works are carried out.

All critical injuries shall be reported promptly to the Company. The report shall cover type, nature, cause, physician's report and actions for prevention of those types again.

To ensure effective enforcement of the rules and regulations relating to safety precautions, arrangements made by the Bidder shall be open to inspection by the Company.

The cost so incurred by the Bidder in providing for safety standards and requirements as above shall be deemed to be included in the rates quoted for various items under the scope of Contract and no extra amounts shall be payable to the Bidder on this account.

The Bidder shall furnish to the Company within seven days from issue of Work Order whichever is earlier, for approval of Company, the proposed safety program on how it intends to implement the safety procedures and precautions to ensure that the site is accident free.

The Bidder shall ensure adequate safety precautions at site as required under the law of the land and shall be entirely responsible for the complete safety of their workman as well as other workers at site and premises. The Bidder shall not deploy any worker below the age of 18 years.

The Bidder shall observe the safety requirements as laid down in the contract and in case of sub-contract (only after written approval of company), it shall be the responsibility of main Bidder that all safety requirements are followed by the employees and staff of the sub-vendor.

The Bidder employing two hundred employees or more, including contract workers, shall have a safety coordinator in order to ensure the implementation of safety requirements of the contract and a Bidder with lesser number of employees, including contract workers, shall nominate one of his employees to act as safety coordinator who shall liaise with the safety officer on matters relating to safety and his name shall be displayed on the notice board at a prominent place at the work site.

The Bidder shall be responsible for non-compliance of the safety measures, implications, injuries, fatalities and compensation arising out of such situations or incidents.

In case of any accident, the Bidder shall immediately submit a statement of the same to the owner and the safety officer, containing the details of the accident, any injury or casualties, extent of property damage and remedial action taken to prevent recurrence and in addition, the Bidder shall submit a monthly statement of the accidents to the owner at the end of each month.

17. STATUTORY OBLIGATIONS:

The Bidder shall take all steps as may be necessary to comply with the various applicable laws/rules including the provisions of contract labour (Regulation & Abolition Act) 1970 as amended, minimum wages Act, 1984, Workman Compensation Act, ESI Act, PF Act, Bonus Act and all other applicable laws and rules framed there under including any statutory approval required from the Central/State Govt. Ministry of Labour. Broadly, the compliance shall be as detailed below, but not limited to:

- a) An Electrical license issued by Govt. of Delhi.
- b) PF Code No. and all employees to have PF A/c No. under PF every Act, 1952.
- c) All employees to have a temporary or permanent ESI Card as per ESI Act.
- d) ESI Registration No.
- e) PAN No.
- f) Work Contract Tax Registration Number/ GSTN Registration.
- g) Labour License under Contract Labour Act (R & A) Act 1970

(The Bidder shall provide BRPL Engineer-in-charge a copy of Labour License responsible for execution of the job before start of the work.)

The Bidder must follow:

- a) Third party Insurance Policy before start of work.
- b) To follow Minimum Wages Act prevailing in the state.
- c) Salary / Wages to be distributed in presence of representative of Company's representative not later than 7th of each month.
- d) To maintain Wage- cum - Attendance Register.
- e) To maintain First Aid Box at Site.
- f) Latest P.F. and E.S.I. challans pertaining to the period in which work was undertaken along with a certificate mentioning that P.F. and E.S.I. applicable to all the employees has been deducted and deposited with the Authorities within the time limits specified under the respective Acts.
- g) Workman Compensation Policy. {If applicable}
- h) Labour license before start of work. {If applicable}

18. WORKMAN COMPENSATION:

The Contactor shall take insurance policy under the Workman Compensation Act to cover such workers who are not covered under ESI and PF by the Bidder however engaged to undertake the jobs covered under this order and a copy of this insurance policy will be given to Company for reference and records. This insurance policy shall be kept valid at all

times. In case there are no worker involve other than those who are covered under ESI and PF by the Bidder, the Bidder shall certify for the same.

The Bidder shall keep the company indemnified at all times, against all claims of compensation under the provision of Workmen Compensation Act 1923 and as amended from time to time or any compensation payable under any other law for the time being workman engaged by the Bidder/sub-contractor/sub-agent in carrying out the job involved under this work order and against costs and expenses, if any, incurred by the company in connection therewith and without prejudice to make any recovery.

The company shall be entitled to deduct from any money due to or to become due to the Bidder, moneys paid or payable by way of compensation as aforesaid or cost or expenses in connection with any claims thereto and the Bidder shall abide by the decision of the Company as to the sum payable by the Bidder under the provisions of this clause.

19. STAFF AND WORKMAN

It shall be responsibility of Bidder

(a) To obtain Contract Labour License from the concerned authorities and maintain proper liaison with them. Necessary Forms for obtaining Labour License would be issued by the company. However you will bear all expenses for obtaining Labour license and registration in PF Department for your scope of work. You will deposit PF of your staff/laborer each month and all related documents should be furnished to us.

b) To obtain workman insurance cover against deployment of workers etc.

(II) To maintain, proper records relating to workmen employed, in the form of various Registers, namely,

- a) Register of workmen.
- b) Register of muster roll.
- c) Register of overtime.
- d) Register of wages.
- e) Any other register as per latest amendment Labour Act.

The records shall be in the prescribed formats only.

(III) To disburse monthly wages to your workers/ supervisors in time and in the presence of Company representatives or as directed by the Labour authorities.

(IV) To maintain proper liaison with the Project authorities, local police and all other government and local bodies.

(V) To pay your workmen at least not less than the minimum prescribed wages as per state/Central Labour laws as may be, applicable. The Bidder shall, be responsible for compliance of all the provisions of minimum Wages Act, PF, ESIC Act workmen Compensation Act and Contract Labour Regulation & Abolition Act the rules made there under. In case of non-compliance of the statutory requirements, the company would take necessary action at the risk and cost of the Bidder.

(VI) To employ required number of skilled/semi-skilled and unskilled workmen as per site requirement to complete the entire project as per schedule. To provide safety shoes, safety helmets, safety belts, gloves etc. to your worker/staff as per requirement during erection work.

(VII) To employ necessary engineering and supervisory staff for completion of the Project in time. While day-to-day management of the site and supervision of the works shall be the responsibility of your Engineer - In charge, he will report to the Engineer in charge to assist him to discharge the overall responsibility of the execution of the project.

20. INSURANCE**a) THIRD PARTY INSURANCE**

Before commencing the execution of the work the Bidder shall take third party insurance policy at his own cost to insure against any damage or loss or injury which may occur to any property/public property or to any person or any employee or representative of any outside Agency / the company engaged or not engaged for the work of the company, by or arising out of the execution of the work or temporary work or in carrying out of this Agreement. For third party insurance policies, the Bidder shall be responsible for settlement of claims with the underwriters without any liability on the purchaser / owner and will arrange replacements / rectification expeditiously without awaiting settlement by insurance claim at Bidders own cost.

b) ACCIDENTAL INSURANCE POLICY FOR LIFE COVER:

Before commencing the execution of the work, the Bidder shall take Accidental insurance policy for the staff engaged by him for this work to insure against any loss of life which may occur during the contract for the work of the Company. The policy shall have coverage of Rs. 10 Lacs (Table C- Death + Permanent Total Disability + Partial permanent Disability due to external accidents). The Bidder shall be responsible for on the spot same day claim settlement with the victim's legal heirs without waiting for settlement by insurance claim without any liability on BRPL. The premium amount for such life cover policy shall be borne by the Bidder. The Bidder shall furnish copy of policy when demanded by BRPL.

c) INSURANCE FOR MAN, MATERIAL & MACHINERY DEPLOYED AT SITE

Bidder shall be responsible for the insurance for his own man, material and machinery deployed at site for the package awarded. Bidder shall furnish the copy of this insurance policy to the purchaser, prior start of work.

21. SECURITY

Adequate number of trained Security Guards shall be deployed both at the storage yard and stores as well as places of work to prevent theft and pilferage of material and accessories and various other materials. All security rules and safety rules enforced at site by company shall be strictly observed.

22. ENVIRONMENTAL, HEALTH & SAFETY PLAN:

Bidder will make ensure that the Environment, Health & Safety (EHS) requirements are clearly understood and faithfully implemented at all levels at site as per instruction of Company. Bidders must comply with these requirements:

- a) Comply with all of the elements of the EHS Plan and any regulations applicable to the work
- b) Comply with the procedures provided in the interests of Environment, Health and Safety
- c) Ensure that all of their employees designated to work are properly trained and competent
- d) Ensure that all plant and equipment they bring on to site has been inspected and serviced in accordance with legal requirement and manufacturer's or suppliers' instructions
- e) Make arrangements to ensure that all employees designated to work on or visit the site present themselves for site induction prior to commencement of work
- f) Provide details of any hazardous substances to be brought onsite

g) Ensure that a responsible person accompanies any of their visitors to site

All Bidders staffs are accountable for the following:

1. Use the correct tools and equipment for the job and use safety equipment and protective clothing supplied, e.g. helmets, goggles, ear protection, etc. as instructed
2. Keep tools in good condition
3. Report to the Supervisor any unsafe or unhealthy condition or any defects in plant or equipment
4. Develop a concern for safety for themselves and for others
5. Prohibit horseplay
6. Not to operate any item of plant unless they have been specifically trained and are authorized to do so.

23. TEST CERTIFICATE & QUALITY ASSURANCE:

The Bidder shall procure all equipment from genuine sources as approved by the Company and as per Company specifications. The Bidder shall submit all the test certificates and joint inspection reports related to major equipment wherever applicable. The Bidder shall ensure for the strict compliance to the specifications and Field Quality Procedures issued by company / Engineer in-charge.

24. SUB-CONTRACTING / SUBLETTING:

BIDDER shall not assign or transfer the whole or any part of this Work Order or any other benefits accruing there from nor shall it subcontract / sublet the whole or any part of the Works without the prior written consent of COMPANY.

In the event the Bidder assigns this work order, Bidder's assignees shall be bound by the terms and conditions of this work order and shall, if deemed necessary by COMPANY at the time of such assignment, undertake in writing to be so bound by this Work Order.

Notwithstanding the subletting / subcontracting of any portion of the works, Bidder shall remain wholly responsible for the carrying out, completion and satisfactory execution of Works in all respects in accordance with this Work Order, specification, approved drawings and data sheets.

25. INDEMNITY:

Bidder shall indemnify and save harmless COMPANY against and from any and all liabilities, claims, damages, losses or expenses arising due to or resulting from:

- A. Any breach non-observance or non-performance by Bidder or its employees or agents of any of the provisions of this Work Order.
- B. Any act or omission of Bidder or its employees or agents.
- C. Any negligence or breach of duty on the part of Bidder, its employees or agents including any wrongful use by it or them of any property or goods belonging to or by COMPANY or any other third party at site including adjoining neighbors.

Bidder shall at all times indemnify COMPANY against all liabilities to other persons, including the employees or agents of COMPANY or Bidder for bodily injury, damage to property or other loss which may arise out of or in consequence of the execution or completion of Works and against all costs charges and expenses that may be occasioned to COMPANY by the claims of such person.

26. EVENTS OF DEFAULTS:

COMPANY may, without prejudice to any of its other rights or remedies under the Work Order or in law, terminate the whole or any part of this Work Order by giving written notice to the Bidder, if in the opinion of COMPANY, Bidder has

neglected to proceed with the works with due diligence or commits a breach of any of the provisions of this work order including but not limited to any of the following cases:

- a) Failing to complete execution of work within the terms specified in this work order.
- b) Failing to complete works in accordance with the approved schedule of works.
- c) Failing to meet requirements of specifications, drawings, and designs as approved by COMPANY.
- d) Failing to comply with any reasonable instructions or orders issued by COMPANY in connection with the works.
- e) Failing to comply with any of the terms or conditions of this work order.

In the event COMPANY terminates this work order, in whole or in part, on the occurrence of any event of default, COMPANY reserves the right to engage any other sub-vendor agency to complete the work or any part thereof, and in addition to any other right COMPANY may have under this work order or in law including without limitation the right to penalize for delay under clause 15.0 of this tender, the contractor shall be liable to COMPANY for any additional costs that may be incurred by COMPANY for the execution of the Work.

27. RISK & COST:

If the Contractor fails to execute the work as per specification / as per the direction of Engineer's In-charge within the scheduled period and even after the extended period, the contract shall get cancelled and company reserves the right to get the work executed from any other source at the Risk & Cost of the Contractor. The Extra Expenditure so incurred shall be debited to the Contractor.

28. ARBITRATION:

To the best of their ability, the parties hereto shall endeavor to resolve amicably between themselves all disputes arising in connection with this LOA. If the same remain unresolved within thirty (30) days of the matter being raised by either party, either party may refer the dispute for settlement by arbitration. The arbitration is to be undertaken by two arbitrators, one each to be appointed by either party. The arbitrators appointed by both the parties shall mutually nominate a person to act as presiding arbitrator before entering upon the reference in the event of a difference between the two arbitrators and the award of the said presiding arbitrator in such a contingency shall be conducted in accordance with the provisions of the Indian Arbitration & Conciliation Act, 1996 and the venue of such arbitration shall be in the city of New Delhi only.

29. FORCE MAJEURE:

29.1 General:

An "Event of Force Majeure" shall mean any event or circumstance not within the reasonable control, of the Party affected, but only if and to the extent that:

(i) Such event or circumstance, despite the exercise of reasonable diligence, could not have been prevented, avoided or reasonably foreseen by such Party;

(ii) Such event or circumstance materially and adversely affects the ability of the affected Party to perform its obligations under this Contract, and the affected Party has taken all reasonable precautions, due care and reasonable alternative measures in order to prevent or avoid the effect of such event on the affected parties ability to perform its obligations under this Contract and to mitigate the consequences thereof. For the avoidance of doubt, if such event or circumstance would not have materially and adversely affected the performance of the affected party had such affected party followed good industry practice, such event or circumstance shall not constitute force majeure.

(iii) Such event is not the direct or indirect result of the failure of such Party to perform any of its obligations under this Contract; and

(iv) Such Party has given the other Party prompt notice describing such events, the effect thereof and the actions being taken in order to comply with above clause

29.2 Specific Events of Force Majeure:

Subject to the provisions of above clause, Events of Force Majeure shall include only the following to the extent that they or their consequences satisfy the above requirements:

The following events and circumstances:

- a) Effect of any natural element or other acts of God, including but not limited to storm, flood, earthquake, lightning, cyclone, landslides or other natural disasters, and
- b) Explosions or fires
- c) Declaration of the Site as war zone.
- d) Any order, regulation, directive, requirement from any Governmental, legislative, executive or judicial authority.

29.3 Notice of Events of Force Majeure

If a force majeure event prevents a party from performing any obligations under the Contract in part or in full, that party shall:

- (i) Immediately notify the other party in writing of the force majeure events within 2 working days of the occurrence of the force majeure event
- (ii) Be entitled to suspend performance of the obligation under the Contract which is affected by force majeure event for the duration of the force majeure event
- (iii) Use all reasonable efforts to resume full performance of the obligation as soon as practicable
- (iv) Keep the other party informed of all such efforts to resume full performance of the obligation on a regular basis
- (v) Provide prompt notice of the resumption of full performance or obligation to the other party.

29.4 Mitigation of events of force majeure:

The Bidder shall:

- (i) Make all reasonable efforts to prevent and reduce to a minimum and mitigate the effect of any delay occasioned by an Event of Force Majeure, including applying other ways in which to perform the Contract;
- (ii) Use its best efforts to ensure resumption of normal performance after the termination of any Event of Force Majeure and shall perform its obligations to the maximum extent practicable as agreed between the Parties; and Keep the Company informed at regular intervals of the circumstances concerning the event of Force Majeure, with best estimates as to its likely continuation and what measures or contingency planning it is taking to mitigate and or terminate the Event of Force Majeure.

29.5 Burden of proof:

In the event that the Parties are unable in good faith to agree that a Force Majeure event has occurred to an affected party, the parties shall resolve their dispute in accordance with the provisions of this Contract. The burden of proof as to

whether or not a force majeure event has occurred shall be upon the party claiming that the force majeure event has occurred and that it is the affected party.

29.6 Terminations for certain events of force majeure:

If any obligation of any Party under the Contract is or is reasonably expected to be delayed or prevented by a Force Majeure event for a continuous period of more than 1 (one) month during the Term of the Contract the Contract shall be terminated at the discretion of the Company and neither Party shall be liable to the other for any consequences arising on account of such termination.

30. SECRECY CLAUSE:

The technical information, drawing and other related documents forming part of work order and the information obtained during the course of investigation under this work order shall be the Company's executive property and shall not be used for any other purpose except for the execution of the work order. The technical information drawing, records and other document shall not be copied, transferred, or divulged and/ or disclosed to third party in full/part, not misused in any form whatsoever except to the extent for the execution of this work order.

This technical information, drawing and other related documents shall be returned to the Company with all approved copies and duplicates including drawing/plans as are prepared by the Bidder during the executions of this work order, if any, immediately after they have been used for agreed purpose.

In the event of any breach of this provision, the Bidder shall indemnify the Company against any loss, cost or damage or claim by any party in respect of such breach.

31. TERMINATION

"During the course of the execution, if at any time BRPL observe and form an opinion that the work under the order is not being performed in accordance with the terms of this Agreement, BRPL reserves its right to cancel this Agreement giving 15 days notice mentioning the reason for the termination of the agreement and BRPL will recover all damages including losses occurred due to loss of time from Bidder.

32. QUALITY

Bidder shall ensure that strict quality is maintained and execution of works under the Work Order and Works are executed in conformity with the Specification.

All tools, tackles, instruments and other equipments used in the execution of the Works shall be duly calibrated as required and Bidder shall maintain proper records of such tools, tackles, instruments and / or equipment.

33. LIABILITY OF BIDDERS

Subject to the due discharge of its obligations under the Contract and except in case of gross negligence or willful misconduct on the part of the Bidder or on the part of any person acting on behalf of the Bidder, with respect to any loss or damage caused by the Bidder to the Employer's property or the Site, the Bidders shall not be liable to the Employer for the following:

- a) For any indirect or consequential loss or damage; and
- b) For any direct loss or damage that exceeds:
 - (i) The total payments made and expected to be made to the Bidder under the Contract including reimbursements, if any; or
 - (ii) The insurance claim proceeds which the Bidder may be entitled to receive from any insurance purchased by the Bidder to cover such a liability, whichever is higher.



BSES RAJDHANI POWER LIMITED

This limitation of liability shall not affect the Bidder's liability, if any, for damage to any third party, caused by the Bidder or any Person or firm acting on behalf of the Bidder in executing the Works.

Notwithstanding anything contained in the Contract, the Bidder shall not be liable for any gross negligence or willful misconduct on the part of the Employer or any of its affiliates, any Bidder, or any party, other than Bidder and/or, its directors, officers, agents or representatives or its affiliates, or Sub-vendor, or the Bidder or any third party engaged by it.

Notwithstanding anything contained in the Contract, including but not limited to approval by the Employer of any drawings, documents, Bidder list, supply of information or data or the participation of the Employer in any meeting and/or discussion or otherwise, shall not absolve the Bidder from any of its liabilities or responsibilities arising in relation to or under the Contract.

SECTION VII

PRICE FORMAT – ERECTION, TESTING & COMMISSIONING

66/11kV Goyla Khurd SS with 2 PTR with provision of 3rd PTR_Service							
S.No.	Item Description	Qty	UOM	Basic (Rs)	GST (Rs)	Unit Landed (Rs)	Total Landed Cost (Rs)
1	ETC of 66/11KV 31.5 MVA Power Transformer including NIFPS	2	Set				
2	Installation of AL Pipe bus bar	1	Lot				
3	ETC of 66kV 3 Pole SF6 circuit Breaker along with support structures	8	Nos				
4	ETC of 66kV Current Transformer	24	Nos				
5	ETC of 66kV Potential Transformer	6	Nos				
6	ETC of 66kV CVT	12	Nos				
7	ETC of Horizontally Rotating double break motorized isolators with one earth switch	16	Nos				
8	ETC of Horizontally rotating double break motorized isolator with 2 earth switch	2	Nos				
9	ETC of Horizontally rotating double break motorized Tendem isolator without earth switch	7	Nos				
10	ETC of Bay Marshaling Kiosk	8	Nos				
11	Fabrication and installation of Galvanized lattice type switchyard structure tower and Girder	1	Lot				
12	Installation of String bus with Quad zebra ACSR conductor for bus coupler and jumpering	1	Lot				
13	Installation of Double and single suspension tension string Hardware assembly for Quad Zebra	1	Lot				
14	Fabrication and installation of Support Structure for all equipments including post insulators	1	Lot				
15	ETC of Station aux Transformer 11/0.433kV 400kVA	1	No				
16	ETC of 66kV Control Relay Panel						
16a	ETC of 66kV Control Relay Panel Line Feeder	4	Set				
16b	ETC of 66kV Control Relay Panel Transformer Feeder	3	Set				

16c	ETC of 66kV Control Relay Panel Bus coupler Feeder	1	Set				
17	ETC of 220V Li-Ion Battery bank	1	Set				
18	ETC of DCDB with battery charger	1	Nos				
19	ETC of ACDB	1	Nos				
20	ETC of 11kV APFC 4 Stage, 7.2 MVAR capacitor bank with motorized isolator	2	Sets				
21	ETC of 11kV APFC 2 Stage, 3.6 MVAR capacitor bank with motorized isolator	2	Sets				
22	ETC of 66kV single phase gapless metal oxide surge arrestor	21	Nos				
23	ETC of 66kV Bus Post Insulator including civil work	1	Lot				
24	Installation of Cable Mounting Structure including civil work	4	Set				
25	LA Mounting Structure including civil work	21	Nos				
26	ETC of SCADA RTU	1	Set				
27	ETC of 11kV VCB switchgear with numerical protective relays(as per SLD)		Set				
27a	ETC of 11kV VCB switchgear with numerical protective relays(as per Tender SLD)- Incoming	4	Set				
27b	ETC of 11kV VCB switchgear with numerical protective relays(as per Tender SLD)- Buscoupler	2	Set				
27c	ETC of 11kV VCB switchgear with numerical protective relays(as per Tender SLD)- outgoing	30	Set				
27d	ETC of 11kV VCB switchgear with numerical protective relays(as per Tender SLD)- Station Transformer	1	Set				
27e	ETC of 11kV VCB switchgear with numerical protective relays(as per Tender SLD)- Capacitor (7.2 MVAR)	2	Set				
27f	ETC of 11kV VCB switchgear with numerical protective relays(as per Tender SLD)- Capacitor (3.6 MVAR)	2	Set				
27g	ETC of 11kV VCB switchgear Bus PT with riser with numerical protective relays(as per SLD)	2	Set				
27h	ETC of 11kV VCB switchgear Bus PT Panel with numerical protective relays(as per SLD)	2	Set				
27i	ETC of Earthing trucks for 11KV Panels -Bus Earthing	2	Set				

	Truck						
27j	ETC of Earthing trucks for 11KV Panels -Cable Earthing Truck	2	Set				
28	ETC of Grounding and earthing of entire substation including earthing of transformer fence and capacitor bank fence	1	Set				
29	ETC of High mast 16M for Lighting cum Lightening Protection	4	Nos				
30	Installation of Indoor LED lighting system including emergency lighting	1	Lot				
31	Installation of Air conditioning for complete substation building except Toilet and Pantry	1	Lot				
32	Installation of Exhaust and Ventillation for Toilet, Pantry	1	Lot				
33	ITC of Fire detection and alarm system for building	1	Lot				
34	Installation of Building and outdoor lightning protection system	1	Lot				
35	Laying, testing, termination of Control cables						
A	6CX4Sqmm	2000	Mtr				
B	6CX2.5Sqmm	8000	Mtr				
C	10CX2.5Sqmm	8000	Mtr				
36	Laying, testing, termination of LT power cable including terminations and Glands						
A	2CX10Sqmm	1000	Mtr				
B	4CX10Sqmm	1000	Mtr				
C	4CX300Sqmm	100	Mtr				
D	2CX2.5Sqmm	1200	Mtr				
E	4CX95Sqmm	100	Mtr				
37	ITC of 11kv Power cable termination kits along with Glands qty						
A	11KV 3CX400Sqmm I/D cable termination	14	Nos				
B	11KV 1CX1000Sqmm I/D cable termination	39	Nos				
38	Installation of Spacers,Connectors, C- Wedge Connectors and Clamps with 10% Spare as per requirement	1	Lot				
39	Installation of Cable trays as per requirement	1	Lot				

40	Laying, testing, termination of Cabling between equipments and RTU as per requirement	1	Lot				
41	Installation of Control Cable Terminations and Glands as per requirement	1	Lot				
42	Installation of Fire Extinguisher as per spec	1	Lot				
43	Laying, testing, termination of Outdoor LED Lighting including street lighting with poles as per spec	1	Lot				
44	ETC of Line current differential relay for remote location as per spec	4	Nos				
45	ITC of Video Surveillance system as per spec	1	Set				
46	Installation of Cable entry sealing as per requirement	1	lot				
47	Installation of Cable Mounting Structure for 11 kV Cables from Transformer including civil work	3	Set				
48	Installation of Fire Suppression System of 11KV Panels	1	lot				
49	ETC of IT Requirements as per spec/BOQ	1	Lot				
50	ETC of Merging unit for installing process bus including all accessories	1	Lot				
51	Inspection by BRPL Officials (As per Spec)	1	Lot				
52	Training of BRPL officials (As Per spec)	1	Lot				

Appendix-II

COMMERCIAL TERMS AND CONDITIONS – E/T/C

SI No	Item Description	AS PER BRPL	BIDDER'S CONFIRMATION
1	Validity	120 days from the due date of submission or amended due date of submission	
2	Price basis	Firm. Prices shall be inclusive of all taxes & duties.	
3	Payment terms	<p>a) 10% mobilization advance against submission of Advance Bank Guarantee of equivalent amount valid upto completion period/ handing over, whichever is earlier plus 3 months claim period. In case of delay, the BG shall be extended suitably.</p> <p>b) 75% pro-rata of total installation value shall be payable against R/A bills payable within 45 days after installation/erection of material at site duly certified by Engineer in charge.</p> <p>c) 10% pro-rata of total installation value shall be payable against R/A bills payable within 30 days after testing & commissioning of material at site duly certified by Engineer in charge.</p> <p>d) 5% of contract value payable after completion of successful acceptance testing, commissioning and handing over of complete systems duly certified by Engineer in charge, submission of Electrical Inspector Clearance Certificate & submission of Bank Guarantee of 10% of contract value valid up to defect liability period i.e. 24 months from the date of Handing over of entire Installation Plus 3 months towards Claim period.</p>	
4	Completion time	08 months from date of LOI/Order	
5	Defect Liability period	24 months from the date of Handing over of entire Installation.	
6	Liquidated damages	0.5 % of the order value for each week or part there of delay until the actual date of completion up to a maximum deduction of 10% of total order value	
7	Contract Performance Bank Guarantee	10% (Ten percent) of the Contract Price valid up to completion period/handing over.	
8	Performance Bank Guarantee	10% (Ten percent) of the Contract Price valid up to Defect Liability Period i.e. 24 months from the date of Handing over of entire Installation plus 3 months towards claim period.	

SECTION VIII

GENERAL TERMS & CONDITIONS – CIVIL WORKS

1. DEFINITIONS:

The following terms shall have the meaning hereby assigned to them except where the context otherwise requires:

- a. Company shall mean BSES Rajdhani Power Limited, having its office at BSES Bhawan, Nehru Place, New Delhi – 110019 and shall include its authorized representatives, agents, successors and assigns.
- b. Engineer in Charge (EIC) shall be the person authorized by the Company or from time to time duly appointed by the Company for the purpose of the contract.
- c. Contractor shall mean the successful Bidder / vendor to whom the contract has been awarded.
- d. Sub-Contractor shall mean the persons, firm or company to whom any part of the contract has been sublet by the Contractor with the prior written consent of the Company.
- e. Contract, shall mean and include the general terms and conditions, technical specifications, drawings, priced bill of quantities, schedule of rates and prices, if any, tender, Company's letter of intent, the work order and any correspondence letters concerned to the tender, when completed.
- f. Site, shall mean the actual place in over or under which, permanent works or temporary works is to be executed by the Contractor.
- g. Contract Price shall mean the sum named in the letter of acceptance, subject to such additions thereto and /or deductions there from as may be made under the provisions hereinafter contained.
- h. Specifications shall mean specification referred to in the tender and any modification thereof or addition thereto as may, from time to time be instructed by the Company/ the Structural Consultant.
- i. Approved, shall mean approved in writing by Company including subsequent written confirmation of previous verbal approval and "approval" means approval in writing by Company, including as aforesaid.
- j. Defect Liability Period: Shall mean the period during which the contractor shall remain liable for repair or replacement of any defective part of the work performed under the contract, free of cost.

2. EXAMINATION OF SITE AND LOCAL CONDITIONS::

The contractor is deemed to have visited the site of the work under the Tender and ascertained therefore all site conditions and information pertaining to his work. Before submitting the bid, all bidders will at their expenses make or obtain any additional information, investigations, explorations, test and studies and obtain any additional information and data which pertains to the physical conditions at or contiguous to the site or otherwise which may affect cost, progress, performance of the work and which the bidder deems necessary to determine its Bid for performing the work in accordance with the time and other terms and conditions of the tender/contract documents. The company shall not entertain any claim whatsoever arising out of the difficult site/terrain/local conditions, if any.

3. LANGUAGE AND MEASUREMENT:

The Tender issued to the contractor by the company and all correspondence and documents relating to the Tender placed on the Contractor shall be written in English language. Metric System shall be followed for all dimension, units etc., the mode of measurement shall be as per IS 1200.

4. SCOPE OF WORK:

The scope of work shall be civil works of 66/11KV AIS Grid Substation at Goyla Khurd, New Delhi, including all statutory clearances & certification from State Electrical Inspector, Municipal corporation department (if required), Fire officer (if required), Horticulture department (if required) and various local bodies like RWA. Schedule of work shall be as mentioned in the Bill of quantity attached herewith.

All the Labor, plant appliance, ladder, scaffoldings, materials, tool, tackles etc are included in contractor's scope of work. Adequate number of engineers, supervisors and skilled and unskilled Labors shall be posted at site. The Contractor shall also make his own arrangement for the accommodation/conveyance requirements for its staff at site.

Company will provide at site the adequate open space for setting up contractor's site store for storing the materials, tools, tackles etc. The entire Contractor's storage will be within the site premises. All the incoming and outgoing materials, equipment, tools, tackles and any other items related to said work shall be entered into the register kept for this purpose and shall be in the custody of Contractor, however company does not hold any responsibility for any loss or damage of Contractor's material etc.

All loading/unloading, of materials at work-site shall be your responsibility. Involvement of Crane/Hydra/Tractor/Trailer for this type of work shall be in your scope.

Adequate weather protection shall be provided by the contractor to keep the materials safe from sun & rain by providing covered storage space as well as using tarpaulins.

Water and Electricity Power shall be arranged by the Contractor at his own. The cost of insurance during loading/unloading of materials/ equipments during its storage and handling/erection at site for installation is included in the contractor's scope and value is including in the above mentioned Tender value. The unit rates mentioned in annexure is inclusive of barricading, watch & ward during execution and no separate charges shall be paid for the same.

5. VALUE OF THE ORDER:

The rates finalized for this order shall be firm for the entire duration of work carried out by the Contractor under the order and are not subject to any variation and escalation for any reason whatsoever. The rates quoted for each item/work in the BOQ shall be deemed to include and cover all cost, expenses and liabilities to every description and all risk of every kind to be taken in executing, completing and handing over the work to the satisfaction of the Company.

The Contractor shall on his own and at his own expense obtain all necessary permits and permissions to execute the job, including required registrations, agent's etc. to perform its obligation under this Contract and shall indemnify the Company in all related matters.

6. TAXES & DUTIES:

Prices are inclusive of all taxes, duties, Construction Cess etc. leviable by State or Central Government or local bodies including any duties which may be levied by the Govt. during currency of this order. GST as applicable shall be paid on submission of GST Registration and self declaration on your letter head stating that you have deposited/or will deposit the Tax as per the applicable GST laws.

However, Income Tax as per applicable rate will be deducted from your bills as Tax Deduction at Source (TDS).

The total order value shall remain FIRM within stipulated delivery period and shall not be adjusted on account of any price increase/variations in labour & materials. However Statutory Taxes, duties and Levies imposed by

Competent Authorities by way of fresh notification(s) within the stipulated delivery period shall be borne by BRPL on submission of necessary documents claiming such variation.

7. TERMS OF PAYMENT:

Payment shall be made to you as under:

- a) 10% of total civil works value shall be payable as advance against submission of Bank Guarantee of equivalent amount valid up to completion date plus 3 (three) months towards claim period. The advance shall be adjusted against R/A Bills.
- b) 80% pro-rata of total civil works value shall be payable against progressive R/A bills payable within 30 days duly certified by Engineer-In-Charge after completion.
- c) 10% of total civil works value shall be payable after completion against submission of Bank Guarantee of equivalent amount valid up to Defect liability period plus 3 (three) months towards claim period.

The Contractor shall submit the final bill along with duly checked final measurements and completion certificate towards the successful completion of the Contract as certified by the EIC.

Payment of final bill shall not be considered conclusive evidence as to the sufficiency of any work or materials, to which it relates, nor shall it relieve as to the sufficiency of work or materials which it relates, nor shall it relieve the Contractor from his liabilities arising from any defects, which become apparent during the Defects Liability Period.

8. DEFECT LIABILITY PERIOD:

The civil works shall be guaranteed against any defect or failure which may arise due to faulty materials, design or workmanship for a period of 24 months from the date of handing over of the substation. In case any defect in the work is observed during the defect liability period, the same shall be rectified by the Contractor at own cost including supply of all materials, labour, equipments and any other appliance in this regards (as per prevailing rates) for the fulfillment of all obligations under the Contract and to the satisfaction of the Company, within 10 days from the date of receipt of intimation from BRPL.

Under no circumstances any extra claim in terms of time and cost shall be entertained for such repair/rectification.

9. SCHEDULE OF COMPLETION AND PERIOD OF MOBILISATION:

The time schedule for carrying out this work and period for mobilization shall be as under:

9.1 The Contractor shall mobilize their Plants & Equipments, Tools & Tackles, Work Labour Force, project team including Engineering Staff and materials required for execution of work at site for commencement of work immediately on receipt of the order.

9.2 The entire work under this order as indicated in the scope of work shall be carried out and completed within the validity period i.e. 300 days. A detailed L2 Schedule shall be submitted by the contractor within 15 days of WO. The contractor shall plan parallel working (round the clock working) for completion of work as per schedule and mobilize manpower accordingly.

9.3 Progress Review Meeting between the Contractor and the Engineer In charge shall be held at site at least once in a week. Also the report giving the details of the manpower engaged at site and the details of the major job completion shall be submitted to Engineer In charge.

9.4 The above time schedule must be strictly adhered to and improved upon wherever possible. In the event we find that your work is not progressing in quality or time frame as per above agreed schedule and to our satisfaction, we reserve the right to withdraw the work in whole or in part without further notice and liability of the Company.

9.5 The completion of the work shall have to be certified by Engineer In charge.

9.6 In order to maintain the time schedule, if necessary the Contractor shall carry out the work on all Sunday & Holiday except National Holiday with prior written permission from Engineer-in- Charge.

9.7 Contractor shall arrange any permission like for the Road cutting etc. from the local authorities like DDA, PWD, and DJB. Contractor shall also follow up with local authorities and other connected persons that may be required to carry out the job under this order. All Statutory charges and direct fees except Electrical Inspector Clearance fees shall be borne by BRPL.

10. TEST CERTIFICATE & QUALITY ASSURANCE:

Quality Assurance Program:

The Contractor before the start of work shall submit for approval a quality assurance program to the EIC indicating measures that he proposes to implement to ensure that the quality of work shall be in accordance with requirements, specifications laid down in the Contract. The Contractor shall strictly adhere to this program and any failure attributable to the Contractor shall attract the penal provisions determined by the EIC.

Quality of materials and workmanship and tests:

The Contractor shall procure all equipment from genius sources as approved by the Company & as per Company specifications. Cement shall be of grade 43 ordinary port land cement conforming to IS 8112/53 grade O.P.C. conforming to IS 12269, aggregate for cement concrete shall confirm to IS 383, reinforcement for cold twisted bars shall confirm to IS 1786, the bricks for brick work shall correspond to IS 1077, Structural steel shall confirm to relevant IS code, water to be used shall comply with requirement of IS 456. Contractor shall provide all requisite facilities for field tests and laboratory tests shall be carried out in the laboratory having ISO 9001-2000 Certified Testing Lab for which no extra payment shall be made. The Contractor shall maintain mandatory Test Register with Engineer-in-Charge as provided in latest Indian Standard Specifications.

All materials and workmanship shall be of the respective kinds described in the Contract and in accordance with the Engineer-in-Charge's instructions and shall be subjected from time to time to such tests as the Engineer-in-Charge may direct at the place of manufacture or fabrication or on the site or at such other places as may be specified in the Contract, or at all or any of such places. The Contractor shall provide at no additional cost to the Company such assistance, instruments, machines, labour and materials as are normally required for examining, measuring and testing any work and the quality, weight or quantity of any material used and shall supply samples of materials before incorporation in the works for testing as may be selected and required by the EIC.

Cost of samples and tests:

All samples shall be supplied to Company if required by the Contractor at his own cost. The Contractor shall take approval of the EIC prior to start the work for all samples of materials including mix design of concrete to be

utilized for the works to be executed. The mix design of concrete, testing of reinforcement steel and structural steel shall be carried out by an external agency approved by the Company. The cost of all such tests carried out by the external agencies or consultants shall be borne by the Contractor at his own cost and are deemed to be included in the unit rates quoted in the BOQ.

Sampling and Testing Concrete on Site

The Contractor can also have cubes tested in an approved laboratory in lieu of a testing machine at site but at his own cost and with the prior written consent of the Company.

Inspection of operations:

The Engineer-in-Charge/QC department or any person authorized by them shall at all times have access to the works and to all workshops and places where work is being prepared or from where materials, manufactured articles or machinery are being obtained for the works and the Contractor shall afford every facility for and every assistance in or in obtaining the right to such access.

Examination of work before covering up:

No work shall be covered up or put out of view without the approval of the EIC or his representative and the Contractor shall afford full opportunity to the EIC or his representative to examine and measure any work which is about to be covered up or put out of view and to examine foundations before permanent work is placed thereon. The Contractor shall give due notice to the EIC or his representative whenever any such work or foundations is or are ready or about to be ready for examination and the EIC or his representative shall, without unreasonable delay, unless he considers it unnecessary, attend for the purpose of the examining such foundations.

11. SUB-CONTRACTING / SUBLETTING:

CONTRACTOR shall not assign or transfer the whole or any part of this Work Order or any other benefits accruing there from nor shall it subcontract / sublet the whole or any part of the Works without the prior written consent of COMPANY. The Company may approve or reject sub-contractor, which in his opinion do not meet the prerequisite qualifications. The Contractor shall re-submit a fresh name for approval.

In the event the contractor assigns this work order, contractor's assignees shall be bound by the terms and conditions of this work order and shall, if deemed necessary by COMPANY at the time of such assignment, undertake in writing to be so bound by this Work Order. Notwithstanding the subletting / subcontracting of any portion of the works, contractor shall remain wholly responsible for the carrying out, completion and satisfactory execution of Works in all respects in accordance with this Work Order, specification, approved drawings and data sheets.

12. INDEMNITY:

Contractor shall indemnify and save harmless COMPANY against and from any and all liabilities, claims, damages, losses or expenses arising due to or resulting from:

- a) Any breach non-observance or non-performance by contractor or its employees or agents of any of the provisions of this Work Order.
- b) Any act or omission of contractor or its employees or agents.
- c) Any negligence or breach of duty on the part of contractor, its employees or agents including any wrongful use by it or them of any property or goods belonging to or by COMPANY or any other third party at site including adjoining neighbors.

Contractor shall at all times indemnify COMPANY against all liabilities to other persons, including the employees or agents of COMPANY or contractor for bodily injury, damage to property or other loss which may arise out of or in consequence of the execution or completion of Works and against all costs charges and expenses that may be occasioned to COMPANY by the claims of such person.

13. EVENTS OF DEFAULTS:

COMPANY may, without prejudice to any of its other rights or remedies under the Work Order or in law, terminate the whole or any part of this Work Order by giving written notice to the Contractor, if in the opinion of COMPANY, contractor has neglected to proceed with the works with due diligence or commits a breach of any of the provisions of this work order including but not limited to any of the following cases:

- a) Failing to complete execution of work within the terms specified in this work order.
- b) Failing to complete works in accordance with the approved schedule of works.
- c) Failing to meet requirements of specifications, drawings, and designs as approved by COMPANY.
- d) Failing to comply with any reasonable instructions or orders issued by COMPANY in connection with the works.
- e) Failing to comply with any of the terms or conditions of this work order.

In the event COMPANY terminates this work order, in whole or in part, on the occurrence of any event of default, COMPANY reserves the right to engage any other subcontractor or agency to complete the work or any part thereof, and in addition to any other right COMPANY may have under this work order or in law including without limitation the right to penalize for delay under clause 17.0 of this tender, the contractor shall be liable to COMPANY for any additional costs that may be incurred by COMPANY for the execution of the Work.

14. RISK & COST:

If the Contractor fails to execute the work as per specification / as per the direction of Engineer's In-charge within the scheduled period and even after the extended period, the contract shall get cancel and company reserves the right to get the work executed from any other source at the Risk & Cost of the Contractor. The Extra Expenditure so incurred shall be debited to the Contractor.

15. ENVIRONMENTAL, HEALTH & SAFETY PLAN:

Contractor will make ensure that the Environment, Health & Safety (EHS) requirements are clearly understood and faithfully implemented at all levels at site as per instruction of Company. Contractors must comply with these requirements:

- a) Comply with all of the elements of the EHS Plan and any regulations applicable to the work
- b) Comply with the procedures provided in the interests of Environment, Health and Safety
- c) Ensure that all of their employees designated to work are properly trained and competent
- d) Ensure that all plant and equipment they bring on to site has been inspected and serviced in accordance with legal requirement and manufacturer's or suppliers' instructions
- e) Make arrangements to ensure that all employees designated to work on or visit the site present themselves for site induction prior to commencement of work
- f) Provide details of any hazardous substances to be brought onsite
- g) Ensure that a responsible person accompanies any of their visitors to site

All contractors' staffs are accountable for the following:

1. Use the correct tools and equipment for the job and use safety equipment and protective clothing supplied, e.g. helmets, goggles, ear protection, etc. as instructed
2. Keep tools in good condition
3. Report to the Supervisor any unsafe or unhealthy condition or any defects in plant or equipment
4. Develop a concern for safety for themselves and for others
5. Prohibit horseplay
6. Not to operate any item of plant unless they have been specifically trained and are authorized to do so.

16. WORK COMPLETION CERTIFICATION, HANDING OVER.

The work carried out by the Contractor under this order has to be certified by Engineer In-charge for satisfactory completion of work allotted to the contractor with respect to specifications / Field Quality Procedures as per applicable standards. In case of modification/correction to be carried out, contractor shall carry out the said modifications/correction without additional cost. The Contractor shall remain in close contact with Engineer In-Charge at site to report the general findings of the fieldwork during the initial as well as later stage of the work at site.

If required, field findings and for revision of the method for site work if required. Work Completion Certificate shall be issued by the Engineer In charge within 10 days of satisfactory work completion subject to handing over of clear site i/c removal of Labor accommodation, stores, storage arrangements for water, plants, tackles, scaffoldings, ladders, leveling at site. The Contractor shall give undertaking that all standing dues to Labor have been paid and all the statutory obligations have been met with. Completion certificate has to be submitted with the final bill issued by Engineer-in- Charge.

17. PENALTY AND LIQUIDATED DAMAGES:

17.1 Penalty: A penalty of 2.5% of bill amount shall be levied in each case of non-compliance of safety practices and site cleanliness.

17.2 Liquidated Damages: In the event of any delay in completion of the work beyond the stipulated time given by in order due to reasons solely attributable to the Contractor, the Contractor shall pay to the Company liquidated damages.

If the Contractor failed to complete the construction of subject work within the time period specified in the order, the Company shall, without prejudice to its other remedies under the contract, deduct liquidated damages a sum equivalent to 0.5 % of the total order value for each week or part there of delay until the actual date of completion up to a maximum deduction of 10% of total order value. The levy payment or deduction of such damages shall not relieve the Contractor from his obligation to complete the Works on time or from any other part of his obligation and liabilities under the Contract. Once the maximum is reached, the Company reserves the right for termination of contract without any liabilities to the Company.

In the event of an extension of time being granted by the EIC, in writing for the Completion of the works, this clause shall be applicable after the expiry of such an extended period.

Engineer In charge should specifically mention the amount of LD levied on the bill of contractor.

18. SAFETY REGULATIONS:

18.1 The Contractor shall indemnify the Company from any consequence arising due to contractor's failure in respect to safety compliance.

18.2 First Aid facilities at easily accessible place shall be provided by the Contractor at his own cost as per provisions of Labor act or as advised by the Company wherever works are carried out.

18.3 All critical injuries shall be reported promptly to the Company. The report shall cover type, nature, cause, physician's report and actions for prevention of those types again.

18.4 To ensure effective enforcement of the rules and regulations relating to safety precautions, arrangements made by the Contractor shall be open to inspection by the Company.

18.5 The cost so incurred by the Contractor in providing for safety standards and requirements as above shall be deemed to be included in the rates quoted for various items under the scope of Contract and no extra amounts shall be payable to the contractor on this account.

18.6 The Contractor shall furnish to the Company within seven days from issue of Work Order whichever is earlier, for approval of Company, the proposed safety program on how it intends to implement the safety procedures and precautions to ensure that the site is accident free.

19. SAFETY CODE:

The Contractor shall ensure adequate safety precautions at site as required under the law of the land and shall be entirely responsible for the complete safety of their workman as well as other workers at site and premises. The contractor shall not deploy any worker below the age of 18 years.

The contractor shall observe the safety requirements as laid down in the contract and in case of sub-contract (only after written approval of company), it shall be the responsibility of main contractor that all safety requirements are followed by the employees and staff of the sub-contractor.

The contractor employing two hundred employees or more, including contract workers, shall have a safety coordinator in order to ensure the implementation of safety requirements of the contract and a contractor with lesser number of employees, including contract workers, shall nominate one of his employees to act as safety coordinator who shall liaise with the safety officer on matters relating to safety and his name shall be displayed on the notice board at a prominent place at the work site.

The contractor shall be responsible for non-compliance of the safety measures, implications, injuries, fatalities and compensation arising out of such situations or incidents.

In case of any accident, the contractor shall immediately submit a statement of the same to the owner and the safety officer, containing the details of the accident, any injury or casualties, extent of property damage and remedial action taken to prevent recurrence and in addition, the contractor shall submit a monthly statement of the accidents to the owner at the end of each month.

20. STATUTORY OBLIGATIONS:

The Contractor shall take all steps as may be necessary to comply with the various applicable laws/rules including the provisions of contract labour (Regulation & Abolition Act) 1970 as amended, minimum wages Act, 1984, Workman Compensation Act, ESI Act, PF Act, Bonus Act and all other applicable laws and rules framed there under including any statutory approval required from the Central/State Govt. Ministry of Labour. Broadly, the compliance shall be as detailed below, but not limited to:

- a) An Electrical license issued by Govt. of Delhi.
- b) PF Code No. and all employees to have PF A/c No. under PF every Act, 1952.
- c) All employees to have a temporary or permanent ESI Card as per ESI Act.

- d) ESI Registration No.
- e) PAN No.
- f) GSTN Registration.
- g) Labour License under Contract Labour Act (R & A) Act 1970

(The Contractor shall provide BRPL Engineer-in-charge a copy of Labour License responsible for execution of the job before start of the work.)

The Contractor must follow:

- a) Third party Insurance Policy before start of work.
- b) To follow Minimum Wages Act prevailing in the state.
- c) Salary / Wages to be distributed in presence of representative of Company's representative not later than 7th of each month.
- d) To maintain Wage- cum - Attendance Register.
- e) To maintain First Aid Box at Site.
- f) Latest P.F. and E.S.I. challans pertaining to the period in which work was undertaken along with a certificate mentioning that P.F. and E.S.I. applicable to all the employees has been deducted and deposited with the Authorities within the time limits specified under the respective Acts.
- g) Workman Compensation Policy. {If applicable}
- h) Labour license before start of work. {If applicable}
- i) Group personnel accident insurance shall have coverage of Rs. 10 Lac (Table C- Death + Permanent Total Disability + Partial permanent Disability due to external accidents).

Before issue of order it would be mandatory for the Contractor to furnish the Company the permanent PF code no, ESI registration, registration under W.C.T Act.

21. BOCW ACT:

BOCW Act applies to every establishment which employs, or had employed on any day of the preceding twelve months, ten or more building workers in any building or other construction work .

The Contractor for carrying out any construction work, must get themselves registered with the Registering Officer under Section 7 of the Building and Other Construction Workers Act, 1996 and rules made thereto by the concerned State Govt .and submit certificate of Registration, issued from the Registering Officer of the concerned State Govt. (Labour Dept.). As per this Act, the Contractor shall be levied a cess @1% of cost of construction work, which would be deducted from each bill. Cost of material, when supplied under a separate schedule item, shall be outside the purview of cess. The Contractor shall also comply with all provisions of the said Act applicable to him.

22. WORKMAN COMPENSATION:

The Contractor shall take insurance policy under the Workman Compensation Act to cover such workers who are not covered under ESI and PF by the Contractor however engaged to undertake the jobs covered under this order and a copy of this insurance policy will be given to Company for reference and records. This insurance policy shall be kept valid at all times. In case there are no worker involved other than those who are covered under ESI and PF by the Contractor, the Contractor shall certify for the same.

The contractor shall keep the company indemnified at all times, against all claims of compensation under the provision of Workmen Compensation Act 1923 and as amended from time to time or any compensation payable under any other law for the time being workman engaged by the contractor/sub-contractor/sub-agent in carrying out the job involved under this work order and against costs and expenses, if any, incurred by the company in connection therewith and without prejudice to make any recovery.

The company shall be entitled to deduct from any money due to or to become due to the Contractor, moneys paid or payable by way of compensation as aforesaid or cost or expenses in connection with any claims thereto and the Contractor shall abide by the decision of the Company as to the sum payable by the Contractor under the provisions of this clause.

23. INSURANCE

a) THIRD PARTY INSURANCE

Before commencing the execution of the work the contractor shall take third party insurance policy at his own cost to insure against any damage or loss or injury which may occur to any property/public property or to any person or any employee or representative of any outside Agency / the company engaged or not engaged for the work of the company, by or arising out of the execution of the work or temporary work or in carrying out of this Agreement. For third party insurance policies, the contractor shall be responsible for settlement of claims with the underwriters without any liability on the purchaser / owner and will arrange replacements / rectification expeditiously without awaiting settlement by insurance claim at contractors own cost.

b) ACCIDENTAL INSURANCE POLICY FOR LIFE COVER:

Before commencing the execution of the work, the CONTRACTOR shall take Accidental insurance policy for the staff engaged by him for this work to insure against any loss of life which may occur during the contract for the work of the COMPANY. The policy shall have coverage of Rs. 10 Lacs (Table C- Death + Permanent Total Disability + Partial permanent Disability due to external accidents). The Contractor shall be responsible for on the spot same day claim settlement with the victim's legal heirs without waiting for settlement by insurance claim without any liability on BRPL. The premium amount for such life cover policy shall be borne by the contractor. The contractor shall furnish copy of policy when demanded by BRPL.

c) INSURANCE FOR MAN, MATERIAL & MACHINERY DEPLOYED AT SITE

Contractor shall be responsible for the insurance for his own man, material and machinery deployed at site for the package awarded. Contractor shall furnish the copy of this insurance policy to the purchaser, prior start of work.

24. ARBITRATION:

To the best of their ability, the parties hereto shall endeavor to resolve amicably between themselves all disputes arising in connection with this LOA. If the same remain unresolved within thirty (30) days of the matter being raised by either party, either party may refer the dispute for settlement by arbitration. The arbitration is to be undertaken by two arbitrators, one each to be appointed by either party. The arbitrators appointed by both the parties shall mutually nominate a person to act as presiding arbitrator before entering upon the reference in the event of a difference between the two arbitrators and the award of the said presiding arbitrator in such a contingency shall be conducted in accordance with this provisions of the Indian Arbitration & Conciliation Act, 1996 and the venue of such arbitration shall be in the city of New Delhi only.

25. Performance Guarantee:

Bank guarantee shall be drawn in favour of "BSES Rajdhani Power Ltd" as applicable. The performance Bank guarantee shall be in the format as specified by BRPL.

Contract performance bank guarantee of total 10% of the contract price shall be submitted for due performance of this Contract within 15 days of award of contract with the validity till completion of the contract period. The same shall be released after completion of the job

Contractor shall submit the performance bank guarantee equivalent to the 10% of the contract value at the time of claiming the last payment with the validity of the bank guarantee till Defect Liability Period i.e. 24 months from the date of Handing over of entire Installation plus 3 months.

The Company shall reserve the right to invoke the performance bond unconditionally and without recourse to the Contractor, if there is failure to perform any part of the Contract for whatsoever reason. This clause is pertaining to performance of contractual obligations and the decision of Company shall be final in this regard.

In the event, in Company's sole judgment, if the Contractor has fulfilled all its obligations under this Contract, Company shall release the performance bank guarantee without interest, within seven (7) days from the last date up to which the performance bank guarantee is to be kept valid or if it is assessed by the Company that Contractor has not fulfilled its obligation, then the performance bank guarantee shall be extended by the Contractor till that period as requested by the Company.

26. GENERAL CONDITIONS:

- 26.1) No idle labour charges will be admissible in the event of any suspension of work by the Company or stoppage caused in the work due to any other reason resulting in contractors' labour or equipments being rendered idle at any time during the duration of contract.
- 26.2) In the event of any ambiguity, the work order shall supersede LOI & all other correspondence and conditions of contract if furnished earlier.
- 26.3) If the Contractor needs to carry out any work or rework due to change in drawings or structural consultants instructions, the Contractor shall take the prior permission of the Company/ EIC before commencing such works. The Contractors quoted price shall include such rework or incidentals due to quantity variation, or methodology to carry out the works, wherever required and shall not be entitled for any extra payment or extension of time.
- 26.4) The Company reserves the right to claim and recover from the security deposit the damages/ losses incurred due to non-compliance to work, delay in the progress of work by the Contractor as agreed upon. The decision of the Company in this regard shall be final and binding.
- 26.5) The Contractor agrees to abide by other terms and conditions stipulated by the Company from time to time in addition to the above for the proper and satisfactory performance of their obligations under this Contract.

27. STAFF AND WORKMAN

It shall be responsibility of contractor

(a) To obtain Contract Labour License from the concerned authorities and maintain proper liaison with them. Necessary Forms for obtaining Labour License would be issued by the company. However you will bear all expenses for obtaining Labour license and registration in PF Department for your scope of work. You will deposit PF of your staff/laborer each month and all related documents should be furnished to us.

b) To obtain workman insurance cover against deployment of workers etc.

(II) To maintain, proper records relating to workmen employed, in the form of various Registers, namely,

- a) Register of workmen.
- b) Register of muster roll.
- c) Register of overtime.
- d) Register of wages.
- e) Any other register as per latest amendment Labour Act.

The records shall be in the prescribed formats only.

(III) To disburse monthly wages to your workers/ supervisors in time and in the presence of Company representatives or as directed by the Labour authorities.

(IV) To maintain proper liaison with the Project authorities, local police and all other government and local bodies.

(V) To pay your workmen at least not less than the minimum prescribed wages as per state/Central Labour laws as may be, applicable. The contractor shall, be responsible for compliance of all the provisions of minimum Wages Act, PF, ESIC Act workmen Compensation Act and Contract Labour Regulation & Abolition Act the rules made there under. In case of non- compliance of the statutory requirements. the company would take necessary action at the risk and cost of the Contractor.

(VI) To employ required number of skilled/semi-skilled and unskilled workmen as per site requirement to complete the entire project as per schedule. To provide safety shoes, safety helmets, safety belts, gloves etc. to your worker/staff as per requirement during erection work.

(VII) To employ necessary engineering and supervisory staff for completion of the Project in time. While day-to-day management of the site and supervision of the works shall be the responsibility of your Engineer - In charge, he will report to the Engineer in charge to assist him to discharge the overall responsibility of the execution of the project.

28. POLLUTION CONTROL:

All debris shall be removed and disposed of at assigned areas on daily basis. Surplus excavated earth shall be disposed of in an approved manner. In short, the contractor shall be fully responsible for keeping the work site clean at all times. In case of non- compliance, company shall get the same done at Contractor's risk and costs.

All BRPL vendors and execution engineers are hereby advice to adhere below mentioned guidelines while carrying out any civil work including road/ pit digging, plinth/ fence making, road restoration etc.

- I. No construction material/ debris shall be stored on metalled road.
- II. Wind breakers of appropriate height on all sides of ear marked area using CGI sheets shall be raised to ensure that no construction material dust fly outside ear marked area.
- III. The construction material i.e. coarse sand, stone aggregates, excavated earth, cement and any other material to and from the site shall be transported under wet and covered condition to ensure their non-slippage en-route to avoid air contamination.
- IV. The contractor shall provide mask and helmet to every worker working on the construction site and involved in loading/unloading and carriage of construction material and construction debris to prevent inhalation of dust particles.
- V. Over loading of vehicles shall be strictly prohibited
- VI. The construction material at site shall be stored under wet and covered condition.
The dumping sites for temporarily storing the excavated earth shall be properly leveled, watered and rehabilitated by plantation to avoid flying of dust.
- VII. The worker at the site shall be sensitized to adopt / observe the dust controlled measures in true spirit.

- VIII. If any C&D waste is generated at site the same will be transported to the C&D waste site only and the record for the same will be maintained by the agency.
- IX. Wet jet in grinding and stone cutting is being permitted at site.
- X. The necessary record for dust control is being maintained by the department on day to day basis and being monitored regularly.
The Contractor shall be responsible for all the preventive and protective environmental steps as per guidelines. Execution in- charge has to ensure all vendors comply with these instructions. Any violations from the above guidelines have been viewed very seriously by the authorities. Concerned agency is liable for the penalties / other action by the authorities, The Agency shall indemnify BRPL from all liabilities on this account.

29. FORCE MAJEURE:**29.1 General:**

An "Event of Force Majeure" shall mean any event or circumstance not within the reasonable control, of the Party affected, but only if and to the extent that:

(i) Such event or circumstance, despite the exercise of reasonable diligence, could not have been prevented, avoided or reasonably foreseen by such Party;

(ii) Such event or circumstance materially and adversely affects the ability of the affected Party to perform its obligations under this Contract, and the affected Party has taken all reasonable precautions, due care and reasonable alternative measures in order to prevent or avoid the effect of such event on the affected parties ability to perform its obligations under this Contract and to mitigate the consequences thereof. For the avoidance of doubt, if such event or circumstance would not have materially and adversely affected the performance of the affected party had such affected party followed good industry practice, such event or circumstance shall not constitute force majeure.

(iii) Such event is not the direct or indirect result of the failure of such Party to perform any of its obligations under this Contract; and

(iv) Such Party has given the other Party prompt notice describing such events, the effect thereof and the actions being taken in order to comply with above clause

29.2 Specific Events of Force Majeure:

Subject to the provisions of above clause, Events of Force Majeure shall include only the following to the extent that they or their consequences satisfy the above requirements:

The following events and circumstances:

- e) Effect of any natural element or other acts of God, including but not limited to storm, flood, earthquake, lightning, cyclone, landslides or other natural disasters, and
- f) Explosions or fires
- g) Declaration of the Site as war zone.
- h) Any order, regulation, directive, requirement from any Governmental, legislative, executive or judicial authority.

29.3 Notice of Events of Force Majeure

If a force majeure event prevents a party from performing any obligations under the Contract in part or in full, that party shall:

- (i) Immediately notify the other party in writing of the force majeure events within 2 working days of the occurrence of the force majeure event
- (ii) Be entitled to suspend performance of the obligation under the Contract which is affected by force majeure event for the duration of the force majeure event
- (iii) Use all reasonable efforts to resume full performance of the obligation as soon as practicable
- (iv) Keep the other party informed of all such efforts to resume full performance of the obligation on a regular basis
- (v) Provide prompt notice of the resumption of full performance or obligation to the other party.

29.4 Mitigation of events of force majeure:

The Contractor shall:

- (i) Make all reasonable efforts to prevent and reduce to a minimum and mitigate the effect of any delay occasioned by an Event of Force Majeure, including applying other ways in which to perform the Contract;
- (ii) Use its best efforts to ensure resumption of normal performance after the termination of any Event of Force Majeure and shall perform its obligations to the maximum extent practicable as agreed between the Parties; and Keep the Company informed at regular intervals of the circumstances concerning the event of Force Majeure, with best estimates as to its likely continuation and what measures or contingency planning it is taking to mitigate and or terminate the Event of Force Majeure.

29.5 Burden of proof:

In the event that the Parties are unable in good faith to agree that a Force Majeure event has occurred to an affected party, the parties shall resolve their dispute in accordance with the provisions of this Contract. The burden of proof as to whether or not a force majeure event has occurred shall be upon the party claiming that the force majeure event has occurred and that it is the affected party.

29.6 Terminations for certain events of force majeure:

If any obligation of any Party under the Contract is or is reasonably expected to be delayed or prevented by a Force Majeure event for a continuous period of more than 1 (one) month during the Term of the Contract the Contract shall be terminated at the discretion of the Company and neither Party shall be liable to the other for any consequences arising on account of such termination.

30. SECRECY CLAUSE:

The Contractor shall not communicate or use in advertising, publicity, sales release or in any medium photograph or reproduction of the works under this contract, or description of the site, dimensions, quantity or any other information concerning the works unless prior written permission is obtained from Company. The Contractor shall keep all the information obtained directly or indirectly through appointment of this contract confidential and shall not reveal the same to any other party without the prior written permission of the Company.

The technical information, drawing and other related documents forming part of work order and the information obtained during the course of investigation under this work order shall be the Company's executive property and shall not be used for any other purpose except for the execution of the work order. The technical information

drawing, records and other document shall not be copied, transferred, or divulged and/ or disclosed to third party in full/part, not misused in any form whatsoever except to the extent for the execution of this work order.

This technical information, drawing and other related documents shall be returned to the Company with all approved copies and duplicates including drawing/plans as are prepared by the Contractor during the executions of this work order, if any, immediately after they have been used for agreed purpose.

In the event of any breach of this provision, the contractor shall indemnify the Company against any loss, cost or damage or claim by any party in respect of such breach.

31. APPROACHES:

The Contractor shall have to make his own arrangements for all approaches to the site required for transporting his men and material to site of work. The Company shall entertain no payment or claims on account of "Making of Approaches".

32. SITE LOCATION:

The Contractor must see the site of the work, surrounding locality, local traffic rules, site approaches etc. carefully. No claim of any sort shall be entertained on account of any site conditions. If any approach from main road is required or existing approach is to be improved and maintained, for cartage of materials by the contractor, the same shall be provided, improved and maintained by him at his own cost.

33. CO-ORDINATION WITH OTHER AGENCIES:

The Contractor shall execute the work in strict consultation with the Company and in co-ordination with other agencies appointed by the Company who will also simultaneously execute the components of work allotted to them.

The Contractor at his own cost shall also extend their site facilities, plant and equipments on written request of the Company/ EIC for use by other contractors appointed by the Company

34. TERMINATION OF CONTRACT:

If in case the Contractor;

- a) becomes bankrupt or insolvent, has a receiving order issued against it compounds with its creditors, or if the Contractor is a corporation a resolution is passed or order is made for its winding up (other than a voluntary liquidation for the purposes of amalgamation or reconstruction) a receiver is appointed over any part of its undertaking or assets or if the Contractor takes or suffers any other analogous action in consequence of debt.
- b) Assigns or transfers the Contract or any right or interest therein in violation of the provision of given work to sub-contractor.
- c) In the judgment of the Company, has engaged in corrupt or fraudulent practices in competing for or in executing the Contract.

For the purpose of this Sub-clause

"Corrupt practice" means the offering, giving, receiving or soliciting of anything of value to influence the action of a public official in the procurement process or in Contract execution.

"Fraudulent practice" means misrepresentation of facts in order to influence a procurement process or the execution of a Contract detriment to Company and includes collusive practice among Bidders (prior to or after bid submission) designed to establish bid prices at artificial non-competitive levels and to deprive the Purchaser of the benefits of free and open competition.

- a) Has abandoned or repudiated the Contract
- b) Has without valid reason failed to commence work on the Facilities promptly or has suspended days after receiving a written instruction from the Company to proceed.
- c) Persistently fails to execute the Contract in accordance with the Contract or persistently neglects to carry out its obligations under the Contract without just cause.
- d) Refuses or is unable to provide sufficient materials, services or labour to execute and complete the Facilities in the manner specified in the program furnished and at rate of progress that give reasonable assurance to the Company that the Contractor can attain completion of the Facilities by the time for completion.

The Company may, without prejudice to any other rights it may possess under the Contract, give a notice to the Contractor stating the nature of the default and requiring the Contractor to remedy the same. If the Contractor fails to remedy or to take steps to remedy the same within fourteen (14) days of its receipt of such notice the Company may terminate the Contract forthwith by giving a notice of termination to the Contractor.

In case, Contractor fails to carry out the work as specified in the schedule or left in between, it will be got done through any other agency at contractors' risk and cost, the same shall be recovered from the amount payable to the Contractor.

In case the Contractor fails to start work / to carry out the work within the specified period i.e. mutually agreed schedule and the work is not found to be satisfactory, the Company reserves the right to terminate the contract, at any stage without assigning any reasons thereof. In such case, the Company shall have the right to forfeit the entire / part amount of EMD / Security Deposit.

35. LIABILITY OF CONTRACTORS

Subject to the due discharge of its obligations under the Contract and except in case of gross negligence or willful misconduct on the part of the Contractor or on the part of any person acting on behalf of the Contractor, with respect to any loss or damage caused by the Contractor to the Employer's property or the Site, the Contractors shall not be liable to the Employer for the following:

- a) For any indirect or consequential loss or damage; and
- b) For any direct loss or damage that exceeds:
 - (i) The total payments made and expected to be made to the Contractor under the Contract including reimbursements, if any; or
 - (ii) The insurance claim proceeds which the Contractor may be entitled to receive from any insurance purchased by the Contractor to cover such a liability, whichever is higher.

This limitation of liability shall not affect the Contractor's liability, if any, for damage to any third party, caused by the Contractor or any Person or firm acting on behalf of the Contractor in executing the Works.

Notwithstanding anything contained in the Contract, the Contractor shall not be liable for any gross negligence or willful misconduct on the part of the Employer or any of its affiliates, any Contractor, or any party, other than Contractor and/or, its directors, officers, agents or representatives or its affiliates, or Subcontractor, or the Contractor or any third party engaged by it.

Notwithstanding anything contained in the Contract, including but not limited to approval by the Employer of any drawings, documents, Contractor list, supply of information or data or the participation of the Employer in any meeting and/or discussion or otherwise, shall not absolve the Contractor from any of its liabilities or responsibilities arising in relation to or under the Contract.

SECTION IX

Price format- Civil

Civil BOQ (Goyla Khurd)							
SL.No.	Description	Qty	Unit	Rate (Rs.)			Amount (Rs.)
				Basic price	GS T	Landed Price	
1	Complete Design & Engineering of Grid Substation. The building foundation shall be designed for Ground floor + 1 Floor Future Planning, including survey of plot, if required.	1	LS				
2	Detailed engineering of Substation building with equipments on ground floor. RCC staircase for approach to roof as per layout and specification. In case of increase in length/width of building due to equipment dimension, the same shall be in scope of Vendor. No additional cost will be given. (Payment break up for Running Bill shall be as follows for this item only.) i) up to DPC -20% ii) Lintel and brick work upto GF (Ground floor) roof slab - 10% iii) Roof casting ground floor & Mumty & brick wall of parapet- 15% iv) Internal/ external finishing and terracing - 15% v) Indoor trenches including supporting hangers & chequered plate- 10% vi) Flooring/painting/water supply & sanitary system- 15% vii) Doors, windows, staircase railing, etc- 5% viii) Final completion - 10%	1	Set				
3	All Outdoor Infeed, Control & Power cable trenches with trench covers (RCC slab or RCC cover), supporting hangers, etc as per specification and system requirement.	1	Lot				
4	Power transformer foundations with oil collection chamber all around & P/F MS grating over oil collection chamber as per specification.	3	Nos				
5	A) Fire wall between transformers/ as per layout/ as per approved drawing.	0	Nos				
	B) BOT and pipe connection for Burnt Oil tank as per approved drawing.	2	Lot				

6	A) RCC/ Cement concrete/ Paver block road inside substation as per layout and specification.	1	LS				
	B) Balance areas not covered by building, switchyard and road shall be Cement Concrete / Paver blocks as per approved drawing.	1	LS				
7	A) Outdoor Switchyard development (as per approved layout/ specification)	1	Lot				
	B) Landscaping & Green belt development as per approved layout (including P/L GI/PVC pipes with hydrants at suitable intervals/locations for post maintenance of green belt).	1	Lot				
8	Underground water tank with electrical (Booster) pump of sufficient capacity and one outlet and hose, etc.	1	Set				
9	Rain water drainage arrangement within and outside switchyard, Rain water harvesting system (as per approved drawing based on CGWB guidelines) & arrangement for drinking water, sanitary system , etc.	1	Lot				
10	Equipment foundation, Gantry/ tower foundation, Capacitor bank foundation, Auxiliary/ local transformer foundation, foundation of lighting poles, BPI foundation, etc. and construction of brick steps with cement plaster for smooth operation of circuit breakers, etc.	1	Lot				
11	Fencing with gate of Switchyard, Capacitor bank, Auxiliary/local transformer, etc as per approved drawing.	1	Lot				
12	Foundation & Oil tank for NIFPS equipment.	1	LS				
13	Supply of good earth (or other approved filling material) including filling in trenches, plinth, road, sides of foundations & in open areas upto required formation level in layers not exceeding 20 cm in depth, consolidating each deposited layer by raming & watering complete.	1	LS				
14	Construction of permanent Security Gumtee (approx. 9 SQM area) is to be made as per standard approved drawing.	1	LS				
	Total						
Note:	For detail description, kindly refer Technical Specification for Civil Work						

Appendix-III**COMMERCIAL TERMS AND CONDITIONS – Civil**

SI No	Item Description	AS PER BRPL	BIDDER'S CONFIRMATION
1	Validity	120 days from the due date of submission or amended due date of submission	
2	Price basis	Firm. Prices shall be inclusive of all taxes & duties.	
3	Payment terms	<p>a) 10% of total civil works value shall be payable as advance against submission of Bank Guarantee of equivalent amount valid up to completion date plus 3 (three) months towards claim period. The advance shall be adjusted against R/A Bills.</p> <p>b) 80% pro-rata of total civil works value shall be payable against progressive R/A bills payable within 30 days duly certified by Engineer-In-Charge after completion.</p> <p>c) 10% of total civil works value shall be payable after completion against submission of Bank Guarantee of equivalent amount valid upto Defect liability period plus 3 (three) months towards claim period.</p>	
4	Completion time	08 months from date of LOI/Order	
5	Defect Liability period	24 months from the date of Handing over of entire Installation.	
6	Liquidated damages	0.5 % of the order value for each week or part there of delay until the actual date of completion up to a maximum deduction of 10% of total order value	
7	Contract Performance Bank Guarantee	10% (Ten percent) of the Contract Price valid up to completion period/handing over.	
8	Performance Bank Guarantee	10% (Ten percent) of the Contract Price valid up to Defect Liability Period i.e. 24 months from the date of Handing over of entire Installation plus 3 months towards claim period.	

SECTION X**GRAND SUMMARY OF THE QUOTED PRICE**

Sr. Nos.	SCHEME DESCRIPTION	Total price for supply F.O.R site inclusive all duties taxes	Total for Erection, Testing & Commissioning inclusive all Taxes(INR)	Total for Civil Works inclusive all Taxes(INR)	Grand Total(INR)
1	Survey, Design, Supply, Installation, Testing and Commissioning including Civil Works of 66/11 kV AIS Grid substation on Single point responsibility basis at Goyla Khurd				
TOTAL Package Cost					
In words :					

We declare that the following are our quoted prices in INR for the entire project/schemes.

Date:

Bidder Name:

Place:

Bidders Address:

Name & Signature

Designation:

Common Seal:.....

APPENDIX IV**BID FORM**

To

Head of Department
Contracts & Material Deptt.
BSES Rajdhani Power Ltd
New Delhi 110019

Sir,

1 We understand that BRPL is desirous of execution of
.....(Name of work)

2 Having examined the Bidding Documents for the above named works, we the undersigned, offer to deliver the goods in full conformity with the Terms and Conditions and technical specifications for the sum indicated in Price Bid or such other sums as may be determined in accordance with the terms and conditions of the contract .The above amounts are in accordance with the Price Schedules attached herewith and are made part of this bid.

3 If our Bid is accepted, we undertake to deliver the entire goods as) as per delivery schedule mentioned in Section IV from the date of award of purchase order/letter of intent.

4 If our Bid is accepted, we will furnish a performance bank guarantee for an amount of 10% (Ten)percent of the total contract value for due performance of the Contract in accordance with the Terms and Conditions.

5 We agree to abide by this Bid for a period of 120 days from the due date of bid submission & subsequent corrigendum/amendment/extension of due date of submission. It shall remain binding upon us and may be accepted at any time before the expiration of that period.

6 We declare that we have studied the provision of Indian Laws for supply of equipments/materials and the prices have been quoted accordingly.

7 Unless and until Letter of Intent is issued, this Bid, together with your written acceptance there of, shall constitute a binding contract between us.

8 We understand that you are not bound to accept the lowest, or any bid you may receive.

9 There is provision for Resolution of Disputes under this Contract, in accordance with the Laws and Jurisdiction of Contract.

Dated this..... day of..... 20....

Signature..... In the capacity of

.....duly authorized to sign for

and on behalf of

(IN BLOCK CAPITALS).....

Appendix V

ACCEPTANCE FORM FOR PARTICIPATION IN REVERSE AUCTION EVENT

(To be signed & stamped by the bidder along-with bid)

BSES Rajdhani Power Ltd (BRPL) intends to use reverse auction through SAP-SRM tool as an integral part of entire tendering process. All techno-commercially qualified bidders shall participate in the reverse auction.

The following terms and conditions are deemed as accepted by the bidder on participation in the bid:-

1. In case of bidding through Internet medium, bidders are advised to ensure availability of all associated infrastructure as required to participate in the reverse auction event. Inability to bid due to telephone glitch, internet response issues, software & hardware hangs/failures, power failures or any other reason shall not be the responsibility of BRPL.
2. In case bidder fails to participate in the reverse auction event due to any reason whatsoever, it shall be presumed that the bidder has no further discounts to offer and the initial bid submitted by them as a part of tender shall be considered as bidder's Final No Regret offer. Any off-line price bids received from a bidder in lieu of non-participation in the reverse auction event shall be rejected by BRPL.
3. The bidder is advised to understand the auto bid process & safeguard themselves against any possibility of non-participation in the reverse auction event.
4. The bidder shall be prepared with competitive price quotes during the day of reverse auction event.
5. The prices quoted by bidder in reverse auction event shall be on FOR Landed cost BRPL Store/site basis inclusive of all relevant taxes, duties, levies, transportation charges etc.
6. The prices submitted by the bidder during reverse auction event shall be binding on the Bidder.
7. The bidder agrees to non-disclosure of trade information regarding bid details e.g. purchase, Identity, bid process/technology, bid documentation etc.
8. BRPL will make every effort to make the bid process transparent. However award decision of BRPL will be final and binding on the bidder.
9. The prices submitted during reverse auction event shall be binding on the bidder.
10. No request for Time extension of the reverse auction event shall be considered by BRPL.
11. BRPL shall provide the user id and password to the authorized representative of the bidder. Authorization letter in lieu of the same shall be submitted along with the signed and stamped acceptance form.
12. The original price bids of the bidders shall be reduced on pro-rata basis against each line item based on the final all inclusive prices offered during conclusion of the reverse auction event for arriving at contract amount

APPENDIX VI**FORMAT FOR EMD BANK GUARANTEE**

(To be issued in a Non Judicial Stamp Paper of Rs.50/-purchased in the name of the bank)

Whereas [*name of the Bidder*] (herein after called the "Bidder") has submitted its bid dated [*date of submission of bid*] for the supply of [*name and/or description of the goods*] (here after called the "Bid").

KNOW ALL PEOPLE by these presents that WE [name of bank] at [*Branch Name and address*], having our registered office at [*address of the registered office of the bank*] (herein after called the "Bank"), are bound unto BSES Rajdhani Power Ltd., with its Corporate Office at BSES Bhawan Nehru Place, New Delhi -110019, (herein after called —the "Purchaser") in the sum of Rs./- (Rupees only) for which payment well and truly to be made to the said Purchaser, the Bank binds itself, its successors, and assigns by these presents.

Sealed with the Common Seal of the said Bank this _____ day of _____ 20_____.

THE CONDITIONS of this obligation are:

- 1 If the Bidder withdraws its Bid during the period of bid validity specified by the Bidder on the Bid Form ; or
2. If the Bidder, having been notified of the acceptance of its Bid by the Purchaser during the period of bid validity:
 - (a) Fails or refuses to execute the Contract Form, if required; or
 - (b) Fails or refuses to furnish the performance security, In accordance with the Instructions to Bidders/ Terms and Conditions;

We undertake to pay to the Purchaser up to the above amount upon receipt of its first written demand, without the Purchaser having to substantiate its demand, provided that is its demand the purchaser will note that amount claimed by it is due to it, owing to the occurrence of one or both of the two condition(s), specifying the occurred condition or condition(s).

This guarantee will remain in force up to and including One Hundred Twenty (120) days after the due date of submission bid, and any demand in respect thereof should reach the Bank not later than the above date.

(Stamp & signature of the bank)

Signature of the witness

APPENDIX - VII

LITIGATION HISTORY

Year	Name of client	Details of contract & date	Cause of Litigation/ arbitration and dispute	Disputed amount

APPENDIX - VIII

CURRENT CONTRACT COMMITMENTS/ WORK IN PROGRESS

Year	Name of client	Details of contract & date	Value of outstanding work	Estimated completion date

APPENDIX - IX

FINANCIAL DATA

(Duly Certified by Chartered Accountant)

	FY 18-19	FY 17-18	FY 16-17
Total assets			
Current assets			
Total Liability			
Current Liability			
Profit before taxes			
Profit after taxes			
Sales Turnover			

APPENDIX X

CHECK LIST

Sl No	Description	Compliance
1	INDEX	YES/NO
2	COVERING LETTER	YES/NO
3	BID FORM (UNPRICED) DULY SIGNED	YES/NO
4	BILL OF MATERIAL (UNPRICED)	YES/NO
5	DOCUMENTS IN SUPPORT OF QUALIFICATION CRITERIA	YES/NO
6	TECHNICAL BID	YES/NO
7	ACCEPTANCE TO COMMERCIAL TERMS AND CONDITIONS	YES/NO
8	FINANCIAL BID (IN SEALED ENVELOPE)	YES/NO
9	EMD IN PRESCRIBED FORMAT	YES/NO
10	DEMAND DRAFT OF RS 1000/- DRAWN IN FAVOUR OF BSES RAJDHANI POWER LTD	YES/NO
11	POWER OF ATTORNEY/AUTHORISATION LETTER FOR SIGNING THE BID	YES/NO
12	FINANCIAL DATA IN TABULAR FORMAT	YES/NO
13	LIST OF CURRENT COMMITMENTS/ WORK IN PROGRESS	YES/NO
14	BANK SOLVENCY CERTIFICATE	YES/NO
15	NO LITIGATION CERTIFICATE	YES/NO

APPENDIX-XI
FORMAT FOR PERFORMANCE BANK GUARANTEE

(TO BE ISSUED ON RS 100/- STAMP PAPER)

Bank Guarantee No.

Place:

Date:

To
BSES Rajdhani Power Limited

Whereas BSES RAJDHANI POWER LTD (hereinafter referred to as the "Purchaser", which expression shall unless repugnant to the context or meaning thereof include its successors, administrators and assigns) has awarded to M/s. _____ with its Registered/ Head Office at _____

(Hereinafter referred to as the "Supplier" which expression shall unless repugnant to the context or meaning thereof, include its successors administrators, executors and assigns), a contract no. _____ Dated _____ (the Contract);

And whereas the value of the Contract is Rs. _____ (The Contract Value).

And whereas it is a condition of the Contract that the Supplier shall provide a Performance Bank Guarantee for the due and faithful performance of the entire Contract for a sum equivalent to - % of the Contract Value to the Purchaser on or before _____

And whereas the Bank under instructions from the Supplier has agreed to guarantee the due performance of the Contract.

Now it is agreed as follows:

1. we _____ (Name of the Bank) having its Head Office at _____ (hereinafter referred to as the Bank, which expression shall unless repugnant to the context or meaning thereof, include its successors, administrators, executors and assigns) Shall indemnify and keep indemnified the Purchaser for, and guarantee and undertake to pay to the Purchaser immediately on written demand, a sum equivalent to _____ % of the Contract Value as aforesaid at any time upto _____ (day/month/year) without any demur, reservation, contest, recourse or protest and/or without any reference to the Supplier, against all losses, damages, costs and expenses that may be caused to or suffered by the Purchaser by reason of any default on the part of the Supplier in performing and observing any and all the terms and conditions of the Contract or breach on the part of the Supplier of terms or conditions of the Contract.
2. The demand shall consist only of an original letter issued by Purchaser stating that the Supplier has failed to fulfill its obligations under the Contract. Such demand made by the Purchaser on the Bank shall be conclusive and binding notwithstanding any difference or dispute between the Purchaser and the Supplier or any difference or dispute pending before any Court, Tribunal, Arbitrator or any other authority.
3. The Bank undertakes not to revoke this guarantee during its currency without previous written consent of the Purchaser and further agrees that the guarantee herein contained shall continue to be enforceable during the period that would be taken for satisfactory performance and fulfillment in all respects of the Contract or in the event of any dispute between the Purchaser and Supplier until the dispute is settled (provided that the claim/ demand under this guarantee is _____)

lodged /referred during the currency of this guarantee) or till the Purchaser discharges this guarantee whichever is earlier.

4. The Purchaser shall have the fullest liberty without affecting in any way the liability of the Bank under this guarantee from time to time to extend the time for performance of the Contract by the Supplier. The Purchaser shall have the fullest liberty, without affecting the liability of the Bank under this guarantee, to postpone from time to time the exercise of any powers vested in them or of any right which they might have against the Supplier, and to exercise the same at any time in any manner, and either to enforce or to forbear to enforce any covenants, contained or implied, in the Contract. or any other course or remedy or security available to the Purchaser. The Bank shall not be released of its obligations under these presents by any exercise by the Purchaser of its liberty with reference: to the matters aforesaid or any of them or by reason of any other act or forbearance or other acts of omission or commission on the part of the Purchaser or any other indulgence shown by the Purchaser of by any other matter or thing whatsoever which under law would, but for this provision, have the effect of relieving the Bank.

5. The Bank agrees that the Purchaser and its option shall be entitled to enforce this guarantee against the Bank as a principal debtor, in the first instance without proceeding against the Supplier and notwithstanding any security or other guarantee that the Purchaser may have in relation to the Supplier's liabilities.

6. Notwithstanding anything contained hereinabove the liability of the Bank under this guarantee is restricted to a sum equivalent to % of the Contract Value ie. Rs.(Rupees) and it shall remain in force upto and including .Unless a demand to enforce a claim under this guarantee is made against the Bank within 3 months from the the above date of expiry i.e. up to all the rights of the Purchaser under the said guarantee shall be forfeited and the Bank shall be released and discharged from all liabilities thereafter.

7. This Performance Bank Guarantee shall be governed by the laws of India.

Dated this Witness

day of 20..... at

1. For Bank

2. Signature
Name Power of Attorney No:

Banker's Seal

SECTION XI

VENDOR CODE OF CONDUCT

Bidder shall agree to comply with Vendor code of Conduct as mentioned in BRPL Website. Purchaser is committed to conducting its business in an ethical, legal and socially responsible manner. To encourage compliance with all legal requirements and ethical business practices, Purchaser has established this Vendor Code of Conduct (the "Code") for Purchaser's Vendors. For the purposes of this document, "Vendor" means any company, corporation or other entity that sells, or seeks to sell goods or services, to Purchaser, including the Vendor's employees, agents and other representatives. Fundamental to adopting the Code is the understanding that a business, in all of its activities, must operate in full compliance with the laws, rules and regulations of the countries in which it operates. This Code encourages Vendors to go beyond legal compliance, drawing upon internationally recognized standards, in order to advance social and environmental responsibility.

I. Labour and Human Rights

Vendors must uphold the human rights of workers, and treat them with dignity and respect as understood by the international community.

- Fair Treatment - Vendors must be committed to a workplace free of harassment. Vendors shall not threaten workers with or subject them to harsh or inhumane treatment, including sexual harassment, sexual abuse, corporal punishment, mental coercion, physical coercion, verbal abuse or unreasonable restrictions on entering or exiting company provided facilities.
- Antidiscrimination - Vendors shall not discriminate against any worker based on race, colour, age, gender, sexual orientation, ethnicity, disability, religion, political affiliation, union membership, national origin, or marital status in hiring and employment practices such as applications for employment, promotions, rewards, access to training, job assignments, wages, benefits, discipline, and termination. Vendors shall not require a pregnancy test or discriminate against pregnant workers except where required by applicable laws or regulations or prudent for workplace safety. In addition, Vendors shall not require workers or potential workers to undergo medical tests that could be used in a discriminatory way except where required by applicable law or regulation or prudent for workplace safety.
- Freely Chosen Employment - Forced, bonded or indentured labour or involuntary prison labour is not to be used. All work will be voluntary, and workers should be free to leave upon reasonable notice. Workers shall not be required to hand over government-issued identification, passports or work permits as a condition of employment.
- Prevention of Under Age Labour - Child labour is strictly prohibited. Vendors shall not employ children. The minimum age for employment or work shall be 15 years of age, the minimum age for

employment in that country, or the age for completing compulsory education in that country, whichever is higher. This Code does not prohibit participation in legitimate workplace apprenticeship programs that are consistent with Article 6 of ILO Minimum Age Convention No. 138 or light work consistent with Article 7 of ILO Minimum Age Convention No. 138.

- Juvenile Labour - Vendors may employ juveniles who are older than the applicable legal minimum age for employment but are younger than 18 years of age, provided they do not perform work likely to jeopardize their health, safety, or morals, consistent with ILO Minimum Age Convention No. 138.
- Minimum Wages - Compensation paid to workers shall comply with all applicable wage laws, including those relating to minimum wages, overtime hours and legally mandated benefits. Any disciplinary wage deductions are to conform to local law. The basis on which workers are being paid is to be clearly conveyed to them in a timely manner.
- Working Hours - Studies of good manufacturing practices clearly link worker strain to reduced productivity, increased turnover and increased injury and illness. Work weeks are not to exceed the maximum set by local law. Further, a work week should not be more than 60 hours per week, including overtime, except in emergency or unusual situations. Workers should be allowed at least one day off per seven-day week.
- Freedom of Association - Open communication and direct engagement between workers and management are the most effective ways to resolve workplace and compensation issues. Vendors are to respect the rights of workers to associate freely and to communicate openly with management regarding working conditions without fear of reprisal, intimidation or harassment. Workers' rights to join labour unions, seek representation and or join worker's councils in accordance with local laws should be acknowledged.

- II. Health and Safety Vendors must recognize that in addition to minimizing the incidence of work-related injury and illness, a safe and healthy work environment enhances the quality of products and services, consistency of production and worker retention and morale. Vendors must also recognize that ongoing worker input and education is essential to identifying and solving health and safety issues in the workplace.

The health and safety standards are:

- Occupational Injury and Illness - Procedures and systems are to be in place to prevent, manage, track and report occupational injury and illness, including provisions to: a) encourage worker reporting; b) classify and record injury and illness cases; c) provide necessary medical treatment; d) investigate cases and implement corrective actions to eliminate their causes; and e) facilitate return of workers to work.
- Emergency Preparedness - Emergency situations and events are to be identified and assessed, and their impact minimized by implementing emergency plans and response procedures, including:

emergency reporting, employee notification and evacuation procedures, worker training and drills, appropriate fire detection and suppression equipment, adequate exit facilities and recovery plans.

- Occupational Safety - Worker exposure to potential safety hazards (e.g., electrical and other energy sources, fire, vehicles, and fall hazards) are to be controlled through proper design, engineering and administrative controls, preventative maintenance and safe work procedures (including lockout/tagout), and ongoing safety training. Where hazards cannot be adequately controlled by these means, workers are to be provided with appropriate, well-maintained, personal protective equipment. Workers shall not be disciplined for raising safety concerns.
- Machine Safeguarding - Production and other machinery is to be evaluated for safety hazards. Physical guards, interlocks and barriers are to be provided and properly maintained where machinery presents an injury hazard to workers.
- Industrial Hygiene - Worker exposure to chemical, biological and physical agents is to be identified, evaluated, and controlled. Engineering or administrative controls must be used to control overexposures. When hazards cannot be adequately controlled by such means, worker health is to be protected by appropriate personal protective equipment programs.
- Sanitation, Food, and Housing - Workers are to be provided with ready access to clean toilet facilities, potable water and sanitary food preparation, storage, and eating facilities. Worker dormitories provided by the Participant or a labour agent are to be maintained clean and safe, and provided with appropriate emergency egress, hot water for bathing and showering, and adequate heat and ventilation and reasonable personal space along with reasonable entry and exit privileges.
- Physically Demanding Work - Worker exposure to the hazards of physically demanding tasks, including manual material handling and heavy or repetitive lifting, prolonged standing and highly repetitive or forceful assembly tasks is to be identified, evaluated and controlled.

III. Environmental

Vendors should recognize that environmental responsibility is integral to producing world class products. In manufacturing operations, adverse effects on the environment and natural resources are to be minimized while safeguarding the health and safety of the public.

The environmental standards are:

- Product Content Restrictions - Vendors are to adhere to applicable laws and regulations regarding prohibition or restriction of specific substances including labeling laws and regulations for recycling and disposal. In addition, Vendors are to adhere to all environmental requirements specified by Purchaser.

- Chemical and Hazardous Materials -Chemical and other materials posing a hazard if released to the environment are to be identified and managed to ensure their safe handling, movement, storage, recycling or reuse and disposal.
- Air Emissions - Air emissions of volatile organic chemicals, aerosols, corrosives, particulates, ozone depleting chemicals and combustion by-products generated from operations are to be characterized, monitored, controlled and treated as required prior to discharge.
- Pollution Prevention and Resource Reduction -Waste of all types, including water and energy, are to be reduced or eliminated at the source or by practices such as modifying production, maintenance and facility processes, materials substitution, conservation, recycling and re-using materials.
- Wastewater and Solid Waste - Wastewater and solid waste generated from operations, industrial processes and sanitation facilities are to be monitored, controlled and treated as required prior to discharge or disposal.
- Environmental Permits and Reporting - All required environmental permits (e.g. discharge• monitoring) and registrations are to be obtained, maintained and kept current and their operational and reporting requirements are to be followed.

IV. Ethics

Vendors must be committed to the highest standards of ethical conduct when dealing with workers, Vendors, and customers.

- Corruption, Extortion, or Embezzlement - Corruption, extortion, and embezzlement, in any form, are strictly prohibited. Vendors shall not engage in corruption, extortion or embezzlement in any form and violations of this prohibition may result in immediate termination as an Vendor and in legal action.
- Disclosure of Information - Vendors must disclose information regarding its business activities, structure, financial situation, and performance in accordance with applicable laws and regulations and prevailing industry practices.
- No Improper Advantage - Vendors shall not offer or accept bribes or other means of obtaining undue or improper advantage.
- Fair Business, Advertising, and Competition - Vendors must uphold fair business standards in• advertising, sales, and competition.
- Business Integrity - The highest standards of integrity are to be expected in all business interactions. Participants shall prohibit any and all forms of corruption, extortion and embezzlement. Monitoring and enforcement procedures shall be implemented to ensure conformance.

- Community Engagement - Vendors are encouraged to engage the community to help foster social and economic development and to contribute to the sustainability of the communities in which they operate.
- Protection of Intellectual Property - Vendors must respect intellectual property rights; safeguard customer information; and transfer of technology and know-how must be done in a manner that protects intellectual property rights.

V. Management System

Vendors shall adopt or establish a management system whose scope is related to the content of this Code. The management system shall be designed to ensure (a) compliance with applicable laws, regulations and customer requirements related to the Vendors' operations and products; (b) conformance with this Code; and (c) identification and mitigation of operational risks related to this Code. It should also facilitate continual improvement.

The management system should contain the following elements:

- Company Commitment - Corporate social and environmental responsibility statements affirming Vendor's commitment to compliance and continual improvement.
- Management Accountability and Responsibility - Clearly identified company representative[s] responsible for ensuring implementation and periodic review of the status of the management systems.
- Legal and Customer Requirements - Identification, monitoring and understanding of applicable laws, regulations and customer requirements.
- Risk Assessment and Risk Management - Process to identify the environmental, health and safety and labour practice risks associated with Vendor's operations. Determination of the relative significance for each risk and implementation of appropriate procedural and physical controls to ensure regulatory compliance to control the identified risks.
- Performance Objectives with Implementation Plan and Measures - Areas to be included in a risk assessment for health and safety are warehouse and storage facilities, plant/facilities support equipment, laboratories and test areas, sanitation facilities (bathrooms), kitchen/cafeteria and worker housing /dormitories. Written standards, performance objectives, targets and implementation plans including a periodic assessment of Vendor's performance against those objectives.
- Training - Programs for training managers and workers to implement Vendor's policies, procedures and improvement objectives.
- Communication - Process for communicating clear and accurate information about Vendor's performance, practices and expectations to workers, Vendors and customers.

- Worker Feedback and Participation - Ongoing processes to assess employees' understanding of and obtain feedback on practices and conditions covered by this Code and to foster continuous improvement.
- Audits and Assessments - Periodic self-evaluations to ensure conformity to legal and regulatory requirements, the content of the Code and customer contractual requirements related to social and environmental responsibility.
- Corrective Action Process - Process for timely correction of deficiencies identified by internal or external assessments, inspections, investigations and reviews.
- Documentation and Records - Creation of documents and records to ensure regulatory compliance and conformity to company requirements along with appropriate confidentiality to protect privacy.

The Code is modelled on and contains language from the Recognized standards such as International Labour Organization Standards (ILO), Universal Declaration of Human Rights (UDHR), United Nations Convention against Corruption, and the Ethical Trading Initiative (ETI) were used as references in preparing this Code and may be useful sources of additional information.

ANNEXURE-I

TECHNICAL SPECIFICATIONS

TECHNICAL SPECIFICATION
FOR
SUPPLY, ERECTION, TESTING & COMMISSIONING
OF 66/11kV GOYLA KHURD AIS GRID SUBSTATION
AT NEW DELHI
ON TURNKEY BASIS
(SPEC NO. BRPL-EHV-TS- GYLKHRD)

Prepared by	Javed / Seema Shekhawat		Rev: 2
Reviewed by	Abhinav Srivastava		Date: 20.07.2021
Approved by	Sheshadri Krishnapura		

Technical Specification for 66/11kV Goyla Khurd AIS Grid Substation at New Delhi**INDEX**

S. No	Description	Page. No
1	General Design Criteria	1
2	Civil Work	14
3	66kV Outdoor Circuit Breaker	41
4	11KV Indoor Switchgear	48
5	66KV Control & Relay Panel	65
6	11KV Auto-Switched Capacitor Bank	82
7	66KV LA (Lightning Arresters)	94
8	Structural Work	97
9	Outdoor Switchyard Material	104
10	Battery Chargers with DCDB	121
11	LI-ION Battery Bank	128
12	415 V AC Distribution Board	138
13	Power Transformers including NIFPS	143
14	Grounding & Lightning Protection System	209
15	LT Power Cable	219
16	Control Cable	241
17	Illumination System	250
18	SCADA Interface Works & Automation	256
19	Cable Installation & Accessories	283
20	Exhaust & Ventilation System including Air Conditioning	289
21	Fire Detection & Alarm System	292
22	Fire Extinguisher	296
23	Fire Suppression System	299
24	Video Surveillance System	307
25	Lighting High Mast	312
26	Packing & Transportation	325
27	Materials Workmanship & Tests	328
28	Misc Activities	332
29	Post Insulator	339
30	Spares & Maintenance tools & tackles	351
31	Grid Energy Meter	354
32	Outdoor Potential Transformer	367
33	CVT	381
34	Outdoor CT	393
35	Outdoor Disconnecting switch	414
36	IT Devices for grid communication	419
37	Cable sealing system	427
38	Training and Inspection	433
39	Approved Makes	437

Technical Specification for 66/11kV Goyla Khurd AIS Grid Substation at New Delhi**SCHEDULE & ANNEXURE**

Schedule	Description	Page No.
Schedule – A	Schedule of General Information	444
Schedule – B1	Technical Data Sheets of HT Indoor Switchgear	446
Schedule – B2	Technical Data Sheets of 66kV CRP	460
Schedule – B3	Technical Data Sheets of Battery bank	464
Schedule – B4	Technical Data Sheets of Battery Charger	466
Schedule – B5	Technical Data Sheets of 11KV Auto Switched Capacitor Bank	468
Schedule – B6	Technical Data Sheets of LT Power Cable	475
Schedule – B7	Technical Data Sheets of Control Cable	477
Schedule – B8	Technical Data Sheets of Illumination System	479
Schedule – B9	Technical Data Sheets of 415 V AC Distribution Board	482
Schedule – B10	Technical Datasheet of High Mast	484
Schedule – B11	Technical Data Sheets of Grounding & Lightning Protection System	491
Schedule – B12	Technical Data Sheets of Cable Accessories	492
Schedule – B13	Technical Data Sheets of 66kV Outdoor CT	493
Schedule – B14	Technical Data Sheets of 66KV PT and CVT	497
Schedule – B15	Technical Data Sheets of Outdoor Circuit Breaker	499
Schedule – B16	Technical Data Sheets of 66kV Outdoor LA	506
Schedule – B17	Technical Data Sheets of 66kV Outdoor Disconnecting Switch	509
Schedule – B18	Technical Data Sheets of Cable tray and Accessories	513
Schedule – B19	Technical Data Sheets of AL Pipe Busbar	514
Schedule – C1 & C2	Deviation from Specification	515
Schedule – D	List of Drawings enclosed with Bid	517
Schedule – E	Schedule of Tests	518
Schedule – F	List of instruments, Testing Equipment, Tools & Tackles for Erection & Maintenance	519
Schedule – G	List of Installation	520
Schedule – H	Delivery, Terms and Conditions	521
Schedule – I	Schedule of Recommended Spares	523
Schedule – J	Declaration	524
Annexure- L	Technical specification for New Grids 24x7 O&M	525
Annexure- M	Substation Layout Plan (proposed)	526
BRPL-CP-DEE-B-0001	Main Single Line Diagram(required)	527

**TECHNICAL SPECIFICATION
FOR
GENERAL DESIGN CRITERIA**

Prepared by	Javed Ahmed		Rev: 0
Reviewed by	Abhinav Srivastava		Date: 17th July, 2021
Approved by	K.Sheshadri		

1.0 INTENT OF SPECIFICATION

This specification is intended to cover complete design, engineering, manufacturing, assembling, testing at manufacturer's works, supply and Transportation F.O.R. site of all equipment and accessories, steel structures, all structural work, substation building, Civil and architectural work, complete erection, testing, commissioning & putting into successful commercial operation of 66/11 KV AIS with Pipe Bus Bar substation including supply of all Labour, supervision, tools & plants and supplies as required.

The 66KV Air insulated Double Bus Outdoor substation shall have following bays with equipments and civil works: - Four (04) no's Feeder Bay – Three (03) no's Transformer bay - One (01) no Bus Coupler bay. -Two (02) sets Bus PT.

The substation shall have control room building with 11kV Indoor Switchgear, 66kV Control and Relay Panel, Battery & Battery Charger, ACDB and DCDB etc. The suggestive Layout Plan and Single Line diagram of the substation is enclosed.

This specification shall be read in conjunction with other sections of bidding document. In the event of any discrepancy with the listed document, the most stringent one shall govern. In the tender document, the term 'Contractor', 'Bidder' and 'Vendor' has been used interchangeably.

It is advisable that bidder should visit the site to confirm its present status prior to submission of their bid.

2.0 SCOPE OF SUPPLY

This scope of work shall include design, engineering, manufacture, shop floor testing, inspection, packing, dispatch, loading, unloading and storage at site, transit/storage and construction insurance, assembly, erection, civil structural, architectural work, complete pre-commissioning checks, testing & commissioning at site, obtaining statutory clearance & certification from State Electrical Inspector, Municipal Corporation department, Fire officer, Horticulture department etc. and handing over to the Owner after satisfactory commissioning of complete 66/11 kV substation of BSES Rajdhani Power Ltd. at Goyla Khurd, New Delhi.

The scope includes all material, equipment and works required for the construction of the Substation complete with all items considered essential for safe and trouble-free continuous commercial operation of the system in a manner acceptable to the Owner and complying with latest revision of National and International Standards, Codes & Practices, Indian Electricity Rules, CEA (Measures relating to Safety and Electric Supply) Regulations 2010 and Indian Electricity Act.

The scope of supply broadly includes the following:

Volume – I Technical Specification | General Design Criteria

2.1 Major Equipments:

- 11kV Auto-Switched Capacitor Bank (APFC) Outdoor Type -
 - 7.2 MVAR -2 Sets
 - 3.6 MVAR -2 Sets
- 66/11kV 31.5MVA Power Transformer and NIFPS along with accessories- 2 Sets
- Aluminum Pipe bus for Main and Jack Bus.
- 3Pole SF6, Circuit breaker with support structure – 8 Nos.
- 66KV single phase gapless metal oxide surge arrester – 7 Sets (3 Nos. per set)
- 66KV Current Transformer – 24 Nos.
- 66KV Potential Transformer – 6 Nos.
- 66KV CVT--12 Nos.
- Horizontally rotating double break motorized isolators with one earth switch – 16 Nos.
- Horizontally rotating double break motorized isolators with two-earth switch – 2 Nos.
- Horizontally rotating double break motorized Tendem isolators without earth switch – 7 Nos.
- Outdoor Bay Marshalling Kiosk – 8 Nos.
- 220V Lithium Ion Battery bank-1 Set
- Battery charger with DCDB -1 Set
- ACDB -1 No.
- Station Aux. Transformer, 11/0.433kV, 400kVA -1 No with Station transformer to ACDB cable shall be 4CX150 sqmm
- SCADA RTU-1 Set
- High mast lights 16 M high-4 Nos

2.2 Item as System

- 11kV VCB Switchgear Panel board with Numerical protection relays and auto reclosure feature (refer SLD).
- Earthing trucks for 11KV Panels -2Nos of bus earthing truck and 2Nos of cable earthing truck for each size of panel.
- All Numerical protection Relay shall be supplied with Conformal coating
- Grounding and earthing of entire substation including all the fences such as Power Transformer Fencing, Aux. transformer fencing and capacitor bank fencing as per Technical Specification.
- 220V Lithium Ion Battery bank, one set of Battery charger compatible with Li Ion battery.
- Outdoor illumination including street lighting with Poles.
- Indoor illumination including emergency lighting (DC lighting incase of black out)
- Air Conditioning, Exhaust and Ventilation for complete substation building.
- Fire detection and alarm system including its SCADA integration.
- Direct stroke lightning protection by shielding spikes.
- 11kV Panel Fire Suppression System including its SCADA integration
- Video Surveillance system including its SCADA integration.
- Material GPS Tracking System.
- Fiber optic Cable including patch cord, LIU splicing inside substation for line differential protection.
- Cable Trench Indoor and Outdoor (Control and Power Cable Trench shall be separate)
- Culvert for road crossing
- The building foundation shall be designed for Ground floor + Future Floor
- Fire retardant paint for all cable entering to panels till the cable opening
- 6 Months O&M from the date of handing over of Substation (refer Annexure-O for Details).
- Merging unit with all accessories for installation of process bus.
- AC and DC Failure Hooter near Security gate on a pole

2.3 Items as Lot

- LT Power & Control cables (fire retardant type) supply and termination and Glands.
- Building Cable entry Sealing
- Supply and providing 11KV Power cable termination kits and Glands.
- Cable trays
- Supply and ETC of Termination Kits
- Supply and installation of Fire extinguisher
- Direct Stroke Lightning Protection for outdoor equipments
- Maintenance tools & tackles including testing & measuring instruments
- Cabling between equipments and RTU
- Supply Erection testing and commissioning of Line differential protection Relay at remote end
- Rubber Mat for all Indoor equipments front and back side
- Material required for IMS (All type of sign boards Sign, First aid Box)

2.4 Civil Works

- As per Civil specification

2.5. Design Work

Design documentation in sufficient copies including design memo, calculations, general arrangement, plans, elevations and sectional drawings, sag/tension calculations, short circuit calculations, electro-dynamic force calculations, single line diagrams, schematic interconnection drawings, wiring diagrams, foundation calculations, foundation plans/details, cable schedules, bill of materials, lighting system design calculations, earthing system design calculations, illumination system design, calculation, conductor sizing, calculation insulation coordination, protection coordination etc.

- Operation & Maintenance Manuals and As-built drawings. (Six sets hard copy & two sets soft copy)
- Documentation required by State Electrical Inspector or by other statutory body for statutory approval/certification of the Substation installation. (as required)
- Temporary sheds for storage of equipment, tools & tackles, construction offices with required fittings & furnishings.

The above equipment and services are specifically listed for the guidance of the Bidder. Apart from the above, Single Line Diagram and Layout Plan (suggestive) may also be referred for further details of equipment. However, it is to be understood that the Contractor's scope is not limited to the items specifically listed above but covers all items required for the completion of a safe and fully functional Substation.

Volume – I Technical Specification | General Design Criteria**2.6 Tools and Spares**

Tools & Commissioning Spares: Contractor should be equipped with all tools, tackles and commissioning spares for successful commissioning of substation.

Recommended Spares: Contractor shall be providing the Owner a list of recommended spares along with quantity and market/budgetary prices. This shall be a recommendation only and shall not be a part of quotation for price bid

3.0 COMPLETION SCHEDULE

The contractor shall be fully responsible to complete the project in time. It is desired that the total project should complete in 300 days from the date of LOA. The broad completion schedule is attached here under for reference. The detailed completion schedule shall be prepared by contractor in MS-Project or Primavera software and shall be submitted at the time of detail engineering for approval. The detailed schedule shall be finalized with the help of schedule given by Owner.

Activity schedule shall be as tabulated below. The reference date shall be the date of LOA.

Sl. No.	Description of Work	Time Line from Zero Date(in days)	Responsibility
1	Zero Date (Letter of Award)	0	BRPL
2	Mobilization of manpower	15	Contractor
3	Inception Report	15	Contractor
4	PERT chart approval / L2 schedule majorly including : <ul style="list-style-type: none">Manpower & Machinery to be deployedProcurement of major equipmentDispatch schedule of the major itemIntermediate milestone schedule	15	Contractor
5	Submission of Drawings/Documents/ calculations for Engineering Approval	30	Contractor
6	Engineering Approval	60	BRPL
7	Civil Works	130	Contractor
8	Procurement/Supplies	210	Contractor
9	Equipment Erection	240	Contractor
10	Commissioning of 66kV line	255	BRPL
11	Commissioning of 1 st Power Transformer	255	Contractor
12	Commissioning of 2 nd Power Transformer	270	Contractor
13	Testing & Commissioning of entire substation	285	Contractor
14	Handing Over	300	Contractor

4.0 ELECTRICITY & WATER FOR CONSTRUCTION

Electricity Supply and Water for construction purpose shall be arranged by Contractor.

5.0 SUPPLY AND WORKS BY BIDDER

The termination kits/jumpers, Glands, Cable Seal and interconnections for all the Cables/Conductors shall be in the scope of Contractor. Extension of 48 core (12 Single Mode and 36 Multimode) Fiber optic embedded in Infeed Power Cable and interconnections for all the Cables/Conductors (with all the accessories of 48 core FO including LIU, joint box, patch cord and extension of fiber optic from Power Cable to LIU), shall be in the scope of Contractor. Laying of cables and stringing of Conductors including its hardware fitting and insulators in the substation premises shall also be in the scope of Contractor only. Cable mounting structure for Power transformer Incoming shall be in Contractors scope.

Works for Future Transformer like Transformer Foundation, Cable trench, Earthing, Cable Seal, Cable Trays shall be in Contractors scope. Also Earthing and grounding, DSLP, illumination, trenches for future transformer shall be in Contractors scope.

WORKS BY OWNER: The following works shall be carried out by Owners:

1. Soil Investigation and Soil resistivity test
2. Topographical survey

The trenches and cable trays for Incoming/outgoing cables inside the Substation premises shall be in the scope of Contractor.

6.0 SUPPLIES AS FREE ISSUE ITEMS:

The following items shall be supplied free of cost to vendor:

- ACSR Zebra Conductor
- 11 kV 1x1000 sq. mm. XLPE Cables
- 11 kV 3x400 sq. mm. XLPE Cables
- 66kV 3Cx300 sq. mm XLPE Cables (If required)
- 66 kV 1x1000 sq.mm. XLPE Cables (if required)

However, the termination kits/jumpers, Glands and interconnections for the above Cables/Conductors shall be in the scope of vendor. Laying of these free issued cables, stringing of Conductors including its hardware fitting & insulators and ETC of Power Transformers in the substation premises shall also be in the scope of vendor only.

Free issue and return of items/excess materials Transportation from BRPL Stores to Site or Site to BRPL stores shall be in Vendors Scope of work.

7.0 COORDINATION WITH STATUTORY BODIES & OUTSIDE AGENCIES

The Contractor shall be fully responsible for getting all statutory clearances, including but not limited to Electrical Inspector clearance, Civic Agencies (MCD/DDA/PWD or any other), Horticulture department, Fire officer or any other statutory bodies for implementation of the work.

The contractor shall be fully responsible for carrying out all co-ordination and liaison work as may be required with Electrical Inspector, Civic Agencies (MCD/DDA/PWD or any other), Horticulture department, Fire officer or any other statutory bodies for implementation of the work.

The application on behalf of BRPL for submission to the Electrical Inspector and other statutory bodies along with copies of drawings complete in all respects shall be done by the contractor & approval / certificates shall be obtained by the contractor well ahead of time so that the actual

Volume – I Technical Specification | General Design Criteria

commissioning of equipment is not delayed for want of inspection and approval by the inspector & statutory bodies. The contractor shall arrange the actual inspection work by Electrical Inspector.

Official fees to electrical inspector / statutory bodies shall be paid by the Contractor.

8.0 COORDINATION WITH OTHER CONTRACTOR & OWNER'S SYSTEM

The contractor shall be fully responsible for carrying out all the co-ordination work required with their sub-contractors, if any, as well as with Owners system for execution and completion of work.

9.0 TERMINAL POINTS OF CONTRACTOR'S SCOPE

9.1 Up to Line take off point and including provision for Cable termination at the incomer and outgoing bays.

9.2 Outdoor Cable Trenches : Upto the boundary wall of substation

9.3 Lighting/Illumination/Lightning : Within Outdoor & Indoor Substation Area

9.4 Earthing : Within Substation area and building.

9.5 Water supply and drainage at suitable point near the substation boundary wall at location to be decided during detailed engineering.

10.0 SALIENT FEATURES, BASIC DESIGN CRITERIA AND MINIMUM TECHNICAL REQUIREMENTS OF 66/11 KV SUBSTATION/SUBSTATION EQUIPMENTS**10.1 Introduction**

BRPL is setting up 66/11KV AIS WITH PIPE BUSBAR Grid substation at Goyla Khurd New Delhi. The Substation shall be constructed on turnkey EPC execution. EPC contractor is responsible for detailed design also. In this paragraph only salient features, basic design criteria and Owner's minimum technical requirements are enumerated for the guidance of the Bidder. However, this should be referred in conjunction with SLD enclosed. The salient features of substation have been tabulated as under:

Particulars	Description
Voltage Level	66/11 kV
Infeed Plan	66 kV Double Circuit
Infeed arrangement	66 kV U/G Cables
Substation Capacity	3 x 31.5 MVA
Present status of Land	In possession of BRPL
Previous work done at site(if any)	Boundary wall

10.2 Substation Capacity

The substation capacity shall be as per the table in Clause no. 9.1 above.

10.3 11KV Switchgears

The 11KV Switchgear shall be installed inside the substation building. The switchgears shall be equipped with Vacuum Circuit Breaker. The metering and protection relays shall be part of switchgear only. Control voltage shall be 220 V DC.

10.4 66/11KV Power Transformer

The Outdoor Power transformer shall be 25/31.5MVA, ONAN/ONAF with OLTC. The microprocessor based Transformer monitoring relay (a-eberle relay model) shall be provided in place of RTCC panel. Each Transformer shall be provided with NIFPS. Each Transformer shall be provided with NIFPS along with its cables, one extra N2 cylinder and extra valves as per specification.

10.5 Battery Charger and Battery Bank

The Control supply shall be 220V DC. The Li-Ion Battery bank shall be installed in separate room with proper ventilation system as per safety requirement. The battery charger shall be thyristor controlled installed inside control room building and shall be SCADA compatible.

10.6 11kV APFC Capacitor Bank

Two set of 7.2MVAR capacitor bank shall be installed outdoor. Each capacitor bank shall have one fixed step of 1.8 MVAR and three steps of 1.8 MVAR. Each sub bank shall be provided with motorized 11KV Isolator cum earth switch, 0.2% series reactors, capacitor switch/vacuum contactor, LA, HT fuses, RVT, Neutral Displacement Relay (numerical type), Under voltage Relay. Automatic power factor controller and all necessary equipment for auto switching.

Two set of 3.6MVAR capacitor bank shall be installed outdoor. Each capacitor bank shall have one fixed step of 1.8 MVAR and one steps of 1.8 MVAR. Each sub bank shall be provided with motorized 11KV Isolator cum earth switch, 0.2% series reactors, capacitor switch/vacuum contactor, LA, HT fuses, RVT, Neutral Displacement Relay (numerical type), Under voltage Relay. Automatic power factor controller and all necessary equipment for auto switching.

10.7 Protection coordination through ETAP Software.**10.8 Power and Control cable –**

All power and control cables within substation premise will be laid in single piece. No cable joint shall be accepted within substation premise.

10.9 Other Parameters for 66 KV Substation

Following parameters /service conditions shall prevail for entire system design under the scope of this turnkey project:

Volume – I Technical Specification | General Design Criteria**General Service Condition**

S. No	Particulars	Data
1	Design Ambient temperature	50 °C
2	Seismic Condition	Zone IV as per IS 1893
3	Wind Pressure	195 kg/M ² upto elevation of 30 M as per IS 875
4	Maximum Relative Humidity	100%
5	Maximum Altitude above Sea level	1000M
6	Rainfall	750mm (concentrated in 4 months)
7	Pollution level	Heavy/Dry

System Parameters

S. No.	Parameters	HV Side	LV Side
1	Nominal Voltage (kV)	66	11
2	Rated Voltage (kV)	72.5	12
3	Rated Frequency (Hz)	50 +/- 3%	50 +/- 3%
4	System Neutral Earthing	Solidly Grounded	Solidly Grounded
5	Short Circuit rating (for 3 sec)	3600 MVA / 31.5 kA	500 MVA / 26.3 kA
6	Basic Insulation Level		
6.1	Impulse frequency withstand voltage (kVp)	325	75
6.2	Power frequency withstand voltage (kV rms)	140	28
7	Internal arc withstand capability kA/s	-	26.3kA for 1 Sec.

Parameters for Outdoor Switchyard Equipments (66KV)

S. No	Particulars	Data
1	Minimum Creepage	31mm/KV
2	Minimum Clearances	
2.1	Phase to Phase	630 mm
2.2	Phase to Earth	630 mm
3	Safety Clearances	
3.1	Sectional Clearances	3000 mm
3.2	Height of lowest live point on the insulator from the ground	4300 mm
4	Bus Configuration(Main bus and Jack Bus)	Double Bus with Aluminum Tube
5	Bus coupler bay	Pipe Bus bar
6	Shielding Wire	7/8 SWG.

Site Service Conditions (considering main external road at 0.00 levels)

S. No.	Particulars	Level
1	Substation Road level	+750 mm
2	Final top level of gravel in outdoor yard	+750 mm
3	Final top level of Equipment & gantry foundation	+1050 mm
4	Control Room Building Plinth Level	+1500 mm

11.0 CODES & STANDARDS

The contractor shall follow latest Indian Standards or international standard. Refer respective equipment specification for applicable standards.

12.0 ENGINEERING DELIVERABLES

The Bidder shall submit following minimum Engineering Deliverables from award of the Contract. Any other drawing / calculation which is not listed below and may be required for execution of the job shall also be submitted by the bidder.

S. No.	Drawing Title
A.	Inception report including work schedule and PERT chart within two weeks from LOA(Letter of Award)
B.	Electrical Drawing
1	Main Single Line Diagram indicating bus/breaker rating, cable/overhead conductor size, fault levels of different voltage grade, Transformer details, metering and protection with CT / PT cores / ratio / burden / accuracy class.
2	Complete BOQ of the substation with technical details.
3	Single Line Diagram of 415 V AC Distribution board
4	Single Line Diagram of 220V DC Distribution board
5	Overall Site Layout Plan
6	Maximum & Minimum fault level calculation for the substations
7	Insulation coordination
8	Switchgear/Control building layout – Plan
9	Cable trench layout Plan & Section – outdoor
10	Cable tray layout Plan & Section – Indoor
11	BOQ of Cable trays and accessories
12	Sizing calculation of LV Cables
13	Power cable schedules
14	Control cable schedules
15	BOQ of Cables
16	Codification of cable trays and cable tray/cable tag marking concept
17	Ground mat design Calculation from actual site soil investigation
18	Drawing of ground mat along with BOQ
19	Drawing of Indoor equipment grounding details
20	Outdoor equipment grounding arrangement and details
21	Input /Output list of SCADA system
22	Outdoor Illumination system design Calculation
23	Indoor Illumination system design Calculation
24	Drawing of Outdoor Illumination with erection details
25	Drawing of Indoor Illumination with erection details
26	Complete BOQ indoor and outdoor illumination system
27	CT/PT sizing/detail calculation of burden, knee point voltage
28	All major equipment sizing calculation
29	Cabling, earthing & lightning concept
30	Power Transformer foundation details, soak pit arrangement, firewall segregation
31	Fire fighting arrangement of Transformers and indoor equipments
32	Relay setting with calculations
33	SWITCHGEARS details and its calculations
34	As built documentation of the drawing / documents

Volume – I Technical Specification | General Design Criteria

S. No.	Drawing Title
35	DC Sizing Calculation
36	Exhaust and Ventilation
37	All the other required design Documents
C. Civil Drawings	
S. No	Drawing Title
1	RCC detail of Control Room Building
2	RCC detail of Outdoor / Indoor Cable Trench including trench cover
3	GA & RCC detail of Transformer foundation & Oil Soak pit
4	GA & RCC detail of Auxiliary Transformer
5	GA & RCC detail of Capacitor Bank
6	GA & RCC detail of Burnt Oil Tank
7	GA & RCC detail of Lighting poles
8	GA & RCC detail of Equipment & tower foundation
9	Structural Detail of Equipment & tower
10	Overall layout plan indicating landscaping.
11	GA & RCC detail of NIFPS System
12	Detail of Water Supply and Sanitary system
13	GA & RCC detail of Septic Tank
14	Detail of Rainwater Harvesting System (detail of recharge pit)
15	GA & RCC detail of Underground Water Tank
16	GA and detail of fencing with gates of Switchyard, Capacitor Bank & Auxiliary Transformer
17	GA and Section of Road , Culvert & Storm Water Drain
18	RCC detail of Security Gumbtee
19	Outdoor /Indoor Trench layout
20	Sectional Details for Outdoor /Indoor Trenches
21	Conduit plan for Control room building.
22	Switch yard layout

13.0 SUBMISSION OF DRAWINGS & OTHER DOCUMENTS

BOQ, Calculations and other documents etc. shall be on A4 size paper. All the drawings shall be drawn to the scale as far as possible on A3 size or larger size paper and should be legible. The submission shall be

- Two (03) Sets of approved and released for construction drawings/BOQ/Calculation for Owners reference.
- Six (06) Sets of final As Built drawings, design, BOQ, Calculation. O&M manual, for all equipments supplied.
- Soft copies of all drawings/Documents/calculation in Auto CAD and Microsoft office file format as applicable.

Drawings shall be treated as submitted, only if provided with BOQ (If applicable). Transmittal sheet shall be mandatory to attach with all the drawing and documents. Format for transmittal shall be provided to successful bidder for drawing approvals etc.

14.0 TEST CERTIFICATES

All equipments shall be tested as per their corresponding specification in Tender document.

Volume – I Technical Specification | General Design Criteria

All tests (Type test, Routine test, Acceptance test) shall be carried out at bidders cost. However prices against special test for equipments have to be quoted separately. Special test shall be Owners decision.

Type and Special test has to be carried out at CPRI/ERDA or as mentioned in specification. Routine, and Acceptance tests may be carried out at manufacturer's lab.

Bidder shall submit type test certificate of all the equipment with validity of five years (on the date of bid opening) carried out at CPRI/ERDA.

15.0 QUALITY PLAN**15.1 Manufacturing Quality Plan**

Manufacturing Quality plan with respect to all major equipment and work has to be submitted by the successful bidder for following as a minimum:

- I. An outline of the proposed work and execution plan for approval.
- II. The structure of the supplier's organization for the contract
- III. The duties and responsibilities assigned to staff ensuring quality of work for the contract
- IV. Hold and notification points
- V. Submission of engineering documents required as per specification
- VI. The inspection of materials and components Inspection during fabrication /construction
- VII. Final inspection & tests

Successful bidder shall include submittal of bills invoice, Bill of lading, and factory test certificate for grade, physical tests, dimension, and specific watt loss per kg of core material to the purchaser for verification in quality plan suitably.

14.2 Field Quality Plan

- 14.2.1 Quality Assurance Plan for various stages of execution work shall be submitted by Contractor for approval of Owner. The plan should include the Organization structure so the Safety personnel to ensure the Manpower and Material safety during the entire duration of execution.
- 14.2.2 Environment, Health and Safety (EHS) shall be covered in the plan submitted by Contractor.
- 14.2.3 A checklist to ensure the quality of equipment installation shall be submitted by Contractor for approval

16.0 INSPECTION

As per specification (Training and Inspection) Volume – 1, Chapter-38.

17.0 TRAINING OF BRPL OFFICIALS

As per specification (Training and Inspection) Volume – 1, Chapter-38.

18.0 MONITORING OF MATERIAL DISPATCH STATUS

Once the material is dispatched after Final clearance Transport Vehicle shall have GPS Tracking Device (Preferably Map My India Asset Tracking Device) and status of dispatch of material shall be sent to all the stake holders via SMS thru GPS Device. This shall be applicable to all the major equipments like Switchgears, HT Panel, and Power Transformers, CRP and RTU.

19.0 OPERATION AND AFTER SALE SERVICES

Contractor shall carry out all day to day operations of entire Substation after successful commissioning for a period of 6Months. Contractor shall assign 24x7 operating personnel for operation activities.

Contractor shall appoint appropriate after sale services staff for all necessary service requirements for a period of 6 Months. Contractor shall keep all necessary spares, tools & tackles, T& P, testing equipments for successful operation and maintenance requirement for said period.

Contractor shall provide after sale support for the tenure of stipulated time.

Responsibility of Contractor O&M Engineer shall include:

- a) Training of BRPL officials on successful operation of all the substation equipments including All switchgear, Relays and SCADA.
- b) Operation and Maintenance of entire substation including all switchgears, Relays and SCADA.
- c) Refer Annexure-O for details

TECHNICAL SPECIFICATION
FOR
CIVIL WORK

Prepared by	Amrita Singh		Rev: 0
Reviewed by			Date: 17 th July, 2021
Approved by	Rajinder Rajpal		

Volume – I Technical Specification for Civil Work

1.0 GENERAL REQUIREMENT

- 1.1. This chapter includes the technical requirements for 66kV Sub-station at Goyla Khurd including associated design and preparation of all civil & structural drawings and execution of all associated civil works. This chapter deals mainly with technical specifications for the design, supervision and construction of complete civil & structural works.
- 1.2. The specifications are intended for general description of work, quality and workmanship. The specifications are not however exhaustive to cover minute details and the work shall be executed according to relevant latest Indian Standards/IRC specifications/CPWD specifications. In the absence of the above, the work shall be executed according to the best prevailing practices in the trade, recommendations of relevant American or British Standards or to the instructions of Engineer. The IS standards/IRC specifications/CPWD specifications to be followed are mentioned in the technical specifications attached hereto. They shall be latest editions/ version of the same. The Contractor is expected to get him clarified on any doubts about the specifications, BOQ, etc. before bidding of the Tender.
- 1.3. The work shall be carried out according to the design / drawings to be developed by the Contractor and approved by the Owner based on Tender Drawings (tentative layout) supplied to the Contractor by the Owner. For all buildings, structures, foundations etc. necessary layout and details shall be developed by the Contractor keeping in view the functional requirement of the Sub-Station facilities and providing enough space and access for operation, use and maintenance based on the input provided by the Owner. Certain minimum requirements are indicated in this specification for guidance purposes only. However, the Contractor shall quote according to the complete requirements.
- 1.4. The Contractor shall take all necessary precautions to protect all the existing equipments, structures, facilities & buildings, etc. from damage. In case any damage occurs due to the activities of the Contractor on account of negligence, ignorance, accidental or any other reason whatsoever, the damage shall be made good by the Contractor at his own cost to the satisfaction of the Engineer. The Contractor shall also take all necessary safety measures, at his own cost, to avoid any harm / injury to his workers and staff from the equipment & facilities of the power station.
- 1.5. During the progress of work, the Engineer will exercise supervision of the work to ensure that the technical provisions of the contract are being followed and the work is being executed accurately and properly. However, such supervision shall in no way relieve the Contractor of the responsibility for executing the work in accordance with the specifications.
- 1.6. Before submitting the bid, the Contractor shall inspect and examine the site and its surroundings and shall satisfy himself as to the nature of the ground and subsoil, the availability of materials necessary for completion of the work, means of access to site and in general shall himself obtain all necessary information as to risks, contingencies and other circumstances which may influence or affect his offer. No extra claim consequent on any misunderstanding or otherwise shall be allowed.
- 1.7. In view of pandemic, the Contractor shall be bound to follow all guidelines issued by the Government & take all necessary arrangements & precautions for his workers & staff.

2.0 GEOTECHNICAL INVESTIGATION

The Owner has carried out Geo Technical Investigation and Topographical Survey for the entire Sub-Station including switchyard. The copy of the report is attached with the tender document as input to Contractor for Civil Design & Estimation Work.

Volume – I Technical Specification for Civil Work

3.0 SITE PREPARATION

3.1. Scope

- 3.1.1. This clause covers the design and execution of the work and site preparation such as clearing of the site, the supply and compaction of fill material as per requirement upto desired formation levels, excavation and compaction of backfill for foundations, road construction, drainage, trenches, etc..

3.2. General

- 3.2.1. The layout and levels of all structures, etc. shall be made by the Contractor at his own cost from the general grids of the plot and benchmarks finalized / approved by the Owner. (The required filling up to formation level shall be in the scope of Vendor). The Contractor shall give all help in instruments, materials and personnel to the Owner for checking the detailed layout and shall be solely responsible for the correctness of the layout and levels.
- 3.2.2. The Owner shall provide a boundary wall all around the plot with 02 entry gates. Contractor shall have to make good to all the damages to the boundary wall and gate during work execution, if occurs.
- 3.2.3. Contractor shall develop a building layout and other layouts so that if the trees are there inside the grid plot, they may be escaped from cutting. In extreme conditions when the tree cutting is unavoidable, necessary liaison for permission shall be on part of Contractor from respective Govt. Agency. Requisite formalities shall be carried out by Owner. Fee shall be borne by the Owner. Compensatory plantation shall be done (if required) by Contractor; BRPL shall provide space for the same.
- 3.2.4. The Contractor shall develop the site area to meet the requirements of the intended purpose. The site preparation shall conform to the requirements of relevant sections of this specification or as per stipulations of standard specifications.
- 3.2.5. If fill material is required, the fill material shall be suitable for the above requirement. The fill shall be designed to prevent the erosion by wind and water of material from its final compacted position or the in-situ position of undisturbed soil.
- 3.2.6. Material unsuitable for founding of foundations shall be removed and replaced by suitable fill material and to be approved by the Owner.
- 3.2.7. Backfill material around foundations or other works shall be suitable for the purpose for which it is used and shall be compacted to the density described under Compaction (clause 3.4 of this Specification). Excavated material not suitable or not required for backfill shall be disposed off by the Contractor in areas as directed by Owner upto a maximum lead of 5 km. Backfill material if found having mix of earth and fly ash should not be used for top 30 cm of formation level and should be supplemented with good earth at the cost of Contractor.

3.3. Excavation and Backfill

- 3.3.1. Excavation and backfill for foundations shall be in accordance with the relevant code.
- 3.3.2. Whenever water level is met during the excavation, it shall be dewatered and water level

Volume – I Technical Specification for Civil Work

shall be maintained below the bottom of the excavation level during excavation, concreting and backfilling. Nothing extra shall be payable by the owner on this account.

- 3.3.3. When embankments are to be constructed on slopes of 15% or greater, benches or steps with horizontal and vertical faces shall be cut in the original slope prior to placement of embankment material. Vertical face shall measure not more than 1 m in height.
- 3.3.4. Embankments adjacent to abutments, culverts, retaining walls and similar structures shall be constructed by compacting of the material in successive uniform horizontal layers not exceeding 15 cm in thickness (of loose material before compaction). Each layer shall be compacted as required by means of mechanical tampers approved by the Owner. Rocks larger than 10 cm in any direction shall not be placed in embankment adjacent to structures.
- 3.3.5. Earth embankments of roadways and site areas adjacent to buildings shall be placed in successive uniform horizontal layers not exceeding 20 cm in thickness in loose stage measurement and compacted to the full width specified. The upper surface of the embankment shall be shaped so as to provide complete drainage of surface water at all times.

3.4. Compaction

- 3.4.1. The density to which fill materials shall be compacted shall be as per, relevant IS and as per direction of Owner. All compacted sand filling shall be confined as far as possible. Backfilled earth shall be compacted to minimum 95% of the Standard Proctor's density at OMC. The sub grade for the roads and embankment filling shall be compacted to minimum 95% of the Standard Proctor's density at OMC. Cohesion less material sub grade shall be compacted to 70% relative density (minimum).
- 3.4.2. At all times unfinished construction shall have adequate drainage system. Upon completion of the roads surface course, adjacent shoulders shall be given a final shaping, true alignment and grade.
- 3.4.3. Each layer of earth embankment when compacted shall be as close to optimum moisture content as practicable. Embankment material which does not contain sufficient moisture to obtain proper compaction shall be wetted. If the material contains any excess moisture, then it shall be allowed to dry before rolling. The rolling shall begin at the edges overlapping half the width of the roller each time and progress to the center of the road or towards the building as applicable. Rolling will also be required on rock fills. No compaction shall be carried out in rainy weather.

3.5. Requirement for fill material under foundation

- 3.5.1. The thickness of fill material under the foundations shall be such that the maximum pressure from the footing, transferred through the fill material and distributed onto the original undisturbed soil will not exceed the allowable soil bearing pressure of the original undisturbed soil. For expansive soils the fill materials and other protections etc. to be used under the foundation has to be approved by the Owner.

Volume – I Technical Specification for Civil Work

4.0 CODES AND STANDARDS

All standards, specifications, acts and code of practice (latest revision) shall be followed. In case of conflict between this specification and those (IS standard/ IRC specification/CPWD Specification, etc.) referred to herein, the former shall prevail.

5.0 SUBMISSIONS

The following documents shall be submitted by the Contractor for approval of the BRPL prior to commencement of fabrication and erection / construction.

This list is not exhaustive but indicative only. Final list of drawings shall be prepared by successful Contractor during detailed engineering.

- i. Design calculation, general arrangement drawings, foundation drawing & detailed erection / construction drawings including R/F drawings for Sub-Station Building.
- ii. Foundation design & drawing of all equipment & gantry foundations.
- iii. Structural steel fabrication drawings for gantry & equipment support structure.
- iv. Site preparation plan including filling up to formation level, etc.
- v. Foundation design & drawing of Power Transformer
- vi. Design & drawing of transformer grating & burnt oil tank
- vii. Foundation design & drawing for lighting pole.
- viii. Foundation design & drawing for Capacitor Bank, Auxiliary Transformer and design of fencing for both.
- ix. Complete fencing along with gate for the Sub-Station yard
- x. Details of Indoor and Outdoor Cable Trenches with cable tray supports and trench covers
- xi. Design & drawing of Rainwater Harvesting System, sewerage system including septic tank, water supply arrangement, landscaping, etc.
- xii. Design & drawing of roads and complete drainage system (with final connection to Rain Water Harvesting recharge pit) within Sub-Station including crossings.
- xiii. Design & drawing Security room.
- xiv. Design & drawing NIFPS system & underground water tank.

6.0 SUB-STATION BUILDING GENERAL REQUIREMENTS

6.1. General

- 6.1.1. The scope includes the design, engineering and construction including anti-termite treatment, plinth protection, DPC of buildings including sanitary, water supply, electrification, fire fighting system, etc. The building shall be of RCC framed structure of minimum concrete grade M25. The Sub-Station Building shall include rooms as specified below:

S. No.	Facility
i.	Control Room
ii.	Switchgear Room
iii.	Maintenance Room
iv.	Pantry
v.	Toilet

Volume – I Technical Specification for Civil Work

- 6.1.2. Minimum floor area requirements have been given in tender drawings, which may be increased at the time of detailed engineering to suit project requirements.
- 6.1.3. An open space of 1200 mm minimum shall be provided on the periphery of the rows of panel and equipment generally in order to allow easy operator movement and access as well as maintenance.
- 6.1.4. The building shall be aesthetically designed keeping in view the surrounding landscape; proper architecture shall be used to design the exterior look and finish. The architectural drawing shall be submitted for Owner's approval.
- 6.1.5. Future extension of one floor shall be considered at the time of design. Any other possibility of annex building shall be taken care of while finalizing the layout of the Control Room building.
- 6.1.6. Control Room cum Administrative building shall be constructed as per the approved drawings by Owner. CPWD specification shall be followed in all the building works. The clear height of building shall be minimum 4.5 m (from floor level to bottom of roof slab of ground floor).

6.2. Design

- a) The building shall be designed on Green Building Concept. The design of Control Room building shall be such decided that's minimum one floor can be added in future.

Following parameters shall be followed: -

- To follow & fulfill the requirements of the National Building Code of India and the standards quoted therein.
 - The specified climatic & loading conditions shall be considered.
 - The building shall have RCC framed super structure.
 - To adequately suit the requirements of the equipment and apparatus contained in the buildings and in all respects to be compatible with the intended use and occupancy.
 - To meet functional and economical space arrangement for maximum utilization of the building.
 - To be aesthetically pleasing with uniformity and consistency in architectural design.
 - To allow for easy access to equipment for their maintenance.
 - Using fire retarding materials for walls, ceilings and doors to prevent spreading of fire wherever required.
 - Using materials preventing dust accumulation.
- b) Suitable expansion joints shall be provided in the longitudinal direction wherever necessary with provision of twin columns.

Volume – I Technical Specification for Civil Work

- c) Individual members of the buildings frame shall be designed for the worst combination of forces such as bending moment, axial force, shear force, torsion etc.
- d) Permissible stresses for different load combinations shall be taken as per relevant IS Codes.
- e) The building lighting shall be designed in accordance with the requirements of relevant section.
- f) The building shall have at least two entry/exits gates.

6.3. Design Loads

Building structures shall be designed for the most critical combinations of dead loads, super- imposed loads, equipment loads, wind loads, seismic loads, and temperature loads. Dead loads shall include the weight of structures complete with finishes, fixtures and partitions and should be taken as per IS: 875 (latest revision). Super-imposed loads in different areas shall include live loads, minor equipment loads, cable trays, small pipe racks & hangers and erection, operation and maintenance loads. Equipment loads shall constitute, if applicable, all load of equipments to be supported on the building frame. The wind loads shall be computed as per IS: 875 (latest revision). Seismic Coefficient method shall be used for the seismic analysis as per IS: 1893 (latest revision) with importance factor 1.5.

For temperature loading, the total temperature variation shall be considered as 2/3 of the average maximum annual variation in temperature. The average maximum annual variation in temperature for the purpose shall be taken as the difference between the mean of the daily minimum temperature during the coldest month of the year and mean of daily maximum temperature during the hottest month of the year. The structure shall be designed to withstand stresses due to 50% of the total temperature variation. Wind and Seismic forces shall not be considered to act simultaneously.

Floors/slabs shall be designed to carry live loads & equipment loads. Cable and piping loads shall also be considered additionally for floors where these loads are expected.

In addition, beams shall be designed for any incidental point loads to be applied at any point along the beams. The floor loads shall be subject to Owner's approval.

For consideration of loads on structures IS: 875 (latest revision), the following minimum superimposed live loads shall however be considered for the design.

Roof	2.5 KN/M2 0.75 KN/M2	for accessible roofs for in-accessible roofs
RCC-Floor	(i) 5 KN/M2 (ii) 15 KN/M2 (min)	for offices, for equipment for floors or actual requirement if higher than 15 KN/M2 based on equipment weight and layout plan
Stairs & balconies	5 KN/M2	

Volume – I Technical Specification for Civil Work

Toilet Rooms 2 KN/M2

Any additional load coming in the structure shall be calculated as per IS: 875 (latest revision).

6.4. Submission

The following information shall be submitted for review and approval to the Owner:

- a) Design criteria shall comprise the codes and standards used. Applicable climatic data including wind loads, earthquake factors, maximum and minimum temperatures applicable to the building locations, assumptions of dead and live loads, including equipment loads, impact factors, safety factors and other relevant information.
- b) Structural design calculations and drawing (including construction/fabrication) for all reinforced concrete and structural steel structures.
- c) Fully, dimensioned concept plan including floor plans, cross sections, longitudinal sections, elevations and perspective view of each building. These drawings shall be drawn at a scale not smaller than 1:50 and shall identify the major building components.
- d) Fully dimensioned drawings showing details and sections drawn to scales of sufficient size to clearly show sizes and configuration of the building components and the relationship between them.
- e) Product information of building components and materials, including walls partitions, flooring, ceiling, roofing, door and windows and building finishes.
- f) A detailed schedule of building finishes including colour schemes.
- g) A door & window schedule showing door types and locations, door lock sets, latch sets and other door hardware.
- h) Copy of all tests/ studies/ investigation carried out by bidder as per scope.

Approval of the above information shall be obtained before ordering materials or starting fabrication or construction activity.

6.5. Flooring

Flooring in various rooms of control room building shall be as per detailed schedules given in Table – 1. Pantry countertop shall be of granite stone of required specification as per direction of Engineer-In-Charge

6.6. Walls

Control room building shall be of framed superstructure. All walls shall be non-load bearing walls. Minimum thickness of walls shall be 340 mm upto DPC level in cement mortar 1:6 (1 Cement : 6 Coarse sand) and 230 mm above DPC level in cement mortar 1: 4 (1 Cement :4 coarse sand).

Volume – I Technical Specification for Civil Work

6.7. Plastering

All internal walls shall have minimum 12 mm / 15 mm thick 1:4 (1 Cement : 4 fine Sand) cement sand plaster. The ceiling shall have 6 mm thick 1:3 cement sand plaster.

6.8. Finishing

All external surfaces (control room building and boundary wall) shall have stone grit/ Marble Chips with colour pigment (with groves formed) (item no.13.72-DSR 2012) finish over 12 mm thick cement sand plaster 1:4 (1 cement : 4 coarse sand) mixed with water proofing compound in the ratio as recommended by the manufacturer. Suitable pigment shall be added to render the surface aesthetically pleasing as per directions of Engineer-in-charge.

6.9. Door & Window

The details of doors and windows of the control room building shall be as per finish schedule Table-I and tender drawing with the relevant IS code. Paints used in the work shall be of best quality specified in CPWD specification.

6.10. Partition

Partition made of powder coated aluminum frame provided with 12.0 mm thick toughened glass shall be installed at locations as per requirement/ direction of Engineer in Charge.

6.11. Plumbing & Sanitation

- a) All plumbing and sanitation works shall be executed to comply with the requirements of the appropriate bye-laws, rules and regulations of the Local Authority having jurisdiction over such matters. The Contractor shall arrange for all necessary formalities to be met in regard to inspection, testing, obtaining approval and giving notices etc.
 - b) PVC sintex or equivalent make Roof water tank of adequate capacity depending on the number of users for 24 hours storage shall be provided. Minimum 2 Nos. 1000 litre capacity shall be provided.
 - c) Unplasticised PVC/ Chlorinated Polyvinyl- chloride (CPVC) pipe shall be used for internal & external piping work for potable water supply.
 - d) PVC pipes for all sanitary works.
 - e) All sanitary fittings shall be of Hindware/ Parryware/ Cera.
 - f) Each toilet shall have minimum fittings
 - i) Water closet (European type W.C. pan) 390 mm high (item no. 17.3.1- DSR 2012) or water closet (Indian type W.C. pan) Orissa Pattern (580 x 440 mm) (item no. 17.1.1- DSR 2012) with all fittings (both types of WCs shall be provided at alternate locations).
 - ii) Half Stall Urinal (580 x 380 x 350 mm) with all fittings (item no. 17.5.2- DSR-2012).
-

Volume – I Technical Specification for Civil Work

- iii) Wash basin (630 x 450 mm) with all fittings (item no. 17.7.1- DSR 2012).
- iv) Bathroom mirror (600 x 450 x 6 mm thick) hard board backing (item no. 17.31- DSR 2012).
- v) CP brass towel rail (600 x 20 mm) with C. P. brass brackets.
- vi) Soap holder and liquid soap dispenser.
- g) Water cooler for drinking water with adequate water storage facility shall be provided and located near control room instead of toilet block.
- h) 1 No stainless steel A ISI 304(18/8) kitchen sink as per IS 13893 with Drain board (510 x 1040 x 225 mm bowl depth for pantry shall be provided complete with all fittings (item no. 17.10.1.2-DSR 2012).
- i) All fittings, fastener, grating shall be chromium plated.
- j) All sanitary fixtures and fittings shall be of approved quality and type manufactured by well known manufacturers. All items brought to site must bear identification marks of the Manufacturer.
- k) Soil, waste and drain pipes for underground works shall be stoneware for areas not subject to traffic load. Heavy-duty cast iron pipes shall be used otherwise.

7.0 STORM WATER DRAINAGE FOR CONTROL ROOM BUILDING

Drains shall be provided all around the building for the collection of storm water from the roof of the building. This water shall be collected in chambers and these chambers shall drain to the main drainage system of the station which shall in turn be connected to rain water harvesting recharge pits.

Unplasticised Rigid PVC rain water down comers (150 dia) conforming to IS: 13592 Type A, including jointing with seal ring conforming to IS:5382, leaving 10 mm gap for thermal expansion shall be provided to drain off the rain water from the roof.

All external drains along road shall be covered with precast perforated RCC covers of suitable size and thickness.

For all buildings, suitable arrangement for draining out water collected from equipment blow down, leakages, floor washings fire fighting etc. shall be provided for each floor.

8.0 DEVELOPMENT OF YARD

8.1. Scope

- 8.1.1. The Contractor shall furnish all labour, equipment and materials required for complete performance of the work in accordance with the drawings, specifications and direction of the Owner.
- 8.1.2. Stone spreading shall be done in the Outdoor Sub-Station Yard area, Power Transformer, Capacitor Bank and wherever equipment and structures are to be provided under the

Volume – I Technical Specification for Civil Work

present scope of work.

General Requirement:

The material required for site surfacing / stone filling shall be free from all types of organic materials and shall be of standard quality and as approved by the Owner.

Test for aggregates should be as follows:

a) Sieve Analysis limits (Gradation)

As per IS: 383-1970

The material to be used for stone filling / site surfacing shall be uncrushed / crushed / broken stone of 20 mm nominal size (ungraded single size) conforming to Table 2 of IS:383 - 1970.

Sieve Analysis (Gradation):
(IS: 383 - Table - 2)

Sieve size	% passing by weight
40mm	100
20mm	85-100
10mm	0 – 20
4.75mm	0-5

One test shall be conducted for every 50 cum.

b) Hardness:

Abrasion value (IS: 2386 Part-IV) - not more than 40%

Impact value (IS: 2386 Part-IV) - not more than 30% and frequency shall be one test per 50 cum with a minimum of one test per source

c) Flakiness Index

As per IS: 2386 Part I

- 8.1.3. Before taking up the final yard treatment, antiweed treatment shall be applied in the switchyard area wherever yard treatment is to be done and the area shall be thoroughly de-weeded including removal of roots. The recommendation of local agriculture or horticulture department shall be sought wherever feasible while choosing the type of chemical to be used. Nevertheless the effectiveness of the chemical shall be demonstrated by the contractor in a test area of 10 M x 10 M (approx.) and monitored over a period of two to three weeks by the Engineer-in-Charge. The final approval shall be given by Engineer-in-Charge based on the results.
- 8.1.4. The antiweed chemical shall be procured from reputed manufacturers. The dosage and application of chemical shall be strictly followed as per manufacturer's recommendation. The contractor shall be required to maintain the area free of weeds for a period of 1 year from the date of application of 1st dose of antiweed chemicals

Volume – I Technical Specification for Civil Work

- 8.1.5. After all the structures/equipment are erected and antiweed treatment is complete, the surface of the substation area shall be maintained, rolled/compacted to the lines and grades as decided by Engineer-in-Charge. De-weeding including removal of roots shall be done before rolling is commenced. Engineer-in-Charge shall decide final formation level so as to ensure that the site appears uniform free from undulations. The final formation level shall however be very close to the formation level using manual or machine roller with suitable water sprinkling arrangement to form a smooth and compact surface.
- 8.1.6. After antiweed treatment & compaction of earth, final yard treatment shall be carried out in the 3 layers as follows:
- Providing and laying in position 75 mm thick base layer of cement concrete 1:5:10 (1 cement : 5 coarse sand : 10 brick aggregate 40mm nominal size).
 - Flat brick flooring with over burnt bricks /class designation 100 as per approval of BRPL on the bed of 12 mm thick cement mortar 1:6 (1 cement : 6 coarse sand) and filling the joints 12 mm thick all around the bricks with same mortar.
 - Over the flat brick flooring, a final surface course of minimum 100 mm thickness of 20 mm nominal size (single size ungraded) broken stone shall be spread and uniformly leveled.
- 8.1.7. In areas that are considered by the Engineer-in-Charge to be too congested with foundations and structures for proper rolling of the site surfacing material by normal rolling equipments, the material shall be compacted by hand, if necessary. Due care shall be exercised so as not to damage any foundation, structure or equipment during rolling/compaction.
- 8.1.8. The sub grade shall be in moist condition at the time the cement concrete is placed. If necessary, it should be saturated with water for not less than 6 hours but not exceeding 20 hours before placing of cement concrete. If it becomes dry prior to the actual placing of cement concrete, it shall be sprinkled with water and it shall be ensured that no pools of water or soft patches are formed on the surface.

9.0 SUB-STATION TRENCHES

- 9.1. The cable trenches and precast removable RCC cover (with lifting arrangement) shall be constructed using RCC of minimum grade M25.
- 9.2. The cable trench wall shall be designed for the following loads.
- Dead load of 155 kg/m length of cable support + 75 Kg on one tier at the end.
 - Triangular earth pressure + uniform surcharge pressure of 2T/m².
- 9.3. Cable trench covers shall be 50 mm thick. All trench covers shall have desired reinforcement welded to M.S. frame of angle 50 x 50 x 6 mm all round the cover. Size of covers shall be as per site requirement / direction of Engineer In Charge.
- 9.4. All cable trenches inside the buildings shall have covers comprising of 6 mm thick chequered plates fixed on angle 40 x 40 x 5 mm frame with arrangement of MS holes for lifting of cover.
-

Volume – I Technical Specification for Civil Work

- 9.5. Cable trench crossing the road/rails shall be designed for class AA loading of IRC/relevant IS Code and should be checked for transformer/reactor loading.
- 9.6. Trenches shall have proper slope. Necessary sumps to be constructed and automatic sump pumps of minimum 2.0 HP capacity of approved make with complete electrical fittings shall be installed. Cable trenches shall not be used as storm water drains.
- 9.7. The top of cable trench shall be such that the surface rain water does not enter the trench.
- 9.8. The trench bed shall be perpendicular to the run. Trench wall shall not foul with the foundation. Suitable clear gap shall be provided.
- 9.9. The trench bed shall have a slope of 1/500 along the run & 1/250 perpendicular to the run.
- 9.10. All the construction joints of cable trenches i.e. between base slab to base slab and the junction of vertical wall to base slab as well as from vertical wall to wall and all the expansion joints shall be provided with approved quality PVC water stops of approx. 230 x 5 mm size for those sections where the ground water table is expected to rise above the junction of base slab and vertical wall of cable trenches.
- 9.11. Cable trenches shall be blocked at the ends if required with brick masonry in cement sand mortar 1:6 and plaster with 12 mm/15 mm thick 1:4 cement sand mortar.
- 9.12. Provision of sump and pump is to be done for disposal of rain water from trench.

10.0 SUB-STATION DRAINAGE SYSTEM

Adequate site drainage system shall be provided by the Contractor. The Contractor shall design the storm water drainage system covering all culverts, ditches, drains, etc. The run off shall be calculated on the basis of maximum rainfall intensity that is likely to occur over the catchment area in one hour period on an average of once in ten years. The surface of the site shall be sloped to prevent the ponding of water. Outfall of drainage shall be suitably connected to rainwater harvesting recharge pits. While designing the drainage system following points shall be taken care of:

- 1. The maximum velocity for pipe drains and open drains shall be limited to 2.4 m/sec and 1.8 m/sec respectively. However, minimum non-silting velocity of 0.6m/sec shall be ensured. Longitudinal bed slope not milder than 1 in 1000 shall be provided.
 - 2. For design of RCC pipes for drains and culverts, IS: 456 and IS: 783 shall be followed.
 - 3. The Contractor shall ensure that water drains are away from the site area and shall prevent damage to adjacent property by this water. Adequate protection shall be given to site surfaces, roads, ditches, culverts, etc. to prevent erosion of material by water.
 - 4. For pipe drains, concrete pipe of class NP2 shall be used. However, for road crossings etc. higher strength pipe of class NP3 shall be provided. For rail crossings, pipes conforming to railway loading standards or at least NP4 class shall be provided. Manholes shall be provided at every 30 m interval, at connection points and at every change of alignment.
 - 5. Pipe drains shall be connected through manholes at an interval of maximum 30 m.
-

Volume – I Technical Specification for Civil Work

6. All internal site drainage system, including the final connection/disposal to rainwater harvesting recharge pits shall be part of Contractor's scope including all required civil work, mechanical & electrical systems. The Contractor shall connect drain(s) at one or more points to rainwater harvesting recharge pits as feasible at site. The drainage layout of the substation shall be approved by the Owner & all works shall be carried out by the Contractor.
7. The drainage scheme and associated drawings shall be got approved from the Owner.

11.0 SUB-STATION ROAD

- 11.1. Inside substation roads to be provided with accessibility for open parking, if adequate space is available in the grid layout. Building and parking are in the scope of bidder. Layout of the roads shall be based on layout drawing for the substation. Parking areas shall be provided for Site personnel and visitors as per layout drawing. Adequate turning space for vehicles shall be provided and bend radius shall be set accordingly. It has to be connected suitably with roads.
- 11.2. All substation roads shall be constructed so as to permit transportation of all heavy equipment upto 60 MT. The main approach roads upto Control Room Building and other relevant roads will be RCC Roads. The other connecting roads and pathways shall be of Paver blocks/ CC Road as per site requirement. The pavers blocks used for the roads shall be M-35 grade 60 mm thick cement concrete pavers manufactured by PLC based automated block/paver making machine having compression and vibration both in sequence using multi cavity precision steel moulds.
- 11.3. Design of road shall be as per IRC standard.
- 11.4. Adequate provision shall be made for road drainage.
- 11.5. All the culverts and its allied structure (required for road/rail, drain, trench crossings, etc.) shall be designed for class AA loading as per IRC standard/IS code. All trenches inside the substation shall cross the road through culverts.
- 11.6. Balance areas not covered by building, switchyard and road shall be Cement Concrete / Paver blocks.

12.0 TRANSFORMER FOUNDATION, RAIL TRACK/ ROAD CUM RAIL TRACK

- 12.1. The Contractor shall construct a proper approach to the power transformer foundation. The approach system shall be suitable to permit the movement of any failed unit fully assembled with integral radiators and oil without the de-energization of any other equipment in the station. This system shall enable the removal of any failed unit from its foundation to a repair area and the installation of the spare unit. This system, preferably, shall not interfere with the normal internal road and trench system. If trench/ drain crossings are required then suitable RCC culverts shall be provided in accordance with I.R.C Code/ relevant IS.
- 12.2. The space between the transformer foundation pedestals shall be suitably filled with local sand and 75 mm thick PCC of grade 1:3:6 placed over sand filling. The top of PCC shall be upto the formation level. Suitable drainage system between the pedestals shall be provided.
- 12.3. The rails shall be of first quality 52 kg/m medium manganese steel as per Indian Railway specification T-12-64 and its subsequent revision, joined together by fish plates as per Indian Railway specification T-1/57 and their drawing no. 090M and 27 mm diameter fish bolts. No joint shall be provided at less than L/3 of the longest part.

Volume – I Technical Specification for Civil Work

- 12.4. The grating shall be made of MS flat of size 50 mm x 5 mm placed at 30 mm center to center and 25 mm x 5mm MS flat at a spacing of 150 mm at right angle to each other with all around frame of MS angle 50 x 50 x 5 mm. Maximum length of grating shall be 1500 mm and width shall not be more than 500 mm. The gratings supported on ISMB 150 mm shall be placed at the formation level and will be covered with 100 mm thick layer of broken/crushed/non-crushed stone having size 20 mm to 40 mm which acts as an extinguisher for flaming oil.

13.0 TRANSFORMER OIL PIT & BURNT OIL TANK

- 13.1. All transformers shall have oil collection pit (transformer oil pit) connected to burnt oil tank.
- 13.2. Each transformer including oil conservator tank, cooler banks, etc. shall fall within the periphery of the transformer pit (pit walls) constructed around the transformer foundation. The clear distance of the retaining wall from the transformer shall be 20% of the transformer height or 0.8m whichever is more. The transformer pit thus formed shall have a capacity equal to volume of oil in the transformers. The MS grating placed at the formation level shall be covered with 100mm thick gravel of 40mm nominal size which acts as an extinguisher for flaming oil.
- 13.3. Each transformer pit shall be drained towards a burnt oil tank whose role is to recover the infiltrating water and the drained oil from the pit. The burnt oil tank shall have sufficient capacity to receive without overflowing the oil content of large transformers plus the water content of any fixed fire fighting system and a certain quantity of rain water collected from the pit connected to it. The system shall be provided with air vents large enough to avoid over pressure during operation. The whole internal surface of the burnt oil tank should be impermeable.
- 13.4. The walls which make up the transformer pit shall be made of fire resistant material such as reinforced cement concrete, etc and shall be impervious to oil.
- 13.5. The floor of the transformer pit shall be of plain cement concrete of grade M15.
- 13.6. Pump house with minimum 2.0 HP capacity & of approved make with electrical fittings of ISI mark shall be supplied and installed by the Contractor to evacuate the fire fighting & rainwater from the burnt oil tank.
- 13.7. If the height of the retaining wall which form the transformer pit exceed 60cm, steps shall be provided to facilitate access to the transformer and its ancillaries.
- 13.8. When designing the transformer pit, the movement of the transformer must be taken into account.

14.0 FIRE PROTECTION WALLS

- 14.1. General
- 14.1.1. Fire protection walls shall be provided, if required, in accordance with Tariff Advisory Committee (TAC) recommendations.
- 14.2. Material
- 14.2.1. The firewall may be made of reinforced cement concrete (M-25 grade) or fire brick as per the system requirements. Materials used must conform to the standards of the National Fire
-

Volume – I Technical Specification for Civil Work

Prevention Association & TAC Norms.

14.3. Fire Resistance

- 14.3.1. The firewall shall have a minimum fire resistance of 3 hours. The walls of the building which are used as firewalls shall also have a minimum fire resistance of 3 hours.
- 14.3.2. The firewall shall be designed to protect against the effect of radiant heat and flying debris from an adjacent fire.

14.4. Dimensions

- 14.4.1. The height of firewall shall be minimum 6 m and shall extend at least 300 mm above the topmost part of the transformer and length wise 600 mm beyond the transformer (on both sides) including any radiators and tap changer enclosure.
- 14.4.2. These dimensions might be reduced in special cases, as per the approval of Owner where there is lack of space.
- 14.4.3. The building walls which act as firewalls shall extend at least 1 m above the roof in order to protect it.

15.0 DESIGN CONSIDERATION FOR FOUNDATION

15.1. General

- 15.1.1. Scope of Work under this Clause of the Specification comprises the design and construction of foundations and other RCC constructions for switchyard structures, equipment supports, trenches, drains, jacking pad, pulling block, control cubicles, bus supports, Power transformer/Reactors, NIFPS system, marshalling kiosks, auxiliary equipment, tanks or any other equipment foundations required to complete the work.
 - 15.1.2. Concrete shall conform to the requirements mentioned in IS: 456 and all the tests shall be conducted as per relevant Indian Standard Codes as mentioned in Standard field quality plan appended with the specification. A minimum grade of M25 concrete shall be used for all structural/load bearing members as per IS: 456 (latest revision).
 - 15.1.3. If the site is sloppy, the foundation height will be adjusted to maintain the exact level of the top of structures to compensate such slopes.
 - 15.1.4. The top of switchyard equipment foundations shall be minimum 300 mm above finished yard level.
 - 15.1.5. Minimum 75 mm thick lean concrete (1:4:8) shall be provided below all underground structures, foundations, trenches etc. to provide a base for construction.
 - 15.1.6. Concrete made with Portland cement shall be carefully cured and special importance shall be given during the placing of concrete and removal of shuttering.
 - 15.1.7. The design and detailing of foundations shall be done based on the approved soil data and sub-soil conditions as well as for all possible critical loads and the combinations thereof. The
-

Volume – I Technical Specification for Civil Work

Spread footing or pile foundation as may be required based on soil/sub-soil conditions and superimposed loads shall be provided.

- 15.1.8. If pile foundations are adopted, the same shall be cast-in-situ driven/bored or precast or under reamed type as per relevant parts of IS: 2911. In every condition only RCC piles shall be provided. Suitability of the adopted pile foundations shall be justified by way of full design calculations. Detailed design calculations shall be submitted by the bidder showing complete details of piles/pile groups proposed to be used. Necessary initial load test shall also be carried out by the bidder at their cost to establish the piles design capacity. The Contractor shall take up the job of piling only after the design capacities of piles have been established. Routine tests for the piles shall also be conducted. All the work (design & testing) shall be planned in such a way that these shall not cause any delay in project completion. The contractor shall go for vertical load testing, lateral load testing & pullout load testing. The contractor may choose static or dynamic load testing upon site condition and time constraint.

15.2. Design

- 15.2.1. All foundation shall be of reinforced cement concrete. The design and construction of RCC structures shall be carried out as per IS: 456 and minimum grade of concrete shall be M-25.
- 15.2.2. Limit state method of design shall be adopted unless specified otherwise in the specification.
- 15.2.3. For detailing of reinforcement IS: 2502 and SP: 16 shall be followed. TMT bars conforming to IS: 1786 shall be used as reinforcement. However, in specific areas mild steel (Grade I) conforming to IS: 432 can also be used. Two layers of reinforcement (on inner and outer face) shall be provided for wall having thickness of 150 mm and above. For footings minimum cover shall be 50 mm.
- 15.2.4. RCC water retaining structures like storage tanks, etc. shall be designed as uncracked section in accordance with IS: 3370 (Part I to IV) by working stress method. However, water channels shall be designed as cracked section with limited steel stresses as per IS: 3370 (Part I to IV) by working stress method.
- 15.2.5. The procedure used for the design of the foundations shall be the most critical loading combination of the steel structure and/or equipment and/or superstructure and other conditions which produces the maximum stresses in the foundation or the foundation component and as per the relevant IS Codes of foundation design. Detailed design calculations shall be submitted by the bidder showing complete detail of piles/pile groups proposed to be used.
- 15.2.6. Design shall consider any sub-soil water pressure that may be encountered following relevant standard strictly.
- 15.2.7. Necessary protection to the foundation work if required shall be provided to take care of any special requirement for aggressive alkaline soil, black cotton soil or any other type of soil which is detrimental / harmful to the concrete foundations.
- 15.2.8. RCC columns shall be provided with rigid connection at the base.
- 15.2.9. All sub-structures shall be checked for sliding and overturning stability during construction as well as operation for various combinations of loads. Factor of safety for these cases shall

Volume – I Technical Specification for Civil Work

be taken as mentioned in relevant IS Codes or as stipulated elsewhere in this Specification. For checking against overturning weight of soil vertically above footing shall be taken and inverted frustum of pyramid of earth on the foundation should not be considered.

- 15.2.10. Earth pressure for all underground structures shall be calculated using coefficient of earth pressure at rest. Co-efficient of active or passive earth pressure (whichever is applicable). However, for the design of substructures of any underground enclosures, earth pressure at rest shall be considered.
- 15.2.11. In addition to earth pressure, ground water pressure, etc., a surcharge load of 2T/ Square metre shall also be considered for the design of all underground structures including channels, sumps, tanks, trenches, substructure of any underground hollow enclosure, etc, for taking in account the vehicular traffic in the vicinity of the structure.
- 15.2.12. Following conditions shall be considered for the design of water tank in pumps house, channels, sumps, trenches and other underground structures:
- a) Full water pressure from inside and no earth pressure, ground water pressure & surcharge pressure from outside (application only to structures, which are liable to be filled up with water or any other liquid).
 - b) Full earth pressure, surcharge pressure and ground water pressure from outside and no water pressure from inside.
 - c) Design shall also be checked against buoyancy due to the ground water during construction and maintenance stages. Minimum factor of safety of 1.5 against buoyancy shall be ensured ignoring the superimposed loadings.
- 15.2.13. Base slab of any underground enclosure shall also be designed for empty condition during construction and maintenance stages with maximum groundwater table (GWT). Minimum factor of safety of 1.5 against buoyancy shall be ensured ignoring the super-imposed loadings.
- 15.2.14. Base slab of any underground enclosure like water storage tank shall also be designed for the condition of different combination of pump sumps being empty during maintenance stages with maximum GWT. Intermediate dividing piers of such enclosures shall be designed considering water in one pump sump only and the other pumps sump being empty for maintenance.
- 15.2.15. The foundations shall be proportioned so that the estimated total and differential movements of the foundations are not greater than the movements that the structure or equipment is designed to accommodate.
- 15.2.16. The equipment foundations shall be checked for a factor of safety of 2.2 for normal condition and 1.65 for short circuit condition against sliding, overturning and pullout. The same factors shall be used as partial safety factor over loads in limit state design also.

15.3. Admixture & Additives

- 15.3.1. Only approved admixtures shall be used in the concrete for the Civil Work. When more than one admixture is to be used, each admixture shall be batched in its own batch and added to

Volume – I Technical Specification for Civil Work

the mixing water separately before discharging into the mixer. Admixtures shall be delivered in suitably labeled containers to enable identification.

- 15.3.2. Admixtures in concrete shall conform to IS: 9103. The waterproofing cement additives shall conform to IS: 2645. Owner shall approve concrete Admixtures/ Additives.
- 15.3.3. The contractor may propose and the Owner may improve the use of a water-reducing set-retarding admixture in some of the concrete. The use of such an admixture will not be approved to overcome problems associated with inadequate concrete plant capacity or improperly planned placing operation and shall only be approved as an aid to overcoming unusual circumstances and placing conditions.
- 15.3.4. The water-reducing set-retarding admixture shall be of an approved brand.
- 15.3.5. The waterproofing cement additives shall be used as required/advised by the Owner.
- 15.3.6. Water proofing treatment on roof shall be as per Item No 22.7.1 - DSR 2012.

16.0 FENCING OF SUB-STATION (LIVE PART) AREA

16.1. General

Fencing shall be designed for the most critical loading combination taking care of wind force, stability, tension on wires, minimum requirements as per this clause for materials IS 8910 and fabrication IS 800 as per recommendations

16.2. Areas Requiring Fencing

16.3. Fencing shall be providing for the following areas:

- 16.3.1. Site fencing for the complete Outdoor substation Yard area including Power transformer area. Gates shall be provided for men and machine / equipment to be taken out of the substation.
- 16.3.2. The IRC weld mesh panels fencing of Capacitor Bank with roof cover (as per approved BRPL pattern) if required.
- 16.3.3. Fencing of Aux. Substation Transformer (as per approved BRPL pattern).

16.4. Product Material

- 16.4.1. The minimum requirements are as follows:
IRC Weld Mesh fencing in accordance to relevant IS Code

- | | |
|--------------------------|---|
| • Size of IRC mesh | 25X75 mm |
| • Nominal wire size | 6 gauge/ 7.75 kg/m ² |
| • Width of fencing panel | 2400 mm |
| • Height of fencing | 2000 mm |
| • Fabrication of panels | 40 mm Nominal bore M.S. Pipe
(medium duty). Providing elbow/bend
at corners & 40 x 5 mm M.S. flats in |

Volume – I Technical Specification for Civil Work

- Paint beading
Aluminum Paint

16.4.2. Posts

- Intermediate Straining Post : 65 mm Nominal bore, M.S. Pipe (Medium duty)
- Base Plate : 12 mm M.S. Plate with 4 nos of hole. Nuts & bolts of suitable diameter.
- Paint : shall be painted with a coat of approved steel primer and two coats of synthetic enamel paint

The IRC weld mesh Panels shall be fixed to the post at the top and bottom of the 65 mm Nominal bore, M.S. Pipe by Nuts and bolts. The Intermediate straining Posts to be erected by using holding down bolts and nuts grouted in toe wall around the Yard (the height of Yard Toe wall to be at least 450 mm above the yard level and upto 340 mm wide).

16.5. Installation

- 16.5.1. Fence shall be installed along switchyard line.
- 16.5.2. Post holes shall be excavated by approved methods.
- 16.5.3. Intermediate posts shall be spaced 2.5 m apart measured parallel to ground surface.
- 16.5.4. Posts shall be set in 1:2:4 plain cement concrete blocks of minimum dimension (340 mm x 340 mm x 750 mm deep) Concrete work shall conform to relevant clause. Post shall be braced and held in plumb position and true alignment and elevation until concrete has set.
- 16.5.5. Fence fabric shall not be installed until concrete has cured a minimum of 7 days.
- 16.5.6. Bottom and top of the fence panels shall be fixed with post by MS flats of 50 mm x 6 mm (min).
- 16.5.7. Toe wall of Brick masonry over 75 mm thick PCC (1:4:8) shall be provided below all fencing and shall be minimum 400 mm above and 450 mm below finished ground level. 50 mm thick coping (M15) to be provided over brick wall. All exposed surfaces of brick toe wall shall be provided with 1:4 cement sand plaster (1 cement : 4 coarse sand) and coated with two coats of Acrylic Smooth exterior paint with a base coat of approved cement primer.

16.6. M.S. Gate

- 16.6.1. M.S. Gate of 6.0 m wide x 2.3 m height (2 nos) and 1.55 m x 2.3 m height (1 no) shall be provided to provide access through the fencing to the yard. M.S. Gate of 6.0 m wide x 2.3 m height shall be made in two leaf and 1.55 m x 2.3 m height shall be made in one leaf with locking arrangements. The gate shall be made with outer frame of 40 NB (Medium) M. S. Pipe. Weld mesh of opening size 25 x 75 mm and nominal wire size of mesh is 6 gauge/ 7.75 kg/m² (as per standard approved drawing of BSES).

Volume – I Technical Specification for Civil Work

16.6.2. Hinges, al-drops and other accessories shall be provided for effective working of the gate.

17.0 GATES

- 17.1. The main gates in boundary wall shall be provided as per BRPL approved standard design / drawing. Make of MS materials shall be Sail/ Jindal/ TATA.
- 17.2. The gates shall be fabricated with welded joints to achieve rigid connections. The gate frames shall be painted with one or more coat of approved steel primer and two coats of synthetic enamel paint.
- 17.3. Gates shall be fitted with approved quality iron hinges. Hinges shall permit gates to swing through 180 degree.
- 17.4. Double gates shall be fitted with centre rest and drop bolt to secure gates in closed position.
- 17.5. Main Gate shall be 6m wide. Gates shall be installed in locations shown on drawings. As per availability of space, next to the main gate, a men gate (1.25 m wide, single leaf) shall also be provided as a wicket gate otherwise wicket gate shall be provided within the larger gate.
- 17.6. Bottom of gates shall be set approximately 40 mm above ground surface and necessary guiding mechanism shall be fitted as per site requirement.
- 17.7. The gates shall be provided with suitable locking arrangement.

18.0 MISCELLANEOUS GENERAL REQUIREMENTS

- 18.1. Bricks having minimum 100 kg/cm² compressive strength can only be used for masonry work. Contractor shall ascertain himself at site regarding the availability of bricks of minimum 100 kg/cm² compressive strength before submitting his offer.
 - 18.2. Doors and windows on external walls of the building (other than areas provided, with insulated metal claddings) shall be provided with RCC sunshade over the openings with 150 mm projection on either side of the openings. Projection of sunshade from the wall shall be minimum 600 mm over window & door openings.
 - 18.3. RCC staircase shall be provided for access to roof of the entire building. All stairs shall have maximum riser height of 150 mm and a minimum tread width of 300 mm Minimum width of stairs shall be 1500 mm. Steel doors shall be provided in the Mumty and height of Mumty should be 2.6m.
 - 18.4. Angles 50x50x6 mm (minimum) with lugs shall be provided for edge protection all round cut outs/openings in floor slab, edges of RCC cable/pipe trenches supporting covers, edges of manholes supporting covers, supporting edges of manhole precast cover and any other place where breakage of corners of concrete is expected.
 - 18.5. The railing of staircase shall be 0.9 m average height comprising of 20 mm square bars of length 1.05 m and 150 mm centre to centre with teak wood handrail on top of railing including fixing of vertical bars in steps by grouting of required hold fast as per direction of Engineer in Charge.
 - 18.6. All buildings shall have 750 mm wide plinth protection all round.
 - 18.7. 50 mm thick DPC shall be provided before laying of masonry (item no. 4.11 & 4.13-DSR 2012).
-

Volume – I Technical Specification for Civil Work

- 18.8. BSES Display board is to be provided of required size and as per approved pattern /drawing of BRPL with name of the grid.
- 18.9. Water and Sewer line connections to be done with running line of CIVIC agency, if approval of CIVIC agency is available
- 18.10. The details given in tender drawings shall be considered along with details available in this section of the specification while deciding various components of the building.

Items/components of buildings not explicitly covered in the specification but required for completion of the project shall be deemed to be included in the scope.

19.0 INTERFACING

The proper coordination & execution of all interfacing civil works activities like fixing of conduits in roofs/walls/floors, fixing of lighting fixtures, fixing of supports/ embedment, provision of cutouts, etc for indoor illumination, ventilation & Air conditioning shall be the sole responsibility of the Contractor. He shall plan all such activities in advance and execute in such a manner that interfacing activities do not become bottlenecks and dismantling, breakage etc. is reduced to minimum

20.0 FIELD QUALITY PLAN FOR CIVIL WORKS

The field quality plan for all civil works shall be in accordance with CPWD specification and other relevant Indian Standard Codes. All quality checks and procedures shall be followed as per relevant CPWD norms.

21.0 WATER SUPPLY

- 21.1. Arrangement of water for construction work as well as drinking purpose shall be in the scope of Contractor.
- 21.2. The Contractor shall carry out all the plumbing/erection works required for supply of water in Substation building.
- 21.3. A scheme shall be prepared by the Contractor indicating the layout and details of water supply which shall be got approved from the Owner before actual start of work including all other incidental items not shown or specified but as may be required for complete performance of the works.
- 21.4. Pumps for water supply shall be in the scope of contractor. The Contractor shall provide an underground water reservoir, near the gate of minimum 20 M³ capacity. Pump house for pumping water from underground water tank to the overhead water tank on top of the building shall be of minimum 2.0 HP capacity & electrical fittings of ISI mark.
- 21.5. The details of tanks, pipes, fittings, fixtures etc for water supply shall be approved by engineer in charge.

22.0 SEWERAGE SYSTEM

- 22.1. Sewerage system shall be provided for control room building.
 - 22.2. The Contractor shall construct septic tank and soak pit suitable for 20 users or make connection with
-

Volume – I Technical Specification for Civil Work

nearby existing sewerage system of Civic agency, if approval of Civic agency is available

- 22.3. The system shall be designed as per relevant IS Codes.
- 22.4. External sewerage system including connection with internal services of building shall be within the scope of this contract. The connection and laying of sewer lines and manholes upto the point of connection with the sewer line of local civic agency if existing within 100 m from any point of boundary of sub-station. If the sewer line of local civic agency does not exist in the area then septic tank with soak pit shall be constructed for control room building (suitable for 20 users). BRPL shall obtain necessary approval from civic agency for laying of sewer lines as aforesaid and connection thereof. Any municipal charges for approval and connection shall be paid by BRPL directly to the local authorities.

23.0 RAIN WATER HARVESTING

- (a) Providing two recharge structures with bore wells at different locations as per approved drawing for rainwater harvesting system. The recharge structures shall be suitably located within the sub-station. Branch drains from the main drain carrying rainwater from entire switchyard, constructed in accordance with clause 9 & 10 shall be connected to the recharge structures.
- (b) The internal diameter of recharge shafts shall be 4.5 meter with 230 mm thick lining of brick work upto a depth of 2.0 meter from ground level and 345 mm thick brickwork below 2.0 meter depth. The brickwork shall be constructed with cement mortar 1:6 (1cement: 6 coarse sand). The overall depth of shaft shall be 5.0 meter below invert level of drain. The shaft shall be covered with RCC slab for a live load of 300 kg per sqm. Two openings of size 0.7 x 0.7 meter shall be provided in the RCC cover slab. An iron cover made of 5 mm thick chequered plate with hinges shall be provided on the openings. Galvanized M.S. rungs of 16 mm diameter at spacing of 300 mm shall be provided in the wall of shaft below the opening in the RCC slab to facilitate cleaning of shaft.
- (c) A 300 mm diameter bore well shall be drilled in the centre of the shaft. The depth of bore well shall be 5.0 meter more than the depth of sub soil water.
- (d) A 100 mm diameter medium duty MS/ PVC pipe conforming to IS: 1161 shall be lowered in the bore well keeping bail plug towards bottom of bore well. The pipe shall have 1.58 mm holes for 4.0 meter length starting from 1.0 meter from bottom of bore well. Holes of 3.0 mm diameter shall be provided for a length of 2.0 meter starting from the bottom level of coarse sand and downwards. The overall length of pipe shall be equal to total depth of bore well plus depth of shaft.
- (e) Gravel of size 3 mm to 6 mm shall be filled around 100 diameter MS pipe in the bore well. The shaft shall be filled with 500 mm thick layers each from the bottom of shaft with boulders of size 50 mm to 150 mm, gravel of size 5 mm to 10 mm, coarse sand having particle size 1.5 mm to 2.0 mm and boulders of size not less than 200 mm respectively.
- (f) Drawing based on above details of recharge structure for rainwater harvesting has to be prepared by contractor and to be approved from engineer in charge.

24.0 STATUTORY RULES

- 24.1. Contractor shall comply with all the applicable statutory rules pertaining to factories act (as applicable far the State), Fire Safety Rules of Tariff Advisory Committee. Water Act for pollution control, Energy

Volume – I Technical Specification for Civil Work

Conservation Act, etc.

- 24.2. Statutory clearance and norms of State Pollution Control Board shall be followed.
- 24.3. Foundation system adopted by Bidder shall ensure that relative settlement and other criteria shall be as per provision in IS: 1904 and other Indian Standards.
- 24.4. All water retaining structures designed as uncracked section shall also be tested for water tightness at full water level in accordance with clause no. 10 of IS :3370 (Part-I).
- 24.5. Construction joints shall be as per IS: 456.
- 24.6. All building/construction materials shall conform to the best quality specified in CPWD specifications if not otherwise mentioned in this specification.
- 24.7. All tests as required in the standard field quality plans of CPWD or as per sound engineering practices have to be carried out.
- 24.8. The type and treatment of all foundation shall be as per recommendation of geo-technical investigation reports.

25.0 TESTS FOR MATERIAL / WORKMANSHIP

All tests required for various bought out items, materials, quality of workmanship or any other tests as desired by Project Manager and as specified in technical specification shall be carried out by the Bidder at his own cost in the presence of the authorized representative of the Engineer.

The Bidder shall submit comprehensive Quality Assurance plan for all materials, equipment, workmanship, services etc. and get it approved from the Engineer. This shall include setting up a test laboratory at site. However, such check list shall in no way limit the liability and responsibility of the Bidder in regard to quality of workmanship as detailed out in the specifications.

The sampling & testing of the construction materials shall be in accordance to latest CPWD Specifications related to all activities of the building and other civil construction works.

26.0 DRAWINGS

The successful Bidder shall first submit the structural design calculations along with general arrangement drawings for approval. After the approval of the design calculations by the owner detailed construction drawings shall be prepared and submitted for Employer's approval along with revised design calculations if required within 7 days. Required number of sets of design calculations, drawings and documents shall be submitted by the Bidder.

Calculations and other documents etc. shall be on A4 size paper. All the drawings shall be drawn to the scale as far as possible on A1 size or larger size paper and should be legible. The submission shall be

- Three (03) Sets of approved and released for construction drawings/Calculation for Owners reference.

Volume – I Technical Specification for Civil Work

- Two (02) Sets of final As Built drawings, design, Calculation & O&M manual for all equipments supplied.
- Soft copies of all drawings/Documents/calculation in Auto CAD and Microsoft office file format as applicable.

Transmittal sheet shall be mandatory to attach with all the drawing and documents. Format for transmittal shall be provided to successful bidder for drawing approvals etc.

27.0 ALTERATION IN SPECIFICATION AND DESIGN

The Project Manager shall have the power to make any alteration and omissions from, additions to or substitution for the original specifications, drawings, designs and instructions that may appear to him to be necessary during the progress of the work and the Bidder shall carry out the work in accordance with any instruction which may be given to him in writing signed by the Project Manager and such alterations, omissions, additions or substitutions shall not invalidate the contract. Any altered, added or substituted work which the Bidder may be directed to do in the manner above specified as part of the work shall be carried out by the Bidder on the same conditions in all respects on which the Bidder agreed to do the original contract work. The time for completion of work shall be altered in the proportion that the altered, added or substituted work bears to the original contract work and the certificate of the Project Manager shall be conclusive as to such proportion.

The rates for the altered items of work shall be worked out on the following basis and necessary alternations in the total amount shall be made on that basis:

- (a) The rates to be reimbursed or recovered shall be taken as same as those given in CPWD-DSR (latest) for those items for which the rates are available in CPWD - DSR (latest). However, the premium as officially declared by CPWD's official circulars, at the time of carrying out these works, the same shall also be applicable.
- (b) Rates for the items not covered under CPWD - DSR (latest) shall be derived from the rates of similar items of CPWD schedule of rates. However, the premium as officially declared by CPWD on the above DSR rates if existing or prevalent through CPWD's official circulars, at the time of carrying out these works, the same shall be applicable.
- (c) In the event there is no similar class of work specified in the CPWD - DSR (latest), the Bidder shall work on a rate for such an item on the basis of the prevalent market rates for materials / men / machines and submit the same together with the detailed analysis to the Project Manager within 7 days. The Project Manager shall thereafter review the correctness and then forward to BRPL C&M for conducting necessary negotiations with the Bidder to arrive at a mutually agreeable rate. Engineer's decision in regard to rates of such items shall be final and binding on the Bidder.

In case of conflict between this chapter and other Chapters of Technical Specifications, provisions given in this chapter shall govern.

Volume – I Technical Specification for Civil Work

Table 1- Finishing Schedule

No	Location	Flooring & Skirting 150mm high	Wall Internal	Ceiling	Doors, Windows, Ventilators
1	Control room	1. False flooring as per design requirement/ layout. OR 2. Homogeneous PVC sheet 2 mm thick over 52 mm thick CC flooring with concrete hardener topping (item no. 11.4-DSR 2012) over an under layer of RCC/CC.	Plastic emulsion Paint on smooth surface applied with putty	Oil bound washable distemper on smooth surface applied with putty	Powder coated Aluminium Hindalco or equivalent extruded sections as per IS 733 & 1285. Glazing with float glass (min 5.5 mm thick). For windows/ventilators double glazing with 12 mm gap hermetically sealed (minimum thickness of powder coating 50 micron of approved colour).
2	Reception Lobby/ Maintenance Room	Polished Kota stone	Oil bound washable distemper on smooth surface applied with putty	Oil bound washable distemper on smooth surface applied with putty	Powder coated Aluminium Hindalco or equivalent extruded sections as per IS 733 & 1285. Glazing with float glass (min 5.5 mm thick). For windows/ventilators double glazing with 12 mm gap hermetically sealed (minimum thickness of powder coating 50 micron of approved colour)
3	Toilet	Anti skid Vitrified tiles with white cement.	DADO glazed tile 2.1m high for toilet, for pantry above working platform up to 750 mm.	Oil bound washable distemper on smooth surface applied with putty	Powder coated Aluminium Hindalco or equivalent extruded sections as per IS 733 & 1285. Glazing with float glass (min 5.5 mm thick). For windows/ventilators double glazing with 12 mm gap hermetically sealed (minimum thickness of powder coating 50 micron of approved colour).
4	Stair	Polished Kota stone	Oil bound washable distemper on smooth surface applied with putty	Oil bound washable distemper on smooth surface applied with putty	Powder coated Aluminium Hindalco or equivalent extruded sections as per IS 733 & 1285. Glazing with float glass (min 5.5 mm thick). For windows/ventilators double glazing with 12mm gap hermetically sealed (minimum thickness of powder coating 50 micron of approved colour).

Volume – I Technical Specification for Civil Work

5	Other areas not specified	Vitrified tile of approved size	Oil bound washable distemper on smooth surface applied with putty	Oil bound washable distemper on smooth surface applied with putty	
6	Switchgear Room	52 mm thick CC flooring with concrete hardener topping (item no. 11.4-DSR 2012) with epoxy paint on top and an under layer of RCC/CC.	Oil bound washable distemper on smooth surface applied with putty	Oil bound washable distemper on smooth surface applied with putty	For windows/ventilators Powder coated Aluminium Hindalco or equivalent extruded sections as per IS 733 & 1285. Glazing with float glass (min 5.5 mm thick). Double glazing with 12 mm gap hermetically sealed (minimum thickness of powder coating 50 micron of approved colour).
7	Internal doors between Control Room & 11KV Switchgear room shall be fire proof doors. (Fire rating of 120 minutes).				
8	The External finishing of Control room building will be of Stone grit/ Wash Marble chip of approved color and quality with color pigments using white / grey cement or combination of both.				
9	External finishing of the building on area other than the area of stone grit/ Wash Marble using Acrylic Smooth exterior paint (painting) shall be Nerolac excel or equivalent The paint shade as approved by BRPL				

TECHNICAL SPECIFICATION
FOR
66KV OUTDOOR CIRCUIT BREAKER

Prepared by	Meenakshi		Rev: 0
Reviewed by	Kiran Alla		Date:
Approved by	Kiran Alla		

Volume – I Technical Specification for 66KV Outdoor Circuit Breaker

1.0 CODES & STANDARDS:

The circuit breakers shall be designed, manufactured and tested in accordance with the latest applicable Indian Standard, IEC standard and CBIP manuals as listed below –

National Standard

Standard Code	Standard Description
Indian electricity act	Revised edition
CBIP manual	
IS-2516	Specification for circuit. Breaker.
IS-13118-1991	Specification for high voltage altering current circuit breaker
IS-335-1995	Insulating oil for Transformer & Switchgear.
IS-2090-1973	Bushing for alternating voltage above 1000 volts.
IS-731-1971	Insulator for Overhead lines.
IS -996-1979	Single phase small AC and Universal Electric Motors.
IS-7572-1974	Guide for testing single phase AC and Universal motors.
IS 4237-1967	General Requirement for switchgear for voltage not exceeding 1Kv.
IS-2147-1962	Degree of protection provided by enclosure for low-voltage switchgear control gear.
IS-1554 Part-I 1988	PVC insulated cables up to & including 1100 volts.
IS-2208	HRC Cartridge fuses links up to 650 volts.
IS-375	Outdoor switchgear & control gear matching with latest IS/IEC requirement
IS-2544	Porcelain Post Insulator
IS-5621	Hollow insulators for use in electrical equipment
IEC-56	Specification for high voltage alternating current circuit breaker
IEC-62271 - 100	High Voltage alternating Current Circuit Breaker
IEC-60694	Common specification for high voltage switchgear and control gear standards
IEC-376	SF6 Gas

Volume – I Technical Specification for 66KV Outdoor Circuit Breaker

2.0 CIRCUIT BREAKER DESIGN FEATURES

	Description	Requirement / Rating
2.1.0	Contacts	
2.1.1	Making & Breaking Contacts	Hermetically sealed, free from atmospheric effects, adjustable to allow for wear, easily replaceable and shall have a minimum number of moveable parts and adjustments to accomplish these results
2.1.2	Arcing Contacts	First to close and last to open
2.1.3	Main Contacts	First to open and last to close.
2.1.4	Material of tips of contact	Silver-plated and have tungsten alloy tipping.
2.2.0	Sulphur Hexa Fluoride Gas (SF6 Gas)	SF6 gas shall comply with IEC 376, suitable in all respect for use in the switchgear under all the operating conditions.
2.3.0	Operating Mechanism	a) Suitable for high speed re-closing, anti-pumping and trip free (as per IEC definition) electrically or mechanically under every method of closing (except during closing for maintenance). b) The operating mechanism shall be such that the failure of any auxiliary spring will not prevent tripping
2.4.0	Indicators	Electrical indicators as well as a mechanical indicator shall be provided for a) Open and close position indication of breaker b) Spring charged indication c) Local / Remote indication These indications shall be located in a position where it will be visible to a man standing on the ground with the mechanism housing closed. An operation counter shall also be provided with each breaker. SF6 gas density monitor shall be provided at 1.5 metre from ground level, tubing between gauge & breaker shall be stainless steel.
2.5.0	Closing Coil	Closing coil shall operate correctly at all values of voltage between 85% and 110% of the rated voltage.
2.6.0	Tripping Coil	a) Shunt trip shall operate correctly at all values of supply voltage between 70% and 110% of rated voltage. b) Trip coil shall be suitable for trip circuit supervision, the relay for monitoring which will be provided by the Owner and mounted on control panel. c) Two no's tripping coil shall be provided.
2.7.0	Remote / Local closing & Tripping	a) Operating mechanism shall normally be operated by remote electrical control. Electrical tripping shall be performed by shunt trip coils. b) A conveniently located manual tripping lever or button shall also be provided for local tripping of the breaker and simultaneously opening the re-closing circuit. It shall be possible to trip the breaker in the event of auxiliary supply failure.
2.8.0	Manual spring charging	For spring charged mechanism a local manual closing device which can easily be operated by one man standing on the ground shall also be provided for maintenance purpose and direction of motion of handle shall be clearly marked
2.9.0	Spring Operated	a) Complete with motor, opening spring and closing spring with limit

Volume – I Technical Specification for 66KV Outdoor Circuit Breaker

	Mechanism	switch for automatic charging and all other necessary accessories to make the mechanism a complete operating unit b) One close-open operation shall be possible after failure of power supply to motor c) Closing action of the circuit breaker shall compress the opening spring ready for tripping
2.10.0	Motors	Motors shall be 'Universal type' capable of satisfactory operation for the application and duty as required by the driven equipment. Motor shall be rated for 240 Volts AC.
2.10.1	Duty requirement	Motors shall be capable of giving rated output without reduction in the expected life span when operated continuously in the system.
2.10.2	Supply Voltage Variation	± 15%
2.10.3	Frequency variation	± 5%
2.10.4	Combined voltage & frequency	± 15%
2.11.0	Interlocks	Necessary interlocks to prevent the closing or opening of the breaker under low SF6 pressure & devices for initiating alarm shall be provided. Also castle key and electrical interlock shall be provided with isolators.
2.12.0	Control Cabinets	Operating mechanism and all accessories shall be enclosed in a control cabinet. A common marshalling box for the three poles of the breaker shall be provided, which shall be IP 55.
2.12.1	Enclosure	Control cabinet enclosure shall be sheet steel enclosed, dust, weather and vermin proof with a degree of protection as mentioned in Annexure-B of GTP.
2.12.2	Mounting	Control cabinets shall be suitable for mounting on the breaker structure at sufficient height for easy operation
2.12.3	Doors & Locks	Control cabinets shall be provided with double hinged doors with padlocking arrangement. All doors, removable covers and plates shall be gasketed all around with neoprene gaskets.
2.12.4	Control cables	Control cable entries shall be from bottom. Suitable removable, undrilled cable gland plate shall be provided on the cabinet for this purpose.
2.12.5	Heaters	Suitable heaters with auto control for ON/OFF at preset temp. shall be mounted in the cabinet to prevent condensation. ON/OFF switch and fuse shall also be provided. Heater shall be suitable for 240 V AC supply voltage
2.12.6	Terminals	a) Terminal blocks shall be 650 V grade 10 Amps rating, complete with insulated barriers stud type terminals, washers, nuts and lock nuts and identification strips. Separated stud shall be provided for incoming and outgoing wires. Marking of terminal strips shall correspond to wire number on diagrams. b) Terminal blocks shall be fully enclosed with easily removable cover and made of NYLON 66. The terminal blocks shall have marking strips and all terminals shall be clearly marked with identification numbers or letters to facilitate connections to the external wiring c) 20 percent spare terminal blocks shall be provided for Owners use in addition to those already provided for interlocks
2.12.7	Illumination	A suitable switch to operate on opening of the door shall be provide to illuminate the interior of the control cabinet

Volume – I Technical Specification for 66KV Outdoor Circuit Breaker

2.12.8	Control Cubicle Wiring	All wiring shall be carried out with 650 Volt grade Single core stranded, flexible copper conductor wire with PVC insulation and shall be flame, vermin and rodent proof. The size of control wire shall be 1.5/2.5 sqmm.
2.12.9	Lugs	Wire terminations shall be made with solderless crimping type of tinned copper lugs. All lugs shall be pre insulated type.
2.12.10	Sleeves	Insulated sleeves shall be provided at all the wire ends and shall fit tightly on the wires and shall not fall off when the wire is disconnected from terminal block. The wire numbers on the wiring diagram shall be in accordance with IS: 375 or to the international Standard
2.12.11	Push Button	a) Close / trip push buttons shall be momentary contact type. The color of the push button shall be subject to approval of the Owner. Each push Button shall be provided with integral inscription plates engraved with their function b) All push buttons shall have two normally open and two normally closed contacts. The contact shall be able to make and carry 5 Amps at 220V DC and shall be capable of breaking 1 Amp. Inductive load
2.12.12	Switches	All control switches shall be of rotary switch type and toggle/piano switches shall not be accepted. All control switches shall be rated for 220V DC
2.12.13	MCB	220V/110V/50V DC, 16A DP MCB shall be used for control circuit and 240V AC, 10A SPN MCB shall be used for motor and heater circuit
2.12.14	Earthing	a) All metal parts not intended for carrying current shall be made of stainless steel and connected to duplicate earthing system and suitable terminals shall be provided on each equipment or part of equipment in conformity with the I.E. Rules and relevant IS. b) The earth continuity conductor shall have sufficient cross-sectional area so as to afford a low resistance path for the full fault current corresponding to the Circuit breaker rating c) The size of earth continuity conductor shall be as large as possible to reduce the potential rise to minimum of the metal frame of the circuit breaker and in no case, more than 10 V d) The size of earth conductor shall also be adequate, so as to restrict the temperature rise to the limit without causing any damage to the earth connection while short circuit current flows through it for the short time rating of the equipment e) No riveted points in current conducting path shall be permitted. Only bolted joints with proper size of nuts & bolts with Plain/spring washer and also locking washer is permitted. The nuts & bolts shall made of stainless steel only
2.13.0	Caution/Danger Plate	Caution name plate shall be provided at all points where terminals are likely to remain live and isolation is possibly only at remote end
2.14.0	Safety Interlocks	Suitable provision for safety electrical interlocks shall be made as per advise of the Owner
2.15.0	Bushings	Porcelain used in bushing manufacture shall be homogenous, free from laminations, cavities and other flaws or imperfections that might affect the mechanical or di-electric quality and shall be thoroughly vitrified tough and impervious to moisture
2.15.1	Colour & Glazing	Glazing of the porcelain shall be of uniform brown colour free from

Volume – I Technical Specification for 66KV Outdoor Circuit Breaker

	of Bushing	blisters, burns and similar other defects.
2.16.0	Galvanization	All iron parts shall be hot-dip galvanized
2.17.0	Nuts & Bolts	Nuts & Bolts shall be stainless steel only
2.18.0	Joints	All joints shall be airtight. Surfaces of joints shall be tarred up, porcelain parts by grinding and metal part of machining.
2.19.0	Creepage distance	The Creepage distance of the bushing shall in no case be less than 31 mm/KV. Suitable for heavily polluted atmosphere
2.20.0	Duty Requirement of Circuit Breaker	a) The circuit breakers shall be totally re strike free under all duty conditions as per Service condition.
		b) The circuit breakers shall meet the above duty requirements in case of application on U/G cable circuits as also on power transformer
		c) The circuit breaker shall be capable of Breaking the steady and transient magnetizing current corresponding to transformers Breaking line charging currents as per IS 2165 (Part-II sec.2) with a temporary over voltage of 3.5 PU without the use of opening resistors
		d) Breaking 25% of the rated fault current at twice rated voltage under phase oppositions conditions as per IS: 9135-1979
2.21.0	Transient recovery voltage	The rated transient recovery voltage for terminal fault and short line faults shall be as per IS: 2165.
2.22.0	Temperature rise	The temperature rise and the maximum temperature on any part of the equipment when in service at site under continuous full load condition and exposed continuously in the direct rays of the sun shall not exceed the permissible limits as per table-4 of IEC publication No. 56-2 and IS: 2516 when the standard specifies the limit of temperature rise. This shall not be exceeded when corrected for the difference between the ambient temperature at site and the ambient temperature specified in the relevant specification. The correction proposed shall be stated in the tender and shall be subjected to the approval from Owner
2.23.0	Painting	Polyurethane based paints shall be used. The color for the finishing paint shall be light grey as per shade No. 692 of IS-5.
2.24.0	Line side terminal connector	Al-alloy A6 grade terminal connector shall suitable for single/twin ACSR conductor as per GTP in schedule C-17

3.0 TESTING & INSPECTION

3.1.0	Tests	Test shall be carried out in accordance with IS 13118 / IEC-56 / IEC-60694 / IEC-62271-100
3.1.1	Type Tests	a) Circuit breakers must be of type tested quality
		b) In case, the product is never type tested earlier, seller has to conduct the type tests from Govt. recognized / Internationally accredited test labs at their own cost, before commencement of supply
		c) If the manufacturer's lab is accredited by Govt. / authorized body then it shall be acceptable for type testing.
3.1.2	Routine test	Test shall be carried out in accordance with IS13118 / IEC-56 / IEC-60694 / IEC-62271-100
3.1.3	Acceptance Test	Test shall be carried out in accordance with IS13118 / IEC-56 / IEC-60694 / IEC-62271-100
3.2.0	Tests on fitting and accessories	As per Manufacturer's Standards

Volume – I Technical Specification for 66KV Outdoor Circuit Breaker

3.3.0	Inspection & Testing	a) The buyer reserves the right to witness all tests specified on completed product b) The buyer reserve the right to inspect the product at the Sellers works at any time prior to dispatch, to verify compliance with the specifications. c) In-process and final inspection call intimation shall be given in advance to Owner. c) If the manufacturer's lab is accredited by govt. / authorized body then it shall be acceptable for type testing.
-------	----------------------	---

4.0 COMMISSIONING SUPPORT

Supervision of Erection and Commissioning inclusive of all testing equipments/instruments shall be included

5.0 TRAINING

- a) Training on installation, commissioning, operation and maintenance shall be included in the proposal or quoted as optional items.
- at factory
 - at site after installation

6.0 DEVIATIONS

Deviation from this specification, if any, shall be clearly brought out in the offer. Unless owner explicitly accepts such deviations, it shall be considered that the offer fully complies with the specification.

TECHNICAL SPECIFICATION
FOR
11KV INDOOR SWITCHGEAR
NEW GRIDS

Specification no – SP-HTSWG-01-R2

Prepared by	Hemanshi Kaul	<i>H. Kaul</i>	Rev: 1
Reviewed by	Abhinav Srivastava	<i>Abhinav Srivastava</i> 11/3/21	Date: 11 Mar 2021
Approved by	K. Sheshadri	<i>K. Sheshadri</i> 11/03/21	Page 1 of 17

Volume – I Technical Specification for 11KV Indoor Switchgear

RECORD OF REVISION

S. No	Revision no & Date	Revision Clause No.	Revision Details
1	R1 11.03.21	15.1.0 & 15.1.1	Sync check feature added in the relays.
2	R1 11.03.21	15.1.0 – 15.1.4	Relays shall be directional
3	R1 11.03.21	26.1.19	Vacuum interrupter make mentioned. Schneider, Siemens, BEL, BHEL, ABB, CGL & L&T.

Volume – I Technical Specification for 11KV Indoor Switchgear

1.0 CODES & STANDARDS:

Material, equipment and methods used in the manufacture of switchboard shall confirm to the latest edition of following standards: -

Standard Name / No	Standard's Description
Indian Electricity Rules 1956	Relevant safety regulation of CEA
Indian electricity act 1910	Latest edition
Switchgear and control gear	IEC: 60694, IEC: 60298, IEC: 62271-200, IEC: 60529. IS: 3427, IS 12729, IS 12063, IS:13947, IS: 9046
Circuit Breaker	IEC 62271-100, IS 13118, IS 2516
Isolators and earthing switches	IEC 62271-102
Current Transformers	IS:2705, IEC:60185
Voltage Transformer	IS:3156, IEC:60186
Indicating Instruments	IS:1248
Energy Meters	IS: 13010
Relays	IS 8686, IS 3231, IS 3842
Control switches and push buttons	IS 6875
HV Fuses	IS 9385
Arrangement of switchgear bus bars, main connections and auxiliary wiring	IS 375
Code of practice for phosphating iron & steel	IS 6005
Colours for ready mixed paints	IS 5
Code of practice for installation and maintenance of switchgear	IS 3072

Volume – I Technical Specification for 11KV Indoor Switchgear

2.0 PANEL CONSTRUCTION

In the event of direct conflict between various order documents, the precedence of authority of documents shall be as follows –

2.1	Enclosure Type	Free standing, indoor, Fully compartmentalized, Metal clad, Vermin Proof
2.2	Enclosure degree of protection	IP 4X for High Voltage compartment IP 5X for low voltage compartment
2.3	Enclosure Material	Pre – Galvanized CRCA steel
2.4	Load bearing members	Minimum 2.5 mm thick
2.5	Doors and covers	Minimum 2.0 mm thick
2.6	Gland Plate (detachable type)	3.0mm MS for multicore and 5.0mm Aluminum for single core cables. All gland plates should be detachable type with gasket
2.7	Height of complete Panel	Maximum 2700mm, operating height maximum 1600mm
2.8	Dimension of Instrument Chamber	Depth (500mm) (Minimum)
2.9	Extensibility	On either side
2.10	Separate compartment for	Bus bar, circuit breaker, HV incoming cable, HV outgoing cable PT, LV instruments & relays.
2.11	Transparent inspection window	For cable compartment at height of cable termination.
2.12	Bus end cable box	For direct cable feeder from bus.
2.13	Breaker compartment door	Separate, with lockable handle (Design with breaker trolley as the front cover is not acceptable). Door of one panel should not cause hindrance for opening of adjacent panel.
2.14	Inter compartmental connections	
2.14.1	Breaker to bus bar compartment	Through seal off bushings
2.14.2	Breaker to cable compartment	Through seal off bushings
2.15	Pressure relief devices	To be provided for each HV compartment.
2.16	Bus support insulator	Non hygroscopic, track-resistant, high strength, Epoxy insulators (calculation for validating dynamic force withstand capability to be submitted during detailed engineering)
2.17	Fixing arrangement	Doors – Concealed hinged, door greater than 500mm shall have minimum three sets of hinges Covers – SS bolts Gasket - Neoprene Gasket arrangement shall be Provided between panels.
2.18	Required HV cable termination height in the cable compartment	650mm (Minimum) for 11KV from bottom of the panel
2.19	Panel Base Frame	Steel base frame as per manufacturer's standard.
2.20	Handle	Removable bolted covers with "C" type handle for cable chamber and busbar chamber. Panel no/identification to be provided on cable box cover also.

Volume – I Technical Specification for 11KV Indoor Switchgear

2.21	Circuit Breaker	
2.22	Type	Truck type Only.
2.23	Mounting	On withdrawable truck or trolley, with locking facility in service position.
2.24	Switching duty	a) Transformer (oil filled and dry type) b) Motor (of small and large ratings – DOL starting with starting current 6 to 8 times the full load current & with a maximum 3 starts per hour) c) Underground cable with length up to 10km.
2.25	Interrupting medium	Vacuum
2.26	Breaker operation	Three separate identical single pole units operated through the common shaft.
2.27	Operating mechanism	Re-strike free, Trip free, with electrical anti-pumping feature
		One O-C-O operation possible after failure of power supply to the spring charging motor.
		Motor wound, spring, charged, stored energy type with manual charging facility
2.28	Breaker Indications and push buttons	
2.28.1	ON/OFF/Emergency trip push button	a) Manual / mechanical b) Emergency Off push button will be provided with a protective flap. c) Mechanical ON shall have padlocking facility.
2.28.2	Mechanical ON-OFF indication	On breaker trolley front
2.28.3	Operation counter	On breaker trolley front
2.28.4	Test-service position indicator	On breaker trolley front
2.28.5	Mechanism charge/discharge indicator	On breaker trolley front
2.29	Breaker positions	Service, test and isolated
2.30	Inter changeability	Possible, only with breaker of same rating
2.31	Breaker control	On panel front only
2.32	Handle	Breaker shall be provided with handles for easy handling, rack in-out operation and manual spring charging as applicable.
2.33	Type of terminal connector at breaker limbs	Jaw Type/Finger type Contacts for breaker limb connection with bus and cable end
3.0	Functional Requirements	
3.1.0	Interlock and safety devices	
3.1.1	Breaker compartment door opening	Opening of door and rack out to test / isolated position should be possible with breaker in OFF position only.
3.1.2	Breaker compartment door closing	Should be possible even when breaker is in isolated position
3.1.3	Racking mechanism safety interlock	Mechanical type
3.1.4	Racking in or out of breaker inhibited	When the breaker is closed
3.1.5	Racking in the circuit breaker inhibited	Unless the control plug is fully engaged

Volume – I Technical Specification for 11KV Indoor Switchgear

3.1.6	Disconnection of control plug inhibited	As long as the breaker is in service position
3.2.0	Additional Requirement	
3.2.1	Exposure to live parts	In case the breaker panel door is required to be opened during a contingency, the personnel should not be exposed to any live parts. Suitable shrouds / barriers / insulating sleeves should be provided.
3.2.3	Operation of breaker	In either service or test position
3.2.4	Closing from local	Only when local/remote selector switch is in local position
3.2.5	Closing from remote	Only when local/remote selector switch is in remote position
3.2.6	Tripping from local	Irrespective of selector switch
3.2.7	Tripping from remote	Irrespective of selector switch
3.2.8	Testing of breaker	In test or isolated position keeping control plug connected
3.3.0	Safety shutters	
3.3.1	Automatic safety shutter for female primary disconnects	To fully cover contacts when breaker is withdrawn to test. Independent operating mechanism for bus bar & cable side shutters, separately pad lockable in closed position.
3.3.2	Label for identification	For bus side and cable side shutters
3.3.3	Warning label on shutters of incoming and other connections	Clearly visible label "isolate elsewhere before earthing" be provided
3.4.0	Breaker electrical operation features	
3.4.1	No. of Trip coil	2 Nos for each breaker. Shunt Trip coil shall operate correctly for all value of voltages between 70% & 110% of rated voltage. Trip coil shall be suitable for Trip circuit supervision relay for monitoring.
3.4.2	Closing Coil	One no. for each Breaker Closing coil shall operate correctly for all value of voltages between 85% & 110% of rated voltage.
3.4.3	Trip circuit supervision	To be given for breaker close and open condition
3.4.4	Trip circuit supervision relay contact	For indication, alarm & to inhibit closing of breaker
3.4.5	Emergency Trip Push button contact	Wired directly to trip coil (wired to Master trip relay if second trip coil provided)
3.4.6		Wired to inhibit closing of breaker
3.4.7	Master trip relay contact	Wired to inhibit closing of breaker
3.4.8	DC Control supply bus in all panels	Fed by two DC Incoming source in bus coupler panel with auto changeover facility
3.4.9	PT supply bus in all panels	Fed normally by Bus PT with automatic changeover facility to incomer line PT
4.0.0	Surge suppressors	
4.1.0	Provision	To be provided in all panels except bus coupler and BPT
	Type	Gapless, metal oxide type
5.0.0	Current Transformers	

Volume – I Technical Specification for 11KV Indoor Switchgear

5.1.0	Type	Shall be cast resin type with insulation class of E or better.
	Rating and technical particulars	For all other feature refer technical particulars.
	CBCT	If specified, bidder shall clearly mention his proposal for mounting the same.
6.0.0	Potential Transformer	
6.1.0	Type	Shall be cast resin type with insulation class of E or better.
6.1.1	Mounting	It shall be mounted on a withdrawable carriage. Mounting of PT on the breaker truck is not acceptable. In case it is mounted on the panel rear top, access to the PT and the reinforcement in the panel for allowing a person to stand should be provided.
6.1.2	Neutral	The HV neutral connection to earth shall be easily accessible for disconnection during HV test.
7.0.0	Feeder and Bus Earthing	
7.1.0	Earthing arrangement	Through separate earthing truck for bus and feeder.
7.1.1	Short time withstand capacity of earthing truck	Equal to rating of breaker. Refer technical parameters.
7.1.2	Operation from front	Mechanically operated by separate switch.
7.1.3	Interlocks	To prevent inadvertent closing on the live circuit, with padlocking arrangement to lock truck in close or open position.
8.0.0	Equipment Earthing	
8.1.0	Material of earthing bus	Copper
8.2.0	Earth bus joints	All bolted joints in the bus will be made by connection of two bolts.
8.3.0	Rating	Sized for rated short circuit current for 3 seconds.
8.4.0	Enclosure and non-current carrying part of the switchboard/components	Effectively bonded to the earth bus
8.5.0	Hinged doors	Earthed through flexible copper braid
8.6.0	Circuit breaker frame / carriage	Earthed before the main circuit breaker contacts/control circuit contacts are plugged in the associated stationary contacts.
8.7.0	Metallic cases of relays, instruments and other LT panel mounted equipment	Connected to the earth bus by independent copper wires of size not less than 2.5 sq mm with green color insulation. For this purpose LT compartment should have a clear designated earth bus to which earth connections from all components are to be connected.
8.8.0	CT & PT neutral	Earthed at one place at the terminal blocks through links.
9.0.0	Meters	
9.1.0	Meters	Flush Mounted
9.2.0	Ammeter	Taut band, moving iron type
9.2.1	Size	96 X 96 mm
9.2.2	Panels where to be provided	All panels except Bus PT
9.2.3	Ammeter selector switch	To be provided

Volume – I Technical Specification for 11KV Indoor Switchgear

9.2.4	Accuracy class	1.0
9.3.0	Voltmeter	Taut Band, moving iron type
9.3.1	Size	96 X 96 mm
9.3.2	Panels where to be provided	Incomer and bus PT panel
9.3.3	Voltmeter switch	To be provided
9.3.4	Accuracy class	1.0
9.4.0	Energy meter	To be provided alongwith complete communication arrangement. Refer Chapter 35 for technical specification.
9.4.1	Panels where to be provided	All panels except bus coupler and bus PT
9.4.2	Accuracy Class	As per BSES Requirement
9.5.0	Multi functional meter – 3Phase 4 wire Connection	Scrolling facility with LCD display for parameters like power factor, KW, KVA ampere etc. accuracy 0.5 with RS 485 port.
9.6.0	Power Quality Analyser	To be provided alongwith complete communication arrangement. Make and model no. shall be Schneider make PM 8000 Series
9.6.1	Panels where to be provided	All incomer panels
10.0.0	Indication	
10.1.0	Indication	Flush mounted
10.2.0	Lamps	High intensity, clustered LED type
10.2.1	Breaker ON	Red
10.2.2	Breaker Off	Green
10.2.3	Spring Charged	Blue
10.2.4	DC Control supply fail	Amber
10.2.5	AC Control supply fail	Amber
10.2.6	Auto trip	Amber
	Service position	White
	Test position	White
10.2.7	Heater circuit healthy	Yellow (Indication with integrated push button for checking)
10.2.8	Trip circuit healthy	White
10.2.9	PT supply as applicable	R, Y, B
10.3.0	Hooter with isolation switch	Hooter for AC and Alarm for DC supply failure
11.0.0	Selector switches and push buttons	
11.1.0	Selector switch	Flush mounted on LV compartment door, with shrouded terminals
11.2.0	TNC Switch with pistol grip	Lockable spring return to normal position
11.3.0	Local / SCADA selector switch	As Per BSES Requirement
11.5.0	Selector switch for ammeter	6 way 7 position
11.6.0	Selector switch for voltmeter	6way 7 position
11.7.0	Rotary ON/Off switches	For heater / illumination circuit
11.7.1	Rating	16 A
11.8.0	Push button	Flush mounted on LV compartment door, with shrouded terminals
11.8.1	Emergency trip push button	Red color with stay put

Volume – I Technical Specification for 11KV Indoor Switchgear

11.8.2	Accept push buttons	Black color – Trip alarm / DC fail alarm
11.8.3	Reset push buttons	Yellow color – Trip alarm / DC fail alarm
11.8.4	Test push buttons	Blue color – for heater circuit healthy
11.8.5	Rating	10 A
12.0.0	Internal Wiring	
12.1.0	Internal wiring	1100V grade PVC insulated (FRLS) stranded flexible copper wire.
12.2.0	Size	2.5 sq. mm for CT circuit, 1.5 sq mm for PT and 1.5 sq. mm for control circuit
12.3.0	Colour code	
12.3.1	PT	R ph – Red Y Ph – Yellow B Ph – Blue Neutral – Black
12.3.2	CT	R ph – Red Y Ph – Yellow B Ph – Blue Neutral - Black
12.3.3	Others	DC – grey, AC-black, Earth – green
12.4.0	Ferrules	At both ends of wire
12.4.1	Ferrule type	Interlocked type (one additional red color ferrule for all wires in trip circuit)
12.5.0	Lugs	Tinned copper, pre-insulated, ring type, fork type and pin type as applicable. CT circuits should use ring type lugs only.
12.6.0	Spare contacts of relays, timers etc	Wired up to the terminal blocks
12.7.0	Wiring enclosure	Plastic channels, inter panel wiring through PVC sleeves or suitable grommets.
12.7.1	Inter panel wiring	Wiring with ferrule to be terminated in the adjacent shipping section will be supplied with one end terminated and the other end bunched and coiled.
13.0.0	Terminal Blocks (TB)	
13.1.0	Rating and Type	1100V grade, moulded piece, stud type screw driver operated terminals complete with insulated barriers, washers, nuts and lock nuts.
13.2.0	Marking and covers	White fiber markings strip and clear plastic, slip-on/clip-on terminal covers to be provided.
	Disconnecting Facility	To be provided in CT and PT terminals.
	Shorting and Earthing Facility	To be provided in CT Terminals
13.3.0	Spare terminals	20% in each type of TB row
13.4.0	TB shrouds & separators	Moulded non-inflammable plastic material
13.5.0	Clearance	
13.5.1	Clearance between 2 sets of TB	100 mm min.
13.5.2	Clearance with cable gland plate	250 mm min
13.5.3	Clearance between AC / DC set of TB	100 mm min
13.6.0	Test Terminal blocks	Screw driver operated stud type for metering circuit

Volume – I Technical Specification for 11KV Indoor Switchgear

14.0.0	Relays and protection	
14.1.0	Technology and Functionality	Numerical, microprocessor based with provision for multifunction protection, control, metering and monitoring.
14.1.1	Mounting	Flush Mounting, IP 5X
14.1.2	Architecture	Hardware and software architecture shall be modular and disconnect able to adapt the protection and control unit to the required level of complexity as per the application.
14.1.3	Programming and configuration	Relay shall utilize a user friendly setting and operating multi-lingual software in windows environment with menus and icons for fast access to the data required. Programming software and communication cord for offered relays should be included in scope of supply.
14.1.4	SCADA Interface port	RS 485 rear port for interfacing with SCADA on IEC 61850 protocol. If relays have any other rear port, hardware/software required to achieve the above said protocol for compatibility will be in supplier's scope.(If any required converter needs to be consider by vendor).
14.1.5	PC Interface port	Front port (preferably serial) for configuration/data download using PC. Cost of licensed software and communication cord, required for programming of offered protection relays shall be included in the cost of switchgear.
14.1.6	User Interface	An alphanumeric key pad and graphical LCD display with backlight indicating measurement values and operating messages. It should be possible to access and change all settings and parameters without the use of PC.
14.1.7	Relay characteristics	Relay shall integrate all necessary protections for different applications in accordance with IS and IEC. Relay shall provide wide setting ranges and choice of all IEC, IEEE and other tripping curves through a minimum of two setting groups.
14.1.8	Event and Fault records	Relay shall have the facility of recording of various parameters during event/fault with option to set the duration of record through settable pre fault and post fault time. Relay shall store records for last 10 events and 10 faults (minimum). It should be possible to download records locally to PC or to remote SCADA.
14.1.9	General Features of Numerical Relays	Measurement of Event Recording , Disturbance Recording, Harmonic Distortion , RMS Current values & Frequency, Peak and rolling Current Values, Max. and Average current Values, Phase and or Neutral Angles , Max. and average voltage, Power and Energy, Apparent Power and Apparent Power and Apparent Energy with Time Synchronization.
14.1.10	Self diagnosis	Relay shall be able to detect internal failures. A watchdog relay with changeover contact shall provide information about the failure.
14.1.11	Time synchronization	All relays shall be capable of being synchronized with the system clock using SCAD interface and PC.
14.1.12	Digital Input and Digital Output of numerical relays	No. of Digital input / Digital output of any type of relay which shall be used in control and relay panel shall be as per BSES requirement and signal list only. Refer the attached tentative signal list of all feeders (Incomer , Out

Volume – I Technical Specification for 11KV Indoor Switchgear

		going, Capacitor Bank , Buscoupler, Station Transformer & Bus PT).
14.1.12	Operation Indicators	LEDs with push button for resetting.
14.1.13	Test Facility	Inbuilt with necessary test plugs for Relays and Meters.
15.1.0	Protection Relays for 11Kv Incomer panel	
	Relay 1	3 phase over current and Earth fault protection with IDMT. Definite time and instantaneous characteristics. Relay shall have both directional and non directional features independently.
		Under voltage and overvoltage protection
		PT supervision (fuse failure monitoring)
		Sync Check function
	Relay 2	High Impedance Restricted Earth fault protection.
	Note	Combining functions of Relay -1 and Relay-2 in single relay is not acceptable.
15.1.1	Protection Relays for 11Kv Bus section panel	
	Relay 1	Directional 3 phase over current and Earth fault protection with IDMT, Definite time and instantaneous characteristics.. Relay should have Sync check function.
15.1.2	Protection Relays for 11Kv Outgoing panel	
	Relay 1	Directional 3 phase over current and Earth fault protection with IDMT, Definite time and instantaneous characteristics.
15.1.3	Protection Relays for 11Kv Station Transformer panel	
	Relay 1	Directional 3 phase over current and Earth fault protection with IDMT, Definite time and instantaneous characteristics.
15.1.4	Protection Relays for Capacitor panel	
	Relay 1	Directional 3 phase over current and Earth fault protection with IDMT, Definite time and instantaneous characteristics.
		Earth fault protection
		Under voltage and overvoltage protection
		PT supervision (fuse failure monitoring)
	Relay 2	Neutral unbalance relay (voltage based) for each step
		Timer for on time delay (minimum 300seconds)
	Note	Combining of functions of Relay -1 and Relay -2 in single relay is not acceptable.
16.1.0	Auxiliary Relay – General Features	
16.1.1	Auxiliary Relay use for Circuit supervision, trip and timer relays	Static or electromechanical type
16.1.2	Reset mechanism for auxiliary relays	Self reset contacts except for lock out relays.

Volume – I Technical Specification for 11KV Indoor Switchgear

16.1.3	Reset mechanism for lockout relays	Electrical reset type for all type panel.
16.1.4	Operation Indicators	With hand-reset operation indicators (flags) or LEDs with pushbuttons for resetting.
17.1.0	Auxiliary relays – Requirement	
17.1.1	For each breaker	Anti pumping (94), lockout(86) and trip circuit supervision (74) relays
17.1.2	PT selection relays	To be provided for selection between Bus PT and Line PT of respective sections.
17.1.3	Switchgear with two incomers and bus coupler	Lockout (86) contact of each incoming breakers to be wired in series in closing circuit of other incoming breakers and bus coupler.
17.1.4	Auxiliary relays, coupling relays, transducers etc.	To effect interlocks and to exchange signals of status & control from remote.
17.1.5	General Requirements for all relays/contactors	
17.1.6	Auxiliary Supply	220/50VDC. All relays / contactors shall be suitable for continuous operation at 15% overvoltage.
18.1.0	Space Heaters	
18.1.1	Space heaters	Thermostat controlled with switch for isolation
18.1.2	Space heater location	Breaker & HV cable compartment to be mounted on a insulator. Heater position in cable compartment should be easily accessible after cable termination. Heater position in breaker chamber shall be accessible with breaker racked-in.
19.1.0	Switch and sockets	
19.1.1	Lamp with switch	For LV & cable chamber
19.1.2	Universal type (5/15A) socket with switch	In LV chamber
20.1.0	Name Plates and Marking	
	Nameplates	To be provided as per the following description
	Equipment Nameplates	<ol style="list-style-type: none"> All equipment mounted on front side as well as equipment mounted inside the panels shall be provided with individual name plates with equipment designation engraved. All front mounted equipment shall be also provided at the rear with individual name plate engraved with tag numbers corresponding to the one shown in the panel internal wiring to facilitate easy tracing of the wiring.
	Feeder Nameplates	<ol style="list-style-type: none"> Large and bold name plate carrying the feeder identification/numbers shall be provided on the top of each panel on front as well as rear side. On rear side, nameplate should be provided on frame. Rear bottom of each panel shall have a nameplate clearly indicating the following: Customer Name – Project details; PO No and date; Drawing Reference No.etc.
	Rating Plate	<p>Following details are to be provided on Panel and CB rating plate;</p> <ol style="list-style-type: none"> Customer Name – BSES Delhi

Volume – I Technical Specification for 11KV Indoor Switchgear

		b. P.O.No. and Date – As per respective PO.
	Material	Non – rusting metal or 3 ply lamicaid. Nameplates shall be black with white engraving lettering. Stickers are not allowed.
	Fixing	All nameplates / rating plates shall be riveted to the panels at all four corners. Bolting / screwing is not acceptable.
	Markings	Each switch shall bear clear description identifying its function. Similar inscription shall also be provided on each device whose function is not other wise identified. If any switch or device does not bear this inscription separate nameplate giving its function shall be provided for it. Switch shall also have clear inscription for each position indicating e.g. Trip – Neutral close, ON-OFF etc.
21.1.0	Surface treatment & painting	
21.1.1	Surface treatment	Sand blasting or by seven tank process
21.1.2	Paint type	Powder coated. Pure polyester base grade A structure finish
21.1.3	Paint shade	RAL 7032 for external & internal surface
21.1.4	Paint thickness	Minimum 50 microns
22.1.0	Inspection and testing	
22.1.1	Type Tests	The product must be of type tested quality as per all tests in Indian standards
22.1.2	Type test report validity period	Last five years from date of bid submission
23.1.0	Stage and Final Inspection	All the Qty. of Panels will be inspected by BSES as per approved QAP.
23.1.1	Acceptance & routine test	As per the specification and relevant standards. Charges for these tests shall be deemed to be included in the equipment price.
		The Owner/owner reserves the right to witness all the tests.
23.1.2	Notice to Owner for conducting type tests.	At least three weeks in advance.
23.1.3	Test reports of acceptance and routine tests before dispatch for approval	To submit six copies
23.1.4	Submission Of QAP	QAP will be submitted by suppliers with submission of Schematic Drawings.
24.1.0	Deliverable	1.As Built Drawing of panel 6 Sets 2. Maintenance Manuals – 2CD / DVD Soft Copy , 6 Set of Hard Copy 3. Relay and equipments Catalogues & Manuals 4. Relay Settings & Maintenance Manuals 5. Relays software and connection/ communication cables
25.1.0	Training	Training on relays and equipment operations shall be provided to the officials of BRPL will be in the Scope of Suppliers.
26.1.0	Approved Make of components for 11KV Switchgear Panel	
26.1.1	Numerical Relays	ABB / SCHNEIDER / SIEMENS Numerical relays used in complete switchboard should be of same make.

Volume – I Technical Specification for 11KV Indoor Switchgear

26.1.2	Auxiliary Electromechanical Relays	ABB / Alstom / Schneider / Siemens
26.1.3	Contactor / Auxiliary Relays	Schneider Electric / Siemens / ABB
26.1.4	Analog Ammeter / Voltmeter	AE / Rishabh
26.1.5	Indication LED , Lamp	Teknic/ Siemens
26.1.6	Push Button	Teknic
26.1.7	Field Terminal Block	Phoneix / Elemex / Connect well
26.1.8	MCB	Schneider / Siemens / ABB
26.1.9	Hooter	Alan
26.1.10	Panel Light	Philips / Bajaj / Surya
26.1.11	Power Socket	Anchor / Reputed make
26.1.12	Multifunction Meter	Rishabh
26.1.13	Wires for wiring	KEI / Finolex / Polycab
26.1.14	Test Terminal Block	Areva / IMP / Nelster
26.1.15	Control Switch	Areva / Switron
26.1.16	Instrument Transformers	ECS / Pragati / Kappa / Narayan power tech
26.1.17	Surge Arrestor	Oblum / Lamco / Raychem
26.1.18	Energy Meter	HPL (Grid Meter for BRPL)
26.1.19	Vacuum interrupter make	Schneider, Siemens , BEL,BHEL,ABB , CGL & L&T.

3.0 DEVIATIONS

Deviation from this specification, if any, shall be clearly brought out in the offer. Unless owner explicitly accepts such deviations, it shall be considered that the offer fully complies with the specification.

Volume – I Technical Specification for 11KV Indoor Switchgear

ANNEXURE – B

GUARANTEED TECHNICAL PARTICULARS (DATA BY OWNER)

1.0.0	Switchgear	
1.1.0	Type	Metal clad, air insulated with VCB type circuit breaker
1.2.0	Service	Indoor
1.3.0	Mounting	Free standing, floor mounted
1.4.0	System voltage	11KV
1.5.0	Voltage variation	+ / - 10%
1.6.0	Frequency	50HZ + / - 5%
1.7.0	Phase	3
1.8.0	Rated voltage	12KV
1.9.0	Rated current @ 50 DEG C ambient	As per SLD
1.10.0	Short time rating for 3 sec.	26.3KA
1.10.1	Insulation level (PF rms / impulse peak)	28 / 75 KV
1.11.0	System ground	Effectively earthed
1.12.0	Enclosure degree of protection	IP – 4X for high voltage compartment and IP – 5X for metering and protection compartment
1.13.0	Bus bar – Main @ 50 ⁰ C ambient	Rating as per SLD, Short time rating as per 1.10
1.14.0	Material	Silver plated/ tinned electrolytic copper
1.15.0	Bus Bar sleeve	Sleeved with shrouds on joints. Tape on joints is not acceptable.
1.16.0	Bus identification	Colour coded
1.17.0	Temperature rise	40DEG C for conventional joints, 55DEG C for silver plated joints
1.18.0	Auxiliary bus bar	Electrolytic grade tinned copper
1.19.0	Auxiliary DC Supply	220V/ 50V DC
1.20.0	Auxiliary AC supply	240V AC 50HZ
1.21.0	Hardware	Stainless steel
1.22.0	Earth bus	Aluminum
1.23.0	Power and control cable entry	From bottom
2.0.0	Circuit Breaker	
2.1.0	Voltage class, insulation level, short time rating	As specified for switchgear
2.2.0	Rated current	As per SLD. Use of two breakers in parallel to meet the required current rating shall not be acceptable.
2.3.0	Duty cycle	O – 0.3sec – CO – 3min – CO
2.4.0	Short circuit rating	
2.5.1	AC sym. Short circuit current	26.3KA

Volume – I Technical Specification for 11KV Indoor Switchgear

2.5.2	Short circuit making current	62.5KA
2.6.0	Operating time	
2.6.1	Break time	Not more than 4 cycles
2.6.1	Make time	Not more than 5 cycles
2.7.0	Range of auxiliary voltage	
2.7.1	Closing	85% - 110%
2.7.2	Tripping	70% - 110%
2.7.3	Spring charging	85% - 110%
2.8.0	No. of spare aux. Contacts of breaker, for owner's use	Minimum 6 NO + 6 NC
2.8.1	No. of spare contacts of service and test position limit switch	2 NO
3.0.0	Current Transformers (Refer SLD)	
3.1.0	Voltage class, insulation level, short time rating	As specified for switchgear
3.2.0	Type	Cast resin, window / bar primary type
3.3.0	Class of insulation	Class E or better
3.4.0	Ratio	As per SLD, secondary shall be 1 A
3.5.0	Number of secondary	3
3.6.0	Accuracy class	
3.6.1	Protection core	5P20
3.6.2	Core balance CT	PS
3.6.3	Protection Diff / REF	PS
3.6.4	Metering	0.2s
3.6.5	VA output	As per calculation
3.6.6	Excitation current of PS class CT's	30mA at $V_k/4$
3.6.7	Primary operating current sensitivity of CBCT's.	5A
4.0.0	Voltage Transformers (Refer SLD)	
4.1.0	Type	Cast resin, draw out type, single phase units
4.2.0	Rated Voltage	
4.2.1	Primary	$11000/\sqrt{3}$
4.2.2	Secondary	$110/\sqrt{3}$
4.2.3	No of phases	3
4.2.4	No. of secondary windings	2
4.2.5	Method of connection	Star/Star
4.2.6	Rated voltage factor	1.2 continuous, 1.9 for 30 seconds
4.2.7	Class of insulation	Class E or better
4.3.0	Accuracy class	
4.3.1	- Protection	3P
4.3.2	- metering	0.2
4.4.0	Primary and secondary fuses	HRC current limiting type, primary fuse replacement shall be possible with VT in withdrawn position
5.0.0	HV Fuses	
5.0.1	Voltage class	12KV
5.0.2	Rupturing capacity	50KA

Volume – I Technical Specification for 11KV Indoor Switchgear

5.0.3	Rated current	As per application
6.0.0	Surge Arrestors	
6.0.1	Rated voltage	9kV
6.0.2	Maximum continuous operating voltage (MCOV)	7.65kV
6.0.3	Discharge current	10kA
6.0.4	Discharge Class	3

TECHNICAL SPECIFICATION OF 66KV CONTROL & RELAY PANEL FOR NEW GRIDS

Specification no – SP-CRP-01-R2

Prepared by	Javed Ahmed		Rev: 3
Reviewed by	Abhinav Srivastava		Date: 14.01.2019
Approved by	K.Sheshadri		

Technical Specification for 66KV Control & Relay Panel

Revision Record

S.No.	Rev.No.	Item/Clause No.:	Nature of change	Approved By
1	R1	4	Width of cubicle shall be 1250mm	KA
2	R1	5.7	Spare terminal in each type of terminal.	KA
3	R1	6	Test terminal block for numerical relays and meter.	KA
4	R1	8	Mimic diagram alignment with discrepancy type control switch.	KA
5	R1	11.4	Multifunction meter with digital output with modbus communication.	KA
6	R1	11.4.3	Communication protocol IEC 61850 metering equipment.	KA
7	R1	12.1.5	Communication protocol IEC 61850 in Numerical Relays.	KA
8	R1	12.1.9	All necessary converters shall be consider for communication of numerical relays in case of optical fiber.	KA
9	R1	12.1.16	Digital input and output of Numerical relays	KA
10	R1	12.2.1.2	Line current differential with distance relays in Line control and relays panel.	KA
11	R1	12.2	Optical fiber communication in line current differential relays with distance relays in Line control and relays panel.	KA
12	R1	12.4	Auxiliary relays shall NO/NC contact shall be as per BSES requirement.	KA
13	R1	13.0	Minimum no. of annunciation window shall be 24Nos.	KA
14	R2	18.4.1	Addition of Alstom Make Relays	VP
15	R3	5.9	DC Changeover for each scheme	KS
16	R3	12.1.1	Harsh weather coating	KS
17	R3	12.1.5	Relay communication clause revised	KS
18	R3	12.1.7	Relay plug settings clause added	KS
19	R3	12.1.8	Fault recording clause revised	KS

Technical Specification for 66KV Control & Relay Panel

20	R3	12.1.9	General features of Relay clause revised	KS
21	R3	12.1.11	Electrical Reset for lockout relays	KS
22	R3	12.1.14	Spare Contacts and Warranty of Relay added	KS
23	R3	12.2	Relay General Requirement clause revised	KS
24	R3	16.4	Ventilation Fan added	KS
25	R3	18.4.1	Approved makes of Numerical Relays Clause revised	KS
26	R3	2.4	Addition of Communication cable and software CD for Relay Programming	KS
27	R3	2.5	Addition of supply of Laptop along with CRP supply	KS
28	R4	1.6	Warranty of all the Relays shall be 5 years.	KS
29	R4	1.7	Harsh weather conformal coating shall be provided for all the numerical Relays.	KS
30	R4	1.8	All Hardware, connecting cables for Relay programming and other connecting cables, Software's, ICD files shall be in Bidders scope.	KS
31	R4	18.4.1	Numerical Relay	KS

Technical Specification for 66KV Control & Relay Panel

SCOPE OF SUPPLY

- 1.1 This specification covers design, manufacture, testing at manufacturer's works, packing and delivery of control and relay panel for substation equipments.
- 1.2 The control and relay panel shall be complete with all components and accessories, which are necessary or usual for their efficient performance and trouble free operation under the various operating and atmospheric conditions as specified in the Annexure A of data sheet.
- 1.3 Such parts which may have not been specifically included, but otherwise form part of the CRP as per standard trade and/or professional practice and/or are necessary for proper operation of control and relay panel, will be deemed to be also included in this specification.
- 1.4 All the Necessary Communication Cable for Relay programming and software CDs
- 1.5 Laptop of Lenovo/Dell make i7 with 1TB HD and 8 GB RAM shall be supplied with CRP free of cost
- 1.6 Warranty of all the Relays shall be 5 years.
- 1.7 Harsh weather conformal coating shall be provided for all the numerical Relays.
- 1.8 All Hardware, connecting cables for Relay programming and other connecting cables, Software's, ICD files shall be in Bidders scope.

2.0 CODES & STANDARDS:

Control and Relay panel should be designed and manufactured in accordance with the following standards –

National Standard

Standard Code	Standard Description
IS-1248, Part 1- 1993	Direct acting indicating analogue electrical measuring instruments and their accessories.
IS-3231, Part 1- 1986 Part 2 & 3 -1987	Electrical relays for power system protection
IS-9000 Part 1 -1988	Basic environmental testing procedures for electronics & electrical items
IS-13703 1993	Low voltage fuses for Voltages not exceeding 1000V AC or 1500 V DC
IS-13947 Part 1 - 1993	Low voltage switchgear & control gear
IEC-60255 - 1989	Specification for electrical relays

Technical Specification for 66KV Control & Relay Panel

IEC 60688 1997	Electrical measuring transducers
----------------	----------------------------------

3.0 PANEL CONSTRUCTION

	Description	Requirement / Rating
4.1	Panel Type	Simplex panels of standard dimensions. Equipment shall be mounted on the front of the panel and doors for wiring access shall be at the back of panels.
4.2	Enclosure type	Completely metal enclosed and dust, moisture and vermin proof. Degree of protection not less than IP-4X in accordance with IS 13947
4.3	Enclosure material	Cold-rolled sheet steel of thickness not less than 2.0 mm. Stiffeners shall be provided wherever necessary.
4.4	Doors	Doors shall be at the rear. For panels having width should be more than or equal to 1250mm, double leaf doors shall be provided. Doors shall have handles with either built-in locking facility or be provided with padlock.
4.5	Gland Plate	At least two separate gland plates of removable type shall be provided for each panel. They shall be of sheet steel of thickness not less than 3.0 mm.
4.6	Cable Entry	Shall be from the bottom
4.7	Gaskets	All doors, removable covers and panels shall be gasketed all around with neoprene gaskets.
4.8	Ventilating louvers	Ventilating louvers, if provided shall have screens and filters. The screens shall be made of either brass or GI wires mesh.
4.9	Foundation	The panels shall be fixed on the embedded foundation channels with intervening layers anti vibration strips made of shock absorbing materials. Base frames shall be supplied along with panels.
4. 10	Mounting	Equipment on front of panel shall be flush mounted. Cutouts if any, provided for future mounting of equipment shall be properly blanked off with blanking plate no equipment shall be mounted on the doors.
4.11	Mounting level	The center lines of switches, push buttons and indicating lamps shall not be less than 750mm and that for relays, meters and recorders shall be not less than 450 mm from the bottom of the panel.
4.12	Appearance	The center lines of switches, push buttons and indicating lamps shall be matched to give a neat and uniform appearance. Like wise the top lines of all meters, relays and recorders etc, shall be matched.
4.13	DC Changeover	DC changeover scheme for each panel with DC1 & DC2

4.0 WIRING

5.1	Internal wiring	1100V grade, single core, stranded copper conductor
-----	-----------------	---

Technical Specification for 66KV Control & Relay Panel

		wires with PVC insulation. Note: all control cables shall be FRLS type
5.2	Size	4 sqmm for CT circuits, 2.5 sqmm for PT and control circuits.
5.3	Colour Code	R ph - Red, Yph - Yellow, B ph - Blue, Neutral - Black for CT and PT circuits. DC - Grey, AC - Black and Earth - Green
5.4	Ferrules	Ferrules marked to correspond with panel wiring diagram shall be fitted at both ends of each wire. Ferrules shall fit tightly on the wire. Wires directly connected to trip circuit shall be distinguished by the addition of red colored unlettered ferrule.
5.5	Termination	Fork type, pin type and ring type (as applicable) tinned copper lugs to be used. Insulated sleeves shall be provided at all the wire terminations.
5.6	Wiring Enclosure	Plastic channels to be used as enclosures. PVC sleeves to be used for inter panel wiring.
5.7	Spare Contacts	Spare contacts of relays and contactors etc. should be wired upto the terminal block
5.8	Inter panel wiring	When panels are arranged adjacent to each other inter panel wiring of common bus wires between the panels shall be furnished. These adjacent inter panel wiring shall be clearly indicated in the wiring tables.
5.9	Auxiliary supply	Auxiliary bus wiring for AC and DC supplies, voltage transformer circuits, annunciation circuits and other common services shall be provided on the same set of terminals in all the panels with proper segregation. DC Changeover scheme for each panel

5.0 TERMINAL BLOCKS

6.1	Rating and Type	1100 V grade, minimum 10 amps continuous rating, Nylon 66, molded piece, complete with insulated barriers, stud type terminals, washers, nuts and lock nuts. White fiber markings strip with clear plastic, slip-on / clip-on terminal covers to be provided.
6.2	CT & PT Terminals	Terminal Blocks (TB) for current transformer and voltage transformer secondary leads shall be Ring Type provided with test links and isolating facilities. Also current transformer secondary leads shall be provided with short-circuiting and earthing facilities.
6.3	Spare Terminals	20% in each type of TB row
6.4	Clearance with gland plate	Minimum 250mm
6.5	Clearance between two TBs	Minimum 150mm

Technical Specification for 66KV Control & Relay Panel

6.6	Test Terminal Blocks	Screw driver operated stud type for each type of numerical relays and metering
6.7	Suitability	Unless otherwise specified, terminal blocks shall be suitable for connecting the following conductors of cable on each side: a) All circuits including current / voltage transformer circuits: 4 sq.mm copper. b) AC / DC power supply circuits: one no. of 10 mm ² Al./ 6 sq.mm Cu.
6.8	Arrangement	Arrangement of the terminal block assemblies and the wiring channel within the enclosure shall be such that a row of terminal block runs in parallel and close proximity to each side of the wiring duct. The side of the terminal block opposite the wiring duct shall be reserved for the external cable connection.

6.0 PAINT

7.1	Paint Type	Powder coated. Pure Polyester base Grade-A, structure finish.
7.2	Paint Shade	RAL7032 'Siemens Grey'
7.3	Paint Thickness	Minimum 50 microns

7.0 MIMIC DIAGRAM

8.1	System Representation	Colored mimic diagram and symbols showing the exact representation of the system shall be provided in the front of control panels and it shall be properly align with all discrepancy type control switch of panels.
8.2	Material	Mimic diagram shall be made preferably of painted Aluminum or plastic of approved fast color material, which shall be screwed on to the panel and can be easily cleaned. Painted overlaid mimic is also acceptable. The mimic bus shall be 2-3 mm thick. The width of the mimic bus shall be 12mm for bus bars and 10 mm for other connections.
8.3	Mimic Indications	Discrepancy type switches are to be used for breaker and isolator control indication and semaphore indicators shall be used for earth switch position.

8.0 NAME PLATES & MARKINGS

9.1	Provision of Nameplates	All equipment mounted on front side as well as equipment mounted inside the panels shall be provided with individual name plates with equipment designation engraved. Also, large and bold name plate carrying the feeder identification numbers shall be provided for circuit / feeder designation on the top of each panel on front as well as rear side. All front mounted equipment
-----	-------------------------	---

Technical Specification for 66KV Control & Relay Panel

		shall be also provided at the rear with individual name plates engraved with tag numbers corresponding to the one shown in the panel internal wiring to facilitate easy tracing of the wiring.
9.2	Nameplate Material	Non-rusting metal or 3 ply lamicaid. Nameplates shall be black with white engraving lettering. Stickers are not allowed.
9.3	Markings	Each switch shall bear clear inscription identifying its function. Similar inscription shall also be provided on each device whose function is not other wise identified. If any switch or device does not bear this inscription separate nameplate giving its function shall be provided for it. Switch shall also have clear inscription for each position indicating e.g. Trip-Neutral close, ON-OFF, R-Y-B OFF etc.

9.0 EARTHING

10.1	Panel Earthing	All panels shall be equipped with an earth bus securely fixed.
10.2	Material	The material and the sizes of the bus bar shall be 25 x 6 mm copper flat unless specified otherwise.
10.3	Earth Bus joints	All bolted joints in the bus will be affected by connection of two bolts.
10.4	Hinged Doors	Earthed through flexible copper braid.
10.5	Instrument and Relay Earthing	All metallic cases of relays, instruments and other panel mounted equipment including gland plate, shall be connected to the earth bus by copper wires of size not less than 2.5 mm ² . The color code of earthing wires shall be green
10.6	CT and PT circuit Earthing	VT and CT secondary neutral shall be earthed at one place only at the terminal blocks through links.

10.0 INSTRUMENTS

11.1	Mounting	Flush Mounting
11.2	Type	Digital
11.3	Ammeters and Voltmeters	Taut Band, Digital type
11.3.1	Size	96x96mm
11.3.2	Provision	All panels
11.3.3	Selector switch	to be provided
11.3.4	Accuracy Class	0.5 or better.

Technical Specification for 66KV Control & Relay Panel

11.4	Multifunction meter	Three phase 4 Wire - digital type with Modbus Output.
11.4.1	Provision	All panels except bus-coupler
11.4.2	Accuracy Class	0.5 or better.
11.4.3	Communication Capability	Provision as per IEC 61850 Protocol with serial port communication to be made.
11.4.4	Additional facility	Scrolling facility with LCD display for parameters like power factor, kW, kWh, kVA, kVAR, current, voltage etc.

11.0 RELAYS

12.1	Protective Relays - General features	
12.1.1	Technology and Functionality	Microprocessor based with provision for multifunction protection and control, metering, monitoring, User machine interface, communication interface, self-diagnosis functionalities. Harsh Weather Coating. With Time Sync on SNTP through GPS
12.1.2	Mounting	Flush Mounting, IP5X
12.1.3	Architecture	Hardware and software architecture shall be modular and disconnect able to adapt the protection and control unit to the required level of complexity as per the application.
12.1.4	Programming and configuration	Relay shall utilize a user friendly setting and operating multilingual software in windows environment with menus and icons for fast access to the data required.
12.1.5	Relay Communication	Ethernet/USB communication interface for data transfer and configuration to Local PC. SCADA using Ethernet on dual RJ45 for 61850 protocol. CB/Isolator control block should be available in relay. FO for line differential shall be single mode(2RX and 2TX)
12.1.6	User Machine Interface	UMI with an alphanumeric key pad and graphical LCD display with backlight indicating measurement values and operating messages. Capability to access and change all settings and parameters.
12.1.7	Relay Characteristics	Relay shall integrate all necessary protections

Technical Specification for 66KV Control & Relay Panel

		for different applications in accordance with IS and IEC. Relay shall provide wide setting ranges and choice of all IEC, IEEE and other tripping curves through a minimum of two setting groups. Wide setting range for Plug setting 0 to 20 times with second decimal resolution for all stages. TMS resolution upto third decimal place.
12.1.8	Fault recording	All events, fault record, to be stored in be in Non-volatile memory with date and time stamp. Minimum 10 Fault record in form of numeric values. Minimum 100 events..
12.1.9	General Features of Numerical Relays	Measurement of Event Recording , Disturbance Recording including differential & Bias current in addition to all currents & voltages, Harmonic Distortion , RMS Current values & Frequency, Peak and Rolling Current Values, Max. and Average current Values, Phase and or Neutral Angles , Max. and average voltage, Power and Energy, Apparent Power and Apparent Power and Apparent Energy with Time Synchronization. DC voltage measurement including soft & hardware based indication. Relay should record not less than 10 Waveform Records of not less than 1sec each which can be triggered through user selectable inputs such as Protection start, trip stage signals, BI, BO, Virtual/goose signals and other user defined signals. Waveform record should show user selectable inputs such as all protection start, trip stage signals, BI, BO, Virtual/goose signals, other user defined signals and analog measurement values along with labels. The waveform record should support standard Comtrade file explorer softwares. Waveform recorder configuration should be user friendly. Supply of relay software and communication cables
12.1.10	Self diagnosis	Relay shall be able to detect internal failures. A watchdog relay with changeover contact shall provide information about the failure.
12.1.11	Reset Contacts	Self reset contacts except for lockout relays. Electrical Reset Lockout relays
12.1.12	Operation Indicators	LEDs with pushbutton for resetting.
12.1.13	Auxiliary supply	As per requirement . Preferably universal Aux

Technical Specification for 66KV Control & Relay Panel

		voltage from 48-250V
12.1.13	Operational Data	Bidder shall provide the reference list of the type of relays offered
12.1.14	Spare Contacts	Minimum 20% Spare contacts Minimum 20% of spare DI and DO. RELAY WARRANTY: 5 Yrs
12.1.15	Test Facility	Inbuilt with necessary test plugs.
12.1.16	DI / DO of Numerical relay	No. of Digital input / Digital output of any type of relay which shall be used in control and relay panel shall be as per BSES requirement and signal list only. Refer the attached tentative signal list of all feeders (Incoming/Out going, Trasformer & Transformer Monitoring Unit, Buscoupler & Bus PT).
12.1.17	Contacts for Transformer NIFPS	Contacts of NIFPS shall be provided in Transformer panel, Separate contacts of relays for 87T,86 trip,Buchholz,PRV
12.2	Protective Relays - Requirement	
12.2.1	For 66kV	
12.2.1.1	Bus Bar Protection Centralised Scheme for Bus Bar Protection	Numerical type, mounted on a separate panel with fault recording. CT wise supervision to be provided.
12.2.1.2	Line Panel	Relay-1 Line current Differential function suitable through optical fiber communication, Distance Protection with multiple characteristics i.e Mho , Quadrilateral etc. -With CBFP Protection Dual redundant FO channel for Differential protection communication between peers. Relay-2 Directional and non- Directional 3-phase over current and earth fault Protection with load blinder. Combining the functions of Relays-1 & Relays-2 in single relay is not acceptable Synchronizing Check Relay (shall be 3 Phase) Broken Conductor Protection
12.2.1.3	Bus Coupler	3 Phase Over current protection , Earth fault protection Check Sync
12.2.1.4	Capacitor feeder	Three phase over current protection Phase unbalance protection Earth fault protection Neutral unbalance (separate relay)

Technical Specification for 66KV Control & Relay Panel

		Under voltage relay
		Over Voltage relay
		Timer for ON time delay.
		Negative Sequence
		Under Current protection
12.2.1.5	Transformer Feeder/Panel	<p>Relay – 1</p> <ul style="list-style-type: none"> Differential protection with Back up O/C & E/F protection, with software based ratio and vector correction without ICT. REF protection for the star side. Relay should support high impedance as well as low impedance REF protection(user selectable through relay HMI/Software) <p>Waveform recorder of relay should record all differential and Bias current along with standard Current and Voltage channel.</p> <p>Relay – 2</p> <ul style="list-style-type: none"> Overcurrent protection Earth fault protection Standby Earth fault protection <p>Relay – 3</p> <p>Transformer monitoring relay including AVR Features or equivalent & the no. of DI / DO Shall be as per BSES Requirement. Minimum 3 Analog i/p (4-20mA)</p> <p>Relay 1, 2 & 3 are separate relays. Combining all the functions of relay 1, 2&3 in a single relay is not acceptable</p>
12.3	Auxiliary relays - General Features	
12.3.1	Type	Static or electromechanical.
12.3.2	Reset Characteristic	Self reset contacts except for lockout relays .Electrical reset for Lockout relay
12.3.3	Operation Indicators	Hand reset operation indicators or LEDs with pushbutton for resetting.
12.3.4	Lockout relay	Manual reset type
12.3.5	Auxiliary supply	As per requirement
12.3.6	Operational Data	Bidder shall provide the reference list of the type of relays offered
12.3.7	Spare Contacts	As per requirement of BRPL + 20% Spare contacts
12.4	Auxiliary relays - Requirement : Provision for multiplication of auxiliary contact of breakers, isolators and earth switches to be made in each panel using contactors instead of Bistable contactors	
12.4.1	Each Panel	To be provided with separate anti-pumping (94), Lockout (86), DC fail (80) and trip circuit supervision (95) relays.
		Including 86 Supervision, Separate DC

Technical Specification for 66KV Control & Relay Panel

		Supervision relays for both sources as well as main panel DC, 95 relay for both coils
12.4.4	Incoming and Outgoing Feeder Panels	Provision of PT supply supervision and suitable automatic selection scheme between Line PT and Bus PT supplies for uninterrupted metering.

12.0 ANNUNCIATION

13.1	Type	Static type along with alarm. Annunciations shall be repetitive type and shall be capable of registering the fleeting signal. Facia test facility should also be provided
13.2	Mounting	Flush mounted
13.3	Facia	Minimum 24 Nos. Facia along with appropriate labels on each facia.in each panel
13.4	Push Buttons	Push buttons for test, accept and reset to be provided
13.5	Potential Free Contacts	To be provided for event logger

Sequence of operation of the annunciator shall be as follows:

S No	Alarm Condition	Fault Contact	Visual Annunciation	Audible Annunciation
1.	Normal	Open	Off	Off
2.	Abnormal	Close	Flashing	On
3.	Accept	Close	Steady on	Off
4.	Return to normal	Open	Steady On	Off
5.	Reset	Open	Off	Off
6.	Reset before return to normal	Close	Flashing	On

13.0 INDICATIONS

14.1	Indicating Lamps	Flush mounted Clustered LED type with rear terminal connections. Lamp Cover to be screwed type an moulded from heat resistant material
14.1.1	Breaker On	Red
14.1.2	Breaker Off	Green
14.1.3	Spring Charged	Blue
14.1.4	DC control supply fail	Amber
14.1.5	Auto trip	Amber
14.1.6	Heater Circuit healthy	Yellow
14.1.7	Trip Circuit Healthy	White
14.1.8	PT supply	R, Y, B
14.1.9	Hooter with isolation switch	For AC and DC supply failure
14.2	Position Indicators	Semaphore type indicators shall be provided for

Technical Specification for 66KV Control & Relay Panel

		mimic diagrams
--	--	----------------

14.0 SELECTOR SWITCHES & PUSH BUTTONS

15.1	Selector Switch	All the selected selector switch shall be only discrepancy type Flush Mounted with shrouded terminals
15.1.1	TNC Switch	Pistol Grip type, Lockable with spring return to normal position
15.1.2	Local/SCADA selector switch	4 pole
15.1.3	Ammeter selector switch	6way 7 position
15.1.4	Voltmeter selector switch	6 way 7 position
15.1.5	Rotary On/Off Switches	For heater/illumination circuit
15.1.6	Rating of switches	16 A
15.2	Push button	Flush Mounted with shrouded terminals
15.2.1	Accept Push Button	Black Color-Trip alarm/DC fail alarm
15.2.2	Reset Push Button	Yellow Color- Trip alarm/DC fail alarm
15.2.3	Test Push Button	Blue Color
15.2.4	Rating	10A

15.0 ACCESSORIES

16.1	Space heaters	Thermostat controlled with switch for isolation
16.2	Socket and switch	240V, 5A socket to be provided in each panel with on-off switch
16.3	MCBs	Provision for receiving, distribution, isolation and fusing of DC and AC supplies to various control circuits should be made using MCBs of appropriate ratings.
16.4	Panel illumination & Ventillation	240V AC illumination lamp controlled by panel door switch to be provided in each panel. Provision of ventilation fan.

16.0 TESTING & INSPECTION

17.1	Type tests	Product must be type tested as per Indian Standards or IEC
17.1.1	Type test report validity	Last five years from the date of bid submission
17.2	Acceptance and Routine tests	As per specifications and relevant standards. Charges of these tests shall be deemed to be included in the equipment price. Purchaser reserves the right to witness all the tests.
17.3	Notice to Purchaser for conducting tests	At least three weeks in advance
17.4	Test reports of acceptance and routine test before dispatch	Six copies to be submitted.
17.5	Stage and Final Inspection	All the Qty. of Panels will be inspected by BSES as per approved QAP .
17.6	Submission Of QAP	QAP will be submitted by suppliers with

Technical Specification for 66KV Control & Relay Panel

		submission of Schematic Drawings.
17.7	Deliverable	1.As Built Drawing of panel 6 Sets
		2. Maintenance Manuals – 2CD / DVD Soft Copy , 6 Set of Hard Copy
		3. Relay and equipments Catalogues & Manuals
		4. Relay Settings & Maintenance Manuals
		5. Relays software and connection/ communication cables
17.8	Training	Training on relays and equipment operations shall be provided to the officials of BRPL will be in the Scope of Suppliers.

17.0 DRAWINGS & DATA SUBMISSION

18.1	Submissions along with the bid	
18.1.1	Duly filled GTP and copy of specification/ Bill of material	2 copies + 1 soft copy
18.1.2	GA/ Cross sectional drawing of panel/SLDs/ Wiring diagrams	2 copies + 1 soft copy
18.1.3	Calculations for MCBs, MCCBs, Fuses and stabilizing resistors etc	2 copies + 1 soft copy
18.1.4	Catalogues and Manuals for all equipments	1 copy
18.1.5	Test Reports	2 copies
18.1.6	Deviations from this specification	
18.1.7	Type test report	For type, size and rating of equipment offered.
18.1.8	Reference List of customers	For last five years with units of similar design and rating
18.1.9	Recommended spares and consumables	For five years of operation along with price list
18.1.10	Manufacturer's quality assurance program	To be provided
18.2	Submissions after award of contract	
18.2.1	Duly filled GTP and copy of specification/ Bill of material	4 copies
18.2.2	GA/ Cross sectional drawing of panel/SLDs/ Wiring diagrams	4 copies
18.2.3	Calculations for sizing of various equipment	4 copies
18.2.4	Catalogues and Manuals for all equipments	1 copy
18.2.5	Deviations from this specification	Approved in writing before award of contract
18.2.6	Foundation Plan	
18.2.7	Calculations for sizing of various components	Showing all views and sections
18.2.8	Type test reports	For all brought out items
18.3	Submissions prior to dispatch	
18.3.1	Inspection and test reports/ compliance report by manufacturer	1 set
18.3.2	As Built drawings/GA/SLDs and Wiring	6 copies + 1 soft copy

Technical Specification for 66KV Control & Relay Panel

	diagrams	
18.3.3	Calculations for sizing of various equipment	6 copies + 1 soft copy
18.3.4	Catalogues and Manuals for all equipments	6 copies + 1 soft copy
18.3.5	Test certificates	6 copies + 1 soft copy
18.4	Drawing and document sizes	Standard size paper A3 and A4
18.4.0	Approved Make of components for 66 KV Switchgear Panel	
18.4.1	Numerical Relays	<p>1) O/C & E/F Relay: a) Siemens- Siprotec 4 and 5 Series Relay b) Schneider Make- P143 c) GE make P14 Series Relay d) ABB Make-REF615</p> <p>2) Differential for Transformer Relay: a) Siemens Make- 7UT Series b) GE&Schneider Make-642 Series</p> <p>3) Line Differential & Distance Relay a) Schneider Make P543 Series</p> <p>In addition to above going forward following points shall be implemented in our specification</p> <p>a) 20% spare contacts in Relays b) Design Temp (continuous operating Temperature) minimum 65 Degree C e) Ring formation of all protection devices instead of star formation.</p>
18.4.2	Auxiliary Electromechanical Relays	ABB / Areva / Schneider
18.4.3	Contactor / Auxiliary Relays	Schneider Electric / Siemens / ABB
18.4.4	Analog Ammeter / Voltmeter	AE / Rishabh
18.4.5	Indication Led , Lamp	Teknic
18.4.6	Push Button	Teknic
18.4.7	Field Terminal Block	Phoneix / Elemex / Connect well
18.4.8	MCB	Schneider / Siemens / L&T/ABB
18.4.9	Hooter	Alan
18.4.10	Panel Light	Philips / Bajaj / Surya

Technical Specification for 66KV Control & Relay Panel

18.4.11	Power Socket	Anchor / Reputed make
18.4.12	Multifunction Meter	Rishab / Socomec
18.4.13	Wires for wiring	KEI / Polycab / Finolex
18.4.14	Test Terminal Block	Areva / IMP/Nelster
18.4.15	Control Switch	Areva / Switron
18.4.16	Annunciator Window	Alan / Minilec
18.4.17	Discrepancy switch	Multimode/As per approved BRPL makes during drawing approval.

18.0 TRAINING AND COMMISSIONING SUPPORT

a) Supervision of Erection, Testing and Commissioning inclusive of all testing equipment/ instruments shall be included in the bid/proposal.

All Hardware and softwares including Relay setting files and other support shall be in the scope of Vendor.

b) Training of buyers officials (6 officials) on operation and maintenance including relay setting/operations at site (after installation) shall be included in the proposal/bid

19.0 DEVIATIONS

Deviation from this specification, if any, shall be clearly brought out in the offer. Unless owner explicitly accepts such deviations, it shall be considered that the offer fully complies with the specification.

TECHNICAL SPECIFICATION

FOR

11KV AUTO SWITCHED CAPACITOR BANK

INDOOR / OUTDOOR TYPE

Prepared by	Reviewed by	Approved by	Rev	00
			Date	11 Nov 2016
HK	AS	VP	Page	1 of 12

TECHNICAL SPECIFICATION FOR 11 KV AUTO SWITCHED CAPACITOR BANK OUTDOOR / INDOOR TYPE**1.0 SCOPE OF SUPPLY**

- a. This specification covers the design, manufacturing, testing, supply, erection & commissioning of 7.2MVAR (with steps 0.9 MVar + 1.8 MVar + 1.8 MVar + 2.7 MVar) or 3.6MVAR (with steps 0.9 MVAR + 2.7 MVar) 11KV three phase outdoor / indoor Auto Switched Capacitor Bank with bus bar arrangement at site for outdoor/indoor installation on structure/panel including but not limited to 0.2% series reactors, capacitor switch/vacuum contactor, motorized isolator cum earth switch, LA, HT fuses, RVT, Automatic power factor controller and all necessary equipment for auto switching.
- b. Each Capacitor Bank shall be fenced as per Civil Specification.
- c. This specification shall be used in conjunction with all specifications, data sheets, single line diagrams, and other drawings attached to the tender.

2.0 CODES & STANDARDS

Indian Electricity Rules	
Indian electricity act	
CBIP manual	
IS 13925 part 1,2 & 3	Shunt capacitors above rated voltage 1000v
IS 11298 part 3	Plastic films for capacitors
IS 9921-1985	Isolator
IS 5553	Series reactor
IS 2099	Bushings for voltages above 1000v
IS 12672	Internal fuses & disconnecter for shunt capacitors
IS 2705 & IS3156	Current transformers & RVT
IS 13067	Imp regnant for power capacitors
IS5	Color of mixed paints
IS 15086	Surge arrestor
IS 3070 (Pt 3)	Surge arrestor
IS 2629	Recommended practice for Hot dip galvanizing of steel
IS 4759	Hot dip Zinc coating on Steel structures and other allied products
IEC 60871	Shunt capacitors for AC power Systems
IEC 61000	Automatic Power Factor Controller
IS 9920-2002	Vacuum Contactors/Capacitor Switch

TECHNICAL SPECIFICATION FOR 11 KV AUTO SWITCHED CAPACITOR BANK OUTDOOR / INDOOR TYPE

In the event of direct conflict between various order documents, the precedence of authority of documents shall be as follows -

- i. Guaranteed Technical Particulars (GTP)
- ii. Specification including applicable codes, standards
- iii. Approved Vendor Drawings
- iv. Other documents

3.0 SERVICE CONDITIONS

3.1	Max Ambient Temperature	50 deg C
3.2	Max Daily average ambient temp	40 deg C
3.3	Min Ambient Temp	0 deg C
3.4	Maximum Humidity	95%
3.5	Minimum Humidity	10%
3.6	Maximum annual rainfall	750 mm
3.7	Average no of rainy days per annum	60
3.8	Rainy months	June to Oct
3.9	Altitude above MSL	300 M
3.10	Seismic Zone	IV

4.0 CAPACITOR BANK

4.1	Capacitor Scheme	3 Phase, 7.2MVAR @ 11KV (with steps 0.9 MVAR + 1.8 MVAR + 1.8 MVAR + 2.7 MVAR) or 3 Phase, 3.6MVAR @ 11KV (with steps 0.9 MVAR + 2.7 MVAR)
4.2	Switching	Auto switching of steps shall be done by capacitor switch/vacuum contactor and controlled by APFC relay mounted in 11kV Capacitor switchgear panel.
4.3	Service location	Suitable for outdoor/Indoor use
4.4	Connection	Refer SLD.
4.5	Residual Voltage Transformer (RVT)	Connect RVT for each step.
4.6	HT capacitor bank assembly	a. Individual single phase capacitor units mounted on steel stand / rack & connected externally by sleeved flexible copper connectors to form double star. b. Sleeves to be Red, Yellow, Blue, & Black in color.
4.7	Interchangeability	Between various single phase capacitor units without disturbing other units
4.8	Enclosure size	To be provided by vendor
4.9	External hardware for HT capacitor bank enclosure (nuts/bolts/handles)	Stainless steel

TECHNICAL SPECIFICATION FOR 11 KV AUTO SWITCHED CAPACITOR BANK OUTDOOR / INDOOR TYPE

4.10	Series Reactor	Each phase each step shall be provided with suitable series air cored reactor.
4.11	Rated current	The reactor shall be rated for 130% continuous current. The short time rating shall be 16 times the normal current for 2 sec.
4.12	Sizing	Reactors shall be suitably designed to limit overloading due to presence of harmonics in the system as per recommendations of IS13925. Design calculation shall be submitted at the time of drawing approval
4.13	GA drawing	Manufacturer shall submit the G.A. Drawings for Capacitor Bank with mounting of series reactor inside the bank.

5.0 COMPLETE ENCLOSURE FOR CAPACITOR BANK

5.1	For Indoor Installation	All the equipments shall be enclosed in the Cubical panel. Panel shall have IP55 Canopy shall be provided over all the panels. Thickness of panel shall be 2.5mm
5.2		There shall be one incomer panel for Isolator and LA. All other panels shall be each of 0.9 MVar + 1.8 MVar + 1.8 MVar + 2.7 MVar Total 7.2Mvar.
5.3	Bus bar material	Tinned copper, sized for 150% of rated current and rated fault duty
5.4	Bus bar arrangement	Suitable for outdoor termination of HT cable size up to 2 x 3C x 300sqmm for each phase
5.5	Indications on panel Front door	
5.6		Breaker ON
5.7		Breaker Off
5.8		Breaker Trip
5.9		Capacitor Bank ON
5.10		Capacitor Bank OFF
5.11	For Outdoor Installation	
5.12		For enclosing complete capacitor bank including Isolators, LA, cable structure, capacitor units, Reactors, flexible copper connectors, NCT/RVT & terminal bus bar. Enclosures shall be provided with solenoid type interlock switch with timer.

TECHNICAL SPECIFICATION FOR 11 KV AUTO SWITCHED CAPACITOR BANK OUTDOOR / INDOOR TYPE

5.13	Enclosure mounting	Free standing on RCC plinth / slab
5.14	Enclosure Material	Steel
5.15	Degree of enclosure protection	IP55(In case of Vacuum Contactor Only, Rest must be wire mesh enclosure)
5.16	Enclosure	Wire Mesh Enclosure – Ref.CI.16 of Technical spec of Civil work
5.17	Bus bar for HV cable termination	One for each phase mounted on porcelain or epoxy insulators
5.18	Bus bar material	Tinned copper, sized for 150% of rated current and rated fault duty
5.19	Bus bar arrangement	Suitable for outdoor termination of HT cable size up to 2 x 3C x 300sqmm for each phase

6.0 SINGLE PHASE CAPACITOR UNIT

6.1	Single phase capacitor unit	Totally enclosed, leak proof, dust proof suitable for outdoor application, comprising individual capacitor elements connected in series & parallel groups. Continuous operating current shall be minimum 1.43 times to max. 1.65 times as per clause 6.2 of IS 13925.
6.2	Capacitor unit size	Preferred size is 200kVAR, however higher unit sizes may be considered if the space availability at site is scarce
6.3	Capacitor element	Developed from alternate layers of conducting metal foil & dielectric film
6.4	Conducting layer material	Aluminum foil
6.5	Dielectric material	Hazy Poly Propylene (APP), Double layer minimum
6.6	Cooling	Natural air
6.7	Impregnating liquid	Non PCB(Poly chlorinated Biphenyl), less toxic, with low bio-accumulation and bio-degradable liquid filled under vacuum
6.8	Capacitor unit enclosure	Fabricated from sheet metal CRCA steel of thickness 2mm minimum, hermetically sealed & hydraulically tested
6.9	Discharge device	For each single phase capacitor unit
6.10	Internal fuse	Metal alloy fuse of suitable rating as per IS 12672 should be provided for each capacitor element. Residue of fuse after operation shall not contaminate the impregnating liquid. The fuse shall not deteriorate when subjected to inrush current. The fuse assembly shall be distinct and separate from the element packs such that it shall isolate only the faulty element packs and

TECHNICAL SPECIFICATION FOR 11 KV AUTO SWITCHED CAPACITOR BANK OUTDOOR / INDOOR TYPE

		the operation of a fuse under worst condition does not affect the other healthy elements.
6.11	Surge arrestor	Gap less metal oxide type
6.12	Rated voltage	9kV
6.13	Maximum continuous operating voltage	7.65kV
6.14	Discharge current	5kA
6.15	Spare capacitor unit	One capacitor unit for each bank

7.0 RESIDUAL VOLTAGE TRANSFORMER

7.1	Neutral current transformer	For outdoor/Indoor application, hermetically sealed
7.2	Voltage class	Suitable for system rated voltage
7.3	Ratio	10/1/1
7.4	Accuracy class	0.5 / 5P10
7.5	Burden	15VA / 15VA
7.6	Material	Cast resin
7.7	Mounting	On RCC slab/plinth, near capacitor unit steel stand
7.8	Terminal marking	To be provided on RVT enclosure
7.9	Primary terminals	Brought out of RVT enclosure through insulator bushing of voltage class equal to rated capacitor voltage
7.10	Secondary terminals	Brought out in a terminal box mounted on RVT enclosure
7.11	Secondary terminal box	Suitable for degree of protection IP55 with cable entry for 6c x 2.5sq mm YWY 1100volt grade cable
7.12	Residual Voltage Transformer	Oil Cooled Type
7.13	Connection	Star/Star-Open delta winding (11Kv / Sqrt3 : 110V/Sqr 3:190V
7.14	Accuracy Class	0.5/3 PR
7.15	Nominal and Highest System Voltage	11 & 12 kV

TECHNICAL SPECIFICATION FOR 11 KV AUTO SWITCHED CAPACITOR BANK OUTDOOR / INDOOR TYPE**8.0 LIGHTNING ARRESTER**

8.1	Installation	Outddoor/Indoor
8.2	Type	Metal Oxide
8.3	Arrestor Rating	9kV (rms)
8.4	Maximum continuous operating voltage	7.65kV (rms)
8.5	Nominal Discharge current	10kA
8.6	Class	Station Class III

9.0 VACUUM CONTACTOR/SWITCH FOR AUTO SWITCHING

9.1	Rated Voltages	11 KV
9.2	Rated Continuous Current	200% of full load current (minimum) of unit being switched
9.3	Rated Capacitor Switching Current	150% of full load current (minimum) of unit being switched
9.4	Frequency	50 Hz
9.5	Control supply	230 V Single phase AC supply
9.6	Type	Vacuum
9.7	Installation	Outdoor / Indoor
9.8	Mechanical Endurance	100000 operations (minimum)
9.9	Electrical Endurance	100000 electrical operations at rated capacitive switching current (minimum) without getting damaged.
9.10	Mechanical Indicator	To show number of operations and to show whether the contact is in open/closed position.
9.11	Trip lever	For emergency tripping operation
9.12	Closing lever	For capacitor bank discharging
9.13	Make	ABB/EPCOS/CGL

TECHNICAL SPECIFICATION FOR 11 KV AUTO SWITCHED CAPACITOR BANK OUTDOOR / INDOOR TYPE**10.0 SERIES REACTOR**

10.1	Series Reactor	Shall be provided fulfilling following requirement, a. Parallel switching of one bank with another two bank in service b. Suitable design calculation shall be submitted at the time of drawing approval c. Reactors shall be suitably designed to limit inrush current with proper calculation to be submitted to BRPL. d. The series reactor shall be designed to suit the final capacity of Capacitor Bank e. The manufacturer shall submit the G.A. Drawings for Capacitor Bank with mounting of series reactor inside the bank
10.2	Series reactor continuous rating	0.2% of each 1.8Mvar step
10.3	Series reactor rated voltage	Same as capacitor bank rated voltage
10.4	Series reactor rated frequency	50Hz
10.5	Series reactor single phase unit connections	Connected between single phase capacitor units and neutral star point
10.6	Series reactor type	Dry type with air natural cooling
10.7	Series reactor power frequency withstand voltage	28 KV
10.8	Series reactor lightening impulse withstand voltage	75 KV
10.9	Series reactor short time withstand current rating for 3 seconds	16 times capacitor rated current at 130% rated voltage

11.0 AUTOMATIC CONTROL UNIT

11.1	General Construction Requirements of Automatic Control Unit	The Automatic control unit shall be provided inside the control room to continuously monitor power factor on secondary side of the transformer and shall automatically switch ON or switch OFF the capacitor banks through the operation of 12Kv Capacitor switch. Overriding provision shall also be made for electrical switching ON & OFF of the capacitor switch by the operator from the ACU control box. The switching ON operation will take place after period of 10 minutes. The switching OFF operation of relevant steps will be instantaneous.
------	--	---

TECHNICAL SPECIFICATION FOR 11 KV AUTO SWITCHED CAPACITOR BANK OUTDOOR / INDOOR TYPE

11.2		<p>The ACU shall instantly switch OFF the incomer VCB of capacitor bank in the following contingencies occurring in any of the phases.</p> <ul style="list-style-type: none">a) Voltage increased by 10% above the rated voltage of 11Kv.b) Power transformer current impedance between any of the two phases exceeding 20% of the lowest.c) Current increase in any capacitor unit by 30% above the rated current (only relevant capacitor switch will open)d) Current between any of the two phases of the capacitor bank differs more than 15% of the lowest current of the 3 phases (only the relevant capacitor switch will open)
11.3		<p>A suitable display should be provided to indicate the capacitor current in each phases of the complete capacitor bank on the ACU panel inside the control room. Indications shall be provided to indicate ON & OFF status of each capacitor bank.</p> <p>The DC control Voltage for operation of the ACU shall be taken from substation DCDB. The required control voltage shall be either 50VDC or 220VDC.</p>
11.4		<p>Besides in-built protection against lines surges and transient over voltages, suitable fuses/MCB shall be provided for protection against overcurrent. The ACU shall remain fully functional during and after line surges and transient over voltage.</p> <p>Except for the terminal, the ACU shall be enclosed in a suitable casing so as to avoid ingress of dust and should be IP54.</p>

TECHNICAL SPECIFICATION FOR 11 KV AUTO SWITCHED CAPACITOR BANK OUTDOOR / INDOOR TYPE**12.0 ISOLATOR**

12.1	Installation	Outdoor / Indoor
12.2	Rated Voltage	11 KV
12.3	Type	Single throw, Double break, off load type, triple pole and horizontal gang operated with earth switch. Mechanical interlock should be provided between isolator and earth switch.
12.4	Operation Type	Manual
12.5	Creepage Distance	31mm/kV

13.0 PERFORMANCE

13.1	Over voltage operation	as per IS 13925 part1
13.2	Over current operation	as per IS 13925 part1
13.3	Operating temperature category	+5/C as per IS 13925 part1
13.4	Discharge characteristic as per IS 13925 part1	a. Each capacitor single phase unit residual voltage after disconnection from mains supply shall be 50V (maximum) within 10 minutes b. Capacitor bank residual voltage after disconnection from mains supply shall be 50V (maximum) within 10 minutes
13.5	Power loss and tangent of Loss angle ($\tan \delta$)	To be specified by manufacturer as per IS 13925 part1

14.0 LABELS & FINISH

14.1	Rating plate for HT Capacitor bank	
	Material	Anodized aluminum 16SWG
14.2	Background	Satin silver
14.3	Letters, diagram & border	Black
14.4	Process	etching
14.5	Bank Name plate details	Mfg name, Mfg Sr. No., Month & year of Mfg, equipment type, total output rating, Bank Capacitance in μ F, Bank watt losses, Owner name & order number, Temp. category, connection diagram, Guarantee period.
14.6	Unit Name plate details	Mfg name, Mfg Sr. No., Month & year of Mfg, equipment type, total output rating, unit Capacitance in μ F, unit watt losses, Temp. category, Discharge device rating, connection diagram, Owner name & order number, Guarantee period, unit wt. in kG,

TECHNICAL SPECIFICATION FOR 11 KV AUTO SWITCHED CAPACITOR BANK OUTDOOR / INDOOR TYPE

14.7	Danger plate on front & rear side of wired mesh enclosure	Anodized aluminum with white letters on red background
14.8	Painting - Capacitor single phase unit	
14.9	Surface preparation	Shot blasting or chemical 7 tank process
14.10	External finish	Powder coated pure-polyester base Mat finish, shade– Siemens Gray RAL 7032, uniform thickness 50 microns minimum
14.11	Painting– Wire-mesh, frame enclosure	a. Chemical 7 tank process for surface b. Hot dipped Galvanized with uniform thickness 65 microns minimum as per IS 2629 and 4759.

15.0 INSPECTION & TESTING

15.1	Type test	Equipment of type tested quality only, type test certificate to be submitted along with offer.
15.2	Routine test	As per relevant Indian standard
15.3	Acceptance test as per IS	To be performed in presence of Owner at manufacturer works, as per relevant Indian standard along with BOM.

16.0 DEVIATIONS

Deviations from this Specification shall be stated in writing with the tender by reference to the Specification clause/GTP/Drawing and a description of the alternative offer. In absence of such a statement, it will be assumed that the bidder complies fully with this specification. No deviation will be acceptable post order.

17.0 TYPICAL SCHEME OF HT CAPACITOR 3 PHASE BANK

Refer SLD (BRPL-G1DW-DEE-B-001).

**TECHNICAL SPECIFICATION FOR 11 KV AUTO SWITCHED CAPACITOR BANK OUTDOOR / INDOOR
TYPE****18.0 MANDATORY SPARES**

Following spares have to be provided with capacitor banks

- a. Capacitor Units – 2 nos
- b. Series Reactors – 2 nos
- c. Vacuum Switch – 2 nos

TECHNICAL SPECIFICATION
FOR
LIGHTNING ARRESTERS

Prepared by	Hemanshi		Rev: 0
Reviewed by	Abhinav Srivastava		Date: 2.11.2013
Approved by	Vijay Panpalia		

Volume – I Technical Specification for Lightning Arrestor

1.0 CODES & STANDARDS:

Materials, equipment and methods used in the manufacturing of Lightning Arresters shall confirm the latest edition of following standard: -

National Standard

Standard Code	Standard Description
	Indian Electricity Rules (relevant safety regulation of CEA)
	Indian Electricity Act 2003
	CBIP manual
IS: 3070 Part-3	Lightning Arresters for Alternating Current Systems
IS : 2071 - Part I	Method of high voltage testing
IS : 2629 -1985	Recommended practice for Hot-Dip Galvanizing of Iron and Steel
IS : 5621 – 1980	Hollow insulators for use in electrical equipment
IS : 6639 - 1972	Specification for Hexagon bolts for Steel structures

International Standard

Standard Code	Standard Description
IEC 60099-4-2001	Metal-Oxide surge arresters without gaps for AC system

2.0 DESIGN FEATURES

S No	Description	Requirement / Rating
2.1	Application	To be used for protection of transformers, circuit breakers and other sub-station equipment against lightning and switching surges.
2.2	Type of Lightning Arrester	Gap-less metal oxide type (ZnO type)
2.3	Pressure relief device	Pressure relief device of class 40 KA shall be provided
2.4	Accessories	Clamps and counter
2.5	Mounting	LA mounting vertically on steel structures with insulating bases. Surge counters in weather proof enclosures suitable for mounting on structure of lightning arrester
2.6	Line-side Terminal Connectors	Suitable for ACSR Zebra/ Goat conductor / Pipe Bus
2.7	Ground Terminal Connectors	Suitable for 50x6 mm GS flat
2.8	Surge Counter	Non – resettable type

Volume – I Technical Specification for Lightning Arrestor

2.9	Name Plate Marking	Following minimum information must be marked – i) Name of the manufacturer ii) Type and serial No. iii) Model No. iv) Rated voltage v) Max. continuous Operating Voltage vi) Nominal discharge current vii) Pr. Relief Current viii) Identification mark on each separately housed unit to enable it to be replaced in correct position after the multiunit arrester has been dismantled.
3.0	Approved make of Components	
3.1	Insulators	JS / WSI / BHEL / Modern / Saravana
4.0	Testing & Inspection	
4.1	Internal Test	Manufacturer shall carry out comprehensive inspection and testing during manufacturing of the equipment.
4.2	Type test	The product must be of type tested quality. Type test reports shall be submitted for the type, size & rating of equipment offered along with bid. If the manufacturer's lab is accredited by Govt./ authorized body then it shall be acceptable for type testing
4.3	Routine test	As per relevant IS / IEC
4.4	Acceptance test	as per relevant IS / IEC
4.5	Test Witness	
		The buyer reserves the right to witness all tests specified on completed product
		The buyer reserve the right to inspect the product at the sellers works at any time prior to dispatch, to verify compliance with the specifications.
		In-progress and final inspection call intimation shall be given in advance to Owner.
4.6	Tests on Fitting and Accessories	As per manufacturer's standard and relevant IS / IEC

3.0 DEVIATIONS

Deviation from this specification, if any, shall be clearly brought out in the offer. Unless owner explicitly accepts such deviations, it shall be considered that the offer fully complies with the specification.

**TECHNICAL SPECIFICATION
FOR
STRUCTURAL WORK**

Prepared by			Rev: 0
Reviewed by			Date:
Approved by			

Volume – I Technical Specification Structural Work

1.0 GENERAL

- 1.1 The scope of specification covers design fabrication, proto assembly, supply and erection of galvanized steel structures for towers, girders, and equipment support structures, towers which shall be lattice type structures fabricated from structural steel conforming to IS: 2062(latest) The scope shall include supply and erection of all types of structures including bolts, nuts, washers, hangers, shackles, clamps, anti climbing devices, bird guards, step bolts, inserts in concrete, gusset plates equipment mounting bolts, structure earthing bolts, foundation bolts, spring and flat washers, fixing plates and any other items as required to complete the job.
- 1.2 The connection of all structures to their foundations shall be by base plates and embedded anchor/foundation bolts. All steel structures and anchor anchor/foundation bolts shall be galvanized. The weight of the zinc coating shall be at least 0.610 Kg/m² for anchor bolts/foundation bolts and for structural members. One additional nut shall be provided below the base plate which may be used for the purpose of leveling.

2.0 DESIGN REQUIREMENTS FOR STRUCTURES

- 2.1 For design of steel structures loads such as dead loads, live loads, wind loads etc. shall be based on IS: 802 Part 1 Sec 1
- 2.2 For material and permissible stresses IS: 802, Part-1, Section-2 shall be followed in general. However additional requirements given in following paragraphs shall be also considered.
- 2.3 Minimum thickness of galvanized tower member shall be as follows:
- | Member | Minimum thickness (mm) |
|---------------------------|------------------------|
| Leg members, ground wire | 5 |
| Peak members/main members | |
| Other members | 4 |
| Redundant members | 4 |
- 2.4 Maximum slenderness ratios for leg members, other stressed members and redundant members for compression force shall be as per IS-802
- 2.5 Minimum distance from hole center to edge to adjacent hole shall be minimum 1.5 X bolt diameter. Minimum distance between center to center of holes shall be 2.5 x bolt diameter.
- 2.6 The minimum bolt diameter shall be 16 mm.

Volume – I Technical Specification Structural Work

2.7 Step Bolts

In order to facilitate inspection and maintenance, the structures shall be provided with climbing devices. Each tower shall be provided with step bolts not less than 16mm diameter and 175mm long spaced not more than 450mm apart, staggered on faces on one leg extending from about 0.5M above ground level to the top of the tower. The step bolt shall conform to IS: 10238

2.8 Design Criteria

- a) All structures be designed for the worst combination of dead loads, live loads, wind loads as per code IS 802 seismic forces as per code IS : 1893, importance factor of 1.5, loads due to deviation of conductor, load due to unbalanced tension in conductor, torsion load due to unbalanced vertical and horizontal forces, erection loads, short circuit forces shall be calculated considering a fault level of 31.5KA for 3 secs. IEC-865 may be followed for evaluation of short circuit forces.
- b) Switchyard girders structure shall be designed for the two conditions i.e. normal condition and short circuit condition. In both conditions the design of all structures shall be based on the assumption that stringing is done only on one side i.e. all the three (phase) conductors broken on the other side. Factor of safety of 2.0 under normal conditions and 1.5 under short circuit condition shall be considered on all external loads for the design of switchyard structures, which are of lattice type.
- c) Vertical load of half the span of conductors/string and the earth wires on either side of the beam shall be taken into account for the purpose of design. Weight of man with tools shall be considered as 150KGs for the design of structures.
- d) Terminal / line take off girders shall be designed for a minimum conductor tension of 1000Kg per sub conductor per phase for 66KV. The distance between terminal girders and the dead end tower shall be taken as per standard. The design of these terminal girders shall also be checked considering +/- 30 deg deviation of conductor in both vertical and horizontal planes. For other girders the structural layout requirements shall be adopted in design.
- e) The girders shall be connected with lattice columns be bolted joints.
- f) All support structures used for supporting equipments shall be designed for the worst combination of dead loads, erection load. Wind load/seismic forces, short circuit forces. Short circuit forces shall be calculated considering a fault level of 31.5KA for 3 seconds.
- g) Foundation bolts shall be designed for the loads for which the structures are designed

Volume – I Technical Specification Structural Work

3.0 DESIGN DRAWINGS, BILL OF MATERIAL & DOCUMENTS

- 3.1 The contractor shall furnish design, drawing and BOMs to the Owner after award of the contract. However contractor shall have to prepare and submit any other drawings, bill of material additionally required during design and construction stage which the Owner feels necessary. In case Owner feels that any design drawing, BOM are to be modified even after its approval, contractor shall modify the design & drawings and resubmit the design drawing, BOM as required in the specification.
- 3.2 The fabrication drawings are to be provided and furnished by the contractor shall be based on design approved by Owner. These fabrication drawings shall be based on the design approved by the Owner. These fabrication drawings shall indicate complete details of fabrication and erection including all erection splicing details, lacing details, weld sizes and lengths. BOM in the Performa approved by the Owner shall be submitted. Bolt details and all customary details in accordance with standard structural engineering practice whether or not given by the Owner.
- 3.3 The fabrication work shall start only after the final approval to the design and drawings is accorded by the Owner. The design drawing should indicate not only profile, but section, numbers and sizes of bolts and details of typical joints.
- 3.4 Such approval shall however not relieve the contractor his responsibility for the safety of the structure and good connections and any loss or damage occurring due to defective fabrication design or workmanship shall be borne by the contractor.

4.0 FABRICATION OF STEEL MEMBERS

- 4.1 The fabrication and erection works shall be carried out generally in accordance with IS 802. A reference however may be made to IS 800 in case of non-stipulation of some particular provision in IS 802. All materials shall be completely shop fabricated and finished with proper connection material and erection marks for ready assembly in the field.

5.0 PROTO – ASSEMBLY

- 5.1 The component parts shall be assembled in such a manner that are neither twisted not otherwise damaged and shall be so prepared that the specific camber, if any, is provided. In order to minimize distortion in member the component parts shall be positioned by using the clamps, Clips, lugs, jigs and other suitable means and fasteners (bolts and weld) shall be placed in a balanced pattern. If the individual components are to be bolted, paralleled and tapered drifts shall be used to align the part so that the bolts can be accurately positioned.
- 5.2 Sample towers, beams and lightning masts and equipment structures shall be trial assembled in the fabrication shop and shall be inspected and cleared by contractor based on the design approval accorded by the Owner before mass fabrication.

Volume – I Technical Specification Structural Work

- 5.3 Pursuant to above the BOM's along with proto-corrected fabrication drawing shall be prepared and submitted by the main vendor to Owner as document for information. Such BOM, which shall be the basis for the Owner to carry out inspection.

6.0 BOLTING

- 6.1 Every bolt shall be provided with two flat and one spring washer under the nut so that no part of the threaded portion of the bolt is within the thickness of the parts bolted together. Locking nut shall be provided with each grouting bolt.
- 6.2 All steel items, bolts, nuts and washers shall be hot dip galvanized.
- 6.3 2.0% extra nuts and bolts shall be supplied for erection.

7.0 WELDING

- 7.1 The work shall be done as per approved fabrication drawings, which clearly indicate various details of joints to be welded, type of weld, length and size of weld, whether shop or site weld etc. Symbols for welding on erection and shop drawings shall be according to IS 813. Efforts shall be made to reduce site welding so as to avoid improper joints due to constructional difficulties.

8.0 FOUNDATION BOLTS

- 8.1 Foundation bolts for the towers and equipment supporting structures and elsewhere shall be embedded in first stage concrete while the foundation is cast. The contractor shall ensure the proper alignment of these bolts to match the holes in the base plate.
- 8.2 The contractor shall be responsible for the correct alignment and leveling of all steel work on site to ensure that the towers/structures are plumb.
- 8.3 All foundation bolts for lattice structures are to be supplied by the contractor.
- 8.4 All foundation bolts shall be fully galvanized so as to achieve 0.610 kg. Per Sq.m. of Zinc coating as per specifications.
- 8.5 All foundation bolts shall conform to IS 5624 but the material shall be MS conforming to IS 2062.

9.0 STABILITY OF STRUCTURES

The method of grouting the column bases shall be subject to approval of Owner and shall be such as to ensure complete uniformity of contact over the whole area of the steel base. The contractor will be fully responsible for the grouting operations.

Volume – I Technical Specification Structural Work

10.0 GROUTING

The method of grouting the column bases shall be subject to approval of Owner and shall be such as to ensure complete uniformity of contact over the whole area of the steel base. The contractor will be fully responsible for the grouting operations.

11.0 GALVANISING

- 11.1 All structural steel works and support shall be galvanized after fabrication.
- 11.2 Zinc required for galvanizing shall have to be arranged by the manufacturer. Purity of zinc to be used shall be 99.95% as per IS 209.
- 11.3 The contractor shall be required to make arrangement for frequent inspection by the Owner as well as continuous inspection by a resident representative of the Owner, if so desired for fabrication work.

12.0 TOUCH UP PAINTING

The touch up primers and paint shall consist of Zinc phosphate / Zinc chromate conforming to the requirements of IS 2074 with a pigment to be specified by the Owner.

13.0 INSPECTION BEFORE DESPATCH

- 13.1 Each part of the fabricated steel work shall be inspected as per approved quality plans and certified by the Owner or his authorized representative as satisfactory before it is dispatched to the erection site.
- 13.2 Such certification shall not relieve the contractor of his responsibility regarding adequacy and completeness of fabrication.

14.0 TEST CERTIFICATE

Copies of all test certificates relating to material by the contractor for the works shall be forwarded to the Owner.

15.0 ERECTION

The contractor should arrange on his own all plant and equipment, welding set, tools and tackles, scaffolding, trestles equipments and all other accessories and ancillaries required for carrying out erection without causing any stresses in the members which may cause deformation and permanent damage.

Volume – I Technical Specification Structural Work

16.0 SAFETY & PRECAUTION

The contractor shall strictly follow at all fabrication, transportation and erection of steel structures, raw m, materials and other tools and tackles, the stipulations contained in Indian standard code for safety during erection of structural steel work.

17.0 DEVIATIONS

Deviation from this specification, if any, shall be clearly brought out in the offer. Unless owner explicitly accepts such deviations, it shall be considered that the offer fully complies with the specification.

TECHNICAL SPECIFICATION FOR OUTDOOR SWITCHYARD MATERIAL

Prepared by			Rev: 1
Reviewed by			Date:
Approved by			

Volume – I Technical Specification Outdoor Switchyard Material

1.0 INTENT OF SPECIFICATION

- 1.1 This specification is intended to cover the design, manufacture, assembly, testing at manufacturer's works, supply & delivery, properly packed for transport F.O.R site of 66KV Outdoor Switchyard Material and Hardware complete with all accessories for efficient and trouble free operation.
- 1.2 In the event of any discrepancy between listed documents, the stipulation of this specification shall govern.
- 1.3 The specification shall be read and constructed in conjunction with other sections of bidding document.

2.0 SCOPE OF WORK

2.1 Scope of Supply

Type, rating, connections etc. of the materials shall be as detailed in the drawings and annexure. The materials shall be furnished in strict compliance with the same.

2.2 Following materials and hardware's are to be furnished:

- a) ACSR ZEBRA Conductor
- b) Aluminum Pipe.
- c) G.S Shield Wire
- d) Tension & Suspension Insulator String Assembly Sets
- e) Disc Insulator & Post Insulators
- f) Conductor Spacers, Clamps, Connectors.
- g) Bay Marshalling Kiosk.

Any material or accessory, which may not have been specifically mentioned but which is usual and / or necessary shall be supplied free of cost to the Owner.

3.0 GENERAL REQUIREMENTS

3.1 Codes and Standards

- i) All equipment and materials shall be designed, manufactured and tested in accordance with the latest applicable Indian Standards (IS) & IEC Standard except where modified and / or supplemented by this specification.

Volume – I Technical Specification Outdoor Switchyard Material

- ii) Equipment and material conforming to any other standard, which ensures equal or better quality, may be accepted. In such cases, copies of the English version of the standard adopted shall be submitted along with the bid.
- iii) The electrical installation shall meet the requirements of Indian Electricity Rules as amended upto date and relevant IS Codes of Practice. In addition other rules or regulations applicable to the work followed. In case of any discrepancy, the more restrictive rule shall be binding.

4.0 DESIGN CRITERIA

- 4.1 All the ACSR conductors, disc and string insulators, clamps & connectors, hardware's etc. will be used in extra high voltage system having characteristics as listed in the annexure.
- 4.2 All equipments, conductors, hardware's, insulators & clamps etc. will be installed outdoor in a hot, humid & tropical atmosphere.
- 4.3 The maximum temperature in any part of the clamps, connectors, conductors etc at specified rating shall not exceed the permissible limit as stipulated in the relevant standards.
- 4.4 All equipments, conductors, clamps, connectors, insulators etc shall be capable of withstanding the dynamic & thermal stresses of maximum short circuit current without any damages or deterioration.
- 4.5 In order to avoid concentration of stresses, all sharp edges of clamps, connectors etc. shall be rounded off.
- 4.6 Bi-metallic connectors shall be used for any connection between dissimilar materials.

5.0 SPECIFIC REQUIREMENT

5.1 Equipment & Materials

- i) Equipment & material shall comply with description, rating etc. as detailed in this specification and annexure.
- ii) All accessories, fittings, supports, bolts etc. which form part of the equipment or which are necessary for safe and satisfactory installation and operation of the equipment shall be furnished.
- iii) All parts shall be made accurately to standard gauges so as to facilitate replacement and repair. All corresponding parts of similar equipment shall be interchangeable.
- iv) After the treatment of steel surfaces damaged during transit sufficient quantity of anti-corrosive paint shall be applied and subsequently finished with two coats of final paint of approved shade.

Volume – I Technical Specification Outdoor Switchyard Material

5.2 ACSR Conductor

- i) The Aluminum Standard conductor and steel reinforced shall have the technical parameters matching with the requirements given in Annexure. ACSR conductors shall conform to the latest revision of IS-398.
- ii) The material for ACSR conductor shall conform to the following:

Aluminum

The Aluminum strands shall be hard drawn from electrolytic Aluminium rods having purity not less than 99.5% and a copper content not exceeding 0.04%.

Steel

The steel wire strands shall be drawn from high carbon steel wire rods and shall conform to the following chemical composition:

Element -% Composition

Carbon - 0.50 to 0.85 Manganese - 0.50 to 1.10 Phosphorous -not more than 0.035
Sulphur -not more than 0.045 Silicon - 0.10 to 0.35

Zinc

The zinc used for galvanizing shall be electrolytic High Grade Zinc of 99.95% purity. It shall conform to and satisfy all the requirements of IS: 209-1979.

5.3 Clamps and connectors

- i) All clamps, connectors and hardware's shall be designed manufactured and tested as per relevant standards.
- ii) All clamps & connectors for connection with Aluminum Pipe/ACSR conductors shall have high tensile Aluminum alloy grade A6 body. U- Bolt and nut for the clamp shall be made of non-magnetic material e.g. chromium steel.
- iii) Bolt, nut, washer, shackle etc. required for other purpose shall be of forged steel with adequate strength and the surface shall be so protected as to offer maximum resistance to corrosion. Malleable iron wherever used for any part shall be of best quality and shall correspond to latest amendments of relevant IS.
- iv) Various fittings & accessories of the clamps & connectors shall be so designed as to eliminate sharp edges & maintain bright smooth surface. All bolts, nuts, rivets etc. shall have round profiles.

5.4 Disc Insulator

- i) All disc insulators shall be dimensioned appropriately so as to have the required Electro- Mechanical strength for EHV outdoor duties.

Volume – I Technical Specification Outdoor Switchyard Material

- ii) Suspension and tension insulators shall be wet process porcelain with ball and socket connection. Glazing of the porcelain shall be uniform brown colour, free from blisters, burrs and other similar defects. Insulators shall be interchangeable and shall be suitable for forming either suspension or strain strings. Each insulator shall have rated strength markings on porcelain printed and applied before firing.
- iii) When operating at normal rated voltage there shall be no electric discharge between conductor and insulator which would cause corrosion or injury to conductors or insulators by the formation of substances due to chemical action. No radio interference shall be caused when operating at normal rated voltage.
- iv) Insulating shall be co-ordinated with basis impulse level of the system. The creepage distance shall correspond to very heavily polluted atmosphere (31mm/KV)
- v) Porcelain used in insulator manufacture shall be homogeneous, free from lamination, cavities and other flaws or imperfection that might affect the mechanical or dielectric quality and shall be thoroughly vitrified, tough and impervious to moisture.
- vi) The design of the insulator shall be such that stresses due to expansion and contraction in any part of the insulator shall not lead to deterioration. All ferrous parts shall be hot dip galvanized in accordance with the latest edition of IS: 209. The zinc coating shall be uniform, adherent, smooth, reasonably bright, continuous and free from imperfection such as flux, ash, rust stains bulky white deposits and blisters.
- vii) Bidder shall make available data on the essential features of design including the method of assembly of discs and metal parts, number of discs per insulators, the manner in which mechanical stresses are transmitted through discs to adjacent parts, provision for meeting expansion stresses, results of corona and thermal shock tests, recommended working strength and any special design or arrangement employed to increase life under service conditions.
- viii) Insulator hardware shall be of forged steel. Malleable cast iron shall not be accepted except for insulator disc cap. The surface of hardware must be clean, smooth, without cuts, abrasion or projections. No part shall be subjected to excessive localized pressure. The metal parts shall not produce any noise generating corona under operating conditions.
- ix) The insulator hardware assembly and clamps shall be designed for 120KN Tensile load. The clamps shall be designed for 700 Kg tensile load. Earth wire tension clamp shall be designed for 1000 Kg tensile load with a factor of safety of two (2).
- x) The tension string assemblies shall be supplied along with suitable turn buckle.

Volume – I Technical Specification Outdoor Switchyard Material

5.5 Post Insulator Stack

- i) Post type insulators shall consist of a porcelain part permanently secured in a metal base to be mounted upright. They shall be designed to withstand any shocks to which they may be subjected to by the operation of the associated equipment. Only solid core insulators will be acceptable.
- ii) Porcelain used shall be homogeneous, free from lamination, cavities and other flaws or imperfection that might affect the mechanical or dielectric quality and shall be thoroughly vitrified, tough and impervious to moisture.
- iii) Glazing of the Porcelain shall be of uniform brown in color, free from blisters, burrs and other similar defects.
- iv) The insulator shall have alternate long and short sheds with aerodynamic profile. The shed profile shall also meet the requirements of IEC-815 for the specified pollution level.
- v) When operating at normal rated voltage there shall be no electric discharge between conductor and insulators, which would cause corrosion or injury to conductors or insulators by the formation of substances produced by chemical action.
- vi) The design of the insulators shall be such that stress due to expansion and contraction in any part of the insulator shall not lead to deterioration.
- vii) All ferrous parts shall be hot dip galvanized in accordance with the latest edition of IS: 2633 & IS: 4579. The zinc used for galvanizing shall be grade Zn 99.95 as per IS: 209. The zinc coating shall be uniform, adherent, smooth, reasonably bright, continuous and free from imperfections.
- viii) If corona extinction voltage is to be achieved with the help of corona ring or any other similar device, the same shall be deemed to be included in the scope of the manufacturer.
- ix) Post insulator shall be complete with necessary fixing clamp at top for clamping of ACSR conductor, as required. The insulators shall be provided with necessary nuts, bolts and washers.

5.6 Galvanized Steel Shield Wire

- i) Galvanized steel shield wire shall generally conform to IS 398 (Part-II) except as specified herein and in annexure. The steel strands shall be drawn from high carbon steel rods produced by either acid or basic open hearth process, the electric furnace process or basic oxygen process. The wire shall be hot dip galvanized.

Volume – I Technical Specification Outdoor Switchyard Material

- ii) Zinc used for galvanizing shall be electrolytic high-grade zinc of 99.5% purity and shall conform to IS: 209 -1966. The hot dip galvanizing shall be done as per IS: 4826 - 1968 for heavy coating.
- iii) There shall be no joint of any kind in the finished strand wire entering into the construction of earth wire.
- iv) The wire shall be 7/8SWG galvanized steel wire. The ultimate strength of individual strand shall not be less than 1000 Kgs.

5.7 Bundle Spacers

- i) Bundle spacers shall have enough strength so as to restore normal spacing of conductors after displacement by winds, short circuits etc. without damages or permanent deformation. The spacers shall have long life without fatigue or wear and shall have gentle but firm grip on conductor. They shall be able to withstand all the electromagnetic and electrostatic forces under different operating conditions including dead short circuit
- ii) They shall be one-piece construction and shall not have separate small components.
- iii) The materials used in spacers shall be corrosion resistant and made of Aluminum alloy grade A6.
- iv) The spacers shall be flexible enough so as to avoid distortion or damages to the conductor or themselves. Rigid spacers are not acceptable.

5.8 Marshalling Kiosk

- i) Marshalling Kiosk shall be furnished for each bay of 66KV switchyard. It is intended to have all interlocking circuit, CT & PT connections (for star point) AC, DC distribution in each bay through this cubicle. For this purpose, adequate terminals shall be provided in this cubicle. The terminal blocks shall be installed at least at a height of 200mm from bottom gland plate and gap between two terminal blocks shall be at least 150mm.
- ii) The cubicle shall be outdoor type having IP-55 class of protection with suitable canopy of gasketed weatherproof construction fabricated from sheet steel minimum 2mm thick.
- iii) The marshalling Kiosk shall have three distinct compartments for the following purpose:
 - a) To receive two incoming 415V, 3phase, 32A, AC supply with auto changeover and MCB unit and distribute 5 nos., 415V, 16A, AC supplies controlled by MCB

Volume – I Technical Specification Outdoor Switchyard Material

- b) To distribute 5 nos., 240V, 10A, single phase supplies to be controlled by MCB and drawn from above 3 phase incomers.
- c) 150nos. terminals blocks in vertical formation for interlocking facilities.
- d) To receive 220V DC, two incoming supply and distribute the same to all the circuit breaker, isolator and transformers of each bay.
- iv) The cubicle shall have front access door with lock and key and removable gland plate at the bottom for cable entry Internal illumination lamp and 3- pin 5A socket with individual ON-OFF switches shall be provided in the cubicle
- v) Suitable space heater with thermostat shall be provided to prevent condensation.
- vi) The cubicle shall be epoxy painted to shade 692 of IS 5.

5.9 Junction Box for CT, PT & CVT

- i) CT/CVT/PT separate junction box is not required. Instead the marshalling Kiosk can be used for CT/PT/CVT connection. Although the contractor if wants to can also use junction Boxes for these connection. The Boxes shall outdoor type having IP-55 class of protection with suitable canopy of gasketed weatherproof construction fabricated from sheet steel minimum 2mm thick.
- ii) The box shall have front access door with lock and key and removable gland plate at the bottom for cable entry.
- iii) The junction box shall have stud type (non disconnecting) terminals. Arrangement shall be provided for shorting of the secondary terminals while the CT is in energized condition for testing and other purposes, if necessary. Sufficient space shall be provided so that all terminals are accessible. No. of terminals shall be 20 nos. each in a terminal block and 5 nos. such blocks in CT junction box and 3 nos. such terminal blocks in CVT junction box.
- iv) All incoming and outgoing connections in the junction box shall be properly marked with ferrules.
- v) The box shall be epoxy painted to shade 692 of IS 5

Volume – I Technical Specification Outdoor Switchyard Material

5.10 Aluminum Pipe Busbar

5.10.1 Codes and Standards:

Standard Name / No	Standard's Description
IS 2678	Dimensions and tolerances for wrought aluminium and aluminium alloy drawn round tube
IS 738	Wrought aluminium alloys, drawn tube for general engineering purposes

5.10.2 Erection of Aluminum Pipe Busbar

- i) Aluminum pipes are used for 66kV bus bar jumpers and interconnections at 66 kV Grid Substation. The nominal outer diameter of the pipes is 80 mm and wall thickness 8 mm.
- ii) The minimum height of the 66 kV main bus is 6.4 meters.
- iii) Longitudinal connection between the pipes for main Busbar shall be either by Welding or by flexible jumpers of suitable Size/Rating.
- iv) Welding to pipes should be done on ground using straight run couplers.
- v) In case the bus height changes, then the pipes at the different levels shall be welded together with a piece of pipe using appropriate angular couplers (90° or 135°) prior approval to be obtained from purchaser.
- vi) Suitable vibration damper should be placed/inserted in the pipe busbar.
- vii) Jumpers from equipment to equipment and from equipment to bus shall be either direct by connected or supported on post insulators. One Jumper shall be a single continuous length of Pipe.
- viii) If required length of jumpers is more than one pipe length and where angles are required to be given in the jumpers, welding of aluminum pipe to pipe or pipe to angular connectors shall be done.
- ix) All the open ends of pipes shall be closed with corona end shields.
- x) All joints/Coupling shall be done meeting the best Industrial practices/Standards
- xi) Each and every joint shall be subjected to:
 - a) Physical examination.
 - b) Liquid penetration test.

Volume – I Technical Specification Outdoor Switchyard Material

6.0 TESTS

6.1 Routine Tests

- i) During manufacture and on completion of all equipment, conductors, insulators, clamps, connectors and accessories shall be routine tested as per applicable standards at manufacture's works.
- ii) The suspension and tension strings, insulator discs and hardware shall be subjected to the following, acceptance tests and routine tests:
 - a) Visual examination
 - b) Verification of Dimensions as per Cl no. 10.5 of IS: 731
 - c) Temperature cycle test as per Cl no. 10.6 of IS: 731
 - d) Puncture test as per Cl no. 10.10 of IS: 731
 - e) Galvanizing test as per Cl no. 10.12 of IS: 731
 - f) Mechanical performance test as per IEC-575 Cl. 4
 - g) Test on locking device for ball & socket coupling as per IEC-372 (2)
 - h) Porosity test as per Cl no. 10.11 of IS: 731

Acceptance Tests

- a) Visual examination as per Cl. 5.10 Of IS: 2468 (Part-1)
- b) Verification of Dimensions as per Cl. 5.8 Of IS: 2468 (Part-1)
- c) Galvanizing / Electroplating test as per Cl. 5.9 Of IS: 2468 (Part-1)
- d) Slip strength test as per Cl. 5.4 Of IS: 2468 (Part-1)
- e) Shore hardness test for the Elastomer (if applicable as per the value guaranteed by the Bidder)
- f) Mechanical strength test for each component (including grading rings and arcing horns).
- g) Test on locking devices for ball and socket coupling as per IEC: 372 (2)

Routine Tests on Disc Insulator / Long rod Insulator

- a) Visual Inspection as per Cl No. 10.13 of IS: 731
- b) Mechanical Routine Test as per Cl No. 10.14 of IS: 731
- c) Electrical Routine Test as per Cl No. 10.15 of IS: 731

Routine Tests on Hardware Fittings

- a) Visual examination as per Cl. 5.10 Of IS: 2468 (Part-1)
- b) Mechanical strength Test as per Cl. 5.11 Of IS: 2468 (Part-1)

Test during manufacture on all components as applicable on Disc Insulator

Volume – I Technical Specification Outdoor Switchyard Material

- a) Chemical analysis of zinc used for galvanizing:

Samples taken from the zinc ingot shall be chemically analyzed as per IS: 209. The purity of zinc shall not be less than 99.95%.

- b) Chemical analysis, mechanical hardness tests and magnetic particle inspection for malleable casting:

The chemical analysis, hardness tests and magnetic particle inspection for malleable casting will be as per the internationally recognized procedure for these tests. The sampling will be based on heat number and heat treatment batch

Test during manufacture on all components as applicable on hardware fittings

- a) Chemical analysis of zinc used for galvanizing

Samples taken from the zinc ingot shall be chemically analyzed as per IS: 209. The purity of zinc shall not be less than 99.95%.

- b) Chemical analysis, mechanical hardness tests and magnetic particle inspection for malleable casting:

The chemical analysis, hardness tests and magnetic particle inspection for malleable casting will be as per the internationally recognized procedure for these tests. The sampling will be based on heat number and heat treatment batch

- c) Chemical analysis, mechanical hardness tests and magnetic particle inspection for fabricated hardware.

The chemical analysis, hardness tests and magnetic particle inspection for fabricated hardware will be as per the internationally recognized procedure for these tests. The sampling will be based on heat number and heat treatment batch.

- iii) The following, acceptance & routine tests and tests during manufacturing shall be carried out on the conductor.

Acceptance Tests

a)	Visual check for joints, scratches etc. and length of conductor	
b)	Dimensional check on steel and Aluminum strands	
c)	Check for lay ratio of various layers	
d)	Galvanizing test on steel strands	

Volume – I Technical Specification Outdoor Switchyard Material

e)	Torsion and Elongation test on steel strands	
f)	Breaking load test on steel and Aluminum strands	
g)	Wrap test on steel and Aluminum strands	IS: 398(Part-V) 1982 Clauses 12.5.2, 12.7 & 12.8
h)	DC resistance test on Aluminum strands	
i)	UTS test on welded joint of Aluminum strands	

NOTE: All the above tests except test mentioned at (i) shall be carried out on Aluminum and steel strands after stranding only

Routine Tests

- a) Check to ensure that the joints are as per specification
- b) Check that there are no cuts, fins etc. on the strands
- iv) The following type, routine & acceptance tests and tests during manufacturing shall be carried out on the earth wire.

Acceptance Tests

- a) Visual check for joints, scratches etc. and length of Earth wire
- b) Dimensional check
- c) Galvanizing test
- d) Lay length check
- e) Torsion test
- f) Elongation test
- g) Wrap test
- h) DC resistance test : IS: 398 (Part III) 1976
- i) Breaking load test
- j) Chemical Analysis of steel

Routine Tests

- a) Check that there are no cuts, fins etc. on the strands.
- b) Check for correctness of stranding

Volume – I Technical Specification Outdoor Switchyard Material

6.2 Type Test

Test certificates for type tests shall be from CPRI/ERDA/NABL approved lab, as stipulated in Indian Standards carried out on similar equipment shall be furnished. If test certificate for any of the type test is not available, the same shall be carried out free of cost from CPRI/ERDA/NABL.

6.3 Test Witness

Tests shall be performed in presence of Owner's representative if so desired by the Owner. The contractor shall give at least fifteen (15) days advance notice of the date when the tests are to be carried out.

6.4 Test Certificates

- i) Certified copies of all tests carried out at works shall be furnished in requisite no. of copies as stated in the condition of contract for approval of the Owner. The certificates shall furnish complete identification, date including serial number of each material and accessory.
- ii) Equipment shall be dispatched from works only after receipt of Owner's written approval of shop test reports.
- iii) Type test certificate on any equipment, if so desired by the Owner, shall be furnished. Otherwise, the equipment shall have to be type tested, free of charge, to prove the design.

7.0 SPARES

The Bidder shall submit a list of recommended spare parts for three (3) years of satisfactory and trouble free operation, indicating itemized price of each item of the spares.

Volume – I Technical Specification Outdoor Switchyard Material

8.0 DRAWING & DOCUMENTS TO BE FURNISHED

8.1 To be submitted with each copy of the Bid

- i) Typical general arrangement drawing of the equipment / items.
- ii) Technical leaflets on equipment / items expending constructional features.
- iii) Type test certificates on similar equipment / items.

8.2 To be submitted for Approval and Distribution

- i) Dimensional general arrangement drawing showing disposition of various fittings for equipment, accessories, components etc.
- ii) Assembly drawing for erection at site with part numbers and schedule of materials.
- iii) Type & Routine test certificates
- iv) Technical leaflets on equipment / items
- v) Back-up calculation for:
 - a) Selection of equipment / material ratings.
 - b) Sag-Tension of ACSR.
 - c) Lighting protection system
 - d) Selection of rigid bus support spacing.
- vi) Any other relevant drawing, documents, calculations and data necessary for satisfactory installation, operation and maintenance.

DESCRIPTION OF HARDWARE TO BE SUPPLIED UNDER THIS SPECIFICATION

SL. NO.	DESCRIPTION
1.0	66KV Tension String (Ball dia. 20mm)
a)	Double Tension String with double anchor, tension clamps suitable for Twin ZEBRA conductor.
b)	Double Tension String with double anchor, tension clamps suitable for Twin ZEBRA conductor.
c)	Double Tension String with double anchor, tension clamps suitable for Single ZEBRA conductor, with turnbuckle and metal parts
d)	Double Tension String with double anchor, tension clamps suitable for Single ZEBRA conductor.
2.0	66KV Suspension String (Ball dia 20mm)
a)	Single Suspension string including arching horn, drop clamp suitable for Single Zebra conductor (sub conductor spacing of 250mm), metal parts
b)	Single Suspension string including arching horn, drop clamp suitable for Twin Zebra conductor (sub conductor spacing of 250mm), metal parts
c)	Single Suspension string including arching horn, suspension clamp suitable for Single Zebra conductor (sub conductor spacing of 250mm), metal parts
d)	Single Suspension string including arching horn, suspension clamp suitable for Twin Zebra conductor (sub conductor spacing of 250mm), metal parts

Volume – I Technical Specification Outdoor Switchyard Material

3.0	Bolted Type Clamp
a)	Tee connector Twin Zebra to Twin Zebra, Vertical take-off
b)	Tee connector Twin Zebra to Single Zebra
c)	Tee connector Single Zebra to Single Zebra.
d)	Parallel Groove clamp Single Zebra to Single Zebra
4.0	Flexible Spacer
a)	Suitable for Single Zebra with sub conductor spacing of 250mm
b)	Suitable for Twin Zebra with sub conductor spacing of 250mm
5.0	Shield Wire Tension clamp
6.0	Disc insulator Unit

Bidder to note that the above type of hardware is a minimum requirement and indicated for guidance only. Bidder shall estimate the quantity and types of hardware and offer and supply accordingly for successful operation of the installation.

9.0 DEVIATIONS

Deviation from this specification, if any, shall be clearly brought out in the offer. Unless owner explicitly accepts such deviations, it shall be considered that the offer fully complies with the specification.

Volume – I Technical Specification Outdoor Switchyard Material

RATINGS & REQUIREMENTS

1.0	CONDUCTORS	
1.1	ACSR Conductor	
1.1.1	Reference standard :	IS 398
1.1.2	Code Name :	ZEBRA
1.1.3	Type :	ACSR
1.1.4	Overall diameter	28.62mm
1.1.5	Stranding no. of wire and diameter :	54/3.18 (Al) 7/3.18 (St)
	Number of strands Core	1
	1st Layer	6
	2nd Layer	12
	3rd Layer	18
	4th Layer	24
1.1.6	Sectional area of Aluminum :	428.9 sq.mm
1.1.7	Total Sectional area :	484.5 sq.mm
1.1.9	Ultimate Strength (min) :	130.32 KN
1.1.10	Calculated DC resistance at 20 Deg C :	0.06868 ohm/Km

NOTE – The 66KV Main Bus Shall be with TWIN ZEBRA. The equipment bay shall be Single Zebra.

2.0	GALVANISED STEEL SHIELD WIRE	
2.1	Reference standard :	IS 398
2.2.	Number of strands	Steel core-1, outer Steel layer-6
2.3	Total sectional area	54.55 sq.mm
2.4	Overall diameter	9.45 mm
2.5	Approximate weight	428 kg/km
2.6	Calculated DC. resistance at 200C	3.37 ohms/km
2.7	Minimum ultimate tensile strength	56 KN
2.8	Direction of lay of outer layer	Right hand
2.9	Minimum tensile strength	110 Kgf/mm2
3.0	CONNECTORS / PG CLAMP ASSEMBLY / SPACER	
3.1	Reference standard :	
3.1.1	Clamp / Connector	IS 5561
3.1.2	Spacer	IS 10162
3.2	Material	Aluminum Alloy A6
3.3	Continuous current carrying capacity (r.m.s) at 50deg C ambient temp.	2000A (min)
3.4	Short time current carrying capacity	31.5KA for 3 sec
3.5	Maximum temperature rise over Ambient of 50	35 deg C

Volume – I Technical Specification Outdoor Switchyard Material

	deg C	
4.0	INSULATORS	
4.1	Reference standard	
4.1.1	String Insulators/Insulator fittings	IS 731/ IS 2486
4.1.2	Post Insulators	IS 2544
4.2	Type	Post Insulator-
	Cylindrical solid	
	Core type,	
	Suspension &	
	Tension Insulator	
4.3	Service	Outdoor
4.4	System details	
4.4.1	Voltage	66/72.5KV (Nom/Max)
4.4.2	Nos. of phases	3
4.4.3	Frequency	50Hz
4.4.4	System neutral earthing	Effectively earthed
4.5	Insulation Level	
4.5.1	Dry power frequency withstand	140KV r.m.s
4.5.2	Wet power frequency withstands	140KV r.m.s
4.6	Impulse withstand	325KV
4.7	Creepage	31mm/KV

Bus Post Insulators shall have minimum cantilever strength of 800Kg and minimum torsion moment of 500 Kg.

FITTINGS AND ACCESSORIES OF INSULATORS

Each insulator shall be furnished complete with the fittings and accessories as listed below according to requirement

1. Suspension top fitting
2. Suspension clamp fitting
3. Conductor suspension clamp
4. Tension end fitting
5. Tension (anchor) clamp adopter
6. Conductor tension (anchor) clamp
7. Top metal fitting
8. Bottom metal fitting
9. Nuts, Cotter pin, security clips etc.
10. Forged pin, studs etc.

Other standard accessories which are not specifically mentioned but usually provided with insulator of such type and rating for efficient and trouble free operation.

TECHNICAL SPECIFICATION
FOR
BATTERY CHARGER

Prepared by	Javed Ahmed		Rev: 0
Reviewed by	Abhinav Srivastava		Date:
Approved by	Vijay Panpalia		

Chapter 6b. Technical Specification for Battery Charger

1.0 CODES & STANDARDS:

Material, equipment and methods used in the manufacture of battery charger shall confirm to the latest edition of following standard: -

Standard Name / No	Standard's Description
Indian Electricity Rules	Relevant safety regulation of CEA
Indian Electricity Act 2003	
CBIP manual	
IS 3895	Specification for rectifier equipment in general
IS 5921	Printed circuit boards
IS 6619	Safety code for semiconductor devices
IS 4540	Semiconductor rectifier assemblies and equipment
IS 694	PVC Insulated Cables for Working Voltage up to and including 1100 V
IS 1248	Direct Acting Electrical indicating instruments
IS 2705	Current transformer
IS 3156	Voltage transformer
IS 3231	Electric relay for power system protection
IS 5578	Guide for making of insulated conductors
IS 8623	Low voltage switchgear and control gear assemblies
IS 13703	Low voltage fuses for voltages not exceeding 1000AC
IS 12063	Degree of enclosure protection
IS5	Color of mixed paints
IS 6297	Transformer & inductors for electronic equipment
IS 6553	Environment requirements for semiconductor device
IS 4007	Terminals for electronic equipment

2.0 DOCUMENTS REQUIRED

In the event of direct conflict between various order documents, the precedence of authority of documents shall be as follows –

- i. Guaranteed Technical Particulars (GTP)
- ii. Specification including applicable loads
- iii. Approved vendor drawings
- iv. Other documents
- v. Battery Charger sizing calculation

Chapter 6b. Technical Specification for Battery Charger

3.0 CHARGER DESIGN FEATURES:

The equipment shall have all the following features –

3.1	Configuration	As per calculation during detailed engineering with 2X100% Float cum Boost Charger.
3.2	Panel type	Metal enclosed frame construction
3.3	Location	Indoor, non air conditioned environment
3.4	Doors for front access	With anti theft hinge & handle
3.5	Cover for rear access	With Allen screw M6 size & handle
3.6	Construction	Sheet metal 2.0mm thick CRCA
3.7	Base frame	75mm ISMC
3.8	Lifting lugs	Four number
3.9	Gland plate	3mm metallic, un drilled & removable type
3.10	Enclosure protection	IP42 Minimum
3.11	Power terminal	Bus bar type, minimum 300mm above gland plate
3.12	Control terminal	Nylon66 with brass clamp
3.13	Bus bar	Tinned copper with insulation sleeve
3.14	Earth bus bar	Aluminum sized for rated fault duty for 1sec
3.15	Earth bus internal connection to all non current carrying metal parts	By copper flexible wire 2.5 sqmm
3.16	Earth bus external connection to owner earth	Al bus on both sides of panel with two holes for M10 bolt
3.17	Cooling	Natural ventilation without fan
3.18	Panel heater	Thermostatically controlled through MCB
3.19	Panel internal wiring	Multi strand flexible color coded PVC insulated copper wire 1.5 sqmm 1100volt grade with 1.5 sqmm ferruling (other than circuit wiring related to PCB cards)
3.20	Input isolation transformer	Dry type
3.21	Isolation & protection device	Mounted at height minimum 1000mm from bottom
3.21.1	MCCB	For charger input, output & battery input
3.21.2	Battery & test resistor load	Lockable change over switch with one position for charger, second for 'OFF' & third position for external test resistor.
3.22	Hardware (Nut, bolts & handle)	Stainless steel
3.23	Charger configuration	
3.23.1	Type	3 phase full wave full controlled semiconductor rectifier with heat sink
3.23.2	Pulse	Minimum six pulse

Chapter 6b. Technical Specification for Battery Charger

3.23.3	Essential provision	Surge suppression, harmonic suppression, blocking diodes, filters for ripple control ,
3.23.4	Automatic phase sequence corrector	For 3 phase supply in right sequence, phase conversion. Protect equipment from phase reversal, phase loss.
3.23.5	Insulating shrouds	On all live parts, power semi conductors & electronic components
3.24	DC distribution board	If integral with charger, shall be given in separate compartment / shipping section
3.24.1	Outgoing feeder	Number & rating as per requirement. Each equipment shall have separate outgoing feeder.
3.24.2	Feeder type	All double pole MCB with insulating shrouds located inside panel
3.25	Ripple content in DC output	1% maximum
3.26	DC output voltage regulation	Maximum $\pm 1\%$ of rating with AC input supply variation of $\pm 10\%$ from 415 volts, frequency variation of $\pm 5\%$ from 50 HZ and simultaneous load variation of 0-100%
3.27	Reverse polarity connection	Protected against reversed battery polarity
3.28	Charger efficiency	85% minimum
3.29	Noise output	65DB maximum
3.30	Charger selector switch	For auto/manual and float/boost selection, lockable type inside panel
3.31	Charging current settings	25% to 100% of rating
3.32	Charging current accuracy	2% of set current with input voltage variation of $\pm 10\%$ and frequency variation of $\pm 5\%$
3.33	DC output adjustment range for float & boost charge (voltage & current)	By potentiometers inside panel, range suitable for NiCd as well as Lead Acid battery bank
3.34	Louvers	With stainless steel wire mesh
3.35	Gasket	Neoprene rubber
3.36	Panel illumination lamp with door switch	MCB controlled, with 5/15amp switch socket
3.37	Panel door keys	4 no. per panel, identical key for all panels
3.38	PCBs for electronic circuitry	With protective layer finish at back
3.38.1	PCB soldering	Preferably by wave soldering process
3.38.2	PCB/ electronic card mounting	With press fit type locking arrangement
3.39	Semiconductor component mounting	Shall not be on bakelite sheet

Chapter 6b. Technical Specification for Battery Charger

4.0 METERING, ANNUNCIATIONINS & INDICATION:

4.1	Ammeter (96x96mm)	Digital type, for AC input, DC output & battery current
4.2	Voltmeter (96x96mm)	Digital type, with selector switch for AC input, DC output & battery voltage
4.3	LED indication on panel front	
4.3.1	Status	
4.3.1.1	Input AC supply available on R,Y & B phase	Red/yellow/blue color LED
4.3.1.2	Float cum Boost charger AC MCCB 'ON'	Red color LED for each charger module
4.3.1.3	Charger output DC 'ON'	Red color LED for each charger module
4.3.1.4	Outgoing DCDB feeder ON	Red color LED for each other
4.3.2	Fault	
4.3.2.1	DC earth fault	Amber color LED
4.3.2.2	Battery MCCB OFF	Amber color LED
4.3.2.3	Charger output DC under/ over voltage	Amber color LED
4.3.2.4	AC mains under	Amber color LED
4.4	Annunciation	Hooter with isolating switch for fault annunciation.
4.5	Potential free contacts for remote indication	Wired to terminal blocks
4.5.1		Battery on boost
4.5.2		DC bus under voltage
4.5.3		DC bus over voltage
4.5.4		DC bus earth fault
4.5.5		Battery MCCB trip/ OFF
4.5.6		Common charger trouble
4.6	Common charger trouble to include-	All the charger trouble conditions shall have a potential free contact wired to terminal block and annunciation in the form of separate annunciation or on display unit of common controller
4.6.1	Incoming AC under voltage	
4.6.2	Incoming AC over voltage	
4.6.3	Charger input MCCB trip/ OFF	

Chapter 6b. Technical Specification for Battery Charger

4.6.4	Charger output MCCB trip/ OFF	
4.6.5	Charger Dc under voltage	
4.6.6	Charger Dc over voltage	
4.6.7	Charger rectifier fuse blown	
4.7	Communication	All the above alarm, analog signal etc shall be available at single port on modbus protocol for SCADA.

5.0 APPROVED MAKE & COMPONENTS

5.1	Switch	Siemens / L&T (Salzer)
5.2	HRC Fuse Links	GE/ Siemens/ L&T
5.3	Diodes & SCR	Hirect/USHA/IOR
5.4	Meters	AE/Rishabh
5.5	AC Contractors &O/L Relay	L&T/Siemens/Telemecanique/GE/ABB
5.6	Terminals	Connectwell/Elmex/Wago/Phoenix
5.7	Push buttons / Actuator	L&T/Siemens/Vaishno
5.8	MCCB	L&T/Siemens/ ABB/GE
5.9	MCB	Legrand/Hager/Schneider
5.10	Indicating lamps LED type	Vaishno/Binay/Teknic/Siemens/Mimic

Note – Any other make or component to be approved by owner.

6.0 DCDB FEEDER DETAILS:

DCDB shall be integral part of Battery charger and in scope of Vendor

S.No	Application	Type of Switchgear	Rating (A)	Quantity
1	Incomer	MCCB*	250	2
2	Battery Discharge feeder	MCCB*	250	1
3	DC emergency light	MCB*	40	2
4	ACDB	MCB*	40	1
5	66kV CRP	MCB*	40	8
6	11kV VCB	MCB*	40	15
7	Fire Alarm	MCB*	40	2
8	SAS	MCB*	40	2

20% spare Feeders shall be provided each type in addition to above

Chapter 6b. Technical Specification for Battery Charger

7.0 MMIC DIAGRAM, LABEL & FINISH

6.1	Mimic diagram	To be provided
6.2	Name plate on panel front	
6.2.1	Material	Anodized Aluminum 16SWG
6.2.2	Background	SATIN SILVER
6.2.3	Letter, diagram & border	Black
6.2.4	Process	Etching
6.2.5	Name plate details	Manufacturer name, month & year of manufacture, equipment type, input & output rating, Owner name & order number, guarantee period, weight of panel, degree of protection, Sr. No.
6.3	Labels for meters, indication & all cards / sub assemblies in panel	Anodized Aluminum with white character on black background
6.4	Danger plate on front & rear side	Anodized Aluminum with white letters on red background
6.5	Painting surface preparation	Shot blasting or chemical 7 tank process
6.6	Painting external finish	Powder coated polyester base grade A, shade – RAL 7032, uniform
6.7	Painting internal finish	Powder coated polyester base grade A, shade – white, uniform thickness 50 micron minimum
6.8	Labels for all components in panel	Anodized Aluminum with white character on black background, fixed by rivets only

8.0 INSPECTION & TESTING

7.1	Type test	Equipment of type tested quality only, type test certificate to be submitted along with offer. If the manufacturer's lab is accredited by govt. / authorized body then it shall be acceptable for type testing.
7.2	Routine test	As per relevant Indian standard
7.3	Acceptance test	To be performed in presence of Owner at manufacturer works
		- Physical inspection & BOM, wiring check
		- Insulation resistance test
		- HV test for one minute
		- Voltage regulation test
		- Heat run test for 12 hours
		- Measurement of efficiency, power factor & ripple content

9.0 DEVIATIONS

Deviation from this specification, if any, shall be clearly brought out in the offer. Unless owner explicitly accepts such deviations, it shall be considered that the offer fully complies with the specification.

BSES

TECHNICAL SPECIFICATION FOR LITHIUM ION BATTERY

Specification No-GN101-03-SP-118-00

Prepared by	Amar Deep Singh	APPROVED <small>By Amar Deep Singh at 1:52 pm, Jul 20, 2021</small>	Rev: 4
Reviewed by	Abhinav Srivastava	<i>Abhinav</i>	
Approved by	K. Sheshadri	<i>Kes</i> <i>20/07/21</i>	Date: 20/7/21

Registered Office: BSES Bhavan, Nehru Place, Delhi - 110019

Revision Summary

S. No	Revision No	Item Clause	Nature of Change	Approved By
1	R1	Clause no 6.1	Battery Size shall be Minimum 150AH	KS
2	R1	Clause no 6.18	Indications for ON/OFF and SOC	KS
3	R1	Clause no 6.19	Name Plate Details	KS
4	R1	Clause no 6.20	Equipment ID Painting	KS
5	R1	Clause No. 8	Packing and Delivery	KS
6	R2	Clause no 12	Variation in voltage levels	KS
7	R3	Clause No. 6.5.1	Li-ion chemistry – other available chemistry are also added	KS
8	R3	Clause No. 2	IEC and UL standards are added at S. No. 4, 5, 6 & 15	KS
9	R3	Clause No. 5.3	Nominal voltage changed from 50V to 48V as per industry norms	KS
10	R3	Clause No. 6.21	Safety Features – RoHS compliance is added	KS
11	R3	Clause No. 6.23	Battery Management System specification is added	KS
12	R3	Clause No. 6.5.1	Volumetric Energy Density parameter is removed	KS
13	R3	Clause No. 6.5.2	Gravimetric Energy Density parameter is removed	KS
14	R3	Para 12	Battery DoD is added in GTP	KS
15	R3	Para 12	Battery Cut-off is added in GTP	KS
16	R4	Clause No. 6.22	Life cycle	KS
17	R4	Para 12	Battery DoD in GTP	KS
18	R4	Para 12	Life cycle in GTP	KS
19	R4	Para 12	Service life in GTP	KS
20	R4	Para 12	Self discharge rate per month in GTP	KS

APPROVED
By Amar Deep Singh at 1:58 pm, Jul 20, 2021

Index

1.0	Scope
2.0	Code and Standards
3.0	Service Conditions
4.0	Documents required
5.0	DC Distribution Data
6.0	Battery Bank Design Features
7.0	Inspection and Testing
8.0	Packing and Delivery
9.0	Deviations
10.0	Accessories & Spares
11.0	Training
12.0	GTP

APPROVED
By Amar Deep Singh at 1:58 pm, Jul 20, 2021

1.0 SCOPE

This specification covers design, engineering, manufacture, assembly, stage testing, inspection & testing before supply, delivery at site and Erection Testing & Commissioning including SCADA communication of Li Ion Battery Bank.

2.0 CODES & STANDARDS

Material, equipment and methods used in the manufacturing of Li Ion battery shall confirm to the latest edition of following standard

Standard Name / No	Standard's Description
Indian Electricity Act	
CBIP manual	
IEC 62281, 62619, 61000-4-2	Safety of primary and secondary lithium cells and batteries, Safety requirements for secondary lithium cells and batteries, for use in industrial applications, Electrostatic Discharge Immunity Test
IEC 62133, IEC 62620:2014,	Battery Safety
IEC 61960	Performance tests, Designations, markings, dimensions, and other requirements
IEC 61959	Tests and requirements for verifying the mechanical behavior.
IS 5	Paint and Enamels
IS 13703	LV Fuses
IS 5578	Guide for marking insulated conductors
IS 694	Polyvinyl Chloride Insulated Unsheathed And Sheathed Cables/Cords With Rigid And Flexible Conductor For Rated Voltages Up To And Including 450/750 V
IS 1248	Direct Acting Indicating Analogue Electrical Measuring Instruments and their Accessories
IEEE	Relevant Standard
UL 1642	Individual cell compliance
UL 1973	Battery module complies, test methods and requirements to ensure safety during transport other than for recycling or disposal
UL 2054	Household and commercial Batteries

3.0 SERVICE CONDITIONS

S. No	Particulars	Data
1	Design Ambient temperature	0°C to 50 °C
2	Seismic Condition	Zone IV as per IS 1893
3	Wind Pressure	195 kg/M ² upto elevation of 30 M as per IS 875

4	Maximum Relative Humidity	100%
5	Maximum Altitude above Sea level	1000M
6	Rainfall	750mm (concentrated in 4 months)
7	Pollution level	Heavy/Dry
8	Average of no thunderstorm days	40 per annum

4.0 DOCUMENTS REQUIRED

In the event of direct conflict between various order documents, the precedence of authority of documents shall be as follows –

- i. Guaranteed Technical Particulars (GTP)
- ii. Specification including applicable loads
- iii. Approved vendor drawings
- iv. Other documents
- v. Battery sizing calculation

5.0 DC DISTRIBUTION SYSTEM DATA

5.1	DC Supply	2 wire, with positive & negative polarity
5.2	Earth reference	Unearthed system
5.3	Nominal Voltage	User Defined a) 220V DC b) 48VDC
5.4	Application - Industrial	Standby DC back up for switchgear control supply & SCADA RTU

6.0 BATTERY BANK DESIGN FEATURES:

The equipment shall have all the following features –

6.1	DC battery bank Ah rating & sizing	150Ah (Minimum) battery bank at charging voltage of 220VDC/48VDC in CC-CV mode. Battery Shall be compatible with existing chargers i.e Dual Float cum Boost Charger
6.2	DC load curve	With High discharge characteristics. With 0.5C/ battery module
6.3	Location of battery bank	Indoor
6.4	Mounting of battery bank	On steel rack/cabinet with window glass, painted with anti corrosive paint.
6.5	Battery type	Li-ion Battery only
6.5.1	Li-ion cell chemistry	Different chemistry with material Manganese /Cobalt/iron/titanium etc subject to fulfillment of required parameters as mentioned in this specification.

APPROVED

By Amar Deep Singh at 1:58 pm, Jul 20, 2021

6.5.2	Battery module round trip efficiency (%)	Min. 92
	Ingress protection	IP-55
6.6	Battery lifting/withdrawing arrangement	Suitable arrangement on Module
6.7	Battery Module designation	To be marked on cell as per relevant standard
6.8	Battery Module marking	Manufacturer name & type, month & year of manufacturer, nominal voltage, rated Ahr capacity & cell number
6.9	Battery terminals	As per Manufacturer standard
6.10	Terminal polarity marking	Positive & negative marked on Module
6.11	Insulating shrouds	For all battery terminals
6.12	Insulating pads for battery rack	Battery module to be 19 inch rack mounted, with supporting brackets on sides.
6.13	Battery suitable for Ripple content	5% minimum in DC charger output
6.14	Power terminal with insulator	Bus bar type mounted on rack suitable for 70sqmm cable
6.15	Cooling	As per Manufacturer standard
6.16	Communication	Modbus RS 485
6.17	Key parameters	Design capacity, full charge capacity, remaining capacity, state of charge, state of health, cycle count, total voltage, current, max cell voltage, min cell voltage, max cell temp, min cell temp, max FET temp.
6.18	Indications	LED Type i) Status type ii) SOC series of LED lights
6.19	Name Plate	
A	Material	Anodized Aluminum 16SWG
B	Background	SATIN SILVER
C	Letter, diagram & border	Black
D	Process	Etching
E	Name plate details	Manufacturer name, month & year of manufacture, equipment type, input & output rating, Owner name & order number, guarantee period, weight of panel, degree of protection, Sr. No.
6.20	Equipment ID Painting	Shall be given at the time of drawing approval. Following will be the features: 1) Equipment ID shall be painted on any appropriate face of the equipment at a clearly readable height from the base level of the equipment.

APPROVED
By Amar Deep Singh at 1:58 pm, Jul 20, 2021

		<p>2) Font: Recommended type face for the signage is True type or Post script.</p> <p>3) Font Size: All painting should be in UPPERCASE. Recommended height of 50 mm with spacing between alphabets of 3 mm.</p> <p>4) Total No's of Character: 18</p> <p>5) Height of Font: 50 mm</p> <p>6) Height of Base: 100 mm</p> <p>7) Spacing between alphabets: : 3 mm</p> <p>8) Paint: Base coat – Dense Yellow. Letters – Black Quick Drying paint 2 coats.</p>
6.21	Safety feature	Internal fuse, protective terminal covering to avoid unintentional contact, secondary level hardware protection for overvoltage, heat propagation resistant cell holding structure, overvoltage protection, under voltage protection, over charging current protection, over discharge current protection, over temperature during discharge protection, over temp during charge protection. RoHS compliant – no use of certain hazardous in electric and electronic equipment
6.22	Life Cycle	Cycle life should be more than 3000 and should have no effect of high temperature storage.
6.23	Battery management system	<ul style="list-style-type: none"> i. Inbuilt battery data measurement and monitoring system ii. All data should be available through mod bus RS 485 (for Monitoring in SCADA) iii. Internal data logging for battery usage iv. Battery SOH monitoring v. Display panel vi. Self-protection and Diagnostic for over charge, over current, Module reverse polarity protection, fuse failure, over voltage, over discharge protection, over temperature during charge and discharge etc.

7.0 INSPECTION & TESTING

6.1	Type test	Equipment shall be of type tested quality as per CI no. 2.0 for battery If the manufacturer's lab is accredited by govt. / authorized body then it shall be acceptable for type testing. For international standards, relevant certificate/test reports shall be acceptable.
6.2	Routine test	As per relevant standard mentioned in cl.no. 2.0
6.3	Acceptance test	To be performed in presence of Owner at

		manufacturer works and as per relevant std mentioned in cl. No. 2.0
--	--	---

8.0 PACKING AND DELIVERY

Shall be packed such that protected against corrosion, dampness, heavy rains, breakage and vibration

9.0 DEVIATIONS

Deviation from this specification, if any, shall be clearly brought out in the offer. Unless owner explicitly accepts such deviations, it shall be considered that the offer fully complies with the specification.

10.0 ACCESSORIES & SPARES

Mandatory Spares shall be supplied along with Battery Bank.

11.0 TRAINING

Training on installation, commissioning, operation and maintenance of Battery Bank shall be at factory or at site after installation

APPROVED
By Amar Deep Singh at 1:58 pm, Jul 20, 2021

12. GUARANTEED TECHNICAL PARTICULARS (DATA BY BIDDER)

S.NO.	Description	BRPL Requirement		Data to be filled by Manufacturer	
		48V	220V	48V	220V
1	Battery (as per scope of supply) – Yes / No	Yes	Yes		
2	battery type	Li-Ion	Li-ion		
3	Type/Model No.				
4	Cell Chemistry				
5	Battery nominal voltage with variation upto $\pm 5\%$				
6	Total battery bank CC-CV charging required in volts	As per clause no 6.1	As per clause no 6.1		
7	Nominal Voltage of each Cell				
8	No of cells in each module				
9	No. of modules				
10	Input charge voltage				
11	Charge current				
12	Discharge current				
13	Battery DOD	80% (minimum)	80% (minimum)		
14	Life cycle with 80% DOD	3000 (minimum)	3000 (minimum)		
14	Battery efficiency (watt hour round trip)	>92%	>92%		
15	Service life	10 Years	10 Years		
16	Self discharge rate per month	3% @ 25°C	3% @ 25°C		
17	Cut off voltage	45V	210V		
18	Conformance to design standards as per specification clause no. 2.0 – Yes / No	Yes	Yes		
19	Conformance to design feature as per specification clause no. 5&6 – Yes / No	Yes	Yes		
20	Submitted of deviation sheet for each specification clause no - Yes / No	Furnish each deviation if yes	Furnish each deviation if yes		
21	Battery GA drawing submitted - Yes / No	Required	Required		
22	Battery selection / sizing calculation submitted – Yes / No	Required	Required		

APPROVED

By Amar Deep Singh at 1:58 pm, Jul 20, 2021

Registered Office: BSES Bhavan, Nehru Place, Delhi - 110019

Page | 8

23	Battery rating offered in Ahr	150Ahr	150Ahr		
24	Rating at temperature 45 deg C	150Ahr	150Ahr		
25	Battery bank dimensions in mm (length x depth x height)	As required	As required		
26	Battery Module weight in kg	As required	As required		
27	Heat generated by battery at rated full load (in Kw)	Less than 0.025kW/module	Less than 0.025kW/module		
28	Manufacturer of Li-Ion Battery Cells and Modules	Yes	Yes		
29	Manufacturer of Battery management system (BMS)	Yes	Yes		
30	Availability of Service team in India	Yes	Yes		
31	Built In Battery Management System	Yes	Yes		

APPROVED
By Amar Deep Singh at 1:58 pm, Jul 20, 2021

TECHNICAL SPECIFICATION
FOR
415V AC DISTRIBUTION BOARDS

Prepared by	Supriya Raina	Rev: 0
Reviewed by	Abhinav Srivastava	Date: 25.11.2013
Approved by	Vijay Panpalia	

Volume-I Technical Specification for 415V AC Distribution Board

1.0 415V AC DISTRIBUTION BOARDS:

- 1.1 The AC distribution board shall be located in the Substation Building and shall be in two sections, each section fed by 415V, 3-phase supply from i) Station Aux Transformer ii) Shall be left for use in future. Each load center will be fed with separate outlet/ outgoing feeder. Auto changeover shall be provided between the two incomers with necessary interlocks.
- 1.2 The distribution boards shall be of modular construction with provision for complete compartmentalization of all feeders. It shall be free-standing, dead front type comprising dust-tight and vermin-proof sheet steel cabinets suitable for indoor installation with IP-54 degree of protection. The distribution boards shall be complete with necessary bus bar support insulators, cable glands, cable supports, terminal blocks, name-plates etc. All switches provided on the distribution board shall be on front side of the cabinets, operable from outside. The doors of cabinets shall be lockable. All instruments and control devices shall be mounted on the front of cabinets and fully wired to the terminal blocks. The board shall preferably be of the single front type, in fixed execution.
- 1.3 The various modules constituting the boards shall be provided with equipment/components such as switches, contactors, relays, control MCCB, ammeters, and voltmeters, terminal blocks etc. as required for complete circuit of the respective module.
- 1.4 The Boards shall be made out of at least 2.0 mm thick cold rolled steel sheet, suitably reinforced to provide flat level surfaces. Gland plate shall be 3.0mm thick. No welds, rivets, hinges or bolts shall be visible from outside. The doors shall be fitted with double lipped gaskets (subject to approval).
- 1.5 All cables shall enter and leave from bottom. Suitable cable terminal blocks with cable lugs shall be provided inside each cabinet for the incoming and outgoing cables. The terminals shall be serially numbered to facilitate installation and maintenance. Main busbars shall be accommodate in busbar chambers and cable alleys arranged by their side. Compression type cable glands shall be provided to hold the cables to avoid any pressure or tension on the terminal block connections. The terminal blocks shall be easily accessible for inspection and checking.
- 1.6 All the load break switches on the board shall be rotary type and shall be key operated.
- 1.7 The boards shall be given one primer coat followed by two finishing coats of epoxy based paint of light grey of Shade RAL 7032 with glossy finish.
- 1.8 The AC boards shall be provided with the following equipments wherever applicable:
 - i. Busbars of adequate rating.
 - ii. Terminal arrangement with necessary equipment for connecting the incoming supply.
 - iii. Module for voltage and current measurement in the incomer feeder.

Volume-I Technical Specification for 415V AC Distribution Board

- iv. Outgoing modules with switch / MCCB units of adequate capacity for the outgoing feeders and 20% spare feeder units of each rating.
- v. Necessary cable glands and terminal blocks.
- vi. Adequate number of spare terminals on terminal blocks for receiving connections from the spare contacts of the relays and for external connections.
- vii. Multifunctional meter, voltmeter and ammeter.

1.9 The number of outgoing feeders from AC boards shall be such that each substation equipment is fed by separate feeder with 20% as spare(refer below table).

S.No	Application	Type of Switchgear	No of Poles	Rating (A)	Quantity
1	Incomer	MCCB*	4	630	2
2	Transformer Oil filtration	MCCB*	4	100	2
3	Power Socket(Indoor)	MCB*	4	63	1
4	Welding(Outdoor)	MCB*	2	63	4
5	Outdoor Lighting	MCB*	4	32	2
6	Indoor Lighting	MCB*	4	32	2
7	BMK	MCB*	4	32	8
8	Marshalling Box(PTR)	MCB*	4	32	3
9	Battery Charger	MCB*	4	32	2
10	AC Supply	MCB*	4	32	2
11	UPS	MCB*	2	16	1
12	11kV Switchgear	MCB*	2	16	3
13	CRP	MCB*	2	16	2
14	RTU/SCADA	MCB*	2	16	2
15	Fire Fighting	MCB*	2	16	1
16	EPAX	MCB*	2	16	1

*Approved Make of MCCB/MCB:-Schneider/ABB/L&T

2.0 INSTRUMENTS

The indicating instruments shall be analog type square shaped and shall be flush mounting type. These shall have dust-proof and moisture- resistant enclosed cases. These shall be suitable for use in tropical climate. All AC instruments shall be connected through suitably rated current/voltage transformers.

3.0 BUSBARS

The busbars shall consist of tinned electrolytic copper of ample cross-sectional area, suitable for carrying their rated continuous current without their temperature exceeding 85 Deg.C. The busbars shall be continuous throughout each section.

Volume-I Technical Specification for 415V AC Distribution Board

The busbars shall have current rating to suit the requirements corresponding to the loads incident thereon under the various operating conditions and shall withstand the applicable voltage and maximum short circuit stresses. The busbars shall be insulated from supporting structure by means of durable non-hygroscopic, non-combustible and non-tracking polyester fiberglass material or porcelain. Busbars shall be encased in heat-shrunk sleeves of insulating material which shall be suitable for the operating temperature of busbars during normal service. The busbar joints shall be provided with removable thermosetting plastic shrouds.

The busbars shall be housed in totally enclosed busbar chambers. The incoming connections from the busbar to the various feeders shall be so designed as not to disturb cable connections and to ensure safety to the operating and maintenance personnel and to facilitate working outside any outgoing module without the need for switching off in-feed to the adjacent modules, as far as possible.

A cable alley preferably 230 mm wide shall be provided in each vertical section for taking cables into the compartments.

4.0 CONTROL WIRING

Each board shall be furnished completely factory wired upto terminal blocks ready for external connections.

All wires shall consist of 1100 V grade PVC insulated flexible stranded copper wires with a cross-section of 2.5 mm² (min.) suitable for switchboard wiring and complying with the requirements of the relevant IS. Each wire shall bear an identifying ferrule or tag at each end or connecting point.

Control cables for external connections shall consist of stranded copper wire with 1.5, 2.5, 4.0 sq.mm or higher cross-sectional areas and shall enter from bottom.

All interconnecting/outgoing control wiring shall terminate on stud type terminals on terminal blocks. The terminals shall be marked with identification numbers to facilitate connections.

The terminal blocks shall be made of moulded, non-inflammable, plastic material and arranged to provide maximum accessibility for inspection and maintenance.

The terminals shall be made of hard brass and have diameter of not less than 6 mm. The studs shall be securely locked within the mounting base to prevent turning. The terminal blocks shall be provided with twenty (20) percent spare terminals. The terminals shall be suitable for connections through crimped lugs.

5.0 INDICATING LAMPS

Indicating lamps shall be of low wattage LED cluster type. The lamps shall be provided with translucent lamp covers which shall diffuse coloured light to give the specified indications. The lamp covers shall be unbreakable and moulded from heat-resistant fast coloured material. Necessary wiring shall be provided accordingly.

Volume-I Technical Specification for 415V AC Distribution Board

6.0 INCOMER

The ACDB shall have two incomer suitable as per station auxiliaries transformer rating. Each incomer shall have electrically operated MCCB of category B with automatic changeover arrangement. All outgoing shall be provided with MCCB/MCB of suitable rating. MCCB shall have over current and earth fault release.

7.0 NAME PLATES & MARKING

Each panel shall be provided with legible and indelibly marked/ engraved name plates.

Name-plates of all the modules shall be white with black engraved letters.

On top of each module, name-plates with bold letters shall be provided for feeder designation. Each device shall also be suitably marked for identification inside the panels. Name- plates with full and clear inscriptions shall be provided inside the panels for all isolating switches, links, fuse blocks, test blocks and cable terminals. Every switch shall be provided with a nameplate giving its function clearly. Switches shall also have clear inscriptions for each position indication e.g. 'ON' 'OFF' etc.

8.0 DEVIATIONS

Deviation from this specification, if any, shall be clearly brought out in the offer. Unless owner explicitly accepts such deviations, it shall be considered that the offer fully complies with the specification.



Specification for Power Transformer Including NIFPS

Specification no – SP-TRPU-01-R8

Prepared by:		Checked by :		Approved by:		Rev	Date
Name	Sign	Name	Sign	Name	Sign	01	21-Nov-08
DS		SR		DG		02	10 -Aug-09
Supriya		Meenakshi		K.K.Alla		03	16-July-14
Javed Ahmed		Abhinav Srivastava		Kiran Alla		04	18-July-16
Javed Ahmed		Abhinav Srivastava		Vijay Panpalia		05	26-July-17
Javed Ahmed		Abhinav Srivastava		K. Sheshadri		06	22-June-18
JA/SS		Abhinav Srivastava		K. Sheshadri		07	13-Dec-19
JA/SS		Abhinav Srivastava		K. Sheshadri		08	24-May-21

Record of Revision

Sl No.	Revision No	Item/Clause No.	Nature of change	Approved by
1	R3	CI 30 of Annexure C	Capitalization figure revised	MDB/KKA
2	R3	4.2.7.1	Transformer oil indicated as per Annexure O Test result shall be confirming to Annexure O of this specification added.	MDB/KKA
3	R3	4.2.6.2	At any tap added in the clause	MDB/KKA
4	R3	4.2.9.13	Description modified	MDB/KKA
5	R3	4.2.10.1	HV and LV added.	MDB/KKA
6	R3	6.35	Provision for Valves and NRV for mounting of Nitrogen Injection Fire Protection System (NIFPS) added	MDB/KKA
7	R3	4.2.11.2	Clause v added.	MDB/KKA
8	R3	8.0	Approved make of components modified	MDB/KKA
9	R3	12.2-Note 2	Temperature rise test added in Routine Test	MDB/KKA
10	R3	12.4 (V)	Clause Modified	MDB/KKA
11	R3	Annexure-1.16	Provision for mounting of NIFPS system added	MDB/KKA
12	R4	15.0 and 16.0	Addition of Training and Commissioning support	AS/KA
13	R4	Annexure C	Addition of 33/11kV and 66/11kV 25/31.5MVA	AS/KA
14	R5	Annexure- N	Addition of Technical specification of NIFPS	AS/VP
15	R5	Annexure- O	Addition of Technical specification of Oil	AS/VP
16	R5	Annexure- G	Addition of Technical specification of GPS Tracking	AS/VP
17	R5	Annexure- I	Addition of clause on Cancellation of Inspection Call	AS/VP
18	R5	Annexure CR	Addition of CRGO Handling and testing	AS/VP
19	R5	Acceptance	Addition of CRGO testing for all units	AS/VP

		test		
20	R5	Site Acceptance test	Addition Received material acceptance test	AS/VP
21	R6	Clause no 12.5, Site Acceptance test	Clause revised	AS/KS
22	R6	Clause no 14, Commissioning Support	Commissioning support for each Transformer added	AS/ KS
23	R6	Type test clause no 12.3	Type test for one Transformer of each rating and type per lot offered	AS/ KS
24	R6	6.36	Mounting of cooling Fans on separate structure	AS/ KS
25	R6	6.37	Earth, Core and Yoke Terminal Box	AS/ KS
26	R6	4.2.11.17	All Control Cable length shall be minimum 15 Meters	AS/ KS
27	R6	5.9	Removal of mercury switching for all protective devices	AS/ KS
28	R7	Annexure-O	Transformer Oil as per latest IS 335 2018	AS/ KS
29	R7	Clause no 12.5	IR value from 1000 MOhm to 2000M Ohm	AS/ KS
30	R7	GTP 28.4B	NCT Rating 2000/1A to 1600-2000/1A	AS/ KS
31	R8	Mandatory Spares	NIFPS Spare Valves and Spare Contactors	AS/ KS
32	R8	6.38	Marshalling Box Foundation Bolts and PTR PTR also	AS/ KS
33	R8	Annexure-C	TPI 4-20mA type along with Resistive input type	AS/ KS
34	R8	Annexure-C	Aux Contactors in Marshalling Box shall be DC type	AS/ KS
35	R8	5.10	OLTC Top Filtration Valve	AS/ KS
36	R8	Annexure-C	Ladder Shall be Removable type and 1 Meter excess, All Transformer Cable length shall be minimum 10 Meter	AS/ KS

1.0 Scope of supply

For scope of supply, refer Annexure A, Annexure-N, Annexure-G, Annexure-I and Annexure O

2.0 Codes & standards

Materials, equipment and methods used in the manufacture of Power Transformer shall conform to the latest edition of following –

IEC Standards

IEC 60034	Rotating Electrical Machines. (e.g. For Cooler Fan Motors.)
IEC 60071	Co-ordination of Insulation.
IEC 60076	Power transformers.
IEC 60156	Method for Determination of the Electric Strength for Insulating Oils.
IEC 60044	Current Transformers.
IEC 60214	On-Load Tap-Changers.
IEC 60296	Specification for Unused Mineral Insulating Oils for Transformers and Switchgear.
IEC 60354	Loading Guide for Oil-Immersed Power Transformers.
IEC 60445	Basic & safety principles for man-machine interface, marking and identification- Identification of Equipment Terminals and Conductor termination.
IEC 60529	Degrees of Protection Provided by Enclosures (IP Code).
IEC 60551	Determination of Transformer and Reactor Sound Levels.
IEC 60606	Application Guide for Power Transformers.
IEC 60616	Terminal and Tapping Markings for Power Transformers.
IEC 60947	Low-Voltage Switchgear and Control gear.
IEC 60137	Bushing for alternating voltages above 1000V

British Standards

BS 148	Unused Mineral Insulation Oils for Transformers and Switchgear
BS 223	Bushings for Alternating Voltages above 1000 V.
BS 2562	Cable Boxes for Transformers and Reactors.

Indian Standards

IS:335	Insulating oil
IS:1271	Thermal evaluation and classification of electrical insulation
IS:2099	Bushing for Alternating voltage above 1000V
IS:2705	Current Transformers
IS:3347	Dimensions for Porcelain Transformer bushing
IS:3637	Gas operated relays

IS:3639	Fitting & Accessories for power transformers
IS:4201	Application guide for CTs
IS:6600	Guide for loading of oil immersed transformers
IS:8478	Application guide for On-load tap changer
IS:8468	On-load tap changer
IS:10028	Code of practice for selection, installation & maintenance of transformers
IS:13947	LV switchgear and Controlgear-Part1
IS 2026	Power Transformers
IS 5561	Electrical Power Connectors
IS 5	Colours for ready mix paints
IS 6272	Industrial cooling fans
IS 325	Three phase induction motors
IS 12676	OIP Paper insulated condenser bushing dimension and requirements
	Indian Electricity Rules
	Indian electricity act
	CBIP manual

In the event of direct conflict between various order documents, the precedence of authority of documents shall be as follows:

- i. Guaranteed Technical Particulars (GTP)
- ii. This Specification
- iii. Referenced Standards
- iv. Approved Vendor Drawings
- v. Other documents

3.0 Major Design Criteria & Parameters of the Transformer

3.1	Major Design criteria	
3.1.1	Voltage variation on supply side	+ / - 10 %
3.1.2	Frequency variation on supply side	+/- 5 %
3.1.3	Transient condition	- 20 % or + 10 % combined variation of voltage and frequency
3.1.4	Service Condition	Refer Annexure B
3.1.5	Insulation level	Refer Annexure C
3.1.6	Short Circuit withstand level	Refer Annexure C
3.1.7	Overload capability	Refer Annexure C
3.1.8	Noise level	Refer Annexure C

3.1.9	Radio Influence Voltage	Refer Annexure C
3.1.10	Harmonic currents	Refer Annexure C
3.1.11	Partial Discharges	Refer Annexure C
3.1.12	Parallel operation	Shall be designed to operate in parallel with existing transformer. Details of existing transformers shall be forwarded to the bidder on request
3.2	Major Parameters	
3.2.1	Rating	Refer Annexure C
3.2.2	Voltage Ratio	Refer Annexure C
3.2.3	Vector Group	Refer Annexure C
3.2.4	Impedance	Refer Annexure C
3.2.5	Losses	Refer Annexure C
3.2.5.1	No load Loss	Refer Annexure C
3.2.5.2	Load losses at principal tap	Refer Annexure C
3.2.6	Temperature Rise top oil	Refer Annexure C
3.2.7	Temperature winding	Refer Annexure C
3.2.8	Flux density	Refer Annexure C
3.2.9	Current density	Refer Annexure C
3.2.10	Tapping on HV winding	Refer Annexure C
3.2.11	Design Clearances	Refer Annexure C

4.0 Construction & Design

4.1	Type	ONAN/ONAF, Copper wound, three phase, oil immersed with on load tap changer
4.1.1	Essential provision for ONAF cooling	See note 1 of Annexure C
4.1.2	Provision of mounting cooling fan at site in future at service condition	Required.
4.1.3	Provision of replacement of cooling fan at site in future at service condition	Required
4.1.4	Fan guard	Required
4.2	Major Parts	
4.2.1	Tank	
4.2.1.1	Material of Construction	As per Annexure D GTP Cl. 17.1
4.2.1.2	Plate Thickness	Adequate for meeting the requirements of pressure and vacuum type tests as per CBIP
4.2.1.3	Welding features	i) All seams and joints shall be double welded ii) All welding shall be stress relieved for sheet thickness greater than 35 mm iii) All pipes, radiators, stiffeners, welded to the tank shall be welded externally

4.2.1.4	Tank features	<ul style="list-style-type: none"> i) Adequate space at bottom for collection of sediments ii) Stiffeners provided for rigidity shall be adequately sloped to prevent accumulation of water iii) No internal pockets in which gas/air can accumulate iv) No external pocket in which water can lodge v) Tank bottom with welded skid base vi) Tank cover sloped to prevent retention of rain water vii) Minimum disconnection of pipe work and accessories for cover lifting viii) Tanks shall be of strength to prevent permanent deformation during lifting, jacking, transportation with oil filled. ix) Tank to be designed for oil filling under vacuum x) Fitted with lifting lug to lift the tank cover only xi) Manhole of sufficient size required for inspection of core and winding xii) Oil level indicator for transportation
4.2.1.5	Flanged type adequately sized inspection cover rectangular in shape required for	<ul style="list-style-type: none"> i) HV line bushing ii) LV line bushing iii) LV neutral bushing and NCT connection iv) OLTC to winding connection from both sides v) Core assembly earthing <p>Inspection covers should be provided with jacking screws & handle and shall not weigh more than 25KG</p> <p>Overall design shall be in such a way that there shall not be any hindrance / overlapping of some other component, in front of any of the inspection covers.</p>
4.2.1.6	Fittings and accessories on main tank	See under fittings and accessories.
4.2.2	Conservator for the main tank	
4.2.2.1	Capacity	Adequate between highest and lowest visible levels to meet the requirement of expansion of oil volume in the transformer and cooling equipment from minimum ambient temperature to 100° cent.
4.2.2.2	Conservator oil preservation system	By flexible rubber bag (air cell) placed inside conservator

4.2.2.3	Air cell material	Special type of fabric coated with special grade nitrile rubber, outer surface oil resistant and inner surface ozone resistant
4.2.2.4	Conservator features	<ul style="list-style-type: none"> i) Conservator shall be bolted into position so that it can be removed for cleaning / other maintenance purposes ii) Main pipe from tank shall project about 20 mm above conservator bottom for creating a sump for collection of impurities iii) Conservator minimum oil level corresponding to minimum temperature shall be well above the sump level. iv) It shall be possible to remove and replace the air cell if required v) Conservator to main tank piping shall be supported at minimum two points.
4.2.2.5	Fittings and accessories on main tank conservator	<ul style="list-style-type: none"> i) Prismatic oil gauge with NORMAL, Minimum and Maximum marking ii) End Cover iii) Oil Filling Hole with cap iv) Magnetic Oil gauge with LOW LEVEL alarm contact v) Silica Gel Dehydrating Breather with oil seal and dust filter with clear acrylic single piece clearly transparent cover resistant to UV rays vi) Drain cum filling valve (gate valve) with locking rod and position indicator made of Brass, 25 mm with cover plate vii) Shut off valve (gate valve) with position indicator made of Brass located before and after Bucholz relay, 80 mm viii) Flange for Breather connection ix) Air release valve on conservator (gate valve) made of brass, 25 mm with cover plate x) Air release plug as required
4.2.2.6	Essential provision for mounting of conservator	Conservator to be mounted in such a way that the top cover of the transformer can be lifted without disturbing the conservator
4.2.2.7	Essential provision for breather	<ul style="list-style-type: none"> i) Breather piping shall not have any valve placed in between. ii) Breather piping from conservator shall be supported in such a manner that the maximum unsupported length of the of the breather piping shall not be more than 3 metres iii) Breather shall be removable type mounted at a height of 1400mm from the ground level.

4.2.3	Conservator for OLTC	
4.2.3.1	Capacity	Adequate between highest and lowest visible levels to meet the requirement of expansion of oil volume in the OLTC from minimum ambient temperature to 100 deg cent.
4.2.3.2	Conservator oil preservation system	Conventional
4.2.3.3	OLTC Conservator features	Same as 4.2.2.4 except air cell features
4.2.3.4	Fittings and accessories on OLTC conservator	<ul style="list-style-type: none"> i) Prismatic oil gauge with NORMAL and MINIMUM marking ii) End Cover iii) Oil Filling hole with cap iv) Magnetic Oil gauge with LOW LEVEL alarm contact v) Silica Gel Dehydrating Breather with oil seal and dust filter with clear acrylic single piece clearly transparent cover resistant to UV rays vi) Drain valve (gate valve) with locking rod and position indicator made of Brass, 25 mm with cover plate vii) Shut off valve (gate valve) with position indicator made of Brass located before oil surge relay, 25 mm viii) Flange for Breather connection ix) Air release plug as required
4.2.3.5	Essential provision for mounting of OLTC conservator	OLTC Conservator to be mounted in such a way that the OLTC can be inspected / maintained without disturbing the OLTC Conservator.
4.2.3.6	Essential provision for OLTC breather	<ul style="list-style-type: none"> i) Breather piping shall not have any valve placed in between ii) Breather piping from conservator shall be supported in such a manner that the maximum unsupported length of the of the breather piping shall not be more than 3 meters iii) Breather shall be removable type mounted at suitable height from ground so that it can be attended to easily for inspection / maintenance.
4.2.4	Radiators	
4.2.4.1	Thickness	1.2 Min
4.2.4.2	Features	Detachable type with lifting lugs, air release plug, drain plug, isolating valve top and bottom in each radiator, Radiator support from ground if required
4.2.4.3	Essential provision if radiators mounted separately	Expansion bellows to be provided in the pipes between main tank and radiator headers.

4.2.4.4	Essential provision for all type of radiators provided	Radiator header pipes shall not originate from tank top cover to make the tank top cover removable at site with minimum labour.
4.2.5	Core	
4.2.5.1	Material	High grade , non ageing, low loss, high permeability, grain oriented, cold rolled silicon steel lamination
4.2.5.2	Grade	As per Annexure D GTP Cl. 18.2
4.2.5.3	Lamination thickness	As per Annexure D GTP Cl. 18.3
4.2.5.4	Design Flux Density at rated conditions at principal tap	As per manufacturer's design.
4.2.5.5	Maximum Flux Density at 10 % over excitation / overfluxing	As per Annexure C , Cl. 35.0
4.2.5.6	Core Design Features	<ul style="list-style-type: none"> i) Magnetic circuit designed to avoid short circuit paths within core or to the earthed clamping structures ii) Magnetic circuit shall not produce flux components at right angles to the plane of lamination to avoid local heating iii) Least possible air gap and rigid clamping for minimum core loss and noise generation iv) Adequately braced to withstand bolted faults on secondary terminals without mechanical damage and damage/ displacement during transportation and positioning. v) Percentage harmonic potential with the maximum flux density under any condition limited to avoid capacitor overloading in the system vi) All steel sections used for supporting the core shall be thoroughly sand blasted after cutting , drilling, welding vii) Provision of lifting lugs for core coil assembly viii) Supporting framework designed not to obstruct complete drainage of oil from transformer ix) The insulation of core to bolts and core to clamps plates shall be able to withstand a voltage of 2Kv rms for one minute. However boltless construction shall be preferred to avoid generation of hot spots and decomposition of oil as well as to reduce noise level.
4.2.6	Winding	
4.2.6.1	Material	Electrolytic Copper
4.2.6.2	Maximum Current Density allowed at any tap.	3 A/mm ²
4.2.6.3	Winding Insulating material	Class A, non catalytic, inert to transformer oil, free from compounds liable to ooze out, shrink or collapse.
4.2.6.4	Winding Insulation	Uniform

4.2.6.5	Design features	<ul style="list-style-type: none"> i) Stacks of winding to receive adequate shrinkage treatment before final assembly. ii) Connections braced to withstand shock during transport, switching, short circuit, or other transients. iii) Minimum out of balance force in the transformer winding at all voltage ratios. iv) Transposed at sufficient intervals. v) Threaded connection with locking facility vi) Winding leads rigidly supported , using guide tubes if practicable vii) Winding structure and major insulation not to obstruct free flow of oil through ducts viii) Provision of taps as indicated in the technical particulars
4.2.6.6	Essential provision for core coil assembly	<p>Core coil assembly shall be mounted on bottom of the tank.</p> <p>Earthing of core clamping structure and earthing of magnetic circuit shall be in line with CBIP reference guidelines / manual.</p>
4.2.7	Transformer Oil	<p>Should be in accordance with specification as per Annex O of this specification.</p> <p>One sample of oil drawn from every lot of transformer offered for inspection should be tested at NABL accredited lab for tests as listed under Table-1 of IS:1866 (2000). The cost of this testing should be included within the cost of transformer. Test result shall be confirming to Annexure C1 of this specification</p>
4.2.8	Bushings and Terminations	
4.2.8.1	Type below 52 kV	Oil communicating , outdoor, removable
4.2.8.2	Type 52 kV and above	Oil filled porcelain condenser & non-oil communicating type with oil level gauge, oil filling plug and drain valve if not hermetically sealed, tap for capacitance and loss factor measurement, removable without disturbing bushing CTs.
4.2.8.3	Arcing Horns	Not required
4.2.8.4	Termination on HV side bushing	By bimetallic terminal connectors suitable for ACSR/AAAC conductor / Cable connection through cable box with disconnecting link as per Annexure A Scope of Supply
4.2.8.5	Termination of LV side bushing	Cable connection through cable box with disconnecting link as per Annexure A Scope of Supply
4.2.8.6	Minimum creepage distance of bushing	As per Annexure C, Cl. 38.0
4.2.8.7	Protected creepage distance	At least 50 % of total creepage distance
4.2.8.8	Continuous Current rating	Minimum 20 % higher than the current corresponding to the minimum tap of the transformer

4.2.8.9	Rated thermal short time current	As per Annexure C Cl. 38.0
4.2.8.10	Atmospheric protection for clamp and fitting of iron and steel	Hot dip galvanizing as per IS 2633
4.2.8.11	Bushing terminal lugs in oil and air	Tinned copper
4.2.8.12	Sealing washers /Gasket ring	Nitrile rubber/ Expanded TEFLON(PTFE) as applicable
4.2.9	HV , LV, LV Neutral cable box	Required / Not required as Annexure A Scope of supply
4.2.9.1	Material of Construction	Sheet Steel min 4 mm thick. Inspection Covers shall be min 3mm thick
4.2.9.2	Cable entry	At bottom through detachable gland plate with cable clamps of non magnetic material
4.2.9.3	Cable size for HV	As per Annexure C , Cl. 15.4
4.2.9.4	Cable size for LV	As per Annexure C , Cl. 15.5
4.2.9.5	Cable size for LV Neutral	As per Annexure C , Cl. 15.6
4.2.9.6	Detachable Gland Plate material for HV, LV, LV Neutral box	As per Annexure D GTP Cl. 24.4 , 25.4, 26.4
4.2.9.7	Gland plate thickness for HV, LV, LV Neutral box	As per Annexure D GTP Cl. 24.5, 25.5, 26.5
4.2.9.8	Cable gland for HV, LV, LV Neutral cables	As per Cl. 4.8 of this spec. and suitable for cable size as per Annexure D GTP Cl. 24.1 , 25.1, 26.1
4.2.9.9	Cable lug for LV Neutral cables	As per Cl. 4.9 of this spec. and suitable for cable size as per Annexure D GTP Cl. Cl. 24.1, 25.1, 26.1
4.2.9.10	Essential parts	<ul style="list-style-type: none"> i) Disconnecting chamber ii) Flexible disconnecting link of tinned copper iii) Tinned Copper Busbar for Purchaser's cable termination with busbar supports iv) Detachable gland plate as per Annexure D GTP Cl. 24.4, 24.5, 25.4, 25.5, 26.4, 26.5 v) Earthing boss for the cable box vi) Earthing link for the gasketed joints at two point for each joint vii) Earthing provision for cable Armour/ Screen viii) Flange type Inspection cover with handle for inspecting bushing and busbars on top as well as on front cover ix) Removable front cover with handle x) Drain plug xi) Rainhood on gasketed vertical joint xii) Danger plate made of Anodized aluminum with white letters on red background on HV and LV side fixed by rivets. xiii) Phase marking plate inside cable box near termination as well as on front cover of cable box made of Anodized aluminum with black letters on satin silver

		background on HV and LV side fixed by rivets. xiv) Support Insulators for the busbars shall be epoxy resin cast type.
4.2.9.11	Terminal Clearances	As per Annexure C Technical particulars
4.2.9.12	Termination height required for cable termination	Min 1000 mm
4.2.9.13	Essential provision for LV Neutral / cable box	<ul style="list-style-type: none"> i) Neutral shall be outdoor type bushing OR with cable box. Box shall have adequately sized inspection cover suitable for inspection of bushings / replacement / maintenance of neutral CT. For Outdoor Bushing the NCT shall be mounted in IP55 box. ii) Knife switch with locking arrangement to be provided to disconnect the neutral from grounding. Connection from Neutral bushing to the knife switch shall be with 100x12mm Tinned copper bus bar. Bus Bar shall brought down to the bottom of the transformer supported by suitable support insulator made of epoxy resin cast (insulator shall be suitable for outdoor application suitable for connecting. iii) Knife switch shall be suitable for connecting 2 runs of 75 x 10 mm size GS strip. iv) Height of knife switch shall be at maximum 1500 mm. Housing of Knife switch shall be suitable for easy & quick operations.
4.2.10	Current Transformers	
4.2.10.1	HV and LV WTI CT	As per Annexure D GTP Cl. 29.0
4.2.10.1.1	Rating	As per Annexure D GTP Cl. 29.0
4.2.10.1.2	Mounting	In the turret of the bushing
4.2.10.1.3	Essential provision	<ul style="list-style-type: none"> i) CT mounting shall be such that CT can be replaced without removing tank cover. ii) CT secondaries shall be wired upto TB with TB spec. as per Cl. 4.7 of this specification.
4.2.10.2	Neutral CT	
4.2.10.2.1	Type	Cast resin
4.2.10.2.2	Rating	As per Annexure D GTP Cl.28.0
4.2.10.2.3	Location of NCT	Shall be provided In neutral cable box or separate box with TB arranged for secondaries. Bushing type neutral CT is not acceptable.
4.2.10.2.4	Essential provision	<ul style="list-style-type: none"> i) CT mounting shall be such that CT can be replaced without removing the neutral cable box. ii) CT secondaries shall be wired upto TB with TB spec. as per Cl. 4.7 of this specification.

4.2.11	Marshalling Box Cubicle	
4.2.11.1	Material of Construction	CRCA sheet steel of thickness min 2.5 mm for load as well as non load bearing member, with toughened glass window in front of gauges
4.2.11.2	Major equipments in Marshalling box	<ul style="list-style-type: none"> i) Mechanical gauge for HV and LV WTI ii) Mechanical gauge for OTI iii) Electronic WTI and OTI Scanner iv) Other panel accessories listed elsewhere. v) DC contactors to be provided for all trouble signals. Same shall be wired up to TB
4.2.11.3	Gland Plate	Min. 3 mm thick detachable with knockout 6 x 1 inch
4.2.11.4	Contacts wired to terminal block	WTI alarm and Trip OTI alarm and Trip Buchholz relay Alarm and Trip OSR Trip Contacts MOG low level alarm MOG on OLTC low level alarm PRV main tank Trip PRV OLTC Trip Sudden pressure relay trip WTI and OTI relay contacts of the temperature scanner. Note: 2NO +2NC auxiliary contacts for all the above to be provided for customer use (By using auxiliary relay)
4.2.11.5	Signals to be wired to terminal block	WTI CT NCT Sensor for temperature scanner Capillaries for WTI and OTI 4 to 20 mA signals for WTI and OTI repeater located elsewhere.
4.2.11.6	Ingress protection	IP 55 plus additional rain canopy to be provided
4.2.11.7	Welding	Continuous welding on joints, welding at regular intervals on joints and filling of gaps with use of M seal not accepted.
4.2.11.8	Cable entry	Bottom for all cables
4.2.11.9	Panel internal Access	Front only through front door double leaf with antitheft hinges.
4.2.11.10	Pane back access	None
4.2.11.11	Mounting of marshalling box	Tank / Separately mounted as per GTP Cl. 27.1
4.2.11.12	Panel supply	240 V AC, single Phase , 50 Hz,
4.2.11.13	Panel accessories	<ul style="list-style-type: none"> i) Cubicle lamp with door switch and separate MCB ii) Approved space Heaters controlled by thermostat and separate MCB iii) Incoming MCB for the incoming supply iv) Panel wiring diagram fixed on back of panel door on Aluminum plate engraved fixed by rivet v) Stainless steel door handle with lock &

		additional facility for padlock vi) Earthing boss for the marshalling box vii) Single phase power plug industrial type 15/5 Amp. With MCB viii) Single phase preventer. ix) Foundation Bolts
4.2.11.14	Painting of marshalling box	As per Cl. 4.10 of the specification
4.2.11.15	Hardware, Gasket, Cables and Wires, Terminal blocks, Cable gland, Cable lugs of marshalling box	As per Cl. 4.3, 4.4, 4.6, 4.7, 4.8, 4.9 of the specification respectively.
4.2.11.16	Fan motor control if installed in Marshalling box or separate Fan Control Cubicle	i) 2 x 50 % fans ii) Complete fan control with MCB, Contactor, Bimetallic relay, in starter circuit with type 2 Coordinated rating as per IS iii) Automatic control from WTI contact iv) Provision for manual control both from local / remote.
4.2.11.17	Control Cable Length	All the control Cable shall have Minimum 15 Meter of length including NIFPS control cable and OTI WTI.
4.3	Hardware	
4.3.1	External	M 12 Size & below Stainless Steel & above M 12 Hot Dip galvanized Steel
4.3.2	Internal	Cadmium plated except special hardware for frame parts and core assembly as per manufacturer's design
4.4	Gasket	
4.4.1	For Transformer , OLTC chamber, PT chamber, surfaces interfacing with oil like inspection cover etc.	Nitrile rubber based
4.4.2	For Cable boxes, Marshalling box, OLTC drive mechanism etc.	Neoprene rubber based
4.5	Valves	
4.5.1	Material of construction	Brass
4.5.2	Type	Both end flanged gate valve / butterfly valve depending on application
4.5.3	Size	As per manufacturer's standard
4.5.4	Essential provision	Position indicator, locking rod, padlocking facility, valve guard, cover plate.
4.6	Cable routing on Transformer	Control cables for accessories on transformer tank to Marshalling box and WTI, OTI capillaries shall be routed through perforated Covered GI trays
4.6.1	Control cable specification	PVC insulated, extruded PVC inner sheathed, armoured, extruded PVC outer sheathed 1100 V grade control cable as per latest edition of IS 1554 part 1 minimum 2.5 sqmm for signals and 4 sqmm for CT with multistrand copper conductor

4.6.2	Specification of wires to be used inside marshalling box , OLTC drive mechanism box	PVC insulated multistrand flexible copper wires of minimum 2.5 sqmm size, 1100 V grade as per latest edition of relevant IS
4.6.3	Essential provision for Capillary routing from Transformer to Marshalling box	Routing shall be done in such a way that adequate protection is available from mechanical and fire damage.
4.7	Terminal Blocks to be used by the vendor	Nylon 66 material, minimum 4 sq mm, screw type for control wiring and potential circuit. Terminal blocks to be located in such a way to achieve the termination height as min 250mm from gland plate
4.7.1	Essential provision for CT terminals	Sliding link type disconnecting terminal block screwdriver operated stud type with facility for CT terminal shorting material of housing melamine/ Nylon66
4.8	Cable glands to be used by the vendor	Nickel plated brass double compression weatherproof cable gland
4.9	Cable lugs to be used by the vendor	
4.9.1	For power cables	Long barrel medium duty Aluminium lug with knurling on inside surface
4.9.2	For Control Cable	Tinned copper pre insulated Pin, Ring, Fork type as applicable. For CT connection ring type lug shall be used.
4.10	Painting of transformer, Conservator, OLTC, Radiator, Cable boxes marshalling box	
4.10.1	Surface preparation	By 7 tank pretreatment process or shot blasting method
4.10.2	Finish on internal surfaces of the transformer interfacing with oil	Bright Yellow heat resistant and oil resistant paint two coats. Paint shall neither react nor dissolve in hot transformer insulating oil.
4.10.3	Frame parts	Bright Yellow heat resistant and oil resistant paint two coats. Paint shall neither react nor dissolve in hot transformer insulating oil.
4.10.4	Finish on inner surface of the Marshalling box	White Polyurethane paint anti condensation type two coats , minimum dry film thickness 80 microns
4.10.5	Finish on outer surface of the transformer, conservator, radiator, cable boxes, marshalling box	Smoke Grey (IS shade 692) Polyurethane paint two coats , minimum dry film thickness 80 microns

5.0 Minimum Protective devices on Transformer

5.1	Spring loaded with detachable diaphragm type pressure relief valve with two trip contacts for the main tank of LSM model with limit switch design, IP 65 with additional rain hood.	Required
5.2	Spring loaded with detachable diaphragm type pressure relief valve with two trip contacts for OLTC of LSM model with limit switch design, IP 65 with additional rain hood.	Required
5.3	Double float bucholz relay with alarm and trip contacts, service and test position, with test cock for the main tank, Terminal box shall be IP 65 with drain plug for rain water draining. Additional rain hood shall be provided.	Required
5.4	Oil surge relay with two contacts, service and test position, with test cock for OLTC tank, Terminal box shall be IP 65 with drain plug for rain water draining. Additional rain hood shall be provided.	Required
5.5	Sudden pressure relay with trip contact for the main tank	Required
5.6	Oil temperature indicator metallic bulb type 150 mm diameter with maximum reading pointer, potential free independent adjustable alarm and trip contacts, resetting device with temperature sensing element	Required
5.7	HV and LV Winding temperature indicator 150 mm diameter with maximum reading pointer, two sets of potential free independent adjustable alarm and trip contacts, resetting device with temperature sensing element, thermal image coil	Required
5.8	2 nos. PT 100 sensors / RTDs for winding temperature indication and Oil temperature indication wired up to TBs in marshalling box for external connection.	Required
5.9	Magnetic switching for all the protective devices including Bucholz(alarm and Trip) OSR,SPR,WTI and OTI. Mercury switching is not acceptable	Required

5.10	OLTC Top Filtration Valve	Required
------	---------------------------	----------

6.0 Fittings and Accessories on Transformer

6.1	Rating and Diagram Plate	Required
6.1.1	Material	Anodized aluminum 16SWG
6.1.2	Background	SATIN SILVER
6.1.3	Letters, diagram & border	Black
6.1.4	Process	Etching
6.1.5	Name plate details	<p>Following details shall be provided on rating and diagram plate as a minimum</p> <ul style="list-style-type: none"> i) Type / kind of transformer with winding material ii) standard to which it is manufactured iii) manufacturer's name iv) transformer serial number v) month and year of manufacture vi) rated frequency in Hz vii) rated voltages in kV viii) number of phases x) rated power in kVA xi) type of cooling (ONAN) xii) rated currents in A xiii) vector group symbol xiv) 1.2/50µs wave impulse voltage withstand level in kV xv) power frequency withstand voltage in kV xvi) impedance voltage at rated current and frequency in percentage at principal, minimum and maximum tap xvii) load loss at rated current; xviii) no-load loss at rated voltage and frequency xix) auxiliary loss xx) continuous ambient temperature at which ratings apply in °C xxi) top oil and winding temperature rise at rated load in deg C; xxii) temperature gradient of HV and LV winding xxiii) winding connection diagram xxiv) weight of radiator xxv) volume and weight of oil in radiator xxvi) transport weight of transformer xxvii) weight of core and frame xxviii) weight of winding xxix) weight of core and windings

		xxx) weight of tank and fittings xxxi) total weight xxxii) volume of oil xxxiii) weight of oil xxxiv) NCT, WCT, details xxxv) type of OLTC xxxvi) tapping details xxxvii) name of the purchaser xxxviii) PO no and date xxxix) Guarantee period
6.2	Instruction Plate for OLTC anodized aluminium black lettering on satin silver background fixed by rivet	Required
6.3	Oil filling Instruction Plate anodized aluminium black lettering on satin silver background fixed by rivet	Required
6.4	Valve schedule plate anodized aluminium black lettering on satin silver background fixed by rivet	required
6.5	Instruction Plate anodized aluminium black lettering on satin silver background for flexible air cell for oil conservator	Required
6.6	Terminal marking Plate for Bushing, WTI, OTI, & RTD anodized aluminium black lettering on satin silver background fixed by rivet	Required
6.7	Company Monogram Plate	Required
6.8	Lifting Lugs/ bollards with antiskid head to lift complete transformer with oil	Required
6.9	Lashing Lug	Required
6.10	Jacking Pad with Haulage hole to raise or lower complete transformer with oil	Required
6.10.1	Essential provision for jacking pads	Designed in such a way that jacking of complete transformer with oil shall be possible with 3 nos jacking pads out of 4 nos jacking pads provided as a minimum
6.11	Rollers	Detachable Bidirectional Roller Assembly with corrosion resistant bearing, fitting/nipple for lubrication or with permanently lubricated bearing, anti-earthquake clamping device & locking device. The wheels shall be capable of swiveling when transformer is lifted with provision for locking the swivel movement. Roller shall be suitable for 90 lb rail. Suitable anti-rolling clamp for 90 lb rail minimum 4 nos. shall be provided.
6.12	Pockets for OTI, WTI & RTD on tank	Required
6.13	Pockets for ordinary thermometer on tank cover, top and bottom header of	Required

	radiator , top of each radiator	
6.14	Ordinary thermometer 4 nos	Required
6.15	Drain valve (gate valve) for the main tank, 80 mm	Required
6.16	Drain valve (gate valve) for OLTC, 50 mm	Required
6.17	Drain valve (gate valve) for all headers, 50 mm	Required
6.18	Filter valve (gate valve) at top and bottom of the main tank, 50 mm	Required
6.19	Sampling valve (gate valve) at top and bottom of the main tank, 15 mm	Required
6.20	Vacuum breaking valve (gate valve), 25 mm	Required
6.21	Drain Plug on tank Base	Required
6.22	Air Release Plug on various fittings and accessories	Required
6.23	Earthing pad on tank for transformer earthing complete with non ferrous nut , bolt, washers, spring washers etc.	Required
6.24	Vacuum pulling pipe with blanking plate on main conservator pipe work	Required
6.25	Rainhood (canopy) for Bucchohz relay, PRV,MOG on main transformer and OLTC, OSR relay of OLTC	Required
6.26	Rainhood for vertical gasketed joints , in cable boxes	Required
6.27	Oil level gauge on tank for transformer shipment	Required
6.28	Earthing bridge by tinned copper strip jumpers on all gasketed joints at at least two points for electrical continuity	Required
6.29	Aluminium Ladder with anticlimbing device and safety flap, with lockable hinged plate for at least 1.5 m from ground level. Ladder shall be located in such a way that it avoids any hindrance to operation of nearby electrical / mechanical accessories etc.	Required
6.30	OLTC panel as specified	Required
6.31	Skid base welded type	Required
6.32	Core , Frame to tank Earthing	Required
6.33	Danger plate made of anodized aluminium white lettering on red background fixed by rivet	Required

6.34	Identification plate in English for all accessories, protective devices, instruments, thermometer/ RTD pockets, Earthing terminals, all inspection covers, cable boxes, marshalling boxes, etc. made of anodized aluminium black lettering on satin silver background fixed by rivet	Required
6.35	Provision for Valves and NRV for mounting of Nitrogen Injection Fire Protection System (NIFPS).	Required
6.36	Separate structure for mounting cooling fans Note: Mounting of cooling fans on Radiator fins is not acceptable	Required
6.37	Terminal box of contacts from Earth, Core and Yoke with shorting link at top cover of Transformer	Required, The IR test will be performed on these terminals on trailer prior to unloading at site
6.38	Foundation Bolts of Transformer and Marshalling Box	Required

7.0 OLTC

7.1	Requirement	For 33kV – CTR make EQ16 or equivalent. For 66kV – CTR make FQ 16 or equivalent No in-tank OLTC acceptable.
7.2	OLTC Gear Location	Side mounted on Conservator side not in front of HV bushing
7.3	Type of OLTC gear	The tapings shall be controlled by a high speed resistor transition type gear in which tap change is carried out virtually under 'no volt' 'no ampere' conditions and the selector switches do not make and break any current, main current is never interrupted and a resistor is provided to limit the arcing at diverter contacts to a minimum suitable for outdoor mounting and continuously rated for operating at all positions including positions in the middle of tap change. In particular, the tap change gear shall be suitable when delivering the full output plus permissible overload and operating the lowest voltage tap on the HV side. The value of the transition resistor shall be indicated on the rating plate of the OLTC with continuous current rating with reference to design ambient temperature specified.
7.4	Tappings	As per Cl. 34 of Annexure C
7.5	Operation of OLTC Gear	Selection of Local / Remote Operation by selector switch on OLTC drive mechanism.

7.5.1	Local operation	From OLTC drive mechanism through pistol grip rotary switch as well as emergency mechanical hand operation.
7.5.2	Remote operation	From Digital RTCC provided by customer /SCADA depending on the selection of control on Digital RTCC panel
7.6	Safety Interlocks in OLTC	<p>Following safety interlock to be provided in OLTC as a minimum</p> <ul style="list-style-type: none"> i) Positive completion of tap changing step once initiated ii) Blocking of reverse tap change command during a forward tap change already in progress until the mechanism resets and vice-versa iii) Cutting of electrical circuits during mechanical operation iv) Mechanical stops to prevent overrunning of the mechanism at the end taps v) Interlock to avoid continuous tap change which will cut off motor supply in such events vi) Raise / Lower command in OLTC and Digital RTCC (Provided by Customer) shall be positively interlocked
7.7	Features of OLTC	<ul style="list-style-type: none"> i) OLTC mechanism and associated controls shall be housed in an outdoor , IP 55, weatherproof, verminproof, and dust proof cabinet ii) It shall be ensured that oil in compartments containing contacts making and breaking current, compartments containing contacts not making and breaking current and main transformer tank does not mix iii) The hand cranking arrangement shall be such that it can be operated at standing height from ground level. iv) Mechanical indicator to indicate completion of tap change operation shall be provided with suitable (Green & Red) colour code to confirm correct method of completion of tap change operation v) Contactors shall be placed in the OLTC Driving mechanism in such a way that the name- plate shall be visible on opening of door. vi) Protective cover shall be provided for raise and lower push buttons,

		<p>external ON-OFF switch, which are mounted on OLTC Driving mechanism door. This is required to prevent unauthorized person operating these buttons.</p> <p>vii) It shall be possible to remove the top cover of the OLTC tank without difficulty. The OLTC Conservator, piping & Oil Surge Relay shall be placed accordingly.</p> <p>viii) The tap change equipment shall be so designed that if the mechanism is stuck in an intermediate position, the transformer shall be capable of delivering full load without any damage.</p> <p>ix) Limit switches may be connected in the control circuit of the operating motor provided that a mechanical de-clutching mechanism is incorporated. Otherwise it shall be directly connected to the operating motor circuit and mechanical stop.</p> <p>x) Thermal devices or other means shall be provided to protect the motor and control circuits</p> <p>xi) The tap changer shall be capable of permitting parallel operation with other transformers for which necessary wiring and accessories, if any, shall be provided.</p> <p>xii) The control scheme for the tap changer shall be provided for independent control of the tap changers when the transformers are in independent service. In addition, provision shall be made to enable parallel operation control also at times so that the tap changer will be operated simultaneously when one unit is in parallel with another it will not become out of step and this will eliminate circulating current. Additional features like Master/ Follower and visual indication during the operation of motor shall also be incorporated.</p> <p>xiii) OLTC shall be suitable for bi-directional power flow in transformer</p> <p>xiv) Mechanical indicator and operation counter shall be visible through</p>
--	--	---

		<p>glass window OLTC drive mechanism door</p> <p>xv) External ON /OFF switch in addition to door switch.</p> <p>xvi) All HRC fuses shall be located in such a way that they are easily replaceable.</p> <p>xvii) Motor Protection relay shall be provided with single phasing preventer for both current and voltage unbalance.</p> <p>xviii) All accessories inside drive mechanism shall be provided with metallic label , no sticker permitted.</p>
7.8	Essential BOM for OLTC drive mechanism (indicative only , Bidder to provide all necessary components to complete the function of the OLTC)	<p>i) Control circuit transformer 415/55-0-55 V, adequate capacity</p> <p>ii) Local remote selector switch 1 Pole, 2 Way, 6A, pistol grip</p> <p>iii) Retaining Switch Raise/Lower</p> <p>iv) Handle Interlock switch</p> <p>v) Raise / Lower switch 1 Pole, 2 Way, 6A, Pistol Grip</p> <p>vi) Lower limit switch</p> <p>vii) Raise limit switch</p> <p>viii) Tap Changer Motor, 415 V AC, 3 phase, adequate rating</p> <p>ix) Motor protection relay with single phasing preventor</p> <p>x) Motor control contactors Raise/ Lower</p> <p>xi) Stepping Relay</p> <p>xii) Out of step switch</p> <p>xiii) Tap position indicator</p> <p>xiv) Operation counter</p> <p>xv) Emergency stop Push button</p> <p>xvi) Tap change incomplete scheme with timer</p> <p>xvii) Required indication lamp</p>
7.9	Essential provision of accessories on OLTC	<p>i) Pressure relief valve</p> <p>ii) Oil surge relay</p>
7.10	Drive mechanism accessories	<p>i) Cubicle lamp with door switch and separate fuse / MCB with external ON / OFF switch on front cover of OLTC drive mechanism</p> <p>ii) Approved space Heaters controlled by thermostat and separate fuse /MCB</p> <p>iii) Incoming Fuse switch / MCB for the incoming supply</p> <p>iv) Panel wiring diagram fixed on back of panel door Aluminium engraved fixed by rivet</p> <p>v) Nylon 66 Terminal block min 4 sq</p>

		mm screw type, with 10 % spare terminals vi) Stainless steel door handle with lock & additional facility for padlock. vii) Earthing boss
7.11	Hardware, Gasket, Cables and Wires, Terminal blocks, Cable gland, Cable lugs of OLTC Drive mechanism	As per Cl. 4.3, 4.4, 4.6, 4.7, 4.8, 4.9 of the specification respectively.
7.12	OLTC and drive mechanism painting	As per Cl. 4.10 of the specification
7.13	RTCC Panel	Not In the Scope Of Supply

8.0 Approved make of components

8.1	CRGO	Nippon/JFE/Posco
8.2	Copper	Birla copper/Sterlite
8.3	Pre compressed Pressboard	Raman Board, Mysore/ Senapathy Whiteley
8.4	Laminated Wood	Permali Wallance / Rochling Engineers
8.5	Oil	Apar/Savita/Raj
8.6	Condensor Bushings (OIP)	CGL/BHEL/ABB/ALSTOM
8.7	Porcelain Bushing	CJI/ /BHEL
8.8	Steel	TATA/Jindal/SAIL
8.9	Lugs/Glands	Jainson/Dowells/Comet
8.10	Radiators	CTR/Hi-Tech Radiators/Tarang Engineers
8.11	Fans	Marathon / Khaitan
8.12	Magnetic Oil Level Indicator	Sukrut /Yogya
8.13	Pressure relief valve	Sukrut / Qualitrol
8.14	Bucchholz Relay	Proyog / ATVUS
8.15	Oil surge Relay	Proyog / ATVUS
8.16	Winding Temperature Indicator	Precimeasure / Perfect Controls / Pradeep sales
8.17	Oil Temperature Indicator	Precimeasure / / Perfect Controls/ Pradeep Sales
8.18	Sudden Pressure Relay	Sukrut / Qualitrol
8.19	Aircell	Sukrut(Unirub)/Pronol / Rubber Product
8.20	Neutral CT	Pragati /ECS / KAPPA
8.21	WCT	Pragati / ECS / KAPPA
8.22	Switch	L&T (Salzer) / Siemens
8.23	HRC Fuse Links	Siemens / L&T/GE
8.24	Fuse base	Siemens / L&T/GE

8.25	AC Contactors & O/L Relay	L&T / Siemens / Schneider
8.26	Terminals	Connectwell / Elmex
8.27	Push buttons / Actuator	L&T / Siemens
8.28	Thermostat	Velco
8.29	Heater	Velco
8.30	Voltmeter Selector Switch	Siemens
8.31	Control selector switch	Siemens
8.32	Auxiliary Relays	ABB/Siemens/Schneider/L&T/GE
8.33	Timers	L&T /Siemens
8.34	Tap Position Indicator	Accord
8.35	Annunciator	Accord
8.36	Digital tap change counter	Selectron
8.37	LED cluster type indication lamp	L&T/ Siemens/ Schneider/ABB
8.38	NIFPS	CTR

Note – Any other make of component to be approved by purchaser

9.0 Quality assurance

9.1	Quality Assurance Program	<p>To be submitted before contract award. Program shall contain following</p> <ul style="list-style-type: none"> i) The structure of the polarization ii) The duties and responsibilities assigned to staff ensuring quality of work iii) The system for purchasing, taking delivery and verification of materials iv) The system for ensuring quality of workmanship v) The system for control of documentation vi) The system for the retention of records vii) The arrangements for the Supplier's internal auditing viii) A list of the administration and work procedures required to achieve and verify Contract's quality requirements. These procedures shall be made readily available to the Purchaser for inspection on request. ix) The manufacturers shall have dedicated quality personnel at each step of manufacturing. x) Manufacturers who are not approved vendors with BSES / REL can be considered after validation of their factory for quality processes.
9.2	Quality Plan	<p>To be submitted by the successful bidder for approval. Plan shall contain following as a minimum.</p> <ul style="list-style-type: none"> i) An outline of the proposed work and programme sequence

		<ul style="list-style-type: none"> i) The structure of the Supplier's organization for the contract ii) The duties and responsibilities assigned to staff ensuring quality of work for the contract iii) Hold and notification points iv) Submission of engineering documents required by the specification v) The inspection of materials and components on receipt vi) Reference to the Supplier's work procedures appropriate to each activity vii) Inspection during fabrication/construction viii) Final inspection and test ix) Successful bidder shall include submittal of Mills invoice, Bill of lading, Mill's test certificate for grade, physical tests, dimension and specific watt loss per kG for the core material to the purchaser for verification in the quality plan suitably.
--	--	---

10.0 Progress Reporting

10.1	Outline Document	To be submitted for purchaser approval for outline of production, inspection, testing, inspection, packing, dispatch, documentation programme
10.2	Detailed Progress report	<p>To be submitted to Purchaser once a month containing</p> <ul style="list-style-type: none"> i) Progress on material procurement ii) Progress on fabrication iii) Progress on assembly iv) Progress on internal stage inspection v) Reason for any delay in total programme vi) Details of test failures if any in manufacturing stages vii) Progress on final box up viii) Constraints ix) Forward path

11.0 Submittals

11.1	Submittals required with bid	<ul style="list-style-type: none"> i) Completed technical data schedule; ii) Descriptive literature giving full technical details of equipment offered; iii) Outline dimension drawing for each major component, general arrangement drawing showing component layout and general schematic diagrams; iv) Type test certificates, where available, and sample routine test reports; v) Detailed reference list of customers already using equipment offered during the last 5 years with particular emphasis on units of similar design and rating;
------	------------------------------	--

		<ul style="list-style-type: none">vi) Details of manufacturer's quality assurance standards and programme and ISO 9000 series or equivalent national certification;vii) Deviations from this specification. Only deviations approved in writing before award of contract shall be accepted;viii) Recommended spare parts and consumable items for five years of operation with prices and spare parts catalogue with price list for future requirementsix) Transport / Shipping dimension and weights, space required for handling parts for maintenancex) Write up on oil preservation systemxi) Write up on OLTCxii) Quality Assurance Program
--	--	--

11.2	Submittals required after award for Approval (A), Reference I, and subsequent distribution	<ul style="list-style-type: none"> i) Programme for production and testing (A) ii) Guaranteed Technical Particulars (A) iii) General description of the equipment and all components, including brochures I iv) Calculations to substantiate choice of electrical, structural, mechanical component size/ratings (A) v) Detailed dimension drawing for all components, general arrangement drawing showing detailed component layout and detailed schematic and wiring drawings for all components like marshalling box and OLTC drive mechanism box vi) Detailed loading drawing to enable the Purchaser to design and construct foundations for the transformer I vii) Transport / shipping dimensions with weights, wheel base details, untanking height etc I viii) Terminal arrangements and cable box details (A) ix) Flow diagram of cooling system showing no of cooling banks (A) x) Drawings of major components like Bushing , CT etc (A) xi) Valve schedule diagram plate (A) xii) Instruction plate for flexible separator (A) xiii) Rating and diagram plate with OLTC connection details xiv) List of makes of all fittings and accessories (A) xv) Statement drawing attention to all exposed points in the equipment at which contact with or in close proximity to other metals and stating clearly what protection is employed to prevent corrosion at each point (A) xvi) Detailed installation and commissioning instructions xvii) Quality Plan
11.3	Submittals required at the final hold point prior to dispatch	<ul style="list-style-type: none"> i) Inspection and test reports carried out in manufacturer's works (A) ii) Test certificates of all bought out items iii) Operation and maintenance Instructions as well as trouble shooting charts
11.4	Drawing and document sizes	Standard size paper A0, A1, A2, A3, A4
11.5	No of drgs /Documents required at different stages	As per Annexure A Scope of Supply

12.0 Inspection & Testing

12.1	Inspection and Testing	
------	------------------------	--

	during manufacture	
12.1.1	Tank and Conservator	<ul style="list-style-type: none"> i) Check correct dimensions between wheels demonstrate turning of wheels through 90 deg and further dimensional check. ii) Check for physical properties of materials for lifting lugs, jacking pads etc. All load bearing welds, including lifting lug welds shall be subjected to required load tests. iii) Leakage test of the conservator as per CBIP. iv) Certification of all test results. v) Oil leakage test on all tanks at normal head of oil plus 35 kN/sqm at the base of the tank for 24 hrs vi) Vacuum and Pressure test on tank as type test as per CBIP vii) Leakage test of radiators as per CBIP
12.1.2	Core	<ul style="list-style-type: none"> i) Vendor to submit the documentary evidence for procurement of CRGO laminations and prove that they have procured / used new core material. During in process inspection at lamination sub vendor, Customer shall randomly select / seal lamination for testing at ERDA / CPRI (Accredited NABL labs) for Specific core loss, accelerated ageing test, surface insulation resistivity, AC permeability and magnetization, Stacking factor, ductility etc. This testing shall be in the scope of vendor. ii) Check on the quality of varnish if used on the stampings. <ul style="list-style-type: none"> a) Measurement of thickness and hardness of varnish on stampings. b) Solvent resistance test to check that varnish does not react in hot oil. c) Check overall quality of varnish by sampling to ensure uniform hiping color, no bare spots. No ever burnt varnish layer and no bubbles on varnished surface. iii) Check on the amount of burrs. iv) Bow check on stampings. v) Check for the overlapping of stampings. Corners of the sheet are to be apart. vi) Visual and dimensional check during assembly stage. vii) Check on complete core for measurements of iron-loss and check for any hot spot by exciting the core so as to induce the designed value of flux density in the core. viii) Check for inter laminar insulation between core sectors before and after pressing. ix) Visual and dimensional checks for straightness and roundness of core, thickness of limbs and suitability of clamps. x) High voltage test (2 KV for one minute) between core and clamps.

		xi) Certification of all test results.
12.1.3	Insulating Materials	<ul style="list-style-type: none"> i) Sample check for physical properties of materials. ii) Check for dielectric strength. iii) Visual and dimensional checks. iv) Check for the reaction of hot oil on insulating materials. v) Certification of all test results.
12.1.4	Windings	<ul style="list-style-type: none"> i) Sample check on winding conductor for mechanical properties and electrical conductivity. ii) Visual and dimensional check on conductor for scratches, dept. mark etc. iii) Sample check on insulating paper for PE value, Bursting strength, Electric strength. iv) Check for the reaction of hot oil on insulating paper. v) Check for the bending of the insulating paper on conductor. vi) Check and ensure that physical condition of all materials taken for winding is satisfactory and free of dust. vii) Check for absence of short circuit between parallel strands. viii) Check for Brazed joints wherever applicable. ix) Measurement of voltage ratio to be carried out when core/ yoke is completely restocked and all connections are ready. x) Certification of all test results.
12.1.4.1	Checks before drying process	<ul style="list-style-type: none"> i) Check conditions of insulation on the conductor and between the windings. ii) Check insulation distance between high voltage connection distance between high voltage connection cables and earthed and other live parts. iii) Check insulation distance between low voltage connection and earthed and other parts. iv) Insulation test of core earthing. v) Check for proper cleanliness vi) Check tightness of coils i.e. no free movement. vii) Certification of all test results.
12.1.4.2	Checks during drying process	<ul style="list-style-type: none"> i) Measurement and recording of temperature and drying time during vacuum treatment. ii) Check for completeness of drying. iii) Certification of all test results.
12.1.5	Oil	As per BSES specification.
12.1.6	Test on fittings and accessories	As per manufacturer's standard
12.2	Routine / Acceptance tests	<p>The sequence of routine testing shall be as follows</p> <ul style="list-style-type: none"> i) Visual and dimension check for completely assembled transformer ii) Measurements of voltage ratio iii) Measurements of winding resistance at each taps.

	<ul style="list-style-type: none"> iv) Vector Group and polarity test v) *Measurements of insulation resistance and polarization index vi) Separate sources voltage withstand test. vii) Measurement of iron losses and exciting current at rated frequency and 90%, 100% and 110% rated voltage. viii) Induced over voltage withstand test. ix) Load losses measurement at principal, minimum and maximum taps. x) Impedance measurement of principal, minimum and maximum taps of the transformer. x) Routine test of tanks xi) Induced voltage withstand test (to be repeated if type tests are conducted). xii) Measurement of Iron loss (to be repeated if type test are conducted). xiii) Measurement of capacitance and Tan Delta for transformer winding and HV bushing and Tan Delta for transformer oil (for all transformers). xiv) Phase relation test; Polarity, angular displacement and phase sequence. xv) Ratio of HVWTI CT, LV WTI CT and neutral CT xvi) Excitation and Knee point voltage test on class PS core of neutral CT. xviii) Routine Test on on-load tap changer. xix) IR test from terminals mentioned in Clause no 6.37 xviii) Oil leakage test on assembled transformer xviii)Magnetic balance test xix) Measure the auxiliary loss (Loss of fan) xx) Power frequency voltage withstand test on all auxiliary circuits. xxi) Certification of all test results. xxii) Temperature rise test as per IS# xxiii) SFRA <p>Note 1: *Insulation resistance measurement shall be carried out at 5kV. Value of IR should not be less than 2000 Mohms.</p> <p>Polarisation Index ($PI = IR_{10min}/IR_{1min}$) should not be less than 1.5 (If one minute IR value is above 5000 Mohms and it is not be possible to obtain an accurate 10 minutes reading, in such cases polarisation index can be disregarded as a measure of winding condition.</p> <p>Note 2: #Temperature rise test is necessary to be carried out on 5% of the order quantity (subject to minimum 1) at the manufacturer's works. Purchaser's engineer, will at his discretion, select transformer for temp. rise test at manufacturer's works and witness the same for comparison with type test results.</p>
--	--

		Note 3: CRGO shall be verified as per annexure CR
12.3	Type Tests	<p>Following type test shall be carried out on one transformer of each rating & type per lot offered from the lot offered for inspection.</p> <ul style="list-style-type: none"> i) Impulse withstand test on all three HV and LV limbs of the transformers for chopped wave as per standard ii) Temperature rise test as per IS iii) Dissolved gas analysis before and after Temperature Rise Test to be carried out from CPRI/ERDA iv) Pressure relief device test v) Pressure and Vacuum test on tank* (*stage inspection).
12.4	Special Tests	<p>Following tests shall be carried out on one transformer of each rating and type</p> <ul style="list-style-type: none"> i) Measure of zero seq. impedance (Cl. 16.10 IS 2026 Part I). ii) Measurement of acoustic noise level (Cl. 16.12 of IS 2026 Part I). iii) Measurement of harmonic level on no load current. iv) CRGO testing for Specific core loss, accelerated ageing test , surface insulation resistivity , AC permeability and magnetization , Stacking factor , ductility etc. v) Oil testing to be tested at ERDA/CPRI labs, whose samples shall be selected & sealed by customer inspection engineer.
12.5	Site Acceptance test	<p>Following tests shall be conducted while receiving the Power Transformer.</p> <ul style="list-style-type: none"> i) Insulation Resistance from terminal box mentioned in clause no 6.37. The test shall be conducted on following basis: <ul style="list-style-type: none"> a) The IR test will be performed on the terminals mentioned in clause no 6.37 on trailer prior to unloading at site. b) The results shall be compared with the results obtained during inspection. c) The IR value in any of the tests (Factory as well as site) should not be less than 1000M Ohm d) To access internal physical damage during transportation, Transformer will not be received if the site results are less than 1000M Ohm. ii) SFRA with same kit done at factory (Instrument shall be in Vendors scope

12.5	Note for Type test and Special test	Cost of the above tests, if extra, shall be quoted separately by the Bidder, which shall be considered in the price evaluation.
12.6	Notification to bidders	<p>The product offered must be of type tested design with valid type test report of not more than five (5) years.</p> <p>In case the product offered is never type tested for tests as per above list, type tests to be conducted by bidder at his own cost at Govt. recognized independent test laboratory / Internationally accredited test lab or at manufacturer's facility if it is approved by competent authority</p> <p>Valid Type test reports for Dynamic Short circuit test as per IS may be forwarded for customer's review and approval.</p> <p>In case the product offered is never tested for dynamic short circuit the same to be conducted by bidder at his own cost at Govt. recognized independent test laboratory / Internationally accredited test lab.</p>

13.0 Packing, Shipping, Handling and Storage

13.1	Packing	
13.1.1	Packing protection	Against corrosion, dampness, heavy rains, breakage and vibration
13.1.2	Packing for accessories and spares	Robust wooden non returnable packing case with all the above protection
13.1.3	Packing details	<p>On each packing case details required as follows</p> <ul style="list-style-type: none"> i) Individual serial number; ii) Purchaser's name; iii) PO number; iv) Destination; ; v) Supplier's name; vi) Name and address of supplier's agent vii) Description and numbers of contents; viii) Manufacturer's name ix) Country of origin x) Case measurements xi) Gross and net weights in kilograms xii) All necessary slinging and stacking instructions.
13.2	Shipping	The bidder shall ascertain at an early date and definitely before the commencement of manufacture, any transport limitations such as weights, dimensions, road culverts, overhead lines, free access etc. from the manufacturing plant to the project site; and furnish to the Purchaser confirmation that the proposed packages can be safely transported, as normal or

		oversize packages, upto the plant site. Any modifications required in the infrastructure and cost thereof in this connection shall be brought to the notice of the Purchaser.
13.3	Handling and Storage	As per manufacturer's instruction

14.0 COMMISSIONING SUPPORT

Supervision of Erection and Commissioning inclusive of all testing equipments/instruments shall be included for minimum 3 days for each Transformer.

It includes following:

- a) BRPL will give vendor 7 days advance notice prior to erection testing and commissioning of Transformer.
- b) After successful erection testing and commissioning of Transformer Vendor shall issue erection quality check certificate to BRPL.

15.0 TRAINING

- a) Training on installation, commissioning, operation and maintenance shall be included in the proposal.
 - at factory
 - at site after installation

16.0 Deviations

Deviations from this Specification shall be stated in writing with the tender by reference to the Specification clause/GTP/Drawing and a description of the alternative offer. In absence of such a statement, requirements of the Specification shall be met without exception.

Annexure - A

Scope of supply

The scope of supply shall include following

- 1.1 Design, manufacture, assembly, testing at stages of manufacture as per Cl. 12 of this specification, final testing at manufacturer works on completely assembled transformer before dispatch, packing, transportation, delivery and submission of all documentation for the Power transformer with all accessories as below and ratings & requirements as specified in Annex C.

Sr. No	Description	Scope of Supply
1.0	Fully assembled transformer with all major parts like conservator, Radiators, Marshalling box, Protective devices as per Clause 5.0 of this specification, Fittings and accessories as per Clause 6.0 of this specification	YES
1.1	OLTC as per this specification	YES
1.2	RTCC panel as per this specification	No
1.3	HV, LV, LV NEUTRAL cable boxes	YES
1.4	Support steel material for support of cable boxes from ground	YES
1.5	Foundation Bolts for complete transformer	YES
1.6	Nickel Plated brass double compression weather proof glands for HV and LV cables	No
1.7	Long barrel medium duty Aluminium lugs for power cables	YES
1.8	Nickel Plated brass double compression weatherproof glands and tinned copper lugs for control cable termination in Marshalling box for vendor's cables	YES
1.9	Cables and wires for transformer accessories and internal wiring of Marshalling box	YES
1.10	Touch up paint, minimum 5 litres	YES
1.11	Extra Transformer oil 10 % in non returnable drums	YES
1.12	One spare complete set of gaskets	YES
1.13	One set (4 nos in a set) of anti rolling clamp for 90 lb rail	YES

1.14	Ordinary Thermometers 4 nos	YES
1.15	Recommended spares as per manufacturer	YES
1.16	Provision for mounting of NIFPS system	YES
2.0	Routine testing as per Cl. 12 of this specification	YES
3.0	Type testing as per Cl. 12 of this specification	YES
4.0	Special testing as per Cl. 12 of this specification	YES
5.0	Submission of Documentation as detailed below	YES

2.0 Submission of documents

Submission of drawings, calculations, catalogues, manuals, test reports shall be as follows

	Along with offer	For Approval after award of contract	Final after approval / *After completion of delivery	Remarks
Drawings	3 copies (Typical drgs)	4 copies	12 copies + 1 soft copy in CD	See Clause 11 for various drawings required
Calculations	3 copies (Typical)	4 copies	6 copies + 1 soft copy in CD	See Clause 11 for details
Catalogues	1 copy		12 copies + 1 soft copy in CD	
Instruction manual for the transformer	1 copy		12 copies + 1 soft copy in CD	
Type Test Report & Routine Test Report*	2 copies (Type test and sample Routine Test)		12 copies + 1 soft copy in CD Routine Test Report	

3.0 Delivery schedule

- 3.1 Delivery period start date - from date of purchase order
- 3.2 Delivery period end date - as agreed with supplier
- 3.3 Material dispatch clearance - after inspection by purchaser and written dispatch clearances from purchaser

Annexure B

Service Conditions

2.0.0	Delhi Atmospheric conditions	
a)	Average grade atmosphere :	Heavily polluted, dry
b)	Maximum altitude above sea level	1000 M
c)	Ambient Air temperature	Highest 50 deg C, Average 40 deg C
	Design ambient air temperature	50 deg C
d)	Relative Humidity	90 % Max
e)	Seismic Zone	4
f)	Rainfall	750 mm concentrated in four months

Annexure – C

Technical particulars (Data by purchaser)

Sr No	Description	Data by purchaser	
1.0	Location of equipment	OUTDOOR	
2.0	Reference design ambient temperature	40 deg C	
3.0	Type	Oil immersed, core type, step down	
4.0	Type of cooling	ONAN / ONAF(see note 1)	
5.0	Reference standard	IS: 2026	
6.0	No. of phases	3	
7.0	No. of windings per phase	2	
8.0	Rated frequency (Hz)	50 Hz	
9.0	Rated voltage (kV)		
9.1	HV winding	33	66
9.2	LV winding	11	11
10.0	Vector Group Reference	Dyn11	Dyn11
11.0	Nominal Continuous Rating, MVA		
11.1	For 20/25MVA		
	ONAN	20	20
	ONAF	25	25
11.2	For 25/31.5MVA		
	ONAN	25	25
	ONAF	31.5	31.5
12.0	Impedance at Principal tap at rated frequency with IS tolerance	12 % (for 20 MVA) 15% (for 25MVA) 15%(31.5MVA)	12 % (for 20 MVA) 15% (for 25MVA) 15%(31.5MVA)
13.0	Maximum no load loss at rated condition allowed without any positive tolerance, kW	12kW (For upto 25MVA) 14kW (For 31.5MVA)	12kW (for Upto 25MVA) 14kW (For 31.5MVA)
14.0	Maximum load loss at rated condition @ 75 deg C and principal tap allowed without any positive tolerance, kW	85kW (for 25MVA) 115kW (for 31.5MVA)	85 kW (for 25MVA) 115kW (for 31.5MVA)

15.0	Terminal connection / Cable / Conductor Size		
15.1	HV side	33 kV	66 kV
		By 2 runs of 3 C x 400 sq.mm A2XFY, 33 kV (E) grade cable	By Single / Double ACSR "ZEBRA" conductor per phase
15.2	LV side	1) By 3 runs of 1C x 1000 sqmm per phase A2XY unarmoured cable 11 kV (E) grade cable (For 25MVA) 2) By 4 runs of 1C x 1000 sqmm per phase A2XY unarmoured cable 11 kV (E) grade cable (For 31.5MVA)	1) 3 runs of 1C x 1000 sqmm per phase A2XY unarmoured cable 11 kV (E) grade cable 2) 4 runs of 1C x 1000 sqmm per phase A2XY unarmoured cable 11 kV (E) grade cable
15.3	LV neutral	By G.S Strip minimum 2x 75 x 10 mm size	By G.S Strip minimum 2x 75 x 10 mm size
16.0	Highest system voltage HV side, kV	36	72.5
17.0	Highest system voltage LV side, kV	12	12
18.0	Lightning Impulse withstand voltage , kV peak		
18.1	For nominal system voltage of 11 kV	75	
18.2	For nominal system voltage of 22 kV	125	
18.3	For nominal system voltage of 33 kV	170	
18.4	For nominal system voltage of 66 kV	325	
18.0	Power Frequency Withstand Voltage kV rms		
18.1	For nominal system voltage of 11 kV	28	
18.2	For nominal system voltage of 22 kV	50	
18.3	For nominal system voltage of 33 kV	70	
18.4	For nominal system voltage of 66 kV	140	
19.0	Clearances Phase to Phase , mm		

19.1	For nominal system voltage of 11 kV	280
19.2	For nominal system voltage of 22 kV	330
19.3	For nominal system voltage of 33 kV	350
19.4	For nominal system voltage of 66 kV	700
20.0	Clearances Phase to Earth , mm	
20.1	For nominal system voltage of 11 kV	140
20.2	For nominal system voltage of 22 kV	230
20.3	For nominal system voltage of 33 kV	320
20.4	For nominal system voltage of 66 kV	660
20.5	Ground clearance – Live part to ground for 66kV – mm	4000
21.0	System Fault Level , HV side	1500 MVA for 33 kV 3600 MVA for 66 kV
22.0	System Fault Level , LV side	500 MVA for 11 kV
23.0	Short Circuit withstand Capacity of the transformer	
23.1	Three phase dead short circuit at secondary terminal with rated voltage maintained on the other side	For 3 secs.
23.2	Single phase short circuit at secondary terminal with rated voltage maintained on other side	For 3 secs.
24.0	System earthing	
24.1	HV	Solidly earthed
24.2	LV	Solidly earthed
25.0	Overload Capability	As per IS 6600
26.0	Noise Level	Shall not exceed limits as per NEMA TR-1 with all accessories running measured as per IEC 551 / NEMA standard

27.0	Radio Influence Voltage	Maximum 250 microvolt
28.0	Harmonic suppression	Transformer to be designed for suppression of 3 rd , 5 th , 7 th harmonic voltages and high frequency disturbances.
29.0	Partial Discharge	Transformer to be free from partial discharge upto 120 % of rated voltage as the voltage is reduced from 150 % of rated voltage i.e. there shall be no significant rise above background level
30.0	Temperature rise of top oil by thermometer	40 deg C
31.0	Temperature rise of winding by resistance	45 deg C
32.0	Note for the bidders	(left blank)
33.0	Tappings to be provided on HV winding for OLTC	+ 5 % to –15 % @ step of 1.25 % 16 taps, 17 tap positions, Tap no.5 is principal tap, Tap Position input to TMU/CRP/A Eberle to be provided through Transducer 4-20mA Type along with Resistive type
34.0	Maximum flux density allowed in the core at extreme over excitation / over fluxing	1.9 Tesla
35.0	Maximum current density allowed at any tap	3.0 A / sqmm.
36.0	AVR input voltage / aux. supply	(Not applicable)
37.0	Bushing Parameters	
37.1	Rated current	1000A for 33kV bushing 2000A for 11kV bushing
37.2	Creepage factor for all bushing mm / KV	31 mm / kV minimum
37.3	Rated thermal short time current for all bushing	25 times rated current for 2 secs.
37.4	Angle of mounting	0 to 90 degree
37.5	Cantilever withstand load	2000N for 66kV bushing 1250N for 33kV bushing 2000N for 11kV bushing
37.6	Overall Length(Approx)	1085mm for 66kV bushing 678mm for 33kV bushing 503mm for 11kV bushing
37.7	Diameter of base	100mm
37.8	Aux Contactor	Aux Contactors in Marshalling Box shall be DC type
37.9	Ladder	Ladder Shall be Removable type and 1 Meter excess
37.10	Cable	Transformer Cable length shall be minimum 10 Meter length

Note 1:

For ONAN and ONAF rating the temperature rise of the transformer shall be within the values specified at sl. No. 31.0 and 32.0 above. Under ONAF cooling 20% spare cooling fans shall be provided. Design of cooling equipment and control shall comply to CBIP clause no. 2.1.3 of Section A (general)

Note 2 :

The transformers will be evaluated against the losses guaranteed by the bidders with capitalization of losses as per figures indicated under sl.no. 30.1, 30.2 and 30.3 above. However, the maximum loss figures acceptable are as per cl. 13.0 & 14.0 of Annexure C. In the event of measured loss figures during testing exceeding the guaranteed loss figures of the successful bidder penalty shall be levied at a rate of 1.25 times the figures mentioned above for no load, load losses and cooler loss.

Annexure-N (Technical specification of NIFPS)**1.0.0 SUPPLY AND SCOPE WORK**

Design, manufacture, testing of the assembled system at manufacturer's works before dispatch, packing and supply at site, erection and commissioning of the Nitrogen Injection Fire Protection system

Installation testing and commissioning of Nitrogen Injection Fire Protection system shall be in scope of bidder. All material including Pipes, ducts control cables, tools, tackles, hardware, testing equipments and manpower required for the work shall be in scope of bidder except for any type of civil work like fire wall, soak pit etc. Bidder if feels shall conduct physical survey of the power transformer to check feasibility and quantum of work involved.

2.0.0 INTRODUCTION

Nitrogen Injection Fire Protection System (NIFPS) shall use nitrogen as fire quenching medium. The protective system shall prevent transformer / Reactor oil tank explosion and possible fire in case of internal faults. In the event of fire by external causes such as bushing fire, OLTC fires, fire from surrounding equipment etc, it shall act as a fast and effective fire fighter without any manual intervention. It shall accomplish its role as fire preventer and extinguisher without employing water and / or carbon dioxide. Fire shall be extinguished within 3 minutes (Maximum) of system activation and within 30 seconds (maximum) of commencement of nitrogen injection.

3.0.0 APPLICABLE CODES AND STANDARDS

The design and installation of the complete fire protection system shall comply with the latest applicable Indian standards

a) **IS 10028 (Part II) :** Code of practice for selection, installation, and maintenance of transformer

S **Tariff Advisory Committee :** Regulations for the electrical equipment of buildings

S **National fire Codes 1993 of National Fire Protection Association (NFPA) USA**

d) **Central Electricity Authority, The Gazette of India, Extraordinary 2010 :**
Safety provisions for electrical installations and apparatus of voltage exceeding 650V

4.0.0 ACTIVATION OF THE FIRE PROTECTIVE SYSTEM

Mal-functioning of fire prevention / extinguishing system could lead to interruption in power supply. The supplier shall ensure that the probability of chances of malfunctioning of the fire protective system is practically zero. To achieve this objective, the supplier shall plan out his scheme of activating signals which should not be too complicated to make the fire protective system inoperative in case of actual need and should not be

dependent on auxiliary power source. The system shall be provided with automatic control for fire prevention and fire extinction without any manual intervention. Besides automatic control, remote electrical push button control at Control box and local manual control in the fire extinguishing cubicle shall also be provided. The following electrical-signals shall be required for activating the fire protective system under prevention mode / fire extinguishing mode.

4.1.0 Auto Mode

4.1.1 For prevention of fire :

Differential relay operation + Buchholz relay paralleled with pressure relief valve or RPRR (Rapid Pressure Rise Relay) + Tripping of all or one circuit breakers (on HV & LV/IV side) associated with transformer / reactor is the pre-requisite for activation of system. The system shall have sufficient Input modules.

4.1.2 For extinguishing fire :

Fire detector + Buchholz relay paralleled with pressure relief valve (PRV) or sudden pressure relay (SPR) + tripping of all circuit breakers (on HV & LV/IV side) associated with transformer / reactor is the pre-requisite for activation of system.

4.2.0 Manual Mode (Local / Remote electrical)

Tripping of all circuit breakers (on HV & LV/IV side) associated with transformer/reactor is the pre-requisite for activation of system.

4.3.0 Manual Mode (Mechanical)

Tripping of all circuit breakers (on HV & LV/IV side) associated with transformer / Reactor is the pre-requisite for activation of system.

The system shall be designed to be operated manually in case of failure of power supply to fire protection system.

5.0.0 GENERAL DESCRIPTION

Nitrogen injection fire protection system should be a dedicated system for each oil filled transformer / reactor. It should have a Fire Extinguishing Cubicle (FEC) placed on a plinth at 5-7m away (as per statutory requirement) from transformer / reactor or placed next to the fire wall if fire wall exists. The FEC shall be connected to the top of transformer / reactor oil tank for depressurization of tank and to the oil pit as per Indian standard and CBIP from its bottom through oil pipes. The fire extinguishing cubicle should house a pressurized nitrogen cylinder(s) which is connected to the oil tank of transformer/reactor oil tank at bottom. The Transformer Conservator Isolation Valve (TCIV) is fitted between the conservator tank and Buchholz relay.

Cable connections are to be provided from signal box to the control box in the control room, control box to fire extinguishing cubicle, TCIV to signal box and any other wiring to ensure proper functioning of the fire protection system. Fire detectors placed on the top of transformer/reactor tank are to be connected in parallel to the signal box by Fire survival cables. Control box is also to be connected to relay panel in control room for receiving system activation signals. All panel or control equipments shall be fire proof so as to ensure that they do not fail themselves in event of fire.

6.0.0 OPERATION

On receipt of all activating signals, the system shall drain pre-determined volume of hot oil from the top of tank (i.e top oil layer), through outlet valve, to reduce tank pressure by removing top oil and simultaneously injecting nitrogen gas at high pressure for stirring the oil at pre-fixed rate and thus bringing the temperature of top oil layer down. Transformer conservator isolation valve blocks the flow of oil from conservator tank in case of tank rupture / explosion or bushing bursting. Nitrogen occupies the space created by oil drained out and acts as an insulating layer over oil in the tank and thus preventing aggravation of fire.

7.0.0 SYSTEM COMPONENTS

Nitrogen injection fire protection system shall broadly consist of the following components. However, all other components which are necessary for fast reliable and effective working of the fire protective system shall be deemed to be included in the scope of supply.

7.1.0 Fire Extinguishing Cubicle (FEC)

The FEC shall be made of CRCA sheet of 3 mm (minimum) thick complete with the base frame, painted inside and outside with post office red colour (shade 538 of IS-5). It shall have hinged split doors fitted with high quality tamper proof lock. The degree of protection shall be IP55. The following items shall be provided in the FEC.

- a. Nitrogen gas cylinder with regulator and falling pressure electrical contact manometer
- b. Oil drain pipe with mechanical quick drain valve.
- c. Control equipment for draining of oil of pre-determined volume and injecting regulated volume of nitrogen gas
- d. Pressure monitoring switch for back-up protection for nitrogen release
- e. Limit switches for monitoring of the system
- f. Butterfly valve with flanges on the top of panel for connecting oil drain pipe and nitrogen injection pipes for transformer/reactors
- g. Panel lighting (CFL Type)
- h. Oil drain pipe extension of suitable sizes for connecting pipes to oil pit.

7.2.0 Control box

Control box is to be placed in the control room for monitoring system operation, automatic control and remote operation. Control supply will be 50/220VDC (15% tolerance) based on site requirement. The following alarms, indications, switches, push buttons, audio signal etc. shall be provided.

- a. System on
- b. TCIV open
- c. Oil drain valve closed
- d. Gas inlet valve closed
- e. TCIV closed*
- f. Fire detector trip *
- g. Buchholz relay trip
- h. Oil drain valve open*
- i. Extinction in progress *

- j. Cylinder pressure low *
- k. Differential relay trip
- l. PRV / SPR trip
- m. Master relay of Transformer/reactor trip
- n. System out of service *
- o. Fault in cable connecting fault fire detector
- p. Fault in cable connecting differential relay
- q. Fault in cable connecting Buchholz relay
- r. Fault in cable connecting PRV / SPR
- s. Fault in cable connecting transformer /reactor trip
- t. Fault in cable connecting TCIV
- u. Auto/ Manual / Off
- v. Extinction release on / off
- w. Lamp test
- x. Visual/ Audio alarm*
- y. Visual/ Audio alarm for DC supply fail *

Suitable provision shall be made in the control box, for monitoring of the system from remote substation using the substation automation system.

7.3.0 Transformer Conservator Isolation Valve

Transformer conservator isolation valve (TCIV) to be fitted in the conservator pipe line, between conservator and buchholz relay which shall operate for isolating the conservator during abnormal flow of oil due to rupture / explosion of tank or bursting of bushing. The valve shall not isolate conservator during normal flow of oil during filtration or filling or refilling, locking plates to be provided with handle for pad locking. It shall have proximity switch for remote alarm and indication glass window for visual inspection for physical checking of the status of valve.

The TCIV should be of the best quality as malfunctioning of TCIV could lead to serious consequence. The closing of TCIV means stoppage of breathing of transformer/reactor. Fire survival cable connecting TCIV shall be terminated in transformer marshalling box.

7.4.0 Fire detectors

The system shall be complete with adequate number of fire detectors (quartz bulb) fitted on the top cover of the transformer / reactor oil tank. The system generates signal after sensing higher temperature. The placing of fire detectors and numbers shall be designed and finalized by bidder as per requirement.

7.5.0 Signal box

It shall be mounted away from transformer / reactor main tank, preferably near the transformer marshalling box, for terminating cable connections from TCIV & fire detectors and for further connection to the control box. The degree of protection shall be IP55.

7.6.0 Cables

Fire survival cables (capable to withstand 750° C.) of 4 core x 1.5 sq. mm size for connection of fire detectors in parallel shall be used. The fire survival cable shall conform to BS 7629-1, BS 8434-1, BS 7629-1 and BS 5839-1, BS EN 50267-2-1 or relevant Indian standards.

Fire Retardant Low Smoke (FRLS) cable of 12 core x 1.5 sq. mm size shall be used for connection of signal box / marshalling box near transformer/reactor and FEC mounted near transformer/reactor with control box mounted in control room.

Fire Retardant Low Smoke (FRLS) cable of 4 core x 1.5 sq. mm size shall be used for connection between control box to DC and AC supply source, fire extinguishing cubicle to AC supply source, signal box/ marshalling box to transformer conservator isolation valve connection on transformer/reactor.

7.7.0 Pipes

Heavy duty pipe connecting the transformer/reactor tank for oil rain, and for nitrogen injection shall be provided. Pipes connecting oil tank laid underground, shall be preferably be used for interconnection. Pipes, complete with connections, flanges, bends and tees etc. shall be supplied along with the system.

7.8.0 Other items

- 7.8.1 Oil drain and nitrogen injection openings with gate valves on transformer / reactor tank at suitable locations.
- 7.8.2 Flanges with dummy piece in conservator pipe between Buchholz relay and conservator Tank for fixing TCIV.
- 7.8.3 Fire detector brackets on transformer / reactor tank top cover.
- 7.8.4 Spare potential free contacts for activating the system i.e. in differential relay, Buchholz relay, Pressure Relief Device / RPRR, Circuit Breaker of transformer/reactor
- 7.8.5 Pipe connections between transformer / reactor and FEC and between FEC and oil pit required for collecting top oil.
- 7.8.6 Cabling for fire detectors mounted on transformer /reactor top cover
- 7.8.7 Inter cabling between signal box, control box and Fire Extinguishing Cubicle (FEC).
All external cables from / to the system i.e. signal box to control box and control box to FEC shall be provided by the purchaser. All internal cables within the system i.e. between detectors / signal box / marshalling box / FEC / TCIV shall be in the scope of NIFPS supplier.
- 7.8.8 Butterfly valves /Gate valves on oil drain pipe and nitrogen injection pipe which should be able to withstand full vacuum.
- 7.8.9 Supports, signal box etc. which are to be painted with enamelled paint.

The doors, removable covers and panels shall be gasketed all round with neoprene gaskets.

8.0.0 MANDATORY SPARES

Cylinder filled with Nitrogen of required capacity per substation	1 No.
Fire Detectors per transformer	3 No's.
Regulator assembly per sub-station	1 No.
NIFPs Spare Valves	2 Nos
Spare Contactors in Marshalling Box	2 Nos

9.0.0 TESTS

Reports of all type test conducted as per relevant IS/IEC standards in respect of various bought out items including test reports for degree of protection for FEC /control box / signal box shall be submitted by the supplier.

The supplier shall demonstrate the functional test associated with the following:

- Fire Extinguishing Cubicle, Control Box.
- Fire Detector.
- Transformer Conservator Isolation Valve

The performance test of the complete system shall be carried out after erection of the system with transformer at site.

10.0.0 DOCUMENTS TO BE SUBMITTED**10.1.0 To be submitted along with offer**

- 10.1.1 General outline of the system.
- 10.1.2 Detailed write-up on operation of the offered protection system including maintenance and testing aspects / schedules.
- 10.1.3 Technical Data particulars (GTP), the format of which is attached in Annexure A of the specification
- 10.1.4 Data regarding previous supplies, date of commissioning, performance feedback etc.
- 10.1.5 Document related to Type test / proof of design as required by statutory body / electrical inspector

10.2.0 To be submitted after award of contract:

Detailed dimensional layout drawing of the system with complete bill of materials, clearances from ground and other live points, details of detectors, equipment layout drawings, detailed drawings pertaining to signal box, control box, FEC equipment, wiring and schemes, 4 sets of testing, commissioning, Operation and Maintenance manual along with soft copies (in CDs) shall be submitted by the supplier.

11.0.0 PACKING, SHIPPING, HANDLING & SITE SUPPORT

11.1.0	Packing Protection	The packing shall be fit to withstand rough handling during transit and storage at destination. The test set should be properly protected against corrosion, dampness & damage.
11.2.0	Packing for accessories and spares	Robust non-returnable packing case with all the above protection & identification Label. The bidder should get the packing list approved before dispatching the material.
11.3.0	Packing Identification Label	On each packing case, following details are required:
11.3.1	Individual serial number	
11.3.2	Purchaser's name	
11.3.3	PO number (along with SAP item code, if any) & date	

11.3.4	Equipment Tag no. (if any)	
11.3.5	Destination	
11.3.6	Manufacturer / Supplier's name	
11.3.7	Address of Manufacturer / Supplier / it's agent	
11.3.8	Description	
11.3.9	Country of origin	
11.3.10	Month & year of Manufacturing	
11.3.11	Case measurements	
11.3.12	Gross and net weight	
11.3.13	All necessary slinging and stacking instructions	
11.4.0	Shipping	The seller shall be responsible for all transit damage due to improper packing.
11.5.0	Handling and Storage	Manufacturer instruction shall be followed.
11.6.0	Detail handling & storage instruction sheet / manual to be furnished before commencement of supply.	

12.0.0 DEVIATIONS

List of deviations shall be stated in writing with the tender by reference to the Specification clause / GTP/ Drawing. In absence of such a statement, requirements of the Specification shall be assumed to be met without exception by the bidder.

Annexure-O (Technical specification of Transformer Oil)

Sr. No.	Item Description	Specification Requirement
A	Function	
1	Viscosity Max.	15 mm ² /s at 40 ⁰ C 1800 mm ² /s at 0 ⁰ C
2	Pour Point, Max	- 10 ⁰ C
3	Water content, Max	30 mg/Kg
4	Breakdown voltage	
	i) New unfiltered oil. Min.	30 kV
	ii) After filtration Min.	70 kV
5	Density Max.	0.895 g/ml at 20 ⁰ C
6	Dielectric dissipation factor (DDF) at 90 ⁰ C, Max	0.005 at 90 ⁰ C,
7	Particle Content	Value to be provided by the vendor
B	Refining/Stability	
1	Appearance of oil	Clear, free from sediment and suspended matter
2	Acidity Max	0.01 mg KOH/g
3	Interfacial tension at 27 ⁰ C, Min	40 mN/m
4	Total sulphur content	Value to be provided by the vendor
5	Corrosive sulphur	Not-corrosive
6	Potentially Corrosive sulphur	Not-corrosive
7	Dibenzyl Disulphide (DBDS)	Not detectable (<5 mg/kg)
8	Inhibitor	Not detectable (<0.01%)
9	Metal Passivator	Not detectable (<5 mg/kg)
10	Other additives	Type and concentration of additives to be provided
11	2-furfural and related Compounds content	Not detectable (<0.05 mg/kg) for each individual compound
C	Performance	
1	Oxidation stability	
a)	Total acidity, Max	1.2 mg KOH/g
b)	Sludge Max	0.8%
c)	Dielectric dissipation factor (DDF) at 90 ⁰ C, Max	0.5
1	Gassing Tendency	Value to be provided by the vendor
2	Electrostatic charging tendency (ECT)	Value to be provided by the vendor
D	Health, safety and Environment	
1	Flash point Min.	135 ⁰ C,
2	Polycyclic Aromatics content (PCA) Max	3%
3	Polychlorinated Biphenyls (PCB) content	Not detectable (<2 mg/Kg)

Annexure-G (Technical specification of Material Tracking-GPS Device)

Supply of GPS Device shall be in Vendors scope, however it shall be returned to Vendor once Goods are received.

Detailed requirement of GPS Device is as below:

Once the material is dispatched after Final clearance Transport Vehicle shall have GPS Tracking Device and status of dispatch of material shall be sent to all the stake holders via SMS thru GPS Device.

Approve make is Map my India Asset Tracking device.

Annexure-I (Cancellation of Inspection Call)

Penalty equivalent to cost incurred in assigning the inspector shall be levied on vendor in following case:

- 1) Inspector reaches the factory and equipment is not ready for inspection
- 2) Inspection call cancelled by Vendor after making all arrangements (booking tickets and hotel) are done by buyer.
- 3) Any deficiency found in equipment/material during inspection and re inspection is called for.

Annexure-CR (Technical specification for purchase of CRGO ,its handling and its testing)

- 1) Core material shall be directly procured either from the BSES approved manufacturer or through their authorized service centre/distributor and not through any contractor.
- 2) Vendor should have hydraulic core lifting facility to avoid any jerk at the time of core building.
- 3) BSES may appoint recognized testing authority like CPRI /ERDA with their instruments & engineer's team and measure no load loss, load loss and percentage impedance of the transformer at supplier's works at Vendor cost . Bidder shall agree and give them full co-operation during their stay & testing at shop floor. The losses & impedance values so obtained will be considered as final.
- 4) Following stage inspections will be carried out by purchaser or by third party engineers appointed by BSES :
 - A) Verification & inspection of the mother coil at port & putting stamp & seal may be inspected by BSES.
 - B) Reconciliation of mother coil by checking stamp & seal at factory before slitting. One sample of CRGO to be sealed for testing at ERDA/CPRI.
 - C) Bidder should have in house core cutting facility for proper monitoring & control on quality. In case it is done outside cutting shall be done in presence of BSES.
- 5) Following documents to be submitted during the stage inspection :
 - A) Invoice of supplier
 - B) Mills test certificates
 - C) Packing list
 - D) Bill of lading
 - E) Bill of entry certificates by customs

Annexure - D**Guaranteed Technical Particulars (Data by Seller)**

Sr.	Particulars	Specified / Required	Offered
1.0	General		
1.1	Make		
1.2	Type	As per Cl. 3.0 of Annexure C	
2.0	Nominal Continuous Rating, KVA		
2.1	ONAN	As per Annexure C	
2.2	ONAF	As per Annexure C	
3.0	Rated voltage (kV)		
3.1	HV Winding	As per Cl. 9.1 of Annexure C	
3.2	LV Winding	As per Cl. 9.2 of Annexure C	
4.0	Rated current (Amps)		
4.1	HV Winding, ONAN / ONAF		
4.2	LV Winding, ONAN / ONAF		
5.0	Connections		
5.1	HV Winding	As per Cl. 10.0 of Annexure C	
5.2	LV Winding	As per Cl. 10.0 of Annexure C	
5.3	Vector Group reference	As per Cl. 10.0 of Annexure C	
6.0	Impedance at principal tap rated current and frequency, %		
6.1	Impedance	As per Cl. 12.0 of Annexure C	
6.2	Reactance		
6.3	Resistance		
6.4	Impedance at lowest tap rated current and frequency, %		
6.5	Impedance at highest tap rated current and frequency, %		
7.0	Resistance of the		

	winding at 75° C ,at principal tap, ohm		
7.1	a) HV		
7.2	b) LV		
8.0	Zero sequence impedance, ohm		
8.1	a) HV		
8.2	b) LV		
9.0	Guaranteed maximum losses principal tap full load and 75°C without any positive tolerance kW		
9.1	No load losses (max.)	As per Cl. 13.0 of Annexure C	
9.2	Load losses (max.)	As per Cl. 14.0 of Annexure C	
9.3	Cooler fan losses (max.)		
9.4	Total Isq R losses of windings @ 75 deg C		
9.5	Total stray losses @ 75 deg C		
9.6	Total losses (max.)		
9.7	No load loss at maximum permissible voltage and frequency (approx.) kW		
10.0	Temperature rise over reference design ambient of 40 deg C		
10.1	Top oil by thermometer ° C	40 °C	
10.2	Winding by resistance ° C	45 °C	
10.3	Winding Gradient at rated current , deg C		
10.3.1	HV		
10.3.2	LV		

11.0	Efficiency		
11.1	Efficiency at 75 ⁰ C and unity power factor %		
11.1.1	at 110% load		
11.1.2	at 100% load		
11.1.3	at 80% load		
11.1.4	at 60% load		
11.1.5	at 40% load		
11.1.6	at 20% load		
11.2	Efficiency at 75 ⁰ C and 0.8 power factor lag %		
11.2.1	at 110% load		
11.2.2	at 100% load		
11.2.3	at 80% load		
11.2.4	at 60% load		
11.2.5	at 40% load		
11.2.6	at 20% load		
11.3	Maximum efficiency %		
11.4	Load and power factor at which it occurs		
12.0	Regulation , (%)		
12.1	Regulation at full load at 75 ⁰ C		
12.1.1	at unity power factor		
12.1.2	at 0.8 power factor lagging		
12.2	Regulation at 110% load at 75 ⁰ C		
12.2.1	at unity power factor		
12.2.2	at 0.8 power factor lagging		
13.0	Tappings		
13.1	Type		
13.2	Capacity		
13.3	Range-steps x % variation	As per Cl. 34.0 of Annexure C	
13.3	Taps provided on HV winding (Yes /	Yes.	

	No)		
14.0	OLTC Gear		
14.1	Make		
14.2	Type		
14.3	Reference std		
14.4	No of compartment		
14.5	Mounting arrangement	Side mounted	
14.6	Rated current, Amp	500A minimum for 33kV	
14.7	Rated step capacity, kVA		
14.8	Short circuit withstand for 2 secs , kA		
14.9	Time required for one step change,sec.		
14.10	Rated voltage for motor, V AC		
14.11	Rating of motor		
14.12	Rated voltage for auxiliaries, V		
14.13	Consumption of auxiliaries		
14.14	OLTC features as per specification , YES/ NO		
14.15	Does the overload rating of OLTC match with that of the transformer under all conditions, (Yes/No)		
16.0	Cooling system	-	
16.1	Type of cooling	As per Cl. 4.0 of Annexure C	
16.2	No. of cooling unit Groups		
16.3	Capacity of cooling units		
16.4	Mounting of radiators		
16.5	Number of Radiators		
16.6	Type & size of radiator header main valve		
16.7	Type & size of		

	individual radiator valve		
16.8	Total radiating surface , sqmm		
16.9	Thickness of radiator tubes, mm	Minimum 1.2 mm	
16.10	Schematic flow diagram of the cooling system furnished, (Yes/no)	-	
16.11	Number of cooler fans required for rated ONAF rating		
16.12	Number of standby cooler fans provided.		
16.3	Capacity of each cooler fan - kW		
16.4	Cooler fans rated voltage & variation		
16.5	Make of cooler fans		
17.0	Details of Tank		
17.1	Material	Robust mild steel plate without pitting and low carbon content	
17.2	Thickness of sides mm		
17.3	Thickness of bottom mm		
17.4	Thickness of cover mm		
17.5	Confirmation of Tank designed designed and tested for Vacuum, Pressure (Ref: CBIP Manual) , (Yes/ No)		
17.5.1	Vacuum mm of Hg. / (kN/m ²)	As per CBIP	
17.5.2	Pressure mm of Hg.	Twice the normal head of oil / normal pressure + 35kN/m ² whichever is lower, As per CBIP	
17.6	Is the tank lid sloped?	Yes	
17.7	Inspection cover provided (Yes / No)	as per clause	
17.8	Location of	as per clause	

	inspection cover (Yes / No)		
17.9	Min. dimensions of inspection cover (provide list of all inspection cover with dimension), mm x mm		
18.0	Core		
18.1	Type:	Core	
18.2	Core material grade	Premium grade minimum M4 or better	
18.3	Thickness of lamination mm	Max. 0.27 mm with insulation coating on both sides.	
18.4	Insulation of lamination	With insulation coating on both sides of the laminations	
18.5	Design flux density in the core at rated condition at principal tap, Tesla		
18.6	Maximum flux density allowed in the core at extreme overexcitation /overfluxing, Tesla	As per Cl. 35.0 of Annexure C	
18.7	Equivalent cross section area of core, mm ²	-	
18.8	Guaranteed No Load current at 100% / 110 % rated voltage , Amps(Max)	@ 100% - 0.5% of RFLC @ 110% - 1.0% of RFLC	
18.8.1	HV		
18.8.2	LV		
19.0	Type of Winding		
19.1	HV		
19.2	LV		
19.3	Conductor material	Electrolytic Copper as per relevant standard	
19.4	Maximum current density allowed , Amp per sqmm	As per Cl. 36.0 of Annexure C	
19.5	Gauge/area of cross section of conductor, sqmm		

19.5.1	a) HV		
19.5.2	b) LV		
19.6	Maximum Current density achieved in winding, Amp per sqmm		
19.7	Insulating material		
19.7.1	HV Turn		
19.7.2	LV Turn		
19.7.3	LV Core	-	
19.7.4	HV - LV	-	
19.8	Insulating material thickness, mm		
19.8.1	HV Turn		
19.8.2	LV Turn	-	
19.8.3	LV to Core		
19.8.4	HV to LV		
		-	
20.0	Minimum design clearance, mm		
20.1	HV to earth in Air		
20.2	HV to earth in oil		
20.3	LV to earth in Air		
20.4	LV to earth in oil	-	
20.5	Between HV & LV in Air		
20.6	Between HV & LV in oil		
20.7	Top winding and yoke	-	
20.8	Bottom winding and yoke		
21.0	Insulating oil		
21.1	Quantity of oil Ltrs	-	
21.1.1	In the Transformer tank		
21.1.2	In each radiator		
21.1.3	In OLTC chamber		
21.1.4	Total quantity		
21.2	10% excess oil furnished?	Yes	
21.3	Type of Oil	New insulating oil as per BSES Specification	
21.4	Oil preservation system provided (Yes / No)	As per Clause 4.2.7 of the specification	
22.0	Bushing		

22.1	Make	-	
22.2	Type		
22.3	Reference Standard		
22.4	Voltage class, kV		
22.4.1	HV side Bushing		
22.4.2	LV side line and neutral bushing		
22.5	Creepage factor for all bushing mm/KV	As per Cl. 38.0 of Annexure C	
22.6	Rated current, Amp.		
22.6.1	HV bushing		
22.6.2	LV line and neutral bushing		
22.7	Rated thermal short time current		
22.7.1	HV bushing	As per Cl. 38.0 of Annexure C	
22.7.2	LV line and neutral bushing	As per Cl. 38.0 of Annexure C	
22.8	Weight, Kg		
22.8.1	HV bushing		
22.8.2	LV line and neutral bushing		
22.9	Free space required for bushing removal, mm		
22.9.1	HV bushing		
22.9.2	LV line and neutral bushing		
23.0	Terminal connections		
23.1	HV	As per Cl. 15.1 of Annexure C	
23.2	LV	As per Cl. 15.2 of Annexure C	
23.3	LV Neutral	As per Cl. 15.3 of Annexure C	
24.0	H.V. Cable box / Terminals		
24.1	Suitable for cable / Conductor type , size	As per Cl. 15.4 of Annexure C	
24.2	Termination height, mm	1000 mm, minimum	
24.3	Gland Plate dimension, mm x mm		
24.4	Gland Plate material	Aluminium	
24.5	Gland Plate	5 mm minimum	

	Thickness, mm		
24.5	Phase to clearance inside box / terminals, mm		
24.6	Phase to earth inside box / terminals, mm		
25.0	L.V line side Cable box		
25.1	Suitable for cable type , size	As per Cl. 15.5 of Annexure C	
25.2	Termination height, mm	1000 mm, minimum	
25.3	Gland Plate dimension, mm x mm		
25.4	Gland Plate material	Aluminium	
25.5	Gland Plate Thickness, mm	5 mm minimum	
25.6	Phase to clearance inside box, mm		
25.7	Phase to earth inside box, mm		
26.0	L.V neutral Cable box		
26.1	Suitable for cable type , size	As per Cl. 15.6 of Annexure C and for accommodating NCT spec. as per Cl. 4.2.9 of spec. and Cl. 28.0 Of Annexure D	
26.2	Termination height, mm		
26.3	Gland Plate dimension, mm x mm		
26.4	Gland Plate material	Aluminium	
26.5	Gland Plate Thickness, mm	5 mm minimum	
26.5	Phase to clearance inside box, mm		
26.6	Phase to earth inside box, mm		
27.0	Marshalling box cubicle provided as per clause no		

	of spec. (Yes / No)					
27.1	Mounting of Marshalling box	Project specific to be filled up (Separate/ tank mounted)				
28.0	Neutral Current Transformer (NCT)					
28.1	Type					
28.2	Make					
28.3	Reference Standard					
28.4(a)	Neutral CT Ratio	33/11 kV 20/25 MVA, Dyn11		66/ 11 kV 20/25 MVA, Dyn11		
		Core 1	Core 2	Core 1	Core 2	
		1600 / 1 A	1600 / 1 A	1600 / 1 A	1600 / 1 A	
28.4 (b)		33/11 kV 25/31.5 MVA, Dyn11		66/ 11 kV 25/31.5MVA, Dyn11		
		Core 1	Core 2	Core 1	Core 2	
		1600-2000 / 1 A	1600-2000 / 1 A	1600-2000 / 1 A	1600-2000 / 1 A	
28.5	Burden, VA	-	20	-	20	
28.6	Class of Accuracy	PS	5P20	PS	5P20	
28.7	KPV, Volts, minimum	40(Rct +8	-	40(Rct+ 8	-	
28.8	Resistance, ohm @ 75 deg C, maximum	1.0	-	1.0	-	
28.9	Magnetizing current @ Vk/4, mA, maximum	30	-	30	-	
28.10	Short time withstand current	26.3 kA for 3 sec.				
29.0	Winding Current Transformer (WCT)					
29.1	Type					
29.2	Make					
29.3	Reference Standard					
29.4	CT Ratio	33 / 11 kV, 20/25 MVA & 25/31.5MVA		66 / 11 kV, 20/25 MVA & 25/31.5MVA		
	HV LV	As per requirement		As per requirement		
29.5	Burden, VA	Manufacturer Std.				
29.6	Class of Accuracy	Manufacturer Std.				

30.0	Pressure release device		
30.1	Minimum pressure the device is set to rupture		
30.1.1	For Main Tank		
30.1.2	For OLTC		
31.0	Alarm and Trip contact ratings of protective devices		
31.1	Rated / making/ breaking currents , Amp @ Voltage for		
31.1.1	PRV for main Tank		
31.1.2	PRV for OLTC		
31.1.3	Buchholz Relay		
31.1.4	Oil Surge relay for OLTC		
31.1.5	Sudden Pressure Relay		
31.1.6	OTI		
31.1.7	WTI		
31.1.8	Magnetic Oil Gauge		
32.0	Fittings Accessories Each Transformer furnished as per Clause No. (Bidder shall attach separate sheet giving details, make and bill of materials)		
33.0	Painting: as per clause for the transformer, cable boxes, radiator, Marshalling box etc (Yes/No)		
34.0	Over all transformer dimensions	20/25 MVA& 25/31.5MVA	
34.1	Length, mm	6.5 metres maximum	
34.2	Breadth, mm	5.0 metres maximum	

34.3	Height, mm	5.0 metres maximum	
35.0	Transformer Tank Dimensions		
35.1	Length, mm		
35.2	Breadth, mm		
35.3	Height, mm		
36.0	Marshalling Box dimensions		
36.1	Length, mm		
36.2	Breadth, mm		
36.3	Height, mm		
37.0	Weight data		
37.1	Core, kG		
37.2	Frame parts, kG		
37.3	Core and frame, kG		
37.4	Total Winding, kG		
37.5	Core , Frame, Winding, kG		
37.6	Tank, kG		
37.7	Tank lid, kG		
37.8	Empty conservator tank, kG		
37.9	Each radiator empty, kG		
37.10	Total weight of all radiators empty, kG		
37.11	Weight of oil in Tank, kG		
37.12	Weight of oil in Conservator, kG		
37.13	Weight of oil in each Radiators, kG		
37.14	Total weight of oil in Radiators, kG		
37.15	OLTC gear including oil, kG	-	
37.16	Total Transport weight of the transformer, kG		
37.17	Total weight of the transformer with OLTC and all accessories		
38.0	Volume Data		
38.1	Volume of oil in		

	main tank, litres		
38.2	Volume of oil between highest and lowest levels of main conservator, litres		
38.3	Volume of oil between highest and lowest levels of OLTC conservator, litres		
38.4	Volume of oil in each radiator, litres		
38.5	Total volume of oil in radiators, litres		
38.6	Volume of oil in OLTC, litres		
38.7	Transformer total oil volume, litres		
39.0	Shipping Data		
39.1	Weight of heaviest package, kG		
39.2	Dimensions of the largest package (L x B x H) mm		
40.3	Tests		
40.1	All in process tests confirmed as per Cl. (Yes/ No)		
40.2	All Type Tests confirmed as per Cl. (Yes / No)		
40.3	All Routine Tests confirmed as per Cl. (Yes/ No)		
40.4	All Special Tests confirmed as per Cl. (Yes/ No)		

Annexure F**Recommended spares (Data by supplier)**

List of recommended spares as following –

Sr No	Description of spare part	Unit	Quantity
1		No	
2		No	
3			
4			
5			
6			
7			

TECHNICAL SPECIFICATION

FOR

**GROUNDING & LIGHTNING PROTECTION
SYSTEM**

Prepared by	Pronab Bairagi				Rev: 2
Reviewed by	AS	Amit Tomar			Date: 27nd May, 2021
Approved by	VP				

Technical Specification Grounding and Lightning Protection

1.0 GROUNDING & LIGHTNING PROTECTION SYSTEM:

1.1 GROUNDING SYSTEM

Earthing Installation shall be carried out as per IS 3043/IEEE 80-2000/IEC-517. The Station Earth mat shall be designed to meet required minimum area of cross section, current Density, Resistance, Touch & Step voltage criteria's mathematically before installation and shall be tested after installation to ensure the resistance of earth mats to be less than 0.5 Ohms. Bare Earthmat conductors (Strips/ Rods) to be installed below the ground as per safe designed to spacing in a grid pattern. Each junction of the grid shall be bonded by an electric arc welding process. Each bond has to be painted by Anti corrosive Paint (Bitumen). All ground wires installed in conduits shall be insulated. Bare ground conductors shall penetrate concrete through a PVC Sleeve. Equipment shall be generally being furnished with two separate ground pads with tapped holes, bolts, nuts & spring washers etc. Metallic frame of all electrical equipment shall be earthed by two separate and distinct connections to earthing system, each 100% capacity. Steel Columns, metallic stairs, hand rails etc. of the building housing electrical equipment shall be connected to the nearby earthing grid conductor by one Earthing. Metallic Sheaths, Screens and armour of all multi core cables shall be earthed at both ends. Sheaths and armour of single core cables shall be earthed at switch gear end only

All ground wires installed in conduit shall be insulated. Bare ground wires shall penetrate concrete through a PVC sleeve.

Earthing of equipment shall generally be furnished with two separate ground pads with tapped holes, bolts, nuts and spring washers etc. Equipment ground connections, after being checked and tested shall be coated with anti-corrosive paint.

Metallic frame of all electrical equipment shall be earthed by two separate and distinct connections to earthing system, each of 100% capacity. Steel columns, metallic stairs, hand rails etc. of the building housing electrical equipment shall be connected to the nearby earthing grid conductor by one earthing. Metallic sheaths, screens, and armour of all multi core cables shall be earthed at both ends. Sheaths and armour of single core cables shall be earthed at switchgear end only unless otherwise instructed by Owner. Every alternate post of the metallic fence shall be connected to earthing grid by one GS flat and gates by flexible lead to the earthed post. Rail for transformers within the plant area shall be bonded across fish plate and connected to earthing grid at several locations.

For prefabricated cable trays, a separate ground conductor shall run along the entire length of cable tray and shall be suitably clamped on each cable tray at periodic intervals. Each continuous laid out lengths of cable tray shall be earthed at minimum two places by GS flats to Owner's earthing system, the distance between earthing points shall not exceed 30 metre. Wherever earthmat is not available Contractor shall do the necessary connections by driving an earth electrode in the ground.

Neutral points of transformer shall be solidly earthed by means of 2 Nos 75X10mm GI flat. Neutral Earth Electrode dimension shall be calculated by Long duration overloading of the

Technical Specification Grounding and Lightning Protection

Soil (i.e.) 40 A/sq.mtr as per IS 3043-1987 Clause 10.3.a Each earthing lead from the neutral of the Transformers shall be directly connected to two electrodes in treated earth pits which in turn shall be connected to station earthing grid.

Neutral connections and metallic conduits/pipes shall not be used for the equipment earthing. Lightning protection system down conductors shall not be connected to other earthing conductors above the ground level.

Connections between earth leads and equipment shall normally be of bolted type. Contact surfaces shall be thoroughly cleaned before connections.

All ground conductor connections shall be made by electric arc welding and all equipment earth connections shall be made by bolting with the earthing pads through flexible insulated cable leads. Ground connections shall be made from nearest available station ground grid risers. Suitable earth risers approved by Engineer shall be provided above finished floor/ground level, if the equipment is not available at the time of laying of main earth conductor

Resistance of the joint shall not be more than the resistance of the equivalent length of conductor. For rust protection the welds should be treated with red lead compound and afterwards thickly coated with bitumen compound.

Earthing conductors buried in ground shall be laid minimum 600 mm below grade level unless otherwise indicated in the drawing. Earthing conductor's crossings the road shall be installed at 1000 mm depth and where adequate earth coverage is not provided it shall be installed in Hume pipes. Earthing conductors embedded in the concrete floor of the building shall have approximately 50mm concrete cover.

Minimum earth coverage of 300mm shall be provided between earth conductor and the bottom of trench/foundation/underground pipes at crossings. Wherever earthing conductor crosses on runs at less than 300mm distance along metallic structures such as gas, water, steam pipe lines, steel reinforcement in concrete, it shall be bonded to the same.

Earthing conductors along their run on columns, walls, etc. shall be supported by suitable welding/cleating at interval of 750mm.

Electrodes shall be embedded below permanent moisture level. Minimum spacing electrodes shall be decided by calculation referred in IEEE-80 based on soil resistivity value .If soil resistivity is poor and desired reduction in ground resistance is not achieved by adding more Grid Conductor Earth pits shall be treated with Permanent maintenance free artificial treatment compounds as per IEEE 80-2000 Clause14.5d.

On completion of installation, continuity of earth conductors and efficiency of all bonds and joints shall be checked. Earth resistance at each termination shall be measured as per

Technical Specification Grounding and Lightning Protection

IEEE81-1983 (Wenner 3 point method). Earth resistance at earth terminations shall be measured in presence of Owner's representatives. Thickness of galvanizing shall be atleast 610gm/sq.m or 86 microns for all galvanized steel conductors.

- 1.2 The grounding/Earthing material shall be Terec++ or Marconite.
- 1.3 Earthing rods in RCC floor for GIS substation
- 1.4 Ground Electrode shall be 3M long MS rod of required size. These are to be fabricated and driven into the ground by the side of mat conductors. All connection to the conductors shall be done by arc welding process.
- 1.5 Risers are required for connecting the equipment and structures with the ground mat. These will be MS rod, laid from ground mat to above ground level properly clamped or supported along the outer edge of the concrete foundation. Connection to the ground mat shall be done by arc welding and the other end is to be kept free, at least 300 mm above ground level.
- 1.6 All steel Structures are required to be grounded at two points from ground mat. Laying supporting and connection at both end are within the scope of this specification.

All Earth Pits provided at the grid substation shall be interconnected with each other by MS Rod/Flat of adequate size as per symmetrical fault current.. The GI flat shall be buried in the earth at a minimum depth of 300 mm. Minimum ground coverage of 300mm shall be maintained between main earth grid and bottom of trench, tunnels, underground pipes other services / foundations. The earth grid conductor shall be run along the building column wall etc. with adequate and suitable supports at 750mm interval, if site conditions warrant so. The riser for equipment earthing shall be 75X10 mm GI flat. The orientation of these risers shall be such that minimum earthing strip is consumed for equipment earthing.

All the further joints / connection of GI Flat shall be arc welded.

- 1.7 To ensure good welding, it should be carried out only after scratching off the galvanization, dirt, grease etc by thorough cleaning of contact surface. After welding it will be made with anticorrosive zinc rich paint.

The equipment connection with GI Flat shall be bolted connection. Each bolted connection shall be taken through two numbers bolts at each joint to ensure tightness and avoid loosening with passage of time.

In case the GI flat is to cross any obstruction, it shall be laid below the obstruction. At the crossing of building walls, floors etc the earth conductor shall pass through PVC conduit. Both ends of conduits shall be sealed after laying of conductor to prevent ingress of water.

Contractor shall use GI strip of following specification: - The GI flat will have minimum 610 gm/mm² Zinc coating and minimum 86 microns thickness. The galvanization provided shall be as per IS 2629. The galvanized surface shall consist of a continuous and uniform thick coating of zinc, firmly adhering to the surfaces of steel. The finished surface shall be clean and smooth and shall be free from defects like discolored patches, bare spots, and unevenness of coating, spiky deposits, and blistered surfaces, flaking or peeling off.

Technical Specification Grounding and Lightning Protection

All hardware like bolts, nuts, spring and flat washers shall be galvanized; Stainless Steel or Zinc passivated shall be arranged by contractor.

1.7. Earthing Calculation parameters shall be taken as:

- 1) Duration of shock current in secs $t_s=1\text{sec}$.
- 2) Top Gravel resistivity shall be 3000 Ohm Meter.
- 3) Split Factor shall be considered as 1

2.0 EQUIPMENT EARTHING

All the equipment should be grounded with double run earth strip directly connected to earth mat at two different points.

2.1 The table provides the guidelines for Selection of Cross section of Earth conductor as per IEEE 80-2000 Clause 11.3.1 Equation 37 & Mild Steel as an Earth Conductor.

S. No	Fault current Level (KA)	Minimum Required Area of Cross Section (Sq.mm)
2.1.1	5	54
2.1.2	10	108
2.1.3	15	163
2.1.4	20	217
2.1.5	25	271
2.1.6	30	325
2.1.7	35	379
2.1.8	40	433

For various Equipments such as Power Transformer, Station Transformer, 11 KV Switch gear, 415V Panel, Light panel, Junction box, Street Lighting pole, Metallic fence, Isolator, Gantry tower & Electronic Earthing different cross sections of Earth conductor shall be selected as per the fault level. For switch gear rooms, a local earth conductor of adequate size of G.I flat may be run around the room below floor level to facilitate earthing of equipments in switchgear room.

Technical Specification Grounding and Lightning Protection

2.2 However the table below provides general guidelines for selection of Earth Conductor for each Equipment

2.2.1	Description/location	Size
2.2.2	Earth mat	40 mm (min) to be selected by the contractor based on the calculations.
2.2.3	Power Transformer	100 X 8mm
2.2.4	Station transformer	50x6mm
2.2.5	11KV Switchgear	50x6mm
2.2.6	415V panel	50x6mm
2.2.7	Lighting panel	25x3 mm
2.2.8	Junction box	7/8 SWG
2.2.9	Street lighting pole	25x3 mm
2.2.10	Metallic fence	25x3 mm
2.2.11	Transformer yard fence and gate	50x6 GI flat with the help of flexible copper braid.
2.2.12	HV/LV/ LV Neutral cable box	50x6 GI flat
2.2.13	OLTC Drive mechanism body	25X3 GI flat
2.2.14	Battery charger panel	25X3 GI flat
2.2.15	DCDB	25X3 GI flat
2.2.16	Capacitor Bank Structure	50 X 6 GI flat
2.2.17	Capacitor unit and reactors	50 x 6 GI flat
2.2.18	Outdoor Circuit breaker, CT, PT & CVT	50 X 6
2.2.19	Secondary terminal Box of outdoor CT, PT & CVT	25 X 6 mm
2.2.20	Isolator Mechanism box, earth switch box	25 X 6 mm
2.2.21	Gantry tower and structure	75 X 10 mm
2.2.22	Earthing Strip along with Cable Tray	50x6
2.2.23	Electronic Earthing	Separate design and installation for all communication devices and electronic equipments including SCADA RTU, MOXA, Router/Switch. As per recommendation of SCADA vendor

Technical Specification Grounding and Lightning Protection

	Power Transformer Neutral earthing	75x10 sqmm
--	------------------------------------	------------

The most stringent size of conductor among the two tables above shall be selected

- 2.3** For switchgear rooms, a local earth conductor of size 50x 6 mm GI flat may be run around the room below floor to facilitate earthing of equipments in switchgear room. This grid shall be connected to the main earth grid at minimum two points. Size of the conductor shall be selected considering the provisions in clause 2.1 and 2.2 above.
- 2.4** It is to be ensured that all the switchgears and transformers earth points/ connections are connected to earth grid and all the main and auxiliary earth grids are interconnected at minimum two points. With the above arrangement, the return path to the respective transformer neutral will have a predominantly metallic path. (i.e. Cable armour >>switchgear earth bus>>external earth flat>>earth grid>>transformer neutral.).
- 2.5** Where a 66 kV overhead line terminates at the substation, a metallic continuity between the end tower and the substation earth grid should be established with two independent connections.
- 2.6** The GI Flat shall be laid minimum 300 mm below the ground level but for the indoor location, it shall be embedded in the concrete floor; 50mm below the FFL.
- 2.7** The GI flat shall be welded after scratching off the galvanization locally and thorough cleaning of contact surface. After welding or bolting arrangement the joint shall be provided with anticorrosive Bitumen compound or zinc Phosphate paint. Wherever bolted connection is taken, it shall be taken through two bolts at each joint to ensure tightness and avoid loosening with passage of time.
- 2.8** Details of welding, bolting arrangement for various types of joints shall be as per Indian Standard.
- 2.9** Two separate and distinct earth connections shall be used for safety earthing of non-current carrying metallic enclosure of all equipments.
- 2.10** Two separate and distinct earth connections shall be used for earthing of Lightning / surge absorber.
- 2.11** Neutral bushing of oil/dry type Station transformer shall be connected to two independent earth pits by two no's separate GI strips.
- 2.12** Transformer yard fence, structures shall also be connected with the earth mat by 50X6 GI Flat with the help of flexible copper braid.
- 2.13** All damages to the galvanized finishes shall be made perfect with zinc rich or bitumen paint.

Technical Specification Grounding and Lightning Protection

- 2.14** RTU, marshalling box of SCADA or any other equipment installed in substation for SCADA shall not be connected to the earth grid, it shall be connected to separate two earth pits connected at two separate points of the panel.

3.0. LIGHTNING PROTECTION

DESIGN OF LIGHTNING PROTECTION

- 3.1** Direct stroke lightning protection (DSLPP) shall be provided in the EHV switchyard by shield wires. The final arrangement shall be decided after approval of the DSLPP calculations. The Contractor is required to carry out the DSLPP calculations and submit the same to the Owner for approval of the same at detailed engineering stage after award of contract.
- 3.2** The lightning protection system shall not be in direct contact with underground metallic service ducts and cables.
- 3.3** A 40 mm dia. 3000mm long MS earth electrode with test links, CI frame & Cover shall be provided to connect down conductor of towers with peak. The test joint shall be directly connected to the earthing system.
- 3.4** Conductors of the lightning protection system shall not be connected with the conductors of the safety earthing system above ground level.
- 3.5** Down conductors used for lightning protection shall be cleated on the structures at 2000mm interval.
- 3.6** Connection between each down conductor and rod electrodes shall be made via test joint (pad type compression clamp) located approximately 150 mm aboveground level.
- 3.7** Lightning conductors shall not pass through or run inside G.I. conduits.
- 3.8** All metallic structures within a vicinity of 2000 mm in air and 5000mm below ground shall be bound to the conductors of lightning protection system.
- 3.9** In addition to Earth wires above the EHV switchyard, ESE Lightning conductor shall provides zone of Protection. Snapping of Earth wire does not make accidental situations during Lightning.
- 3.10** This ESE Lightning Protection system requires an Air terminal, down conductor, Lightning Counter & an Earthing System. If the structure is more than 30m height then 2 no's of down conductor shall be used for side flashing. The Earthing system should not exceed more than 10Ω.
- 3.11** A 40mm dia M.S Earth Electrodes with Test Links, HDPE Cover shall be provided to connect down conductor. The test Link shall be directly connected to earthing system
- 3.12** Conductors of Lightning Protection system shall not be connected with conductors of Safety earthing system above ground level. Lightning Earth Pits shall be connected other earthing conductor below ground level by using Equipotential bonds which will not allow Surge current to flow from Lightning pits to other Earth pits

Technical Specification Grounding and Lightning Protection

3.13 Connection between each down conductor & Test link shall be located approximately 2000mm above ground Level.

3.14 The Down conductor should be high conductivity bare copper tape with minimum size of 75 Sq.mm

3.15 Constructional Features

3.15.1 Galvanized Steel (Applicable for exposed G.S. flats)

- a) Steel conductors shall be galvanized according to IS: 2629.
- b) The minimum weight of zinc coating shall be 610gm/sq. m. and minimum thickness shall be 86 microns.
- c) The galvanized surfaces shall consist of a continuous and uniformly thick coating of zinc, firmly adhering to the surfaces of steel. The finished surface shall clean and smooth and shall be free from defects like discolored patches, bare spots, unevenness of coating, spelter which is loosely attached to the steel globules, spiky deposits, blistered surfaces, flaking or peeling off etc. The presence of any of these defects noticed on visual or microscopic inspection shall render the material liable to rejection.

3.16 Tests

3.16.1 The Contractor shall perform all tests and inspection to ensure that material and workmanship are according to the relevant standards. Contractor shall have to demonstrate all tests as per specification and equipment shall comply with all requirements of the specification.

- a) The galvanized steel shall be subjected to four one-minute dips in copper sulphate solution as per IS: 2633.
- b) Zinc Coating thickness : As per IS: 4759
- c) Uniformity of zinc coating : As per IS: 2633
- d) Adhesion Test : As per IS: 2629
- e) Mass of zinc coating : As per IS: 6745
- f) Chemical Analysis: As per IS: 513 & IS: 1079

3.16.2 The accessories for GSS Groundwire such as Tension Clamps, Copper braided wire etc. shall conform to & meet the test requirements of IS: 2121.

Technical Specification Grounding and Lightning Protection

4.0. DEVIATIONS

Deviation from this specification, if any, shall be clearly brought out in the offer. Unless owner explicitly accepts such deviations, it shall be considered that the offer fully complies with the specification.



**Technical Specification for
LT POWER CABLE WITH FRLS OUTER SHEATH
(Single & Multi-Core)**

Specification no – SP-EWLP-01-R5

Prepared By		Reviewed By		Approved By		Rev /Pa ges	Date
Name	Sign	Name	Sign	Name	Sign		
Rohit Patil		Amit Tomar		K. Sheshadri		R5/ 22	02.03.2020

TECHNICAL SPECIFICATION OF LT POWER CABLE

INDEX

Contents

RECORD OF REVISION	3
1.0 SCOPE OF SUPPLY	4
2.0 CODES & STANDARDS	4
3.0 CABLE DESIGN	6
4.0 CABLE DRUM	7
5.0 PACKING , SHIPPING , HANDLING & STORAGE.....	8
6.0 QUALITY ASSURANCE , TESTING & INSPECTION	9
7.0 DRAWING, DATA & MANUALS	10
8.0 PROGRESS REPORTING	10
9.0 DEVIATION	11
10.0 TECHNICAL PARTICULARS	12
11.0 ANNEXURE – A.....	13
12.0 ANNEXURE – B.....	14
13.0 ANNEXURE- C.....	18
14.0 ANNEXURE – D.....	21
15.0 ANNEXURE – E	22

TECHNICAL SPECIFICATION OF LT POWER CABLE

RECORD OF REVISION

Sr. No.	Revision No.	Item/Cl. No.	Nature of Change	Approved By
1	R2	2.0	National & International Standards added	VP
2	R2	3.6 (c)	UV resistance test shall be carried out on all size of cable	VP
3	R2	6.4	Type tests Cl. Changed.	VP
4	R2	4.1 & 4.2	Cable Drum as per IS 10418	VP
5	R2	4.3	For 2C X 10 mm ² cable drum length – 1000 +/- 5% Mtr	VP
6	R3	ANNEXTUE- C	New size cable added 1.1 kV 1CX1000 mm ²	KS
7	R4	3.6	Drum number laser printing on every meter of cable outer sheath	KS
8	R5	2.0	National & International Standards added	KS
9	R5	3.6	FRLS outer sheath	KS
10	R5	3.9	FRLS outer sheath properties	KS
11	R5	6.5	Acceptance Test	KS
12	R5	Annexure-E	Sub vendor list	KS

Prepared By

Reviewed By

Approved By

Rohit Patil

Amit Tomar

K. Sheshardri

TECHNICAL SPECIFICATION OF LT POWER CABLE

1.0 SCOPE OF SUPPLY

The specification covers design, manufacture, shop testing, packing and delivery of 1100 Volts grade, Aluminium conductor XLPE insulated multi core power cables.

2.0 CODES & STANDARDS

The cables shall be designed, manufactured and tested in Accordance with the following Indian & IEC standards.

2.1	IS- 7098 (Part-1)	Cross linked polyethylene insulated PVC sheathed cables for working voltages upto and including 1100V.
2.2	IS- 6474	Polyethylene insulation & sheath of electric cables.
2.3	IS- 5831	PVC insulation and sheath of electrical cables.
2.4	IS : 10810	Methods of tests for cables.
2.5	IS : 8130	Conductors for insulated electrical cables and flexible cords.
2.6	IS : 3975	Low carbon galvanized steel wires, formed wires and tapes for armouring of cables.
2.7	IS- 4026	Aluminum ingots, billets and wire bars (EC grade)
2.8	IS-5484	EC Grade aluminium rod produced by continuous casting and rolling
2.9	IS : 10418	Specification for drums for electric cables.
2.10	IS : 3961	Recommended current ratings for cables.
2.11	IS:1255	Installation and Maintenance of power cables upto and including 33 kV rating.
2.12	IS:4826	Specification for hot-dipped galvanized coatings on round steel wires
2.13	IS:1717	Metallic Materials – Wire – Simple torsion test
2.14	IEC 60228	Conductors of insulated cables. Guide to the dimensional limits of circular conductors.
2.15	IEC 60331	Fire resisting characteristics of electric cables.
2.16	IEC 60332 – 3	Tests on electric cables under fire conditions. Part 3: Tests on bunched

TECHNICAL SPECIFICATION OF LT POWER CABLE

		wires or cables.
2.17	IEC 60502	Extruded solid dielectric insulated power cables for rated voltages from 1kV to 30 kV.
2.18	IEC 60754 – 1	Test on gases evolved during combustion of materials from cables. Part 1: Determination of the amount of halogen acid gas evolved during combustion of polymeric material taken from cables.
2.19	IEC 60811	Common test methods for insulating and sheathing materials of electric cables
2.20	IEC 60885	Electric test methods for electric cables
2.21	IEC 60304	Standard colours for insulation for low frequency cables and wires.
2.22	IEC 60227	PVC insulated cables of rated voltages up to and including 460/760 V.
2.23	IEC 1034	Measurement of smoke density of electric cables burning under defined conditions
2.24	ASTMD 2843 (R5)	Standard Test Method for density of Smoke from the burning or decomposition of cables
2.25	ASTM 2863 (R5)	Standard Test Method for measuring of minimum oxygen concentration
2.26	IEC 60754-1 (R5)	Test on gases evolved during combustion of materials for cables. Part 1 – Determination of the Halogen Acid gas Content
2.27	IS 1554 part 1	Specification for PVC insulated (Heavy duty) Electric cable

TECHNICAL SPECIFICATION OF LT POWER CABLE

3.0 CABLE DESIGN

Description of each item mentioned in the specification (the text, BOQ, GTP or any site specific requirement) shall be followed along with IS: 7098 – P1

3.1	Conductor	<div>a) Electrolytic Grade Stranded Aluminium Conductor</div> <div>b) Grade : H2 as per IS: 8130/1984</div> <div>c) Class 2</div> <div>d) Chemical Composition as per IS 4026</div> <div>e) Shape & Size:</div> <table><tr><th>S.no.</th><th>Shape</th><th>Single core</th><th>Multi core</th></tr><tr><td>1</td><td>Compacted Circular</td><td><div>• 1cx300</div><div>• 1cx630</div><div>• 1cx1000</div></td><td>2cx10</td></tr><tr><td>2</td><td>Sector</td><td>---</td><td><div>• 2cx25</div><div>• 4cx25</div><div>• 4cx50</div><div>• 4x150</div></td></tr></table>	S.no.	Shape	Single core	Multi core	1	Compacted Circular	<div>• 1cx300</div> <div>• 1cx630</div> <div>• 1cx1000</div>	2cx10	2	Sector	---	<div>• 2cx25</div> <div>• 4cx25</div> <div>• 4cx50</div> <div>• 4x150</div>
S.no.	Shape	Single core	Multi core											
1	Compacted Circular	<div>• 1cx300</div> <div>• 1cx630</div> <div>• 1cx1000</div>	2cx10											
2	Sector	---	<div>• 2cx25</div> <div>• 4cx25</div> <div>• 4cx50</div> <div>• 4x150</div>											
3.2	Insulation	Extruded XLPE as per IS : 7098 part-1												
3.3	Core Identification	As per Cl.10 of IS 7098 part-1												
3.4	Inner Sheath	For 1.1 kV 2CX10 , 2CX25 Pressurized Extruded For other cable Extruded Inner Sheath of black PVC type ST-2 (IS 5831-1984)												
3.5	Armour	<div>a) For 2C X 10 mm² – Galvanized Steel round wire.</div> <div>b) For all sizes above 10 mm²-Galvanized Steel Strip</div> <div>c) Not applicable for single core cables of size 300 , 500 , 630 & 1000 mm²</div> <div>d) Minimum area of coverage of armouring shall be 90%</div> <div>e) The breaking load of armour joint shall not be less than 95% of that armour wire / strip</div> <div>f) Zero negative tolerance for thickness of armour strip shall be as per IS:3975</div> <div>g) Zinc rich paint shall be applied on strip/wire and its joint surface.</div>												
3.6	Outer Sheath	<div>a) Extruded FRLS (R5)outer sheath of PVC (ST-2) shall be as per IS:5831</div> <div>b) Colour : Yellow (For multi core cables)</div>												

TECHNICAL SPECIFICATION OF LT POWER CABLE

		<p>Black (For single core 300,500, 630 & 1000 mm²)</p> <p>c) FRLS(R5) Outer sheath of all the LT cables shall be UV resistant; as these cables are laid in air exposed to sun. Bidder to ensure the same for these requirements supported by required test.</p> <p>d) Shape of the cable over the outer sheath shall be circular, when manufactured/completed.</p> <p>e) The FRLS (R5) outer Sheath shall be embossed with following minimum text:</p> <ul style="list-style-type: none"> i) The voltage designation ii) Type of construction /cable code (For e.g. A2XWY/A2XFY) iii) Manufacture name/Trade mark iv) Number of Cores and nominal cross section area of conductor v) Name of buyer i.e BRPL (BSES Rajdhani Power Ltd.) vi) Month & year of manufacturing vii) IS reference , i.e. IS:7098 viii) P.O No. and Date ix) Font size shall be 5/5mm x) ISI mark <p>The embossing shall be progressive, automatic, in line and marking shall be legible and indelible.</p> <p>Following points shall be laser printed on every meter of cable</p> <ul style="list-style-type: none"> i. Progressive (Sequential) length of cable at every meter, starting from zero for every drum. Colour filled in for the progressive marking, shall be with proper contrast in colouring. ii. Drum number marking on every meter of the cable length
3.7	Bending Radius	Bending Radius of cable shall comply to IS:1255
3.8	Sealing of cable end	Both ends of the cable shall be sealed by means of non-hygroscopic heat shrinkable HDPE caps
3.9	FRLS Properties (R5)	<p>Oxygen Index : Not less than 29% as per ASTM 2863</p> <p>Temperature Index : 250 Deg C at Oxygen Index 21 (when tested as per ASTM D 2863)</p> <p>Max Acid Gas Generation – Not more than 20% as per IEC -60754-1</p> <p>Light Transmission - Minimum 40% when tested as per ASTM D 2843 (Smoke Density rating shall be max 60%)</p> <p>Flammability Test – As per IEC 60332-III, Cat – B, IEC 60332- I, IS- 10810 – Part 53, IS:10810 – Part 61 & 62 (Category A)</p>

4.0 CABLE DRUM

4.1	Reference Standard	Cable drum shall comply with IS: 10418.
4.2	Type of Drum	Wooden drums with anti termite treatment.

TECHNICAL SPECIFICATION OF LT POWER CABLE

		(The drums shall be provided with M.S spindle plate and nut-bolts arrangement as per IS : 10418)
4.3	Drum Length & Tolerance	For 1.1 KV 2C X 10 mm ² Cable - 1000+/-5% Mtr For all size above 10 mm ² Cables - 500 +/-5% Mtr
4.4	Overall Tolerance	-2 % for the total cable length for the entire order.
4.5	Short Length of Cable	a) Minimum Acceptance short length shall be 1% of the total ordered quantity and no length shall be less than 500 mtrs for 2C X 10 mm ² cable & 250 mtr for all sizes above 10 mm ² . Manufactures shall be taken prior approval from BRPL Engineering for any short length supply. Short length will be accepted in last lot. b) Manufacture shall not be allowed to put two cable pieces of different short length in same cable drum
4.6	Preventive Measure for cable Drum	a) The surface of the drum and outer most cable layer shall be covered with water proof layer b) Ferrous part of wooden drum shall be treated with suitable rust preventive paint/coating to minimize rusting during storage.
4.7	Drum Identification Labels	a) Drum identification number b) Cable voltage grade c) Cable code (eg. A2XFY/A2XWY) d) Number of cores and cross sectional area e) Cable quantity i.e cable length (Meters) f) Purchase order number, date & SAP item code g) Total weight of cable and drum (kg) h) Manufacture's and Buyer's name i) Month & year of manufacturing j) Direction of rotation of drum; an arrow and suitable accompanying wording shall be marked on one end of the reel indicating the direction in which it should be rolled. k) Cable length final end-marking (i.e reading at the inner end and reading at the outer end, just before packing shall be marked on the drum.

5.0 PACKING , SHIPPING , HANDLING & STORAGE

5.1	Shipping information Plan	The seller shall be give complete shipping information concerning the weight ,size of each package
5.2	Transit Damage	The seller shall be held responsible for all transit damage due to improper packing/inside cable damaged found in store/site
5.3	Cable Drum Handling	The drum shall be with M.S spindle plate(with nut –bolts) of adequate size to suit the spindle rod , normally required for handling the drums ,

TECHNICAL SPECIFICATION OF LT POWER CABLE

according to expected weight of the cable drums as per IS:10418

6.0 QUALITY ASSURANCE ,TESTING & INSPECTION

All the tests shall be carried out in accordance with IEC / IS standards.

6.1	Quality Assurance Plan	As per Annexure – E. In event of order Manufacturer has to Submit the signed copy of QAP.
6.2	Inspection hold points	AS per QAP
6.3	Routine Test	a) Measurement of Electrical Resistance b) HV test with power frequency AC voltage
6.4	Type Test	(a) Cables must be of type tested quality. Type test reports shall be submitted for the type, size and rating of cable offered along with bid. Type test shall not be more than 5 years old. In the event of type test being older than 5 years, bidder has to conduct the same at CPRI/ERDA, approved Lab without commercial implication to BRPL (b) Bidder supplying cable to BRPL for the first time shall have to conduct type test, Chemical Composition & UV resistance test on sample randomly selected from lot in event of order from CPRI/ERDA. (c) UV resistance test to be carried out on one sample from CPRI/ERDA/NABL Accredited Lab as per ASTM standard (sample shall meet minimum 80% retention after exposure of 21 days as per ASTM standard).
6.5	Acceptance Test (Shall be conducted as per Cl.15.2 of IS 7098 Part-1 & IS 1554 part 1 for each lot of cable)(R5)	a) For cable sizes up to 50 mm ² – one sample for chemical composition and purity test of aluminium shall be conducted upto r 100km of ordered quantity and multiple thereof. b) For cable sizes above 50 mm ² – one sample for chemical composition and purity test of aluminium shall be conducted upto 50km of ordered quantity and multiple thereof. c) Chemical composition and purity test of aluminium shall be conducted from the lot offered to BRPL on each size involved in the purchase order. Test shall carried out at NABL accredited third party lab without any price implication to BRPL.

TECHNICAL SPECIFICATION OF LT POWER CABLE

		d) The sample will be selected either during acceptance test or after receipt of cable in BRPL Stores.
6.6	Inspection	<p>a) The buyer reserves the right to witness all tests specified on completed cables</p> <p>b) The buyer reserves the right to inspect cables at the seller's works at any time prior to dispatch either in finished form or during manufacturing, to prove compliance with the specifications.</p> <p>c) In-process and final inspection call intimation shall be given in 10 days advance to purchaser/CES.</p>
6.7	Test Certificates	Complete test certificates (routine & acceptance tests) need to be submitted along with the delivery of cables.

7.0 DRAWING, DATA & MANUALS

7.1	To be submitted along with bid	<p>The vendor has to submit:</p> <p>a) Cross section drawing of cable</p> <p>b) Completely filled GTP</p> <p>c) Type test certificates</p> <p>d) Complete cable catalogue and manual along with the bid</p> <p>e) Copy of BIS licence</p>
7.2	After award of contract	Within 7 days, the seller has to submit four sets of above mentioned drawings for buyer's approval along with the signed copy of QAP (Annexure – E).
7.3	Final As Built	6 sets hardcopy + One Soft copy of all documents including type test certificates

8.0 PROGRESS REPORTING

8.1	Outline Document	To be submitted for purchaser approval for outline of Production-inspection, testing-inspection, packing, dispatch, documentation programme.
8.2	Detailed Progress Report	<p>To be submitted to purchaser once a month containing</p> <p>(i) Progress on material procurement</p>

TECHNICAL SPECIFICATION OF LT POWER CABLE

		(ii) Progress on fabrication (As applicable) (iii) Progress on assembly (As applicable) (iv) Progress on internal stage inspection (v) Reason for any delay in total programme (vi) Details of test failures if any in manufacturing stages. (vii) Progress on final box up constraints/forward path.
--	--	--

9.0 DEVIATION

- a) Deviations from this specification shall be listed separately by bidder clause wise (format given below) along with optional offer and has to submit the list along with bid/quotation. BRPL will review the deviations and if BRPL is agreed with the deviation, seller has to take written confirmation from BRPL on deviation during tender evaluation.
- b) In the absence of any separate list of deviations from the bidders with bid as well as written confirmation from BRPL on deviations, it will be assumed by the Buyer that the Seller complies with the Specification fully.
- c) Any deviations mentioned in any other submitted bid documents (i.e.in filled GTP, Catalog, BRPL old approval, buyer's/seller's standards etc) by seller without separate deviation sheets will not consider as a deviation from this tech spec at any stage of contract.

Deviation sheet format.

Sl. No.	Document Name	Clause No.	Deviation	Reason	Merit to BRPL

TECHNICAL SPECIFICATION OF LT POWER CABLE

10.0 TECHNICAL PARTICULARS

- a. GTP - As per Annexure-B for Multi-core cables.
- b. GTP - As per Annexure-C for Single-core cables (300, 500, 630 & 1000 mm² cables).
- c. Armour Coverage Percentage – As per Annexure-D.
- d. Quality Assurance Plan – As per Annexure-E.
- e. List of sub-vendors for Raw Material – As per Annexure-F.

TECHNICAL SPECIFICATION OF LT POWER CABLE

11.0 ANNEXURE – A

SCOPE & PROJECT SPECIFICATION DETAILS

1.0.0 Scope

1.0.0	Scope	Design, manufacture, testing & supply of L.T Power Cables.
2.0.0	Delivery Schedule	To be filled up as per purchase requisition.

2.0.0 Document Submission

Submission of drawings, calculations, catalogues, manuals, test reports shall be as follows

	Along with offer	For Approval after award of contract	Final after approval	Remarks
Drawings	2 copies (Typical Drawings)	2 Copies	2 Copies + 1 soft copy in CD	See Clause 7.0 for details of required drawings
Calculations	2 Copies (Typical)	2 Copies		
Catalogues	1 Copy			
Type Test Report	2 Copies			Type test and sample routine test reports

TECHNICAL SPECIFICATION OF LT POWER CABLE
12.0 ANNEXURE – B
GUARANTEED TECHNICAL PARTICULARS (Multi-core)

(Standard Cable sizes are 2c x10, 2c x25, 4c x25, 4c x50, 4C X 95, 4c x150, 4cx300)

For each size /rating separate GTP need to be furnished

Sr. No.	Description	Buyer's Requirement	Seller's data
	Manufacture Contact Person & Number		
	Purchase Req. No.	
	Guarantee Period: (Min)	60 Months (from date of commissioning) / 66 months (from date of receipt at purchaser's store) whichever is earlier	
	Applicable IS / IEC Standard followed by vendor	As mentioned in the clause no – 2.0	
1	Make	...	
2	Type (as required by purchaser)		
A	For 2CX10Sqmm	A2XWY	
B	For Sizes above 10 mm ²	A2XFY	
3	Voltage Grade (kV)	1.1	
4	Maximum Conductor temperature		
A	Continuous	90°C	
B	Short time	250°C	
5	Conductor		
A	Material and Grade	As per Cl.3.1	
B	Make of Al	Ref Annexure E	
C	Size (mm ²) mm ²	
D	Min no. of wires in each conductor (Nos.)	As per Manufacturer Standard	
E	Min Dia. of wires in each conductor before compaction (mm)	As per Manufacturer Standard	

TECHNICAL SPECIFICATION OF LT POWER CABLE

F	Shape of Conductor	As per Cl.3.1 (e)	
G	Diameter over conductor (mm)	
H	Maximum Conductor resistance at 20 ° C (Ohm/Km)	As per Table 2 of IS 8130	
6	Insulation		
A	Insulation Material	As per Cl. 3.2	
B	Nominal thickness (mm)	As per Table 3 of IS 7098 Part-1	
C	Diameter over Insulation (mm) Approx.	
D	Make of insulation compound	Ref: Annexure E	
7	Inner Sheath		
A	Material and Type	As per Cl. 3.4	
B	Minimum thickness	As per Table 5 of IS 7098 Part-1	
C	Approx. dia. Over sheath (mm)	
8	Galvanized Steel Armour	as per purchaser's site - specific condition	
A	Material		
a)	For 2CX10 mm ²	G.I.Wire	
(i)	Wire Dia (mm)	1.4+/-0.040	
(ii)	No. of wires	As per Manufacturer Standard	
b)	For sizes above 10 mm ²	G.I.Strip	
(i)	Strip size (Width and Thickness)	4x0.8 (Zero negative tolerance for thickness)	
(ii)	No. of Strips	As per Manufacturer Standard	
B	Area covered by Armour	Min 90% and calculations shall be strictly as per Annexure D	
C	Dia. over Armour – Approx.(mm)	
9	Outer Sheath (FRLS)		
A	Material and Type	As per Cl. 3.6	

TECHNICAL SPECIFICATION OF LT POWER CABLE

B	Minimum Thickness	As per Table 8 of IS 7098 Part-1	
C	Colour	Yellow	
D	Embossing Details	As per Cl.3.6 (f)	
10	Approx. overall dia. (mm)	
11	Overall order tolerance	- 2 % for the total cable length for the entire order	
12	Cable Drum		
A	Type of Drum	Wooden	
B	Drum Length & tolerance	As per Spec. Cl. 4.3 & 4.4	
C	Marking on Drum	As per Spec. Cl. 4.7	
D	Drums provide with MS Spindle plate & nut bolts arrangement (as per IS:10418)	Required	
13	End Cap	Required	
14	Weights	
a)	Net Weight of cable (Kg/Km.) – Approx		
b)	Weight of empty drum	Kg	
c)	Weight of cable with drum	Kg	
15	Continuous current rating for standard I.S condition laid direct		
a)	In ground 30° C	Amps	
b)	In duct 30° C	Amps	
c)	In Air 40° C	Amps	
16	Short circuit current for 1 sec of Conductor (kAmp)	
17	Electrical Parameters at Maximum operating temperature:		
A	AC Resistance	Ohm/Km	
B	Reactance at 50 C/s	Ohm/Km	
C	Impedance	Ohm/Km	
D	Capacitance	Micro farad / Km	
18	Recommended minimum bending radius x O/D	

TECHNICAL SPECIFICATION OF LT POWER CABLE

19	Derating factor for following Ambient temperature in	Ground / Air	
a)	At 30° C		
b)	At 35° C		
c)	At 40° C		
d)	At 45° C		
e)	At 50° C		
20	Group factor for following Nos. of cables laid	Touching / Trefoil	
a)	3 Nos.		
b)	4 Nos.		
c)	5 Nos.		
d)	6 Nos.		
21	Process of Cross linking of Polyethylene	Dry/ Sioplas Cure	
22	Type test	Is copy of latest valid TTR for respective Sizes enclosed? Yes / No	
23	FRLS Properties (R5)	As per IS 1554, Part-1	
	Oxygen Index	As per IS 1554, Part	
	Temperature Index	As per IS 1554, Part	
	Max Acid Gas Generation	As per IS 1554, Part	
	Light Transmission / Smoke Density	As per IS 1554, Part	

TECHNICAL SPECIFICATION OF LT POWER CABLE
13.0 ANNEXTURE- C

GUARANTEED TECHNICAL PARTICULARS (Single Core)

 (Separate GTP needs to be furnished for 300, 500, 630 & 1000 mm² cables)

S.No.	Description	Buyer's Requirement	Seller's data
	Manufacture Contact Person & Number		
	Purchase Req. No.	
	Guarantee Period: (Min)	60 Months (from date of commissioning) / 66 months (from date of receipt at purchaser's store) whichever is earlier	
	Applicable IS / IEC Standard followed by Vendor	As mentioned in the clause no-2.0	
1	Make	
2	Type	A2XY (Un-armoured)	
3	Voltage Grade (kV)	1.1kV	
4	Maximum Conductor temperature		
A	Continuous	90°C	
B	Short time	250°C	
5	Conductor		
A	Material and Grade	As per Cl.2.1.1	
B	Size (mm ²)	300 / 500 / 630 / 1000 mm ²	
C	Min no. of wires in each conductor (Nos.)	As per Manufacturer Standard	
D	Min Dia. of wires in each conductor before compaction (mm)	As per Manufacturer Standard	
E	Shape of conductor	Compacted Circular	
F	Diameter over conductor (mm)	
G	Maximum Conductor resistance at 20 ° C (Ohm/Km)	As per Table 2 of IS 8130	
H	Make of Al	Ref Annexure E	
6	Insulation	As per Table 3 of IS 7098	

TECHNICAL SPECIFICATION OF LT POWER CABLE

		Part-1	
A	Insulation Material	As per Cl. 3.2	
B	Nominal thickness (mm)		
(i)	For 1Cx300 mm ²	1.8 mm	
(ii)	For 1Cx500 mm ²	2.2 mm	
(iii)	For 1Cx630 mm ²	2.4 mm	
iv)	For 1Cx1000 mm ²	2.8 mm	
C	Diameter over Insulation (mm) Approx.	
D	Make of insulation compound	Ref: Annexure E	
7	Inner Sheath	Not applicable	
8	Armour	Not applicable	
9	FRLS Outer Sheath (R5)		
A	Material and Type	As per Cl. 3.6	
B	Minimum Thickness	As per Table 8 of IS 7098 Part-1	
C	Colour	Black	
D	Embossing Details	As per Cl.3.6 (f)	
10	Approx. overall dia. (mm)	
11	Overall order tolerance	-2 % for the total cable length for the entire order	
12	Cable Drum		
A	Type of Drum	Wooden	
B	Drum Length & tolerance	As per Spec. Cl. 4.3 & 4.4	
C	Marking on Drum	As per Spec. Cl. 4.7	
D	Drums provide with MS Spindle plate & nut bolts arrangement (as per IS:10418)	Required	
13	End Cap	Required	
14	Weights	
a)	Net Weight of cable (Kg/Km.) – Approx		
b)	Weight of empty drum	Kg	
c)	Weight of cable with drum	Kg	
15	Continuous current rating for standard I.S condition laid direct		


TECHNICAL SPECIFICATION OF LT POWER CABLE

a)	In ground 30° C	Amps	
b)	In duct 30° C	Amps	
c)	In Air 40° C	Amps	
16	Short circuit current for 1 sec of Conductor (kAmp)	
17	Electrical Parameters at Maximum operating temperature:		
A	AC Resistance	Ohm/Km	
B	Reactance at 50 C/s	Ohm/Km	
C	Impedance	Ohm/Km	
D	Capacitance	Micro farad / Km	
18	Recommended minimum bending radius x O/D	
19	Derating factor for following Ambient temperature in	Ground / Air	
a)	At 30° C		
b)	At 35° C		
c)	At 40° C		
d)	At 45° C		
e)	At 50° C		
20	Group factor for following Nos. of cables laid	Touching / Trefoil	
a)	3 Nos.		
b)	4 Nos.		
c)	5 Nos.		
d)	6 Nos.		
21	Process of Cross linking of Polyethylene	Dry/ Sioplas Cure	
22	Type test	Is copy of latest valid TTR for respective Sizes enclosed? Yes / No	
23	FRLS Properties (R5)		
	Oxygen Index	As per IS 1554, Part	
	Temperature Index	As per IS 1554, Part	
	Max Acid Gas Generation	As per IS 1554, Part	

TECHNICAL SPECIFICATION OF LT POWER CABLE

	Light Transmission / Smoke Density	As per IS 1554, Part	
--	------------------------------------	----------------------	--

14.0 ANNEXTURE – D
ARMOUR COVERAGE PERCENTAGE

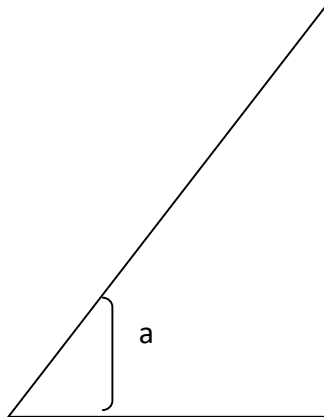

$$\text{Percent coverage} = \frac{N \times d}{W} \times 100$$

Where

N = number of parallel wires / Strips

d = diameter of wire / width of formed wires

W = $\pi \times D \times \cos a$,

D = diameter under armour

a = angle between armouring wire / formed wires and axis of cable

$\tan a = \pi \times D / C$, and

C = lay length of armouring wires / formed wires.

Min 90% armour coverage shall be provided both in case of wires and strips.

The gap between armour wires / formed wires shall not exceed one armour wire / Formed wire space and there shall be no cross over / over-riding of armour wire / Formed wire. So, the minimum area of coverage of armouring shall be 90%.

TECHNICAL SPECIFICATION OF LT POWER CABLE

15.0 ANNEXTURE – E

LIST OF SUB-VENDORS

For critical items


Sr. No.	Description of Material	Sub-Vendors
1	E.C Grade Aluminium Rod	Bharat Aluminium Co. Ltd. (BALCO) Hindustan Aluminium Co. Ltd. (HINDALCO) National Aluminium Co. Ltd. (NALCO)
2	XLPE Compound	Kkalpana Industries Ltd. KLJ Polymers and Chemicals Ltd. Dow Chemical, U.S.A Borealis, Sweden Hanwha, Seoul, South Korea
3	PVC Compound (R5)	Kkalpana Industries Ltd. KLJ Polymers and Chemicals Ltd. Universal SCJ Plastic Sriram Polytech Shri Ram Vinyl, Kota
4	GI Strip (R5)	Tata Balaji Systematic Mica Wires Pvt Ltd. Bansal Industries



**SPECIFICATION
OF
FRLS CONTROL CABLE**

Specification no: SP-EWLP-01-R3

Prepared By		Reviewed By		Approved By		Rev. No.	Date
Name	Sign.	Name	Sign.	Name	Sign.		
HK		MB		KA		02	27.01.14
RP		AT		VP		03	13.03.18

 BSES BSES Rajdhani Power Ltd	SP-EWLP-01-R3
SPECIFICATION OF FRLS CONTROL CABLE	

INDEX

RECORD OF REVISION

1. General Specification.....	4 to 8
2. Annexure A: Scope & Project specific details.....	9
3. Annexure B: General Technical Particulars.....	10

 BSES BSES Rajdhani Power Ltd	SP-EWLP-01-R3
SPECIFICATION OF FRLS CONTROL CABLE	

RECORD OF REVISION

Sr. No.	Revision No.	Item/Cl. No.	Nature of Change	Approved By
1	R3	2.1.7	FRLS Properties	VP

SPECIFICATION OF FRLS CONTROL CABLE

General Specification

1.0.0 Codes & Standards: The cables shall be designed, manufactured and tested in accordance with the following Indian & IEC standards.

National Standards

Indian Standards	
IS- 1554 Part-1	PVC insulated Cables
IS- 5831 : 1984	PVC insulation & sheath of electric cables.
IS- 10810 : 1984	Methods of test for cables.
IS- 8130 : 1984	Conductors for insulated electric cables and flexible cords.
IS- 3975 : 1999	Mild steel wires, formed wires and tapes for armouring of cables.

International Standards

IEC 60228 Ed.3.0 b	Conductors of insulated cables.
IEC 60332-3-21 Ed.1.0 b	Tests on electric cables under fire conditions. Part 3-21. Tests on bunched wires or cables.
IEC 60502-1 Ed. 2.1 b	Power cables with extruded insulation and their accessories for rated voltage from 1kV upto 30kV –Part 1: cables for rated voltages of 1kV and 3kV
IEC 60811	Common test methods for insulating and sheathing materials of electric cables.
IEC 60885 Ed.1.0 b	Electric test methods for electric cables.
IEC 60227	PVC insulated cables of rated voltages up to and including 450/750 V.
IEC 60028 Ed. 2.0 b	International Standard of Resistance for Copper
ASTMD 2843	Standard Test Method for density of Smoke from the burning or decomposition of cables
ASTM 2863	Standard Test Method for measuring of minimum oxygen concentration
IEC 60754-1	Test on gases evolved during combustion of materials fro cables. Part 1 – Determination of the Halogen Acid gas Content


2.0.0	Cable construction Features	Size & dimensions of each item mentioned under this clause shall be followed as detailed out in GTP, refer Annexure B


SPECIFICATION OF FRLS CONTROL CABLE

2.1.1	Conductor	
	Stranded, plain copper, circular	Shall be made from high conductivity copper rods
2.1.2	Insulation	Extruded PVC Insulation Type A as per IS 5831
2.1.3	Core Identification	Each core shall have different color of insulation.
2.1.4	Inner Sheath	Extruded Inner Sheath of Black PVC type ST-2 as per IS 5831
2.1.5	Armour	a) As per Cl 13.2 of IS 1554 Part-1: Galvanized steel round wire armour. b) Minimum area of coverage of armouring shall be 90 %.
2.1.6	Outer Sheath	a) Extruded outer sheath of PVC type ST-2 as per IS 5831 having FRLS properties b) Color : Black c) The Outer Sheath shall be embossed with: <ul style="list-style-type: none"> ➤ The voltage designation ➤ Type of construction / cable code (for e.g. AYWY) ➤ Manufacturers Name or Trade mark ➤ Number of Cores and nominal cross sectional area of conductors ➤ The drum progressive length of cable at every meter. (By Printing) ➤ Name of buyer i.e. BSES ➤ Month & Year of Manufacturing ➤ P.O. No. and P.O. Date
2.1.7	FRLS Properties	a) Oxygen Index : Not less than 29% as per ASTM 2863 b) Temperature Index : 250 Deg C at Oxygen Index 21 (when tested as per ASTM D 2863) c) Max Acid Gas Generation – Not more than 20% as per IEC -60754-1 d) Light Transmission - Minimum 40% when tested as per ASTM D 2843 (Smoke Density rating shall be max 60%) e) Flammability Test – As per IEC 60332-III, Cat – B, IEC 60332- I, IS- 10810 – Part 53, IS:10810 – Part 61 & 62 (Category A)
2.1.7	Sealing of Cable end	Both ends of the cable shall be sealed with PVC Cap.

SPECIFICATION OF FRLS CONTROL CABLE

3.0.0	Testing & Inspection	Tests shall be carried out in accordance with IEC / IS standards.
		a) Routine Test: As per IS 1554 part -1
		b) Type Test
		<ul style="list-style-type: none"> Cables must be of type tested quality. Type test reports shall be submitted for the type, size & rating of cable offered along with bid.
		<ul style="list-style-type: none"> If the manufacturer's lab is accredited by govt. /authorised body then it shall be acceptable for type testing.
		<ul style="list-style-type: none"> Type test on one cable drum of each rating and type, from first lot, shall be conducted at Govt. approved / internationally accredited labs.
		c) Acceptance test : Shall be conducted as per IS 1554 Part-1 for each lot of cable
		d) Inspection
		<ul style="list-style-type: none"> The Buyer reserves the right to witness all tests specified on completed cables
		<ul style="list-style-type: none"> The Buyer reserves the right to inspect cables at the Sellers works at any time prior to dispatch, to prove compliance with the specifications.
		<ul style="list-style-type: none"> In-process and final inspection call intimation shall be given in advance to purchaser.
		e) Test certificates: Three sets of complete test certificates (routine & acceptance tests) need to be submitted along with the delivery of cables.
4.0.0	Drawing, Data & Manuals	
4.0.1	To be submitted along with bid	<p>The seller has to submit:</p> <ul style="list-style-type: none"> Cross section drawing of cable Completely filled GTP Type test certificates Complete cable catalogue and Manual along with the bid.
4.0.2	After award of contract	Within 15 days, the seller has to submit four sets of above-mentioned drawings for buyer's approval.

 BSES BSES Rajdhani Power Ltd		SP-EWLP-01-R3
SPECIFICATION OF FRLS CONTROL CABLE		
4.0.3	Final As Built	6 sets hardcopy + One Soft copy of all documents including type test certificates
5.0.0	Drum Length & tolerance	500+ - 5% Mtr.
5.0.1	Overall tolerance in cable Length	- 2 %
5.0.2	Short length of cables	<ul style="list-style-type: none"> Minimum acceptable short length shall be above 100 Mtrs. Manufacturer shall be required to take prior approval from engineering for any short length supply. Manufacturer shall not be allowed to put two cable pieces of different short lengths in same cable drum. Only 1% of the total ordered quantity.
6.0.0	Packing, Shipping, Handling & Storage	
	a) Drum Identification Labels	
		<ul style="list-style-type: none"> Drum identification number Cable voltage grade Cable code (e.g. YWY) Number of cores and cross sectional area Cable quantity (Meters) Purchase order number and SAP item code Total weight of cable and drum number Manufacturer's & Buyer's name Month & Year of Manufacturing Direction of rotation of drum Cable length initial reading & end reading shall be marked on drum. Cable starting end shall be taken out from winding to read this drum reading with proper sealing to protect against external damage.
	b) Shipping information	The seller shall give complete shipping information concerning the weight, size of each package.
	c) Transit damage	The seller shall be held responsible for all transit damage due to improper packing.
	d) Type of Drum	Wooden drums with anti termite treatment. (The drums shall be with M.S. spindle plate with nut-bolts)
7.0.0	Quality Assurance	
7.0.1	Vendor quality plan	To be submitted for purchaser approval
7.0.2	Inspection points	To be mutually identified & agreed in quality plan
8.0.0	Progress reporting	

 BSES BSES Rajdhani Power Ltd	SP-EWLP-01-R3
SPECIFICATION OF FRLS CONTROL CABLE	

8.0.1	Outline Document	To be submitted for purchaser approval for outline of production, inspection, testing, inspection, packing, dispatch, documentation programme
8.0.2	Detailed Progress report	To be submitted to Purchaser once a month containing <ul style="list-style-type: none"> • Progress on material procurement • Progress on fabrication (As applicable) • Progress on assembly (As applicable) • Progress on internal stage inspection • Reason for any delay in total programme • Details of test failures if any in manufacturing stages • Progress on final box up constraints / Forward path
9.0.0	Deviation	<ul style="list-style-type: none"> • Deviations from this specification are only acceptable where the Seller has listed in his quotation the requirements he cannot, or does not, wish to comply with and the Buyer has accepted, in writing, the deviations before the order is placed.
		<ul style="list-style-type: none"> • In the absence of a list of deviations, it will be assumed by the Buyer that the Seller complies fully with this specification.

Annexure – A

Scope & Project Specific Details


1.0.0 Scope

1.0.0	Scope	Design, manufacture, testing & supply of Control cables
2.0.0	Delivery Schedule	To be filled up as per purchase requisition.

2.0.0 Document Submission

Submission of drawings, calculations, catalogues, manuals, test reports shall be as follows

	Along with offer	For Approval after award of contract	Final after approval	Remarks
Drawings	2 copies (Typical drgs)	2 copies	2 copies + 1 soft copy in CD	See Clause 5.0.0 for details of required drawings
Calculations	2 copies (Typical)	2 copies		

 BSES BSES Rajdhani Power Ltd	SP-EWLP-01-R3
SPECIFICATION OF FRLS CONTROL CABLE	

Catalogues	1 copy			
Type Test Report	2 copies			Type test and sample routine test reports

TECHNICAL SPECIFICATION
FOR
ILLUMINATION SYSTEM

Prepared by	Javed Ahmed		Rev: 0
Reviewed by	AK	AS	Date: 28th Mar, 2017
Approved by	VP		

Volume – I Technical Specification Illumination System

1.0 ILLUMINATION OF SYSTEMS:

1.1 The design of the illumination system shall ensure availability of the average illumination levels as specified below with the maximum possible uniformity in the entire substation. The illumination system shall consist of the normal lighting system and emergency lighting system.

1.2 The minimum illumination levels shall be as specified below.

i)	Outdoor Substation	: 20 LUX
ii)	Roads within substation	: 20 LUX
iii)	Boundary wall of the substation	: 10 LUX
iv)	Control room	: 300 LUX
v)	Switchgear Room	: 200 LUX
vi)	Battery room	: 100 LUX
vii)	Stair case	: 100 LUX
viii)	Cable cellar (for option A)	: 70 LUX
ix)	Near Substation gates	: 20 LUX

The illumination level of specific spots such as operating mechanisms of Capacitor bank isolator, oil level and temperature gauges of transformer etc. shall be minimum 100 Lux. Lux Level calculation to be done considering floor level as work plane height.

1.3 The bidder shall include in his offer light fittings of standard makes such as GE/Philips/Crompton/Bajaj or equivalent. Light fittings to be supplied by the bidder shall be subject to approval by the Owner.

1.4 Luminaries shall be flushed to ceiling

1.5 Complete design calculation sheets for arriving at the number and type of luminaries required for the normal and emergency requirements shall be furnished by the Contractor. Design calculation sheets for the selection of cables, MCB, HRC fuses, bus bars, etc. are also required to be furnished for Owner's approval.

1.6 The illumination system load and welding load in the substation area shall be supplied from 415/240 volt ACDBs to be provided in the substation control room. Requisite numbers of 3-phase, 4-wire, cable circuits for illumination system and welding socket outlets shall be extended from the above board. The laying of cables from the Board to the illumination system/welding socket outlets and their installation are included in the Bidder's scope

1.7 Each outgoing cable circuit for illumination and welding loads from the 415 volt switchboard shall terminate in the respective outdoor pillar boxes located in the substation. Outgoing feeders from the illumination and welding pillar-boxes shall be taken to the various illumination and welding load points in the substation Necessary fuses shall be provided near

Volume – I Technical Specification Illumination System

light fixtures in the substation. 06 No's Welding socket shall be provided in the substation, out of which 4 no's shall be outdoor and two inside the control room building.

- 1.8 The emergency illumination load shall be supplied from the main emergency illumination board located in the control room. Necessary cable circuits with appropriate fuses shall be provided by the Contractor for the supply system for emergency illumination load of the substation.
- 1.9 Complete manufacturer's literature/catalogues, performance curves, illumination distribution curves, G.A. drawings, specification sheets, etc. as relevant in respect of all materials/equipment to be supplied shall be submitted by the Contractor.
- 1.10 Dome lights shall be provided at gates.
- 1.11 Redundancy shall be provided wherever single luminary is considered.
- 1.12 After completion of installation of the illumination system in the substation, the actual illumination level at different locations shall be measured by the Contractor in the presence of Owner's authorized representative. If the average value of the measured illumination levels is found to fall short of the specified levels, the Contractor shall have to provide additional lighting fixtures so as to achieve the specified levels of illumination at no additional cost to the Owner. While measuring the illumination levels due allowance shall be made on account of maintenance factor. The specified lux levels shall be suitably increased to cover maintenance factor of 0.6 for outdoor areas.
- 1.13 Emergency DC lighting system shall be provided in the substation wherever required. The emergency lighting shall be adequate for safe movement by the operating personnel in the substation in the event of failure of normal lighting system. A total Of minimum 12 no's individually controllable 60 watt lamps shall be provided in the substation.

2.0 DISTRIBUTION PILLARS FOR NORMAL ILLUMINATION SYSTEM

Distribution pillars of adequate dimensions shall be constructed from sheet steel having a thickness not less than 2 mm. The pillars shall be totally enclosed weather-proof, dustproof, vermin-proof, having hinged doors with locking arrangement and shall be capable of being mounted in the substation. The pillars suitable for cable entry at the bottom shall be designed for easy access of connections to terminals and inspection of equipment mounted therein.

Each pillar shall accommodate the following

- i) One incoming, 4-pole (3 phase and neutral) isolating switch with cartridge fuses or MCB of appropriate current rating
 - ii) 3-phase and neutral bus bars of appropriate current rating
 - iii) Single-pole earth leakage circuit breakers of suitable current ratings on all outgoing circuits.
-

Volume – I Technical Specification Illumination System

- iv) Neutral links for all outgoing circuits
- v) Cable lugs, compression type cable glands, name plates, circuit numbers, earthing lugs, etc. to make the pillar complete in all respects.
- vi) 20% spare outlets shall be provided for outgoing feeders.
- vii) Three (3) indicating lamps with fuses to indicate that supply is 'ON'.

Local junction boxes for emergency illumination in the substation shall be provided, as required

3.0 LIGHTING DISTRIBUTION BOARDS

The Lighting Distribution Boards shall consist of the followings:

- i) Metal-clad enclosure with minimum 2 mm CRCA sheets for load-bearing members and 1.6 mm for non load-bearing members suitably reinforced with structural.
- ii) 3-phase, 4-wire busbar system with high conductivity Aluminum busbars mounting on FRP insulators having anti-tractive property with minimum 25 mm phase-to-phase and minimum 19 mm phase-to-earth clearances. The busbars shall be uniform throughout the length of the LDB and busbar joints shall be silver plated and covered with shrouds.
- iii) The busbars shall be suitable for short-time current rating of 40KA for 1 Sec.
- iv) The busbar temperature rise shall not exceed 35 Deg.C over an ambient of 50 Deg.C.
- v) The degree of protection for the LDB shall be IP-54.
- vi) All cables shall enter from the bottom.
- vii) Three (3) Nos. indication lamps (Red, Yellow, Blue) shall be provided to indicate that the incoming supply is available. Similarly, 3 Nos. indication lamps shall be provided to indicate that the busbar is energized.
- viii) The LDBs shall be provided with a continuous busbar of 25 x 6 sq.mm (electrolytic copper) with suitable hardware for connection to the main grounding grid.
- ix) The enclosure shall be painted externally with Shade No., 692 to IS:5 and internally with brilliant white of semi-glossy finish to IS:5.

4.0 MAIN EMERGENCY LIGHTING BOARD

The Main Emergency Lighting Board shall consist of the following:

- i) Automatic changeover contactor
 - ii) Voltage sensing relays.
 - iii) Time delay relay.
 - iv) Bus Bars
 - v) Two pole/three pole rotary switches with HRC fuse for incoming and outgoing feeders
 - vi) Test switch, push button type.
 - vii) Indicating lamps, ac - Green, dc - Red.
 - viii) Terminals for remote indication.
-

Volume – I Technical Specification Illumination System

- ix) Cable lugs, compression type cable glands, name-plates, circuit numbers, earthing lugs and remote indication wiring upto substation 415V a.c. control board, to make the board complete in all respects.
- x) Change over DC lighting in case of black out.

The main emergency lighting board shall have an automatic changeover switch to energize the dc lighting system in the event of AC power failure. It shall have voltage-sensing relays to perform the changeover automatically when AC voltage of any one phase falls below 70 percent of 240 volts and continues at that low level for more than 10 seconds. These shall changeover from DC to AC again when 70 percent of 240 volt is restored and this continues for 10 seconds.

Local Emergency Lighting Pillar shall be identical in details to Lighting Distribution Pillar specified in above para except that it shall have two pole isolating switch fuse unit on the incoming side and only two busbars and shall be without neutral links.

5.0 LUMINARIES

- 5.1 Luminaries for use in normal and emergency illumination systems in the substation are suggested below. In case the bidder intends to use luminaries of different types, he shall clearly furnish the advantages and reasons for the proposed luminaries in his bid. All the luminaries shall be supplied complete with all accessories and lamps

Sl. No.	Area / Type of Illumination System	Types of fitting & Lamps
1	Indoor	Fitting and fixtures suitable for LED Type lamps
2	Outdoor	Fitting and fixtures suitable for LED Type lamps
3	Roads	Fitting and fixtures suitable for LED Type lamps
4	Specific spots flood light	Fitting and fixtures suitable for LED Type lamps

- 5.2 The flood light luminaries in the substation shall be fixed at suitable height on the substation structures/ building, so as to provide the specified average illumination in the substation area without causing any glare to the operational/ maintenance staff working in the substation. While fixing the luminaries it shall be ensured that the stipulated electrical clearances are not violated. The Contractor shall supply and install suitable type of pole structures, required for installing the fittings for illuminating the roads, fence etc

Volume – I Technical Specification Illumination System

6.0 WIRING

All lighting fixtures and 5A convenience outlets shall be wired with 1.1 KV grade PVC insulated extra flexible, multi stranded, copper conductor cables of size not less than 2.5 sq.mm.

For 15A heavy-duty outlets copper conductor cables of size not less than 6 sq. mm shall be used.

The wiring shall consist of phase, neutral and ground. For grounding the lighting fixtures/convenience outlets etc., 2.5sqmm Green wire shall be used. The phase and neutral conductor shall be suitably colour coded.

Supply shall be looped between the lighting fixtures of the same circuit by using junction boxes. For this purpose one (1) 100 mm x 100 mm square junction box shall be provided for each lighting fixture. For recessed lighting fixtures, supply shall be extended from the junction boxes to the fixtures by means of flexible conduits. While for stem-mounted/wall-mounted lighting fixtures the junction box shall be mounted below one of the mounting stems.

For lighting branch circuits the nos. of lighting switches shall be decided keeping in mind the ease of control, as well as to limit the current to 2.5A per circuit.

For convenience outlets, the bidder shall design the wiring scheme so as to limit 6 nos. of 5A outlets per branch circuit and two nos. of 15A outlets per branch circuit.

All wiring materials such as terminals, crimping lugs, ferrules etc. shall also be provided by the Contractor.

No section of the conduit shall be filled with more than 70% of its area. Any consumable material that is required for pulling the wires through conduit shall also be provided by the Contractor.

Lighting fixtures coming in one area shall be evenly distributed between three phases so that tripping of one phase or two phases does not cause total loss of illumination in that area.

7.0 JUNCTION BOX / WALL BOX

100 mm x 100 mm junction boxes and wall boxes of standard size shall be provided.

Wall boxes and junction boxes shall be made of sheet metal with a thickness of 14 gauge (minimum). Necessary conduit termination fittings such as bushings, locknuts etc. also be provided.

8.0 DEVIATIONS

Deviation from this specification, if any, shall be clearly brought out in the offer. Unless owner explicitly accepts such deviations, it shall be considered that the offer fully complies with the specification.

NEW GRID

TECHNICAL SPECIFICATION

FOR

SCADA INTERFACE WORK & AUTOMATION

Prepared by	K A SENTIL KUMARAN		Rev: 7.2
Reviewed & Approved by	GOPAL NARIYA		Date: 22-04-2021

Chapter 6b. Technical Specification for SCADA interface work & Automation

1.0 INTENT OF SPECIFICATION:

This specification is intended to cover the supply and execute work related to interface of all electrical equipments with RTU panel complete with all materials and accessories for efficient and trouble free operation. In the event of any discrepancy with the listed documents, the stipulation of this specification shall govern.

2.0 SCOPE OF WORK

For substation, it is proposed to lay and terminate panel wirings / control cables if any between the equipments such as CT, PT, Circuit Breaker, Isolators, 11 KV Switchgear, 66,33,11 KV Control & Relay Panels, Power Transformer & its sensors – OTI, WTI, TPI, AVR, etc, REGDA relay, Capacitor Bank, NIFPS, Smoke Detectors and Battery Charger.

The scope of work under this category would include:

- Supply of SCADA materials – BCU, BCPU & RTU with Processors (Basic License - IEC 870-5, 101, 103, 104, Modbus, IEC 61850-8-1, IEC -104 Master, IEC 104 Slave + PLC License) along with IO Modules. Other accessories such as Communication Rack, Power Supply Modules, MFM, GPS, Converters for DC to DC & Other FO Converters, Cables - FO, CAT-6, RS485, Control Cables, Connectors if any shall be in SCADA vendor's scope of supply.
- Installation, Testing & Commissioning of SCADA equipments with Control Center via IEC-104 Protocol.
- Integration, Database development & Testing of SCADA Front end equipments (Sub Station level equipments integration over Modbus TCP IP, Serial/IEC-103/IEC-61850 Protocols.
- Extraction of ICD/SCD files from IED and further integration with RTU over IEC-61850/IEC103 Protocols at site with Supplied Hardware.
- Supply of Necessary RTU Till Tool with Licenses & Softwares if any (Ex: IET600) required for ICD/SCD file configuration in RTU.
- Laying and Termination of armored Communication cables (Ethernet, Fiber Optic Patch Cards/Cable, RS 485 cables) between grid devices (Numerical Relays/BCPU, Transformer Monitoring Modules, Smoke detector, NIFPS panel, MFM, Battery Charger) to RTU/DCU/Gateway with proper tagging, and dressing upto RTU panel. Supply of Suitable Glands, White Sleeve PVC ferrule, tagging, lugs shall be scope of vendor's supply.
- Laying and termination of control cables between grid equipments (control and relay panel, NIFPS, Battery Units) to RTU for hardwired signals.
- Installation of cable trays with accessories or trench as required for the cabling work.
- Integration of PQA over Modbus TCP IP/IEC-61850 with dedicated network.
- Integration Li-Ion Battery Charger Over Modbus TCP IP/Serial with RTU.

Chapter 6b. Technical Specification for SCADA interface work & Automation

- Preparation of cable schedule, Wiring diagrams, Training documents with Step by Step Procedures and Interconnection as built drawings.
- Separate earthing bus bars to be provided for RTU panel and it will be directly connected to grid earthing. Earth BAR material should be Copper.
- Separate earth pit with connections for Electronic cards, gateway, Switches, DCU., etc.. earthing.
- All internal wiring between BCU and C&R Panel terminals, All Numerical relays, MFM (Multifunctional meters) and other grid equipment integration should be under SCADA vendor's scope.
- Hardware & software integration of RTU, Bay Control Units along with other equipments viz. Battery Chargers, Multi Function Meters, Fire Fighting System Signals, Transformer relays (for OTI, WTI, TPI, AVR, etc.), Smoke Detector Panels, Numerical Relays, 11&33&66KV Control and Relay panel signals etc. shall be in Vendor's scope.
- FAT and Training arrangements at factory/Work shop for BSES SCADA team (6 Persons for 5 days) – Travel, Boarding, accommodation and local conveyance etc. shall be under SCADA Vendor's Scope.

2.1 Cables

The following types of cables / wirings will be required for extending signals and commands. Tagging is mandatory for all types of cables. Heat shrinking ferrule sleeves with printed ferrules to be used for identifying cables & Signals.

- 2.5 mm², multi-stranded flexible copper wire, FRLS 1.1KV HRPVC for AC & DC Supply & 1.5 mm² multi strand cables for other internal wiring for RTU.
- Red(P) and Black(N) color cable core to be used for AC and DC wiring.
- Fiber Optic Cables (GLASS&PLASTIC Types) with suitable connectors & Ethernet cables (CAT6) with conduit pipe for internal connections and GI Armored Cables for external connections.
- 2 C X 2.5 MM² multi stranded copper cable, ARM FRLS 1.1KV HRPVC for external AC / DC Power Supply.
- 16 C x 1.5 mm², multi stranded copper cable, ARM FRLS 1.1KV HRPVC, Application: digital signal feed back.
- 3P X 1.5 mm² for DO (Digital output)
- 2P X 0.5 mm² Screened GI Armored RS485, Twisted pair, 22 gauge Belden 8761 or equivalent for external (RTU to BCUs / MFM / BATT. CHG / Transformer Monitoring Devices) RS 485 connections.

The supplied cable shall be as a latest IS, also refer control cable specification.

❖ Cable Gland

Chapter 6b. Technical Specification for SCADA interface work & Automation

Double Compression cable glands (Materials - Brass and Stainless Steel & Suitable for Industrial Grade) of different sizes for cable entry into the RTU,DCU,CRP & Other Panels

❖ Cable Trays and NS cable Support

Perforated / ladder type (galvanized Iron) with cover for laying the cables.

2.2 Multifunction Meters (Accuracy – 0.2)

To extend the current / voltage / active and reactive power, power factor, etc. to RTU, MFMs, to be installed in C & R Panel individually for each feeder/ breakers and should be integrated with RTU. The outputs of these meters **(in groups of 5)** connections should be made using twisted pair screened cable (Typically 22gauge Belden 8761 or equivalent) & two wires (A and B) connections are daisy chained together and integrated with RTUs. All hardware's or protocol converters for having Modbus Protocol output, CT & PT wirings to MFMs and its Configuration should be in Vendor's scope.

For the protection of MFMs and RTU cards against Surges and electrical leakages, it is necessary to install Surge Protection Devices in b/w RTU & MFM serial loops. The typical diagram for this connection is mentioned in the System Architecture diagram. **MFM should be powered through Grid Battery Voltage (220 Volt or 50 Volts DC).**

The following parameters of MFM must be available for communication with RTU.

- Phase Voltages (L1-N, L2-N, L3-N)
- Line Voltages (L1-L2, L2-L3, L1-L3)
- Line Currents (IL1 , IL2, IL3)
- Active Power & Reactive Power
- Maximum Demand (KW) & Frequency
- Power factor
- Active Energy
- THD mean current & THD mean Voltage
- Neutral Current.
- Phase Angles

Approved Makes – RISH 3440 and Conzerv EM 6400NG

2.3 Numerical Relays or Bay Control Protection Units for all feeders (11,33,66KV)

Numerical Relays(BCPU) shall be integrated with Remote Terminal Units. All hardware's and protocol converters if required for compatibility with SCADA shall be in Vendor's scope.

The respective BCU,BCPU & Numerical Relays must have **dual redundancy communication ports** (Ethernet/Copper Ports) with **PRP & RSTP** protocols for SCADA connections & It will be connected to RTU via IEC 61850 protocol. (Dual Ports required to form **a Ring or PRP** Networks b/w relay to relay connections).

Hot Standby/Dual Power Supply Unit shall be supplied along with BCU. It will increase the BCU availability, if any one Power supply card fails the other one should keep the bay control unit continuous live.

Chapter 6b. Technical Specification for SCADA interface work & Automation

Data Base File must be downloadable and Uploadable from BCU.

The following signals are to be taken from Numerical Relays to the BCUs through internal hard wiring. This list is indicative and signals should not be limited to this. Additional signals can be taken during review of actual drawings. – **Refer Para 2.8 for detail signals list with data format (DPI,DCO,SPI,SCO,Measured Values) types.**

- Online Currents / Voltage & Relay General trip signal
- All breaker, Isolators, Control & Relay Panel indications and commands
- Fault current and phase indication of faulty phase viz. R,Y,B, Earth, Unbalance(O/C & E/F Relay).
- Fault Differential and Bias current in Line and Transformer Differential Relay
- Fault voltage and phase indication of faulty phase viz. R,Y,B (Voltage Protection Relay).
- Post fault currents (R, Y, B phase separately) measured value & Relay Internal Fault
- Fault distance (in case of distance relays - R, Y, B Phase separately)
- Unbalance Current (in case of neutral displacement relay of capacitor feeders).

2.4 Transformer Signal - TMD (REGDA, A-EBERLE relays):

OTI, WTI, TPI, AVR and Transformer auxiliary protection signals should be integrated with RTU via IEC 61850 Protocol. TMD must have dual communication ports & have the option of RSTP and PRP Protocols for SCADA Connections.

All field installations of these sensors and its wiring/cabling and configuration along with hardware's or protocol converters, if any, should be in Contractor's scope. - **Refer Para 2.8 for detail signal's list with data types.**

2.5 Battery Charger and Lithium Battery Integrations:

All signals of Battery Chargers/Lithium Ion should have MODBUS Protocol output and integrated with an RTU through serial communication (RS 485) cables.

Laying communication cables through conduit pipe and battery charger signals (Soft & Hard Signals) integration with an RTU shall be in Vendor's Scope. - **Refer Para 2.8 for detail Battery Charger signal's list with data types.**

2.6 Data Concentrator Unit/Gateway & Remote Terminal Units

For extending the signals from the grid to the Master Control Centre & Backup Control Centre, BCUs and RTUs are to be installed. BCUs needs to be initially physically integrated with Numerical relays of respective breakers to enable soft signals and commands for breakers to be configured there and respective BCU or BCPU integrated with Remote Terminal Units through IEC – 61850 protocol. However the options for IEC-60870-103 protocol along with the MODBUS protocol option is required for other devices integrations. BCUs can be of **ABB, Siemens, Schneider Electric, etc .**, make is depending on the type/ make of switch gears. **Remote Terminal Units need to be installed for interface between the BCUs and Control Centers (Main and Backup) through IEC – 60870 – 104 Protocol.** The

Chapter 6b. Technical Specification for SCADA interface work & Automation

size of RTU will depend on the size of the substation, no. of the feeders/ number of signals and command outputs along with sufficient spares (20%) for future requirement.

All associated equipments and Supply of accessories including software & Operating tool / multiple user licenses for RTU & BCU, MCBs for DC and AC Supply, DC to DC Converter (in case station battery voltage level is 220 volts DC), etc. should be in Vendor's scope.

Hardware & software integration of RTUs, BCU along with other equipments viz. Battery Chargers, Multi Function Meters, Fire Fighting Systems, Signals, Transformer relays (for OTI, WTI, TPI, AVR, etc.), Numerical Relays, etc. should be in Vendor's scope.

In case of more than one BCPU, RTU, DATA Concentrator than these units must be able to communicate with other units on internal local IPs (Ex – 192.168.0.1) other than LAN IP (Ex- 10.125.107.1) series.

Hot redundancy is required for Main Processor cards, rack/board and Gateway for MCC & BCC Communications. Each main processor must have two Ethernet ports dedicated for communication with SCADA servers over IEC 60870-104 protocol. First card will be live and 2nd card will be hot standby. Communication switchover between either cards in case of failure.

Main Processor cards along with Rack for MCC communication should be separate from the IO cards.

Data Base File must be downloadable and Uploadable from RTU, CPU and Gateway.

Approved RTU makes – ABB-RTU560, Schneider-SAITEL DP.

Bidders who are OEM of RTU and Numerical Relays are only acceptable & Pilot with successful test results are main criteria for induction of any new models in BRPL.

Note : System shall be approved if they are agree to fulfill the following terms & Conditions, It is applicable for all OEM products.

- AMC period should be given 3 years along with this proposal.
- AMC period should be started after handovering the system to BSES.
- During AMC period all the issues pertaining to RTU/Gateway/BCU should be handled by OEM at site (this included unlimited site visit)
- 5 Year replacement warranty is applicable for all OEM for Electronic cards & Gateway Units...If any hardware (or) Software fails during this period will be rectified by OEM.
- 5 years warranty is mandatory for all SCADA/RTU products (Electronic cards, GPS, Switches, HMI, etc...). If any cards fails/burnt due to surges from CT, PT via RS485/serial, Surges through cables then replacement will be in your scope up to 5 years. So suitable SPD to be incorporate in the system according to site requirements for avoid card failures.

RTU, Data Concentrator Unit Features & Performance capabilities

2.6.1 RTU, DCU Size and Expandability

20% Spare for RTU, DCU - Provision for 20 % (Basic IO Count +20% Spare) of the total DI / DO signals (hard/soft) as a spare should be made available for future requirement.

Chapter 6b. Technical Specification for SCADA interface work & Automation

Spare Ports – 20% Spare ports (**Minimum – 3 to 4 No's Serial ports are essential**) for IEC 103/Mod Bus Protocol Connections

20% Spare for BCU,BCPU - Each Control and Relay panel BCU must have 20% (Basic + 20% Spare) of the particular bay DI/DO signals as a spare should be available.

Panel Size & Hardware Capacity - The RTU panel sizing should be capable of accommodating additional 50% of the basic I/O counts by way of addition of hardware such as modules, racks, panels, Terminal Blocks of basic I/O counts.

Software Capacity - The RTU software and database generation should be sized to accommodate for additional 50% of the basic I/O count without requiring software or database regeneration or License.

- 2.6.2 Remote database, downloading of RTU from master station/SCADA control center.
- 2.6.3 RTU shall have the capability of automatic start-up and initialization following restoration of power after an outage without the need for manual intervention. All restarts shall be reported to the connected master stations.
- 2.6.4 Act as a data concentrator on IEC60870-5-101/104/MODBUS/IEC 61850 protocols and Support for IEC 60870-5-103, IEC 60870-5-101, IEC 61850,MODBUS TCP IP and RS485 Modbus RTU protocols & ability to act as a gateway for Numerical relays.

2.6.5 Cyber Security

As the SCADA system will use public domain, such LAN/VSAT/GPRS/CDMA etc. therefore it is mandatory to guard the data/ equipment from intrusion/damage/breach of security & shall have SSL/VPN based security.

- 2.6.6 Internal battery backup to hold data in SOE buffer memory & also maintaining the time & date.
- 2.6.7 RTU must have the capability of time synchronization with a GPS receiver and the GPS at the control room will be used for this synchronization purpose. In case of failure of the GPS receiver, the RTUs time synchronization should be through the Master's SCADA clock.
- 2.6.8 **GPS for Time Synchronization** - The RTU must have inbuilt (or) external GPS with antenna & internal real time clock to synchronize the IEDs connected to it over their respective protocol. **GPS must have dual redundant LAN port for time synchronizations.**

Approved Makes – MASSIBUS & SANDS

- 2.6.9 **Main Processor(CPU in RTU & Gateway) HOT Redundancy for MCC & BCC communication**
Main processor (DCU) /RTU should have adequate capacity for data handling / processing and main processor/CPU must have required number of communication ports for simultaneous communication with Master Stations (MCC & BCC), /MFTs and RTU configuration & maintenance tool.**RTU main processor and Gateway must have HOT redundancy features for control center communications.**

Chapter 6b. Technical Specification for SCADA interface work & Automation

2.6.10 Hot Standby/Dual Power Supply Unit & Redundancy in power source for RTU and BCU/BCPU - Possibility to increase the RTU,BCU main rack availability by having a second power supply card in case the first one fails , **if any one Power supply card fails the other one should keep the system continuous live.**

2.6.11 CPU/RTU Soft Configuration Future (Communicate to multiple master stations simultaneously on IEC60870-5-104.)

RTU/DAU must have multiple location (minimum 5 Locations) data transmission facility VAZ Master Control Centre, Backup Control Centre, etc.

2.6.12 Protection Devices for RTU,BCPU – All modules (all Digital, Analog Input modules) and ports (Serial and Ethernet ports) must have in-built or external surge protection devices and optical isolation

2.6.13 Diagnostic Software & Multi user tool/License for RTU/(Numerical Relay) BCU -

Diagnostic Software tool with licensed version shall be provided to continuously monitor the operation of the RTU and report RTU hardware errors to the connected master stations. The software shall check for memory, processor, and input/output ports errors and failures of other functional areas defined in the specification of the RTU. **If any system tries to connect to RTU for download/ Upload files,it should be stored as a log in RTU.**

2.6.14 RTU Panels

At least 50% of the space inside each enclosure shall be unused (spare) space that shall be reserved for future use. The Contractor shall provide required panels conforming to IEC 529 for housing the RTU modules/racks, relays etc. and other required hardware. The panels shall meet the following requirements:

- Shall be free standing, floor mounted and height shall not exceed 2200 mm.
- RTU Panel should have air conditioner and should be mounted on side wall of RTU panel with temperature/humidity control facility. FAN with Filters shall be considered for back up cooling.
- Separate room / Cabinet with AC Provision to be considered for RTU and IT Equipments.
- All doors and removable panels shall be fitted with long life rubber beading.
- All non load bearing panels/doors ,top and bottom portion, rear cover shall be fabricated from minimum 2.0 mm thickness steel sheet and all load bearing panels, frames, top & bottom panels shall be fabricated from minimum 3.0 mm thickness steel sheet.
- Shall have maintenance access to the hardware and wiring through lockable full height doors.
- Shall have the provisions for bottom cable entry.
- All panels shall be supplied with 230V AC, 50 Hz, single-phase switch and 15/5A duplex socket arrangement for the maintenance.
- All panels shall be provided with an internal maintenance lamp, space heaters and gaskets.

Chapter 6b. Technical Specification for SCADA interface work & Automation

- All panels shall be indoor, dust-proof with rodent protection, and meet IP54 class of Ingress protection.
- There shall be no sharp corners or edges. All edges shall be rounded to prevent injury.
- Document Holder shall be provided inside the cabinet to keep test report, drawing, maintenance register etc.
- All materials used in the enclosures including cable insulation or sheathing, wire troughs, terminal blocks, and enclosure trims shall be made of flame retardant material and shall not produce toxic gases under fire conditions.

2.6.15 RTU Grounding

The safety ground shall be isolated from the signal ground and shall be connected to the ground network. Safety ground shall be a copper bus bar. The contractor shall connect the panel's safety ground to the grid grounding network. Separate grounding(2Pits) is created for communication equipments and Signal ground shall be connected to the communication equipment signal ground.

2.7 Ethernet /Fiber Switch

The Ethernet/Fiber optic switches Should be a managed switch and are intended to be installed in the control room and shall be complaint to IEC-61850 electrical substation networks and IEEE 1613 standards. Provisions for additional feeders on the Ring Configuration should be provided on the same switch.

- Laying of Ethernet/Fiber cables for relay/BCU port to the RTU via switch through conduit pipe and integration with an RTU shall be in Vendor's Scope.
- Switch, Standard Features
- Switch design should withstand for power substation automation applications that operate in extremely harsh environments (High and medium voltage S/Stn environments) and it also withstands vibration, electrical surges, fast transients, electrostatic discharge, and extreme temperatures and humidity. Industrial managed Fast Ethernet Switch shall be supplied according to IEEE 802.3.
- Switch features and configuration should be easy to user interface and it must directly integrate with any other IEC-61850 devices. Shall be managed type, Layer-2 Switches and have KEMA certifications for IEC 61850. One switch should be supplied with Layer 3 features.
- The FO switch shall support Multimode fiber and single mode fiber in 100Mbps ports on an SFP (simple form factor pluggable), for ease of functionality and maintenance. 100Mbps ports for sub station level communications & 2 or 4 Gigabit Port for uplink communications.
- Redundancy Ring : Dual Ring to be consider between Ethernet switches for maintaining redundancy network.
- Hot Standby/Dual PSU & Redundancy in power source - Possibility to increase the switch availability by having a second power source in case the first one fails & should be

Chapter 6b. Technical Specification for SCADA interface work & Automation

available with 48VDC. Each PSU should be connected with a different power source, if any one power source or Power supply card fails then other one should keep the switch continuous operation.

- 20% Spare ports - Each switch must have 20% spare ports for future/back up requirements.
- Link Failure contact alarm - Failure contact alarm shall be achieved by hardware contact that is activated when a link problem occurs.
- Logs and alarms with Time Stamp - Statistics about link status alarms are to be stored with the accurate timestamp duly tracing all events.
- Security features - The FO switches shall support different user levels with different passwords, including the facility to work with different VLANs, following the 802.1Q standard, port security based on MAC addresses, possibility to disable unused ports, authentication protocols shall be provided. The FO switches shall have advanced security features to be implemented to avoid unauthorized access to the system Such as RADIUS/TACACS & VPN gateway support with IP Sec & SSH.
- High Speed Implementation of RSTP protocol - The FO switches shall support STP and RSTP protocols, and shall facilitate for recovery and the fault recovery times shall be within 5 -10msec per switch, always fulfilling the RST protocol.
- Time Synchronization to RTU/Server and Connected IED/BCU - The FO switch shall have an internal clock and shall be synchronized from a network SNTP/NTP server, so all time stamped events shall be with a reliable time reference.
- Tools with License - Diagnostics tool, other necessary tools with a multi user license to be provided along with the switch.
- Mounting Options - Switch should be DIN Rail Mountable & also need to quote for Optional Wall/Rack Mountable kit.
- Local USB port for emergency boot is Mandatory.
- Network based distributed security by having a firewall on each port of the switch for all the standard Industrial protocol like IEC-61850 should be available.
- The FO switch shall have the facility of Port mirroring and the user shall configure one port to replicate traffic flows of different ports, so the system administrator can monitor the incoming, outgoing, or all kinds of traffic that is going through the ports under study.
- ITU-T G.8032 support for Ethernet Ring redundancy, ensuring fast failure detection is preferred.
- They FO switches shall sustain the stringent levels in temperature range and electromagnetic immunity defined in the 61850-3, but also the advanced functional requirements defined for operation with other IEC-61850 devices. The Switch should be certified on IEC-61850, functional & Environmental specifications by KEMA.
- Approved Makes – **RUGGEDCOM & HIRSCHMANN**

2.8 SIGNAL LIST (11/33/66KV)

Chapter 6b. Technical Specification for SCADA interface work & Automation

List of Abbreviations
AI - Analog Input/Analog Values
MV - Measured Value
MFM - Multi Function Meter
DCO - Double Command Output
DPI - Double Point Indication
SCO - Single Command Output
SPI - Single Point Indication
RTU - Remote Terminal Units
BCU - Bay Control Units

Signals - 11KV Out Going Feeders	Digital Input/AI soft through N.Relay/BCU	Digital Out Put soft through N.Relay/BCU	Digital Input Hard Wire to RTU	Additional signals Hard wire to RTU for backup	Signal Type	N.Relay Protocol	
Breaker ON	√			√	DPI	IEC-61850 with Dual Communication Ports	
Breaker OFF				√			
Trip Ckt Healthy -1 & 2	√				SPI		
Spring Charge	√				SPI		
Breaker in service	√				SPI		
Breaker in Test					SPI		
Auto Trip(86) Operated	√			√	SPI		
Panel DC Fail			√		SPI		
L/R Switch in Local	√				SPI		
L/R Switch in SCADA			√		SPI		
Relay Int Fault.			√		SPI		
Over Current Operated	√				SPI		
Earth Fault Operated	√				SPI		
BKR Close COMMAND		√		√	DCO		
BKR Open COMMAND							
AutoTrip(86) relay reset from Remote		√			SCO		
3Phase R,Y,B - Current & Voltage,Active Power,Reactive Power,Power Factor,Max.Demand,Neu.Current	√				AI/MV		
Fault current and phase indication of faulty phase viz. R,Y,B, Earth, Unbalance(O/C & E/F Relay).Disturbance Records, Fault Graphs for Remote diagnosis purpose	√				AI		
Total Signals - BCPU & RTU	13 DI + Analog , Measurand Values	3 DO	2DI	5DI + 2 DO			
Essential inbuilt Spare in BCPU,BCU	3 DI	2 DO					

Chapter 6b. Technical Specification for SCADA interface work & Automation

Signals - 11KV Incomers	Digital Input/AI soft through N.Relay/BCU	Digital Out Put soft through N.Relay/BCU	Digital Input/Output Hard Wire to RTU	Additional signals Hard wire to RTU for backup	Signal Type	N.Relay Protocol
Breaker ON	√			√	DPI	IEC-61850 with dual Communication Ports
Breaker OFF				√		
Trip Ckt Healthy -1 & 2	√				SPI	
Spring Charge	√				SPI	
Breaker in service	√				SPI	
Breaker in Test					SPI	
Auto Trip(86) Operated	√			√	SPI	
VT fuse Blown - Metering.	√				SPI	
VT fuse Blown - Protection	√				SPI	
Panel DC Fail			√		SPI	
L/R Switch in Local	√				SPI	
L/R Switch in SCADA				√	SPI	
Relay Int Fault.			√		SPI	
Over Current Operated(All stages)	√				SPI	
Earth Fault Operated (All stages)	√				SPI	
Under Voltage Prot.Operated	√				SPI	
Over Voltage Prot.Operated	√				SPI	
REF Operated	√				SPI	
BKR Close COMMAND		√		√	DCO	
BKR Open COMMAND				√		
AutoTrip(86) relay reset from Remote		√			SCO	
3Phase R,Y,B - Current & Voltage,Active Power,Reactive Power,Power Factor,Max.Demand,Neu.Current	√				AI/MV	
Fault current and phase indication of faulty phase viz. R,Y,B, Earth, Unbalance(O/C & E/F Relay).Fault voltage and phase indication of faulty phase viz. R,Y,B (Voltage Protection Relay). Disturbance Records, Fault Graphs for Remote diagnosis purpose	√				AI	
Total Signals - BCPU & RTU	17 DI + Analog , Measurand Values	3 DO	2DI	5DI + 2 DO		
Essential inbuilt Spare in BCPU,BCU	3 DI	2 DO				
Signals - 11KV Bus Coupler	Digital Input/AI soft through N.Relay/BCU	Digital Out Put soft through N.Relay/BCU	Digital Input/Output Hard Wire to RTU	Additional signals Hard wire to RTU for backup	Signal Type	N.Relay Protocol

Chapter 6b. Technical Specification for SCADA interface work & Automation

Breaker ON	√			√		
Breaker OFF				√	DPI	
Trip Ckt Healthy -1 & 2	√				SPI	
Spring Charge	√				SPI	
Breaker in service	√				SPI	
Breaker in Test					SPI	
Auto Trip(86) Operated	√			√	SPI	
Panel DC Fail			√		SPI	
L/R Switch in Local	√				SPI	
L/R Switch in SCADA				√	SPI	
Relay Int Fault.			√		SPI	
PT MCB - Metering operated	√				SPI	
PT MCB - Protection operated	√				SPI	
Over Current Operated	√				SPI	
Earth Fault Operated	√				SPI	
BKR Close COMMAND		√		√	DCO	
BKR Open COMMAND						
Fault current and phase indication of faulty phase viz. R,Y,B, Earth, Unbalance(O/C & E/F Relay).Disturbance Records, Fault Graphs for Remote diagnosis purpose	√				AI	
Total Signals - BCPU & RTU	14DI + Analog , Measurand Values	3 DO	2DI	5DI + 2 DO		
Essential inbuilt Spare in BCPU,BCU	3 DI	2 DO				

IEC-61850 with Dual Communication Ports

Signals - 11KV Capacitors	Digital Input/AI soft through N.Relay/BCU	Digital Out Put soft through N.Relay/BCU	Digital Input/Output Hard Wire to RTU	Additional signals Hard wire to RTU for backup	Signal Type	N.Relay Protocol
Breaker ON	√			√		
Breaker OFF				√	DPI	
Bank ISO ON	√					
Bank ISO OFF					DPI	
Trip Ckt Healthy -1 & 2	√				SPI	
Spring Charge	√				SPI	
Breaker in service	√				SPI	
Breaker in Test					SPI	
Master Trip(86) Operated	√			√	SPI	
Bus PT fuse Blown - Metering.	√				SPI	
Bus PT fuse Blown - Protection	√				SPI	
Panel DC Fail			√		SPI	
L/R Switch in Local	√				SPI	
L/R Switch in SCADA	√			√	SPI	
Over Current Operated	√				SPI	
Earth Fault Operated	√				SPI	
Under Voltage Prot.Operated	√				SPI	
Over Voltage Prot.Operated	√				SPI	
Neg.Phase.sequence Operated	√				SPI	

IEC-61850 with Dual Communication Ports

Chapter 6b. Technical Specification for SCADA interface work & Automation

Timer Relay operated/Normal	√				DPI
Relay Int Fault.			√		SPI
BKR Close COMMAND		√		√	DCO
BKR Open COMMAND					
BANK ISO OPN		√			DCO
BANK ISO CLS					
Master trip (86)reset from remote		√			SCO
3Phase R,Y,B - Current&Voltage,Reactive Power,Neu.Current	√				AI/MV
Fault current and phase indication of faulty phase viz. R,Y,B, Earth, Unbalance(O/C & E/F Relay).Fault voltage and phase indication of faulty phase viz. R,Y,B (Voltage Protection Relay). Disturbance Records, Fault Graphs for Remote diagnosis purpose	√				AI
Total Signals - BCPU & RTU	19 DI + Analog , Measurand Values	5 DO	2DI	5DI + 2 DO	
Essential inbuilt Spare in BCPU,BCU	3 DI	2 DO			

Signals - 33 & 66KV Incomers/Out Going	Digital Input/AI soft through N.Relay/BCU	Digital Out Put soft through N.Relay/BCU	Digital Input/Output Hard Wire to RTU	Additional Spare signals (Hard wire to RTU for backup)	Signal Type	Protocol
Breaker ON	√			√	DPI	IEC-61850 with Dual Communication Ports
Breaker OFF				√		
Front Bus (89A) ISO ON(In-Case of O/D)	√				DPI	
Front Bus (89A) ISO OFF (In-Case of O/D)						
Rear Bus (89B) ISO ON (In-Case of O/D)	√				DPI	
Rear Bus (89B) ISO OFF (In-Case of O/D)						
LINE ISO (89L) ON (In-Case of O/D)	√				DPI	
LINE ISO (89L) OFF (In-Case of O/D)						
Earth Switch (89LE) -1 ON (In-Case of O/D)	√				DPI	
Earth Switch (89LE) -1 OFF (In-Case of O/D)						
Earth Switch (89LE) - 2 ON (In-Case of O/D)	√				DPI	
Earth Switch (89LE) - 2 OFF (In-Case of O/D)						
Breaker in service (In-case of I/D BKR)	√				SPI	
Breaker in Test (In-case of I/D BKR)	√				SPI	
Trip coil Ckt Healthy - 1 & 2	√				SPI	
Spring Charge	√				SPI	
Master trip(86) Operated	√			√	SPI	
SF6 Pressure Low & SF6 Lock Out	√				SPI	
VT fuse Fail	√				SPI	
Panel DC Fail			√		SPI	
L/R Switch in Local	√				DPI	
L/R Switch in Remote	√			√		

Chapter 6b. Technical Specification for SCADA interface work & Automation

LBB Operated	√				SPI	
Relay Int Fault.			√		SPI	
Over Current Operated (All stages)	√				SPI	
Earth Fault Operated (All stages)	√				SPI	
DIFF.Prot Operated	√				SPI	
DIST.Ptot Operated	√				SPI	
BKR CLS COMMAND		√		√	DCO	
BKR OPN COMMAND				√		
Front Bus (89A) ISO OPNCOMMAND (In-Case of O/D)		√			DCO	
Front Bus (89A) ISO CLS COMMAND (In-Case of O/D)						
Rear Bus (89B) ISO CLS COMMAND (In-Case of O/D)		√			DCO	
Rear Bus (89B) ISO OPN COMMAND (In-Case of O/D)						
LINE ISO (89L) OPN COMMAND (In-Case of O/D)		√			DCO	
LINE ISO (89L) CLS COMMAND (In-Case of O/D)						
Master Trip(86) relay reset from Remote		√			SCO	
3Phase R,Y,B -Current&Voltage,Active&Reactive Power,PowerFactor,Max.Demand,Neu.Current etc	√				AI/MV	
Fault current and phase indication of faulty phase viz. R,Y,B, Earth, Unbalance(O/C & E/F Relay).Fault voltage and phase indication of faulty phase viz. R,Y,B (Voltage Protection Relay). Fault Differential and Bias current in Line and Transformer Differential Relay ,Fault distance (in Distance Relay) ,Disturbance Records, Fault Graphs for Remote diagnosis purpose	√				AI	
Total Signals - BCPU & RTU	29 DI + Analog , Measurand Values	9 DO	2DI	5DI + 2 DO		
Essential inbuilt Spare in BCPU,BCU	6 DI	3 DO				

Signals - 33 & 66KV Transformer	Digital Input/AI soft through N.Relay/BCU	Digital Out Put soft through N.Relay/BCU	Digital Input/Output Hard Wire to RTU	Additional signals Hard wire to RTU for backup	Signal Type	Protocol
Breaker ON	√			√	DPI	IEC-61850 with dual Communication Ports
Breaker OFF				√		
Front Bus (89A) ISO ON(In-Case of O/D)	√				DPI	
Front Bus (89A) ISO OFF (In-Case of O/D)						
Rear Bus (89B) ISO ON (In-Case of O/D)	√				DPI	
Rear Bus (89B) ISO OFF (In-Case of O/D)						
TRF ISO (89T) ON (In-Case of O/D)	√				DPI	
TRF ISO (89T) OFF (In-Case of O/D)						
Earth Switch (89LE) -1 ON (In-Case of O/D)	√				DPI	

Chapter 6b. Technical Specification for SCADA interface work & Automation

Earth Switch (89LE) -1 OFF (In-Case of O/D)					
Earth Switch (89LE) - 2 ON (In-Case of O/D)	√				DPI
Earth Switch (89LE) - 2 OFF (In-Case of O/D)					
Breaker in service (In-case of I/D BKR)	√				DPI
Breaker in Test (In-case of I/D BKR)					
Trip coil Ckt Healthy - 1 & 2	√				SPI
Spring Charge	√				SPI
Auto Trip(86) Operated	√			√	SPI
Differential Operated	√				SPI
LBB Operated	√				SPI
REF/SEF Prot Operated	√				SPI
SF6 Pressure Low & SF6 Lock Out	√				SPI
Panel DC Fail			√		SPI
L/R Switch in Local	√				DPI
L/R Switch in Remote	√			√	
Relay Int Fault.			√		SPI
Over Current Operated	√				SPI
Earth Fault Operated	√				SPI
BKR CLS COMMAND		√		√	DCO
BKR OPN COMMAND				√	
Front Bus (89A) ISO OPNCOMMAND (In-Case of O/D)		√			DCO
Front Bus (89A) ISO CLS COMMAND (In-Case of O/D)					
Rear Bus (89B) ISO CLS COMMAND (In-Case of O/D)		√			DCO
Rear Bus (89B) ISO OPN COMMAND (In-Case of O/D)					
Trf ISO (89T) OPN COMMAND (In-Case of O/D)		√			DCO
Trf ISO (89T) CLS COMMAND (In-Case of O/D)					
Mastertrip (86) relay reset from Remote		√			SCO
3Phase R,Y,B -Current&Voltage,Active&Reactive Power,PowerFactor,Max.Demand,Neu.Current	√				AI/MV
Fault current and phase indication of faulty phase viz. R,Y,B, Earth, Unbalance(O/C & E/F Relay).Fault voltage and phase indication of faulty phase viz. R,Y,B (Voltage Protection Relay). Fault Differential and Bias current in Line and Transformer Differential Relay ,Fault distance (in Distance Relay) ,Disturbance Records, Fault Graphs for Remote diagnosis purpose	√				AI
Total Signals - BCPU & RTU	28 DI + Analog , Measurand Values	9 DO	2DI	5DI + 2 DO	
Essential inbuilt Spare in BCPU,BCU	6 DI	3 DO			

Chapter 6b. Technical Specification for SCADA interface work & Automation

Transformer - RTCC/A-Eberle Signals	Digital Input/AI soft through TMM	Digital Out Put soft through TMM	Digital Input/Output Hard Wire to RTU	Analog Input soft through TMM	Signal Type	Protocol
A-Eberle Unit Faulty/DC Fail			√		SPI	IEC-61850 with Dual Communication Ports
Oil Temp Alarm	√				SPI	
Oil Temp trip	√				SPI	
Winding Temp Alarm	√				SPI	
Winding Temp Trip	√				SPI	
Buchholz Alarm	√				SPI	
Buchholz Trip	√				SPI	
PRV TRIP	√				SPI	
OLTC OSR	√				SPI	
MOG/LOW Oil level Alarm	√				SPI	
SPR Trip	√				SPI	
OSR Main Tank	√				SPI	
L/R Switch in Local	√				DPI	
L/R Switch in Remote	√					
Auto Mode	√				DPI	
Manual Mode	√					
Fan Fail	√				SPI	
Tap Changer Fail	√				SPI	
OLTC Out of Step/Stuck Up/Motor trip	√				SPI	
Tap Rise/Tap Low Command		√			DCO/RCO	
Tap Rise/Tap Low Command		√				
Oil Temp				√	AI	
Winding Temp				√	AI	
Tap Position				√	AI	
Total Signals - BCPU & RTU	19 DI	2 Command	1 DI	3 Analog , Measurand Values		
Essential inbuilt Spare in BCPU,BCU	2 DI	1 DO				

Signals - 33 & 66KV BusCoupler	Digital Input/AI soft through N.Relay/BCU	Digital Out Put soft through N.Relay/BCU	Digital Input/Output Hard Wire to RTU	Additional signals Hard wire to RTU for backup	Signal Type	Protocol
Breaker ON	√			√	DPI	IEC-61850 with Dual Communication Ports
Breaker OFF				√		
Front Bus (89A) ISO ON(In-Case of O/D)	√				DPI	
Front Bus (89A) ISO OFF (In-Case of O/D)						
Rear Bus (89B) ISO ON (In-Case of O/D)	√				DPI	
Rear Bus (89B) ISO OFF (In-Case of O/D)						
Earth Switch (89AE-1) - ON (In-Case of O/D)	√				DPI	
Earth Switch (89AE-1) - OFF (In-Case of O/D)						
Earth Switch (89AE-2) - ON (In-Case of O/D)					DPI	
Earth Switch (89AE-2) - OFF (In-Case of O/D)						
Earth Switch(89BE-3) - ON (In-Case of O/D)	√				DPI	
Earth Switch(89BE-3) - OFF (In-Case of O/D)						
Earth Switch(89BE-4) - ON (In-Case of O/D)					DPI	
Earth Switch(89BE-4) - OFF (In-Case of O/D)						

Chapter 6b. Technical Specification for SCADA interface work & Automation

Breaker in service (In-case of I/D BKR)	√				DPI
Breaker in Test (In-case of I/D BKR)					
Trip coil Ckt Healthy - 1 & 2	√				SPI
Spring Charge	√				SPI
Auto Trip(86) Operated	√			√	SPI
SF6 Pressure Low	√				SPI
SF6 Lock Out	√				SPI
VT fuse-1 Blown	√				SPI
VT fuse-2 Blown	√				SPI
Panel DC Fail			√		SPI
L/R Switch in Local	√				DPI
L/R Switch in Remote	√			√	
LBB Operated	√				SPI
Relay Int Fault.			√		SPI
Over Current Operated (All stages)	√				SPI
Earth Fault Operated(All stages)	√				SPI
BKR CLS COMMAND		√		√	DCO
BKR OPN COMMAND				√	
Front Bus (89A) ISO OPNCOMMAND (In-Case of O/D)		√			DCO
Front Bus (89A) ISO CLS COMMAND (In-Case of O/D)					
Rear Bus (89B) ISO CLS COMMAND (In-Case of O/D)		√			DCO
Rear Bus (89B) ISO OPN COMMAND (In-Case of O/D)					
AutoTrip(86) relay reset from Remote		√			SCO
3Phase R,Y,B - Current ,BUS PT-01 & BUS PT02 3Phase votages.	√				AI/MV
Fault current and phase indication of faulty phase viz. R,Y,B, Earth, Unbalance(O/C & E/F Relay).Fault voltage and phase indication of faulty phase viz. R,Y,B (Voltage Protection Relay). Fault Differential and Bias current in Line and Transformer Differential Relay ,Fault distance (in Distance Relay) ,Disturbance Records, Fault Graphs for Remote diagnosis purpose	√				AI
Total Signals - BCPU & RTU	31 DI + Analog , Measurand Values	9 DO	2DI	5DI + 2 DO	
Essential inbuilt Spare in BCPU,BCU	6 DI	3 DO			

Signals - 33 & 66KV CAP Bank	Digital Input/AI soft through N.Relay/BCU	Digital Out Put soft through N.Relay/BCU	Digital Input/Output Hard Wire to RTU	Additional signals Hard wire to RTU for backup	Signal Type	Protocol
Breaker ON	√			√	DPI	With Dual Communica
Breaker OFF				√		
Front Bus (89A) ISO ON(In-Case of O/D)	√				DPI	
Front Bus (89A) ISO OFF (In-Case of O/D)						

Chapter 6b. Technical Specification for SCADA interface work & Automation

Rear Bus (89B) ISO ON (In-Case of O/D)	√				DPI
Rear Bus (89B) ISO OFF (In-Case of O/D)					
CAP Bank ISO ON (In-Case of O/D)	√				DPI
CAP Bank ISO OFF (In-Case of O/D)					
Earth Switch ON (In-Case of O/D)	√				DPI
Earth Switch OFF (In-Case of O/D)					
Trip coil Ckt Healthy - 1 & 2	√				SPI
Spring Charge	√				SPI
Auto Trip(86) Operated	√			√	SPI
SF6 Pressure Low & SF6 Lock Out of all chambers	√				SPI
VT fuse Blown	√				SPI
Cap Discharge Time	√				SPI
Netural Displacement	√				SPI
Panel DC Fail			√		SPI
L/R Switch in Local/Remote	√			√	DPI
LBB Operated	√				SPI
Relay Int Fault.			√		SPI
Over Current Operated	√				SPI
Earth Fault Operated	√				SPI
Under Voltage Prot.Operated	√				SPI
Over Voltage Prot.Operated	√				SPI
BKR CLS COMMAND		√		√	DCO
BKR OPN COMMAND				√	
Front Bus (89A) ISO OPNCOMMAND (In-Case of O/D)		√			DCO
Front Bus (89A) ISO CLS COMMAND (In-Case of O/D)					
Rear Bus (89B) ISO CLS COMMAND (In-Case of O/D)		√			DCO
Rear Bus (89B) ISO OPN COMMAND (In-Case of O/D)					
CAP Bank ISO OPN COMMAND (In-case of O/D)		√			DCO
CAP Bank ISO CLS COMMAND (In-case of O/D)					
3Phase R,Y,B - Current&Voltage,Reactive Power,Neu.Current	√				AI/MV
Fault current and phase indication of faulty phase viz. R,Y,B, Earth, Unbalance(O/C & E/F Relay).Fault voltage and phase indication of faulty phase viz. R,Y,B (Voltage Protection Relay). Fault Differential and Bias current in Line and Transformer Differential Relay ,Fault distance (in Distance Relay) ,Disturbance Records, Fault Graphs for Remote diagnosis purpose	√				AI
Total Signals - BCPU & RTU	26 DI + Analog , Measurand Values	9 DO	2DI	5DI + 2 DO	
Essential inbuilt Spare in BCPU,BCU	6 DI	3 DO			

Chapter 6b. Technical Specification for SCADA interface work & Automation

Signals - BUS PT-1&2	Digital Input/AI soft through N.Relay/BCU	Digital Out Put soft through N.Relay/BCU	Digital Input/Output Hard Wire to RTU	Additional signals Hard wire to RTU for backup	Signal Type	Protocol
BUS A (89A) ON	√				DPI	IEC-61850 with Dual Communication Ports
BUS A (89A) OFF						
BUS B (89B) ON	√				DPI	
BUS B (89B) OFF						
Earth Switch (89LE) - 1 ON	√				DPI	
Earth Switch (89LE) - 1 OFF						
Earth Switch (89LE) - 2 ON	√				DPI	
Earth Switch (89LE) - 2 OFF						
BUS-A ISO OPN COMMAND		√			DCO	
BUS-A ISO CLS COMMAND						
BUS-B ISO OPN COMMAND		√			DCO	
BUS-B ISO CLS COMMAND						
Total Signals - BCPU & RTU	8 DI	4 DO				
Essential Spare in BCPU,BCU	2 DI	1 DO				

Signals - Smoke Detector - ALL Sensors,Manual Call Points Integration with RTU over MODBUS TCP/IP Protocol.	Soft Signals	Signal Type	Protocol
All Sensors Alarm operated Signals (10 to 20 Sensors)	√	SPI	MODBUS TCP/IP Protocol with Dual Communication Ports
All Manual Call Points - MCP-1,MCP-2.etc...	√	SPI	

Signals - Battery	Digital Input/AI soft through RTU	AI from Transducer(4 to 20MA) /AI Hard wire signal to RTU	Signal Type	Protocol
Charger				
CHG A AC M/F CUM AC U/V	√		SPI	Modbus Protocol with Dual ports
CHG A AC OVER VOLTAGE	√		SPI	
CHG A RECTIFIER FUSE BLOWN	√		SPI	
CHG A FILTER FUSE BLOWN	√		SPI	
CHG A DC MCB TRIP/OFF	√		SPI	
CHG A DC UNDER VOLTAGE	√		SPI	
CHG A DC OVER VOLTAGE	√		SPI	
CHG A FLOAT	√		SPI	
CHG A BOOST	√		SPI	
CHG A DC FAIL	√		SPI	
CHG B AC M/F CUM AC U/V	√		SPI	
CHG B AC OVER VOLTAGE	√		SPI	
CHG B RECTIFIER FUSE BLOWN	√		SPI	
CHG B FILTER FUSE BLOWN	√		SPI	
CHG B DC MCB TRIP/OFF	√		SPI	
CHG B DC UNDER VOLTAGE	√		SPI	

Chapter 6b. Technical Specification for SCADA interface work & Automation

CHG B DC OVER VOLTAGE	√		SPI	
CHG B FLOAT	√		SPI	
CHG B BOOST	√		SPI	
CHG B DC FAIL	√		SPI	
BATTERY MCCB TRIP/OFF	√		SPI	
DC system Earth	√		SPI	
Insulation fault	√		SPI	
Charger A AC INPUT CURRENT	√		AI	
Charger A AC INPUT VOLTAGE	√		AI	
Charger A DC OUTPUT CURRENT	√		AI	
Charger A DC OUTPUT VOLTAGE	√		AI	
Charger B AC INPUT CURRENT	√		AI	
Charger B AC INPUT VOLTAGE	√		AI	
Charger B DC OUTPUT CURRENT	√		AI	
Charger B DC OUTPUT VOLTAGE	√		AI	
Battery Current	√		AI	
Battery Load Voltage	√		AI	
Battery Voltage from Transducer		√	AI	4 to 20 MA O/P
Battery Current from Transducer		√	AI	

Signals - LT Board	Digital Input Hard Wire to RTU	MFM data through Modbus protocol	Signal Type & Meter OP – Modbus with Dual Ports.
LT AC Fail	√		SPI
R,Y,B Phase Current		√	AI

Signals - Fire Fighting(All Transformers)	Digital Input Hard Wire to RTU	Signal Type
SYSTEM OPERATED	√	SPI
SYSTEM OUT OF SERVICE	√	SPI
TCIV CLOSED	√	SPI
FIRE DETECTOR TRIP	√	SPI
N2 CYLINDER PRESSURE LOW	√	SPI
FIRE SYSTEM ALARM	√	SPI
DC SUPPLY FAIL	√	SPI

MFM - BUS PT -1 ,2 Signals (Front & Rear BUS)	Data Type	Protocol
R-Phase Current	MV/MFI	Modbus
Y-Phase Current	MV/MFI	
B-Phase Current	MV/MFI	
Neutral Current	MV/MFI	
R-Y Phase Voltage	MV/MFI	
Y-B Phase Voltage	MV/MFI	

Chapter 6b. Technical Specification for SCADA interface work & Automation

B-R Phase Voltage	MV/MFI	
-------------------	--------	--

MFM - Signals - All Feeders (Including Bus Section/Coupler OF 11/33/66 KV)	Data Type	Protocol
R-Phase Current	MV/MFI	Modbus
Y-Phase Current	MV/MFI	
B-Phase Current	MV/MFI	
Neutral Current	MV/MFI	
R-Y Phase Voltage	MV/MFI	
Y-B Phase Voltage	MV/MFI	
B-R Phase Voltage	MV/MFI	
Active Power	MV/MFI	
Active Energy	MV/MFI	
Reactive Power	MV/MFI	
Power Factor	MV/MFI	
Maximum Demand	MV/MFI	
Phase angle 1	MV/MFI	
Phase angle 2	MV/MFI	
Phase angle 3	MV/MFI	
THD Mean Current	MV/MFI	
THD Mean Voltage	MV/MFI	

Note1 : Suitable Heavy Duty Relay /Contactor's with free Wheeling Diode to be placed in between RTU- DO card & Trip/Close Coil circuits of respective breakers for all breaker /Isolator open & Close circuits..It should be placed either at RTU (or) Breaker panel end.Its Potential free contact will be connected in the Closing/Tripping Coil Circuits.

Note 2: SF6 Low/Lockout of all chamber signal to be wired up to RTU.

Note 3: PQA & Lithium Ion Signal will be finalized at the time of drawing review.

2.8.1.Comments -

Analog signals (Fault Current levels,Disturbance records, Fault graphs for remote diagnosis, etc,) from Numerical relays needs to be confirmed by vendor before finalize the tender documents.

All the above mentioned signals(Refer Signal List -2.8) including Notifier /Smoke Detector Signal are compulsory and additional signal (10%) will be considered during detailed engineering.

Following indications data format should be configured as a DPS (Double point Status) in Relay(BCPU).

- All Feeders Circuit Breaker ON & Circuit Breaker OFF
- All Feeders BUS Isolators (89A,89B,89L,89T) - ON & OFF
- All Earth Switches ON & OFF

Following command data format should be configured as a DPC (Double point control) in Relay(BCPU).

- All Feeders Circuit Breaker - Open & Close
- All Feeders BUS Isolators (89A,89B,89L,89T) - Open & Close

Chapter 6b. Technical Specification for SCADA interface work & Automation

- All Earth Switches – Open & Close.

3.0 Key Points -

- 1 All SCADA equipments viz DAU / DCU, MFM, Battery Charger, A-Eberle relays, etc. Should be powered through auxiliary supply of 48 V (or) 220 Volt DC.
- 2 Space for Energy Meter – Only Space (**Length - 185 mm & Height - 256 mm with CT, PT, Auxiliary Supply terminals & wiring**) without cut out is required to install energy meters.
- 3 Power Supply for Routers/ Gateway (IT Equipments) through an existing battery bank via DC to DC Converters (Input: 48 VDC/220 VDC, Output: 12 Volt DC) or as per the requirements of Routers.

Converter 01 Specifications : Input 220 Volt DC & Output 12 to 48 Volt DC

Converter 02 Specifications: Input 220 Volt DC (or) 48 Volt DC & Output 12 Volt DC

- 4 Any other wiring / cabling if required due to non availability of serial communication /MODBUS/IEC 61850 protocols (with justified reason) should be hardwired and that is in Contractor's scope.
- 5 Suitable transducers with an output of 4-20 mA have to be installed in the RTCC /Battery charger if required and the outputs of these transducers should be extended to terminal for further extension to the RTU.
- 6 STATION BUS : Topology
 - Dual Homing (or) Redundant Ring with Ethernet/Copper Cable – From BCPU,BCU to Switch
 - Redundant Ring with Fiber Optic Cable – From Switch to RTU/Gateway.
 - Note : Dual Homing (or) Redundant Ring Network topology will be decided during the detail engineering stage.
- 7 The C & R ,RTCC,Battery Charger Panel should have additional spare contacts (potential free) for all SCADA signals – **Refer Signal List 2.8**
- 8 **Data Base File must be downloadable and Uploadable from RTU,CPU,BCPU,BCU and Gateway.**
- 9 **Separate Room/Cabinet With AC for RTU and IT Equipments.**
- 10 **Warranty (5 Years) for SCADA products - All Supplied SCADA material should cover warranty for the duration of 5 years & Warranty period will start after successful commissioning of the SCADA equipments at site. If any SCADA materials found faulty during warranty period should be replaced within two weeks.**
- 11 **Training** should be provided on configuration, installation, commissioning aspects of RTU,DCU,BCU and Numerical Relay - BCPU at your training/work center to the BSES SCADA team (4 to 5 persons) & **Training Expenses** (Air & Local Travel, boarding and Lodging for 4 to 5 persons) at factory/training center(5 days) comes under Vendor's scope.

Chapter 6b. Technical Specification for SCADA interface work & Automation

Training documents to be submitted for approval & Documents should contain all the necessary installations, connections and Data Base development procedure & further trouble shooting procedure, etc., shall also be provided in the manual.

Training at Site: Vendor shall provide One trainer at site for training after commissioning of SCADA RTU at site.

12 Antivirus/Cyber Security_solution for Gateway/RTU unit with 5 years validity need to be considered.

13 Spares: loose Spare Materials for following items with below mentioned quantity to be supplied for emergency back up/maintenance purpose.

- CPU (Main Processor) with Ethernet Interface Card/Memory in RTU – 1 No
- CPU(Main Processor Module in BCU) – 1 No
- Gateway – 1 No
- RTU Rack – 1 No
- BCU Rack – 1 No
- Communication Module for IEC-103 & Modbus Communications with Serial Interface Card/Memory in RTU – 1 No
- DO Contactots – 10% of supplied qty.
- DI/DO/AI/ Cards in RTU – 10% of the total IO signals
- DI/DO/AI/ Cards in BCU – 10% of the total IO signals
- PSU Cards in RTU – 1 No
- Ethernet Switches (9 ,16 & 24 Ports) – 1 No's
- Ethernet Switches (16 & 24 Ports) – 1 No's
- LIU Unit – 1 No
- Fiber Optic Patch Cards with Connectors - 20% of total installed cables.
- MFM – 5% of Supplied Qty.
- DC to DC converters if any for RTU Supply – 1 No.

14 Protection devices for all SCADA Equipmentes –

- Surge Protection devices installation between RTU & MFM Serial loops.
- SPD for Main DC Source.
- HDR/Inter Posing Relay for all Digital Output Signal's.
- All modules (All Digital, Analog Input modules in BCPU and RTU) and ports (Serial and Ethernet ports) must have in-built or external surge protection devices and optical isolation.

15 Local HMI should be consider along with RTU :

- Human machine interface (HMI) with control software package, which shall contain an extensive range of system monitoring and data acquisition (SCADA) and control functions.
- Local control function shall have an access control for various level of authorities (for viewing, analyzing and operating). Logistics (Table & Chairs) shall be included in supply.

Chapter 6b. Technical Specification for SCADA interface work & Automation

HMI shall have 19" foldable monitor ,it should be fixed inside RTU Panels. HMI have a backup battery (UPS, APC make) system for 4 hours back up. All necessary accessories shall be a part of supply and installation work. HMI (KVM Type)shall be fixed inside RTU panel.

- Incase of failure of communication equipments then DR shall be extracted from HMI for further diagnosis purpose only. So, It will not be used as a Gateway for control center data process.
 - The LDMS shall be used for local data acquisition, monitoring and control of substation parameters through RTU. The LDMS shall be a mini SCADA system providing MMI capability for use in the sub-station control room building. The LDMS software shall include following functions:
 - data acquisition for analog, digital, events and pulse accumulator type data
 - data processing – Conversion to engineering units, limit monitoring, data validity test, calculated data
 - Calculated data (such as maximum, minimum, average values with associated time-stamping etc.) of all the station parameters.
 - Sequence of Events Processing
 - Supervisory control
 - Alarm, tagging, trending, quality codes etc.
 - Single Line Diagrams, Trends, daily, weekly, monthly reports etc. shall be prepared by the bidder and integrated on LDMS system. The LDMS shall also have capability to generate additional displays, single line diagrams, reports and trends.
 - The LDMS shall store all real-time telemetered data. All alarms, events, SOE etc. shall also be stored on regular basis. It shall be possible to define daily, weekly, monthly Sub-Station reports on LDMS. It shall be possible to generate reports highlighting the maximum, minimum, average with associated time-stamping etc. of all the station parameters. The historical data stored on the storage medium shall be in standard format and necessary tools for its export to standard spreadsheet programs (Excel and .csv) shall be provided.
- 16 Syatem Architecture : System Architecture should be submitted at the time of tendering process.
- 17 Following tools to be supplied
- laptop 1 No to be supplied with following specification
Make : Lenova & Model : Think Pad L Series
10th Generation Intel Core TM i5-10210UProcessor(4Cores/8Threads, 1.60-GHZ up to 2.10 GHZ with Turbo Boost, 6MB Casche), Windows 10 Pro 64,
35.56cms(14.0)FHD (1366x768)TN220nts Anti-glare, 8GB RAM DDR4
5Years Onsite Warranty, Stereo, Dolby@AudioTM
65W Adaptor, Carry Bag & Wired Mouse, Integrated Intel@UHD Graphics
HDMI Port, 2xUSB 3.2Gen1, 1xUSB 3.2 Type-C Gen 1, 1xUSB3.2 Type-C Gen2.

Chapter 6b. Technical Specification for SCADA interface work & Automation

Laptop Battery 3 Cell,45Wh,CAM 720p HD

Intel Wi-Fi & Blue tooth 5.1

- Tool Bag 1 No's along with following tools,

S.no.	Items	Make	QTY
1	Vacuum Cleaner cum blower	Eureka Forbes Euro Clean	1
2	Screw driver set	Taparia	1
3	Drill machine	Bosch	1
4	RJ45 crimping tool	D-Link	1
5	Plier	,Taparia	1
6	wire cable cutter	Taparia	1
7	LAN continuity tester	MOELISSA MS-LT02	1
8	Soldering Iron and accessories Kit	ESKON	1
9	RS485/RS232 to USB Converter	moxa	1
10	PT sequence tester	HTC	1
11	Head Torch	AG TRADE	1
12	Tool Bag	Standard	1

- Ferrule Printing Machine – 1 No with Sleeves for 1.5,2.5 Sqmm Cables.

- 18 Drawings/GTP shall be submitted to BRPL-3 Sets hardcopy for approval in the event of award of work.
- 19 As Built Drawings 3 Sets Hard copy and 2 Set in Pen drive shall be submitted at the time of Handover of project for Final billing.
- 20 DB back up along with Software in Pen drive shall be handover at the time of Handover of project for Final billing.
- 21 **All the above features are indicative only and detailed engineering and deviation will be analyzed just before actual procurement and with discussion through a supplier/ vendor.**

4.0 System Architecture Diagram

The Tentative System Architecture diagram is enclosed for reference. It will be revised during the approval stage of drawings..

5.0 PACKING AND SHIPMENT

Chapter 6b. Technical Specification for SCADA interface work & Automation

Shall be packed such that protected against corrosion, dampness, heavy rains, breakage and vibration in GPS Enabled Vehicle and shipment status through GPS Device shall be sent to BRPL Project incharge Via SMS/Email.

6.0 QUALITY ASSURANCE

Factory Acceptance Test : BRPL executives shall be visiting the vendors factory for inspection of Supply material. Travel Ticket (return flight), local travel, boarding and lodging shall be in vendor's scope.

Field Quality Plan : Vendor shall submit a field quality plan for approval of buyer before taking up the execution work at site.

7.0 DEVIATIONS

Deviation from this specification, if any, shall be clearly brought out in the offer. Unless the owner explicitly accepts such deviations, it shall be considered that the offer fully complies with the specification. No deviations will be acceptable post order.

TECHNICAL SPECIFICATION

FOR

CABLE INSTALLATION & ACCESSORIES

Prepared by			Rev: 1
Reviewed by	Abhinav Srivastava		Date: 28.03.2017
Approved by	Vijay Panpalia		

Volume – I Technical Specification for Cable Installation and Accessories

1.0 INSTALLATION OF CABLES:

- 1.1 The cable shall be laid as per IS 1255. The Contractor shall prepare cable schedules for all the cable circuits associated with the equipment in the substation showing length, size and routing of each cable which shall be given suitable code numbers and submit the same for Owner's/Engineer's information/approval. Cable and Conduit laying shall be done strictly in accordance with the cable schedules.
- 1.2 The control and power cables shall be laid in conduits, concrete pipes, ducts, trays or cable trenches unless indicated otherwise. The power and control cables shall be laid in different trays. Cables shall be cleated to the cable tray after properly dressing.
- 1.3 Ducts shall be provided wherever cable trenches cross roads with provision of one spare duct for future use.
- 1.4 All civil works, viz, excavations, sand cover, providing brick cover on directly laid cables, construction of foundations, trenches with cable tray supports, cable ducts under roads, back filling, finishing associated with cabling work shall be duly completed.
- 1.5 The Contractor shall supply and install all the surface mounted/ embedded rigid and flexible conduits, their connections, and associated clamps, bushings, lock-nuts, caps etc required in the cabling work.
- 1.6 All conduits and their accessories shall be made of galvanized heavy gauge steel as per BIS Specification. The internal bore of all pipes shall be smooth and suitable for pulling PVC sheathed cables without damage.
- 1.7 The Contractor shall supply all fittings including ordinary tees and elbows, check nuts, male and female fittings pull boxes, junction boxes, conduit outlets, outlet boxes, splice boxes, terminal boxes, gaskets and box covers, saddles and all supporting steel work and all such arrangements which are required to complete the conduit installations.
- 1.8 Pre-fabricated junction boxes, conduit boxes and conduits shall be shop fabricated out of malleable iron or steel plates and shall be galvanized and provided with galvanized malleable iron or steel plate covers and rubber gaskets
- 1.9 All the apparatus, connections and cable work shall be designed and arranged to eliminate the risk of fire and minimize damage which might be caused in the event of fire. Wherever cables pass through floor or wall openings or other partitions, suitable bushes of approved type shall be supplied and put in position by the Contractor.
- 1.10 Standard cable grips, reels and rollers shall be utilized for cable pulling.
- 1.11 Each cable, whether power or control, shall be provided with a metallic or plastic tag of an approved type, bearing cable reference number indicated in the cable schedule prepared by the Contractor, at every 10 meter run and at both ends of the cable, adjacent to the

Volume – I Technical Specification for Cable Installation and Accessories

terminations as well as where cables enter or leave ducts. Cable routing shall be so done that cables are accessible for identification and maintenance easily, and are arranged neatly.

- 1.12 In no case the cables shall be bent sharply or kinked with the radius of bending falling below 15D where D is the overall diameter of the cable.
- 1.13 When power cables are laid in the proximity of communication cables, the minimum horizontal and vertical separation between power and communication cables shall be 600 mm. Wherever possible the power and communication cables shall be located as far from each other as possible. The power and communication cables shall cross each other at right angles.
- 1.14 Wherever cables cross roads, water, oil, sewage or steam-lines, special care shall be taken while designing the trenches/ducts for protection of the cables.
- 1.15 In each cable run, some extra length shall be provided at a suitable location to enable making of one or two straight-through joints for carrying out repairs if the cable develops fault at a later date.
- 1.16 Cable splices shall not be permitted except where called for as per the construction drawings, or where permitted by the Engineer. Straight-through joints in the run of cables wherever unavoidable shall be through joint-boxes.
- 1.17 The termination of cables at various equipments shall be carefully made in accordance with the manufacturer's instructions and detailed connection diagrams.

Termination materials for all cables shall match with the type of cable insulation and have thermal and electrical ratings and chemical properties similar to those of the associated cable.

All terminating materials except for those already supplied with the electrical equipment shall be provided by the Contractor.

- 1.18 Control cable terminations shall be made in accordance with the color code marked wiring diagrams of control circuits. Multi-conductor control cable jackets shall be removed as required to train and terminate the conductors. The cable jacket shall be left on the cable, to the extent possible. The insulated conductors from which the jacket is removed shall be neatly trained in bundles and terminated. The bundles shall be firmly, but not tightly, tied utilizing plastic or nylon ties or specially treated fungus-proof cord.
 - 1.19 The connectors for control cables shall preferably terminate in Ross Courteny terminals and washers and be covered with transparent insulating sleeves so as to prevent accidental contact with ground or adjacent terminals. The insulating sleeves shall be fire resistant and shall be long enough to overlap the conductor insulation.
-

Volume – I Technical Specification for Cable Installation and Accessories

1.20 When control cables are to be fanned out and tied together with cord, the Contractor shall make connections to terminal blocks and test the equipment for proper operation before tying the cables together with cord.

1.21 Jointing of cables shall be made in accordance with the applicable Bureau of Indian Standards Code of practice, Owners approval and manufacturer's special instructions. The materials and tools required for cable jointing work shall be in the Contractor's scope.

1.22 The supply of joint boxes shall include all hardware fittings, compounds, tapes and other materials required for making the joints.

Special tools, clips and saddles, glands, seals, PVC sealing compound, locknut, etc, required for connection and termination of cables shall be in the Contractor's scope.

1.23 All cables shall be megger-tested before jointing. After jointing is completed all L.V cables shall be megger-tested.

Cable cores shall be tested for:

- i. Continuity.
- ii. Absence of cross phasing
- iii. Insulation resistance to earth.
- iv. Insulation resistance between conductors.

2.0 CABLE TRAYS, ACCESSORIES & TRAY SUPPORTS, CONDUITS, PIPES AND DUCTS

2.1 Cable trays shall be run either in concrete cable trench or overhead supported from building steel. The cable trays shall be ladder type for power cable and perforated type for Control cable. The trays shall be supplied with matching fittings and accessories.

2.2 Cable tray shall be fabricated out of rolled mild steel sheets free from flaws such as laminations, rolling marks, pitting etc. Minimum thickness of cable trays shall be 2.0mm.

2.3 Cables shall be clamped to the cable trays in the horizontal runs with 18 gauge GI wires. For vertical runs the cables shall be clamped with suitable site-fabricated clamps.

2.4 All cable trays including perforated sheet trays, weld mesh trays, vertical raceways shall be hot-dip galvanized and epoxy coated. The trays shall be of standard width of 150mm, 300mm, 450mm & 600mm and standard length of 2.5M. Trays upto 300mm shall be perforated type and above 300 mm shall be ladder type.

2.5 The conductors carrying AC and DC supplies shall not be bunched together in a conduit. Where single-core cables are individually drawn into separate pipes, HDPE pipes shall be used.

Volume – I Technical Specification for Cable Installation and Accessories

- 2.6 Flexible metallic conduits shall be used for termination of connections to equipment to be disconnected at periodic intervals and also for termination of connections to level switches, limit switches, pressure switches etc.
 - 2.7 In order to minimize condensation or sweating inside the conduit, all outlets of the conduit system shall be properly drained and ventilated so to prevent entry of insects and water as far as possible.
 - 2.8 The conduits or pipes shall be run along walls, floor and ceilings, on steel supports, embedded in soil, floor, wall or foundation, in accordance with the relevant layout drawings, approved by the Owner.
 - 2.9 All fittings in the conduit systems having threaded connections shall be tightened with full thread engagement and with a minimum of wrench work in order to avoid wrench outs.
 - 2.10 Embedded conduits running parallel to a masonry surface shall, wherever possible, have a cover of at least 38 mm.
 - 2.11 The conduits shall be lead into terminal boxes through the entry points provided by the equipment manufacturers unless otherwise shown in the drawings or unless otherwise directed by the Engineer.
 - 2.12 While installing asbestos pipe or other fiber conduit, cracked pieces shall not be used. The sections cracked or broken during or after placement shall be replaced.
 - 2.13 For underground conduit runs the Contractor shall excavate and backfill as necessary.
 - 2.14 Exposed conduit shall be adequately supported by racks and clamps or straps or by other approved means.
 - 2.15 Where conduits are stubbed out of masonry for future extension outside the structure, they shall be specially protected against corrosion and shall be boxed in against possible physical damage.
 - 2.16 Each conduit run shall be marked with its designation as indicated on the drawings - 'Identification'.
 - 2.17 Where conduit and boxes in locations of severe exposure require, painting of galvanized surfaces with Alkyd Resin Zinc Dust paint following by a finish coat of Aluminum paint, shall be performed by the Contractor in a good and approved manner.
 - 2.18 The Contractor shall bond of metal pipes or conduits in which cables have been installed to the main earthing system.
 - 2.19 The conduits and accessories shall be adequately protected against mechanical damage as well as corrosion.
-

Volume – I Technical Specification for Cable Installation and Accessories

3.0 TERMINATION AND STRIGHT THROUGH JOINTS

- 3.1 Termination and jointing kits for 11KV and 33KV grade XLPE insulated Aluminum cables shall be proven design and make already been extensively used and type tested. Termination kit and jointing kits shall be pre moulded type, taped type or heat shrinkable. The joints and termination shall be tested as per IS 13573. The kit contents shall be of proven design and type tested. Kit contents shall be supplied from the same source as were used for type tested. The kit shall be complete with Aluminum solderless crimping cable lugs and ferrules as DIN standard

The termination kit make and specification shall be strictly as per approval of the Owner.

- 3.2 The straight through and termination kit shall be suitable to withstand the fault level for 11KV and 33KV system

4.0 CABLE GLANDS, LUGS & ACCESSORIES

- 4.1 The cable shall be terminated using double compression type cable glands. The cable glands shall confirm to BS 6121 and of robust construction capable of clamping the cables and armour firmly without injury to the insulation. The cable glands shall be made out of heavy duty brass machine finished and nickel chrome plated. The thickness of plating shall not be less than 10 micron. The rubber component shall be made out of neoprene and tested quality.
- 4.2 The trefoil clamps for single core cables shall be pressurized die cast Aluminum or fiber Glass or Nylon and shall include necessary fixing accessories such as GI bolts and nuts. Trefoil clamps shall have adequate mechanical strength to withstand the forces generated by short circuit current.

5.0 DEVIATIONS

Deviation from this specification, if any, shall be clearly brought out in the offer. Unless owner explicitly accepts such deviations, it shall be considered that the offer fully complies with the specification.

TECHNICAL SPECIFICATION

FOR

**EXHAUST & VENTILATION SYSTEM
INCLUDING AIRCONDITIONING**

Prepared by			Rev: 0
Reviewed by			Date:
Approved by			

Volume-I Technical Specification Exhaust and Ventilation System

1.0 INTENT OF SPECIFICATION

- 1.1 This specification is intended to cover the design, manufacture, assembly, testing at manufacturer's works, supply & delivery, properly packed for transport for site of Air Conditioning system and Ventilation system for substation control room building complete with all materials and accessories for efficient and trouble free operation
- 1.2 In the event of any discrepancy with the listed documents, the stipulation this specification shall govern.

2.0 SCOPE OF SUPPLY

The following equipment shall be furnished with all accessories.

- a) Air Handling system.
- b) Air Conditioning
- c) All necessary components for operation of the above equipment.
- d) All wiring & accessories to complete the installation.
- e) All relevant drawings, data & instruction manuals.
- f) Mandatory spares.
- g) Commissioning spares and recommended spare part list for three (3)

3.0 GENERAL REQUIREMENT

- 3.1 All equipment and material shall be designed, manufactured and tested in accordance with the latest applicable Indian Standards except where modified and/or supplemented by this specification.
- 3.2 Equipment and materials conforming to any other standard, which ensures equal or greater quality, may be accepted. In such case copies of the English version of the standard adopted shall be submitted along with the bid.
- 3.3 In particular, the following standards and specifications are applicable.
- 3.4 Air conditioners suitable for 230V, 50 Hz single phase AC supply shall be capable of performing the functions as cooling, dehumidifying, air circulating and filtering. The air conditioners shall be complete with automatic temperature control and cut-in and cutout etc. for temperature range 16 to 25 degree C.
- 3.5 Outdoor unit of the air conditioners shall be fitted discharge cooled type rotary Compressor.
- 3.6 Air Conditioner shall be 5 Star rated
- 3.7 Air Conditioning shall maintain 22 Degree Celsius in summers and Winters, Environment condition shall be referred from General Design Criteria Chapter 1

Volume-I Technical Specification Exhaust and Ventilation System

- 3.8 Approved make of AC is Voltas/LG/Carrier.
- 3.9 The minimum thickness of the base in outdoor unit shall be 1.20 mm & sheet thickness for rest of the body shall be 0.70 mm (Min.) with galvanized coating thickness of 120 g/ sq. m and shall be provided with stiffeners for robust construction and shall have rounded corners.
- 3.10 The casing of the indoor units shall be made of ABS/HIPS/GS and shall be impact resistant. The control box of indoor unit shall withstand flame retardant.
- 3.11 Remote cordless control with LCD/LED Display for Air conditioner shall be provided with one On/Off timer, selecting fan speed (three speed) and setting up of temperature. Display shall be provided on indoor unit or on handset or on both.
- 3.12 Maximum power consumption of the split air conditioners shall be measured at capacity rating test conditions. Overall power factor of the unit shall be at least 0.85 at capacity rating test conditions

This specification shall be read and constructed in conjunction with the bid documents and annexure to determine the scope of work.

DESIGN CRITERIA

	Air Conditioning shall be supplied in Control Room and Switchgear Room , Maintenance room and SCADA room. Exhaust system shall be supplied in following rooms -Toilet – one Pantry- One
Number and details of wall mounted/Ceiling fan	Battery room – 1 No Control room – 3 No's Switchgear Room – 6 No's Note: Wall mounted fan shall be industrial type, domestic fans shall not be acceptable
Power Point & socket	Each room shall be provided with at least 2 No's 15 Ampere Switch socket and 2 no's 5 ampere switch sockets. Two no's industrial 16 ampere points shall be provided in control room for installation of air conditioning system for future.
	All equipment, accessories and wiring shall have fungus protection, involving special treatment of insulation and metal against fungus, insects and corrosion.

4.0 DEVIATIONS

Deviation from this specification, if any, shall be clearly brought out in the offer. Unless owner explicitly accepts such deviations, it shall be considered that the offer fully complies with the specification.

TECHNICAL SPECIFICATION
FOR
FIRE DETECTION AND ALARM SYSTEM

Prepared by			Rev: 0
Reviewed by			Date:
Approved by			

Technical Specification Fire Detection and Alarm System

1.0 INTENT OF SPECIFICATION:

This specification is intended to cover the design, manufacture, assembly, testing at manufacturer's works, supply & delivery, properly packed for transport FOR site of Fire and smoke Detection & Alarm System for substation control room building complete with all materials and accessories for efficient and trouble free operation.

In the even of any discrepancy with the listed documents, the stipulation of this specification shall govern.

2.0 SCOPE OF WORK

2.1 Scope of Supply

The following equipment shall be furnished with all accessories :-

- a) Smoke and heat detectors and installation.
- b) Manual call point for the substation building.
- c) Fire detection alarm panels which shall be SCADA compatible along with its integration with SCADA.
- d) All wiring & accessories to complete the installation.
- e) All installation hardware.
- f) All relevant drawings, data & instruction manuals.

3.0 GENERAL REQUIREMENT

3.1 Codes and Standard

All equipment and material shall be designed, manufactured and tested in accordance with the latest applicable Indian Standards except where modified and/or supplemented by this specification.

Equipment and materials conforming to any other standard which ensures equal or greater quality may be accepted. In such case copies of the English version of the standard adopted shall be submitted along with the bid.

In particular, the following standards and specifications are applicable.

Indian Electricity Rules	Relevant safety regulation of CEA
Indian electricity act	
CBIP manual	
IS 2189	Code of practice for selection, installation & maintenance of automatic fire alarm system.
IS 2190	Selection, installation & maintenance of first aid, fire extinguisher.
IS 1646	Tariff Advisory Committee Manual
	Code for practice for fire safety of buildings

Technical Specification Fire Detection and Alarm System

This specification shall be read and constructed in conjunction with the bid documents and annexure to determine the scope of work.

4.0 DESIGN CRITERIA

General	<ol style="list-style-type: none"> 1. The fire detection system shall consist of various types of fire detectors, control cabling, fire alarm panels, central monitoring station, annunciation/control panels, local panels. 2. The fire detection and alarm system shall be microprocessor based, analogue addressable system. 3. A central monitoring system shall be provided in the control room covering complete substation. 4. The control system shall be compatible to be interfaced with SCADA system through separate communication port.
Location	Fire detectors shall be provided for the entire substation building including control room, switchgear room, battery charger, corridors, Cable Celler etc. Fire detectors shall be located at strategic location in various rooms of the building.
Operation	<p>The operation of any of the fire detectors / manual call point should result in the following :</p> <ol style="list-style-type: none"> a) A visual signal exhibited in the alarm panel indicating the area where the fire is detected. b) An audible alarm (Hooter) sounded in the panel. c) An external alarm sounded in the building, location of which shall be decided during detailed engineering. d) An alarm should be signaled to the control room.
Detection & Alarm system	<ol style="list-style-type: none"> 1. Each zone shall be provided with two zone cards in the panel so that system will remain healthy even if one the cards become defective which shall be indicated at SCADA . 2. The control panel shall be suitable for 230V AC and 220V DC as power supply.
Cabling	The detector cable and the other control cable shall be armoured, screened and twisted FRLS type in external areas and shall be of unarmoured FRLS type inside building (in conduits)
Tests	<p>All equipment shall be completely assembled wired, adjusted and routine tested at the factory as per relevant standards.</p> <p>Following tests shall be performed on the system</p> <ol style="list-style-type: none"> a) Response characteristics of fire detectors. b) Performance test on fire extinguisher as required in the code. c) A comprehensive visual and functional check for the fire alarm panel. d) Verification of wiring as per approved schematic. e) Testing of fire detection panel as per BS3116 Part IV.
Site Test	All the detectors installed shall be tested for actuation by bringing a suitable smoke source near the detector creating a stream smoke over the detector. After each test smoky atmosphere should be cleared so that the detector shall reset.

Technical Specification Fire Detection and Alarm System

	Certify proper operation of all detectors and call points.
	One of each type of extinguisher shall be tested for its performance.

5.0 DEVIATIONS

Deviation from this specification, if any, shall be clearly brought out in the offer. Unless owner explicitly accepts such deviations, it shall be considered that the offer fully complies with the specification.

TECHNICAL SPECIFICATION
FOR
FIRE EXTINGUISHER

Prepared by			Rev: 1
Reviewed by			Date: 24.05.21
Approved by			

Technical Specification Fire Extinguisher

1.0 INTENT OF SPECIFICATION:

This specification is intended to cover the design, manufacture, assembly, testing at manufacturer's works, supply & delivery, properly packed for transport FOR site of Portable wall and trolley mounted Fire extinguisher and fire buckets for substation control room building complete with all materials and accessories for efficient and trouble free operation.

In the even of any discrepancy with the listed documents, the stipulation of this specification shall govern.

2.0 SCOPE OF WORK

2.1 Scope of Supply

The following equipment shall be furnished with all accessories:-

- a) Wall mounted fire extinguisher-15 Nos. of 4.5kG (CO2 Type)
- b) Trolley mounted fire extinguisher- 5 Nos. of 22.5kg (CO2 Type)
- c) Sand buckets with stand- 4 Set with 4 bucket in each stand
- d) All installation hardware.
- e) All relevant drawings, data & instruction manuals.
- f) Mandatory spares.
- g) Commissioning spares and recommended spare part list for three (3) years of operation.
- h) Rubber Mat for entire Indoor equipments front and backside(as per latest IS)

3.0 GENERAL REQUIREMENT

3.1 Codes and Standard

All equipment and material shall be designed, manufactured and tested in accordance with the latest applicable Indian Standards except where modified and/or supplemented by this specification.

Equipment and materials conforming to any other standard which ensures equal or greater quality may be accepted. In such case copies of the English version of the standard adopted shall be submitted along with the bid.

In particular, the following standards and specifications are applicable.

Technical Specification Fire Extinguisher

Indian Electricity Rules	Relevant safety regulation of CEA
Indian electricity act	
IS 2190	Selection, installation & maintenance of first aid, fire extinguisher.
	Tariff Advisory Committee Manual
IS 1646	Code for practice for fire safety of buildings
IS 940	Portable fire extinguisher, Water type - specification
IS 2878	Fire extinguisher CO2 type
IS 2171	Specification for fire extinguisher dry powder.
IS 10204	Specification for fire extinguisher Mechanical foam type.

This specification shall be read and constructed in conjunction with the bid documents and annexure to determine the scope of work.

4.0 DESIGN CRITERIA

General	The contractor shall supply the required type and quantities of fire extinguisher and Sand buckets. The quantity shall be as per TAC recommendations.
Location	Fire extinguisher and sand buckets shall be installed in Control room, battery room, switchgear room, ACDB & battery charger room, Cable cellar, Transformer yard, Outdoor switchyard and Capacitor bank.
Distribution	The fire extinguishers in various locations shall be as per the guidelines of TAC-India.
Tests	All equipment shall be completely assembled wired, adjusted and routine tested at the factory as per relevant standards.

5.0 DEVIATIONS

Deviation from this specification, if any, shall be clearly brought out in the offer. Unless owner explicitly accepts such deviations, it shall be considered that the offer fully complies with the specification.



TECHNICAL SPECIFICATION
FOR
FIRE SUPPRESSION SYSTEM

Specification No- GN101-03-SP-139-00

Prepared by	Javed Ahmed		Rev: 1
Checked by	Javed Ahmed		
Reviewed by	Abhinav Srivastava		
Approved by	Sheshadri Krishnapura		Date: 21 May 2021

Index

- 1.0 Scope
- 2.0 Code and Standards
- 3.0 Service Conditions
- 4.0 General Requirement
- 5.0 System Design
- 6.0 Installation, Testing and Commissioning
- 7.0 Maintenance
- 8.0 Drawing and Data submission
- 9.0 Shipping
- 10.0 Handling and Storage
- 11.0 Quality
- 12.0 Deviation
- 13.0 Testing and Inspection
- 14.0 Training

1.0. SCOPE:

Switchgear Panel Fire Suppression System: This includes Supply, Installation, Testing and Commissioning of Suppression system.

2.0. CODE AND STANDARDS:

This specification shall be governed by following standards/rules & regulations with all amendments unless otherwise specified in this specification.

S.No.	Standard Name / No	Standard's Description
1	AS 1670.1, AS1603.8, ASNZS 3000	Latest Edition
2	Indian electricity act 2013	Latest Edition
3	Fire Industry Association (FIA), Code of Practice for Design, Installation, Commissioning and Maintenance of Aspirating Smoke Detector (ASD) Systems	Latest Edition
4	NFPA Standards	2001 (2015 Edition)
5	NEC Standards, US	Latest Edition
6	NZS 4512	2003
7	Residential Fire and Burglary:– Household Fire Warning System Units – ANSI/UL 985, 2000/05/26 (5th edition) with revisions up to 2004/04/29	Latest Edition
8	IS-875	Latest Edition
9	Local Fire Authority	Delhi
10	National Building Code	Part 4 Fire and life safety 2016

3.0. SERVICE CONDITIONS:

S.No	Particulars	Data
1	Design Ambient temperature	0°C to 50 °C
2	Seismic Condition	Zone IV as per IS 1893
3	Wind Pressure	195 kg/M ² upto elevation of 30 M as per IS 875
4	Maximum Relative Humidity	100%
5	Maximum Altitude above Sea level	1000M

6	Rainfall	750mm (concentrated in 4 months)
7	Pollution level	Heavy/Dry
8	Average of no thunderstorm days	40 per annum

4.0. Scope of Work:

- a. Supply, Installation, Testing and Commissioning of clean Agent Novec 1230 Fire Suppression system designed to provide a uniform concentration within the electrical panels in accordance with NFPA 2001 and requirements of the contract documents.
- b. Provide all engineering design and materials for a complete agent suppression system including Novec 1230 storage cylinders with steel bracket, extinguishing agent, detection tube, cylinder valve and associated accessories including but not limit to; adaptors, pressure switch, Fire Detection tube fittings etc, required for complete operation of system.
- c. All necessary safety requirements such as warning signs, discharge alarm shall be part of system.
- d. The necessary nomenclature such as pressurization level, agent volume, and gross/net weight of cylinder shall be clearly marked on cylinder.
- e. Prior to supply of material at site. Contractor must submit following documents for approval of Engineer-in-charge.
- f. Drawing in A-4 size, clearly showing the panel, routing of tube inside the panel, location and fixing arrangement of cylinder & system components.

5.0 System Description:

- a) The detection tube shall be fixed with cylinder valve at top of cylinder. The tube shall be pressurized with dry nitrogen at 16 bars. In case of fire and on reaching of pre-determined temperature, the tube shall rupture and gas shall be released from tube/ discharge nozzle over the protected area.

- b) The pressure switch shall be provided for necessary indication of discharge of gas.
- c) The Extinguishing Agent shall be stored in cylinder as liquefied compressed gas, super pressurized with dry nitrogen at 195 psi minimum
- d) The cylinder shall be equipped with brass valve, pressure gauge (to monitor agent pressure) and isolation valve for maintenance purposes. The cylinder bracket shall be of steel construction with quick release clamp.
- e) The detection tube shall be installed throughout the compartments of panel. The location and spacing of tube shall be above the hazard, to be protected.
- f) In case of ILP System Nozzles shall be placed properly over the protected area.
- g) With system activation, a signal should be generated via Audio Visual Alarm installed at convenient location as per Engineer-in-Charge.

6.0 System Components:

The bidder shall provide an under taking from Principle Manufacturer of product they intent to install, that manufacturer will fully support the bidder for this specific project.

- a) Cylinder of steel construction with standard red epoxy paint finish. Cylinders shall be accompanied by original manufacturers test certificate confirming the contents of the cylinder.
- b) The cylinders shall be from reputed Manufacturers only. Cylinders shall be super pressurized with dry nitrogen to an operating pressure and temperature as per manufacturer recommendations.
- c) Each cylinder shall have pressure gauge and low pressure switch to provide visual and electrical supervision of the cylinder pressure. The low pressure switch shall be wired to the Audio Visual Alarm to provide audible and visual trouble alarm in the event of drop of pressure. The pressure gauge shall be color coded to provide an easy, visual indication of cylinder pressure.

- d) Furnish a welded steel bracket with each cylinder assembly for holding the cylinders in a saddle with a front bracket piece that secures the cylinders.
- e) The Detection Tube, should be UL approved, UL approval marking, Red Color.
- f) The Pressure Switch should be UL Listed/CE Marked having NO/NC contact.
- g) DLP/ILP Valves should be CE/ISO/EN approved and π marked.
- h) All the Power and Control Cables shall be FRLS type.
- i) System shall give signals to SCADA on through communication port.

MANDATORY APPROVALS/CERTIFICATES SHALL BE REQUIRED

- 1. Authorization letter from Principal OEM of System
- 2. Authorization Letter from OEM of Clean Agent(UL/FM).
- 3. Pneumatic Heat Sensing Tube- UL Listed and marked
- 4. Valve shall be π marked
- 5. Pressure Switch Assembly: UL/CE approved
- 6. UL Approved filling station.

7.0. MAINTENANCE

Bidder shall furnish a maintenance manual and support maintenance activity.

8.0. DRAWING AND DATA SUBMISSION

8.1	Submissions along with the bid	
8.1.1	Duly filled GTP and copy of specification	2 copies + 1 soft copy

9.0. SHIPPING

9.1	Shipping	The bidder shall ascertain at an early date and definitely before the commencement of
-----	----------	---

		manufacture, any transport limitations such as weights, dimensions, road culverts, Overhead lines, free access etc. from the Manufacturing plant to the project site. Bidder shall furnish the confirmation that the proposed Packages can be safely transported, as normal or oversize packages, up to the site. Any modifications required in the infrastructure and cost thereof in this connection shall be brought to the notice of the Purchaser.
		The Bidder shall be responsible for all transit damage due to improper packing.

10.0. HANDLING AND STORAGE

10.0	Handling and Storage	Manufacturer instruction shall be followed. Detail handling & storage instruction sheet / manual needs to be furnished before commencement of supply.
------	----------------------	---

11.0. QUALITY & INSPECTION

11.1	Vendor quality plan	To be submitted for purchaser approval
11.2	Testing & Inspection	As per relevant standards

12.0 Warranty

Warranty shall be 5 Years Minimum. Vendor shall provide free maintenance during warranty period.

Following activities shall be included during period of warranty.

1. one visit by service engineer for general check up -- once in a six month time on each location.
2. Functionality test of the entire system -- once in one year time on each Location.

3. Mandatory Spares shall be provided for upkeeping of system for the period of 5 Years.

13.0 DEVIATION

13.1	Deviation	Deviations from this Specification shall be stated in writing with the tender by reference to the Specification clause/GTP/Drawing and a description of the alternative offer. In absence of such a statement, it will be assumed that the bidder complies fully with this specification. No deviation will be acceptable post order.
------	-----------	---

14.0 TRAINING

Training on installation, commissioning, operation and maintenance shall be included in the quotation.

- At site after installation- 1 Manday



TECHNICAL SPECIFICATION

FOR

VIDEO SURVEILLANCE SYSTEM

Prepared by	Javed Ahmed		Rev: 2
Reviewed by	Abhinav Srivastava		
Approved by	K.Sheshadri		Date: 2 rd Feb 2021

1. SCOPE:

Design, Engineering, procurement of bought out items, manufacture, integration, inspection, factory testing and supply of complete CCTV System for the entire plant as per requisition consisting of following including necessary hardware, software and accessories as applicable.

2. STANDARDS:

In accordance with Latest Relevant IS/IEC.

3. SCOPE OF SUPPLY:

- CCTV cameras suitable for remote operation with all necessary accessories and installation hardware consisting of, but not limited to the following:
 1. High speed zoom lens.
 2. 360 Degree Cameras
 3. Automatic Iris
 4. Pan & tilt unit
 5. Receiver unit
 6. Weatherproof junction box
 7. Weatherproof housing for unit camera.
 8. Glass Dome with reflector shield on outside.
 9. Night Vision.
 10. One set of 360 camera shall be installed before start of work
- System cabinet consisting of following:-
 1. Video encoder, network switches, etc.
 2. Central control unit with all control functions like pan, tilt, focus and consisting of switching unit.
 3. Video Motion Detection system
 4. Video recorder to record video images
- 2 Nos -21" FULL HD, LED Monitor with HDMI interface to CPU with Keyboard, Optical Mouse for monitoring at Main Control Room & Security Security Room.
- Monitoring unit also including Programming unit consisting of programming Monitor LED 21", keyboard and optical mouse, independent of monitoring unit with all required hardware and software for CCTV functioning.
- All furniture required in the Control room and Security Gate, to mount the CCTV equipment like TV, PC, keyboard , DVR, etc.
- All types of Cables (Video, Control/data, Optic Fiber and Power Supply etc.), cable glands, plugs, connectors and accessories, for interconnection of all the equipments supplied by vendor.
- Junction boxes, Power distribution boxes, repeaters, cable glands, etc. as necessary.
- Mounting poles for mounting the camera along with a climbing ladder.
- The Ladder to be provided with wheels & brakes for easy movement on roads.

- HDPE pipe with required pipe fittings for laying optical fiber cables between CCTV Cameras and main control room, and between main control room and security control room (gate / security house).
- Cable trays for CCTV cables within control rooms with required accessories in case required at site. Cable trays outside control room (where main cable duct is not available). Buried cable trench for cabling along the boundary walls.
- All necessary supports for installation of all items supplied by vendor.
- All mounting accessories required to mount various items supplied by vendor.
- Earthing material required for earthing of CCTV equipment installed by Vendor.
- Necessary base frame support for mounting CCTV cabinets in main control room.
- Any other item necessary but not specifically listed for successful operation of CCTV system.
- Packing, forwarding, transportation and storage at site of complete CCTV system and accessories.
- Supply of special instrument or tools needed for testing, calibration and maintenance of offered CCTV system.
- Supply of consumables and commissioning spares as per requisition for CCTV system.
- Any other item or/and activity not listed/indicated specifically but necessary for successful operation of CCTV system.
- CCTV monitoring of the site & image capture in case of an intrusion
- Future hardware expansion facility.
- The CCTV system shall be support high resolution viewing & recording.
- The images shall be transferred to a central location or on Mobile using Internet connectivity.
- The System shall be CE & FCC certified
- Complete system shall be from the same manufacturer.
- System should be design to work on low bandwidth WAN with following considerations:
 - 1) Camera stream : H.265
 - 2) Camera resolution : 4CIF (704x480)
 - 3) Video quality : Medium
 - 4) Number of cameras : 01
 - 5) Frame rate per camera at site :25FPS
 - 6) Frame rate per camera at Centre :15FPS
 - 7) Recording type : Continuous 24 Hours per day
 - 8) Desired days of storage per camera : 30 Days

All cameras should support dual stream and configured in such a way that one stream should provide feed to central control centre and other stream should be capable to support edge recording (memory card on camera or NVR). System should be intelligent to monitor WAN and whenever there is outage or central control centre not reachable camera should start recording on memory card or NVR present on camera and capable to restore the data to the central system in the missing area.

4. SCOPE OF SERVICE :

- Installation, integration of complete CCTV system and associated accessories including calibration, cabling, junction boxes, power supply, distribution boxes, etc.
- Installation of CCTV Cameras. The Cameras to be mounted on top of Pole, so as no blind spot is created due to pole.
- Installation of CCTV monitors for monitors located in main control room and monitors located in security control room (gate / security house).
- Installation of monitor located in MCR and security control room.
- Installation of mounting poles wherever applicable.
- Installation of CCTV cabinets for various units.
- Installation of programming unit PC.
- Installation of various junction boxes (signal, power, control) supplied by vendor.
- Laying of co-axial / optical fiber cable between CCTV Camera & Control Console Cabinets.
- Laying of power cable between CCTV Cameras and CCTV Cabinet in MCR.
- Laying of CCTV Cables (video, control, data, power).
- Laying of CCTV fiber optic Cables between MCR and security control room.
- Termination, ferruling and glanding at both ends and interconnection of various cables (video, optical, control, power) supplied by vendor for complete CCTV system.
- Distribution of power supply and reduction to required levels to various CCTV equipment supplied by vendor.
- Integration of CCTV Camera with BRPL Network

The entire IP surveillance system to be designed to control and monitor the locations provided based on following considerations:

- Camera to be of 4 MP (all to be integrated in the VMS present and future)
- CCTV system should be design to work on WAN with at lower bandwidth as low as (256Kbps per camera). Objects or persons should be identified under low bandwidth Scenario
- Bandwidth should be configurable

- System should be design to work and record on 15fps and 1 MP centrally
- System should be design with event based and continuous recording as and when required

Four types of cameras shall be considered to monitor the movement of the people as follows:

- 1) Indoor
 - 2) Outdoor
 - 3) PTZ
 - 4) 360 degrees outdoor
- All cameras shall be True Day/Night function IP camera
 - Analytics to be in built at camera side like – Face capture, Trip Wire, Counter, Object removal, Motion detection.
 - All accessories with the outdoor cameras like JB's, power supply, media converter etc. should be in water proof and dust proof housing
 - All cabling including LAN network will be in scope of vendor in case of open through ISI mark PVC / GI pipes or concealed through ISI mark PVC / HDPE pipe
 - L2 POE Cisco switches should be used to power-up the camera in case of 4 or more at a location else power adapter to be used to power up the cameras
 - Servers should be either HP / IBM
 - Servers should be planned in redundancy

5. TESTS.

All equipment with their terminal connectors, and other hardware etc., shall conform to type tests and shall be subjected to routine and acceptance tests in accordance with Latest Relevant IS .

6. COMPLETENESS OF EQUIPMENT:

Any fittings, accessories or apparatus which may not have been specifically mentioned in this specification but which are usually necessary for the satisfactory operation of the equipment, shall be deemed to have been included in this specification.

7. PACKINGS:

All material shall be suitably packed for transport, direct to site and Manufacturer shall be responsible for all damages/losses due to improper packing. All boxes shall be marked with signs indicating the up and down sides of the boxes along with the unpacking instructions, if considered necessary by the Manufacturers.

Note: All critical areas/rooms to be covered fully leaving no grey area. Placement of cameras shall be such that there should be no shadow portion.



**Specification for
Lighting High Mast
Specification no – GN101-03-SP-33-00**

Prepared by		Reviewed by		Approved by		Rev No.	Date
Name	Sign	Name	Sign	Name	Sign		
Hemanshi		Abhinav Srivastava		Vijay Panpalia		00	04.01.2012

1.0 Scope of supply

This specification covers the requirement of design, manufacture and testing of 16M high mast along with accessories and requisite hardware. The scope also includes erection, installation and associated civil work like foundation etc.

2.0 Codes & Standards

All standards, specifications, and codes of practice referred to herein shall be the latest edition including all applicable official amendments and revisions as applicable.

IS: 5	1994	Colour for ready mixed paints and enamels.
IS:694	1990	PVC insulated cables for working voltages upto and including 1100V.
IS:800	1984	Code of practice for general construction in steel.
IS:802	1978 Part-2	Code of practice for use of structural steel in Overhead transmission line towers. Part-2 Fabrication, galvanising, inspection and packing.
IS: 875	1987 Part-3	Code of practice for design loads(other than earthquake) for buildings and structures: Wind loads
IS:2062	1992	Steel for general structural purposes.
IS: 2551	1982	Danger notice plates.
IS:2629	1985	Recommended practice for hot dip galvanising on iron and steel.
IS :2633	1986	Methods for testing uniformity of coating of zinc coated articles.
IS :3961	1967 Part-2	Recommended current ratings for PVC insulated cables. Part-2: PVC insulated and PVC sheathed heavy duty cables.
IS :5133	1969 Part-1	Boxes for enclosure of electrical accessories- Part-1: steel and cast iron boxes.
IS: 5831	1984	PVC insulation and sheath of electric cables.
IS :8130	1984	Conductors for insulated electric cables and flexible cords.
IS :10810	1984	Method of tests for cables.
IS:13703	1993 Part-1	Low voltage fuses for voltages not exceeding 1000V AC or 1500V DC .Part-1:General requirements
IS:13703	1993 Part-2	Low voltage fuses for voltages not exceeding 1000V AC or 1500V DC .Part-2:Supplementary requirements for fuses for industrial applications
BS EN 10-027 (part-1)	1992	Designation systems for steel: steel names, principal symbols
BS EN 10-027 (part-2)	1992	Designation systems for steel: steel numbers
BS 5135		National Electrical Code.
BS-EN 10-027		Indian Electricity rules(relevant safety regulation of CEA) and acts

--	--	--

3.0 Service Conditions

Equipment to be supplied against this specification shall be suitable for satisfactory continuous operation under the following tropical conditions.

Maximum Ambient Temperature (Degree C)	50
Maximum temperature in shade (Degree C)	45
Min. Temperature of Air in Shade (Degree C)	-10
Relative Humidity (Percent)	10 To 100
Maximum annual rain fall (mm)	1450
Maximum Wind pressure (Kg/Sq. M.)	150
Maximum altitude above mean sea level (Meters)	3000
Isoceranic level (days per year)	50
Seismic level (Horizontal Acceleration) Moderately hot and humid tropical climate conducive to rust and fungus growth	0.3g

4.0 Technical Requirement

4.1. Structure

The High mast shall be of continuously tapered, galvanised polygonal cross section, at least 20 sided, presenting a good and pleasing appearance, based on proven In-Tension design, conforming to the standards referred to above, to give an assured performance, and reliable service. The structure shall be suitable for wind loading as per IS - 875 Part -III, 1987.

4.2. Construction

The mast shall be fabricated from special steel plates, conforming to BS-EN10-027, cut and folded to form a polygonal section and telescopically jointed and welded. The welding shall be in accordance with BS-5135. The sections are joined together by slip-stressed-fit method. No site welding shall be done. Only bolted joint shall be done on the mast at the site. The minimum over lap distance shall be 1.5 times the diameter at penetration. The dimensions of the mast shall be decided based on proper design and accordingly design calculations shall be submitted for review / approval.

The mast shall be provided with fully penetrated flange, free from any lamination or incursion. The welded connection of the base flange shall be fully developed to the strength of the entire section. The base flange shall be provided with supplementary gussets between the bolt holes to ensure elimination of helical stress concentration. The entire fabricated mast shall be hot dip galvanised both internally and externally.

4.3. Door Opening

An adequate door opening shall be provided at the base of the mast and the opening shall be such that it permits clear access to equipment like winches, cables, plug and socket, etc. and also facilitate easy removal of the winch. The door opening shall be complete with a close fitting, vandal resistant, weatherproof door, provided with a heavy-duty double internal lock with special paddle key.

4.4. Dynamic Loading for the Mast

The mast structure shall designed as per TR No-7 of Institutions of lightning engineers of UK and shall be suitable to sustain maximum reaction arising from a wind speed as per IS-875 (three second gust), and is measured at a height of 10 meters above ground level.

4.5. Lantern Carriage

A fabricated Lantern Carriage shall be provided for fixing and holding the flood light fittings and control gear boxes. The lantern Carriage shall be of special design and shall be of steel tube construction, the tubes acting as conduits for wires, with holes fully protected by

grommets. (The lantern carriage tube should not be used as conduit. Separate flexible conduits are used from CG Boxes to the Flood Light Fixtures) The Lantern Carriage shall be designed and fabricated to hold the required number of flood light fittings and the control gear boxes, and also have a perfect self balance.

The Lantern Carriage shall be fabricated in two halves and joined by bolted flanges with stainless steel bolts and plastic lock type stainless steel nuts to enable easy installation or removal from the erected mast. The inner lining of the carriage shall be provided with protective PVC arrangement, so that no damage is caused to the surface of the mast during the raising and lowering operation of the carriage. The entire Lantern Carriage is hot dip galvanised after fabrication.

4.6. Junction Box

The junction box shall be cast aluminium or SS, weather proof IP67 junction box. It shall be provided on the Carriage Assembly as required, from which the inter-connections to the designed number of the flood light luminaries and associated control gears fixed on the carriage, is made.

4.7. Raising and lowering mechanism

It will be necessary to lower and raise the Lantern Carriage Assembly to install and maintain the luminaries and lamps. To enable this, a suitable Winch Arrangement shall be provided, with the winch fixed at the base of the mast and the specially designed head frame assembly at the top.

4.8. Winch

The winch shall be of completely self-sustaining type, without the need for brake, shoe, springs or clutches. Each driving spindle of the winch is positively locked when not in use. Individual drum also should be operated for the fine adjustment of lantern carriage. The capacity, operating speed, safe working load, recommended lubrication and serial number of the winch shall be clearly marked on each winch.

The gear ratio of the winch shall be 53 : 1 or as recommended by manufacturer. However, the minimum working load shall not be less than 750 kg. The winch shall be self-lubricating type by means of an oil bath and the oil shall be readily available grades of reputed manufacturers and details of the oil shall be furnished.

The winch drums shall be grooved to ensure perfect seat for stable and tidy rope lay, with no chances of rope slippage. The rope termination in the winch shall be such that distortion or twisting is eliminated and at least 5 to 6 turns of rope remains on the drum even when the

lantern carriage is fully lowered and rested on the rest pads. It should be possible to operate the winch manually by a suitable handle and/or by an external power tool. It would be possible to remove the double drum after dismantling, through the door opening provided at the base of the mast. Also, a winch gearbox for simultaneous and reversible operation of the double drum winch shall be provided as part of the contract.

The winch shall be type tested in a reputed test lab/ Institution and the test certificates shall be furnished before supply of materials. Test certificate shall be furnished by the bidder from the original equipment manufacturer, for each winch in support of the maximum load operated by the winch.

4.9. Head Frame

The head frame, which is to be designed, as a capping unit of the mast, shall be of welded steel construction, galvanised both internally and externally after assembly. The top pulley shall be of appropriate diameter, large enough to accommodate the stainless steel wire ropes and the multi-core electric cable. The pulley block shall be made of corrosion resistant material, and is of the cast Aluminium Alloy (LM-6) or SS. Pulley made of synthetic materials such as Plastic or PVC is not acceptable. Self-lubricating bearings and stainless steel shaft shall be provided to facilitate smooth and maintenance free operation for a long period. The pulley assembly shall be fully protected by a canopy galvanised internally and externally.

Close fitting guides and sleeves shall be provided to ensure that the ropes and cables do not dislodge from their respective position in the grooves. The head frame shall be provided with guides and stops with PVC buffer for docking the lantern carriage.

4.10 Stainless Steel Wire Ropes

The suspension system shall essentially be without any intermediate joint and shall consist of only non-corrodable stainless steel of AISI - 316 or better grade.

The stainless steel wire ropes shall be of 7/19 construction, the central core being of the same material. The overall diameter of the rope shall be more than 6 mm keeping in mind contingency. The breaking load of each rope shall not be less than 2350 kg. The design shall have a factor of safety over 5 for the system at full load. The end constructions of ropes to the winch drum shall be fitted with talurit.

The thimbles are secured on ropes by compression splices. Two continuous lengths of stainless steel wire ropes are used in the system and no intermediate joints are acceptable in view of the required safety. No intermediate joints, either bolted or else, shall be provided on the wire ropes between winch and lantern carriage.

4.11 Electrical System, Cable and Cable Connections

A suitable terminal box shall be provided as part of the supply at the base compartment of the high mast for terminating the incoming cable. The electrical connections from the bottom to the top shall be made by special trailing cable. The cable is EPR insulated and PCP sheathed to get flexibility and endurance. Size of the cable is minimum 5 core 2.5 sq mm copper, in case of failure of any core 2 spare cores shall be available. The cable shall be of reputed make. At the top necessary weatherproof junction box to terminate the trailing cable shall be provided. Connections from the top junction box to the individual luminaries is made by using 3 core 1.5 sq mm flexible PVC cables of reputed make. The system shall have in built facilities for testing the luminaries while in lowered position.

Also, suitable provision shall be made at the base compartment of the mast to facilitate the operation of externally mounted, electrically operated power tool for raising and lowering of the lantern carriage assembly. The trailing cables of the lantern carriage rings shall be terminated by means of specially designed, metal clad, multi pin plug and socket provided in the base compartment to enable easy disconnection when required.

4.12 Power Tool for the Winch

A suitable, high-powered, electrically driven, externally mounted power tool, with manual over ride, together with an operating stand shall be supplied for the raising and lowering of the lantern carriage for maintenance purposes. The speed of the power tool may preferably of slow speed, of 1.5 to 1.8 m/minute, so that vibrations associated with high speed operation are avoided. The power tool shall be single speed, provided with a motor of the required rating, suitable for hand/stand operation. The power tool shall be supplied complete with push button type remote control switch, together with 6 (six) meters of power cable, so that the operations can be carried out from a safe distance of 5 (five) meters. The capacity and speed of the electric motor used in the power tool shall be suitable for the lifting of the design load installed on the lantern carriage.

The power tool stand shall be so designed that it will not only be self-supporting but also aligns the power tool perfectly with respect to the winch spindle during the operations. Also, a handle for the manual operation of the winches in case of problems with the electrically operated tool shall be provided and shall incorporate a torque-limiting device.

A separate torque-limiting device to protect the wire ropes from over stretching shall be provided. It shall be mechanical with suitable load adjusting device. The torque limiter is a requirement as per the relevant standards in view of the overall safety of the system.

4.13 Lightning Finial

One number heavy-duty hot dip galvanised lightning finial shall be provided for each mast. The lightning finial shall be minimum 1.2 m in length and shall be provided at the centre of the head frame. It shall be bolted solidly to the head frame to get a direct conducting path to the earth through the mast. The lightning finial shall not be provided on the lantern carriage under any circumstances in view of safety of the system.

4.14 Aviation Obstruction Lights:

Based on site and project specific requirements, 2 nos. Low Intensity Type-B (as per Table 6.3 of Volume-1, Annexure-14 of ICAO Guideline for Aerodrome Design & Operations) LED type aviation obstruction lights of reliable design and reputed manufacturer shall be provided on top of each mast.

4.15 Earthing Terminals:

Suitable earth terminal pad using twin 12 mm diameter stainless steel bolts shall be provided at a convenient location on the base of the Mast, for lighting and electrical earthing of the mast.

4.16 Luminaries:

The non-integral floodlight luminaries with LED Lamp shall be provided with each mast. Optical compartment of the luminary shall be IP 66 and control gear compartment shall be IP 54 or better. Bajaj, Crompton and Philips make luminaries are approved. Detailed technical brochure shall be provided along with the bid.

4.17 Feeder Pillar:

Feeder pillar required for feeding power to the Lighting mast shall also be supplied along with the mast and its accessories. The feeder pillar is fed from the main switchgear / main lighting distribution board. The outgoing of this feeder pillar are connected to the MCBs in the mast. The feeder pillar shall be FLP or WP IP 54 with rain protection canopy in galvanised CRCA sheet or cast Aluminium body (for FLP) and finished with two coats of epoxy primer and grey enamel paint of shade 631 of IS-5. The feeder Pillar shall comprise of incoming 32 Amp TPN switch, HRC fuses, outgoing 25 Amp SP MCB, Time switch and contactor for automatic on & off of circuit with manual override, TP MCB for power tool contactors for reversing the motor and overload Protection of motor. Feeder pillar shall be mounted on suitable foundation near to the mast.

5.0 Tests

All type test certificates for the tests listed in the relevant standards, conducted on identical masts shall be submitted to BSES for approval. Routine tests & acceptance tests as per relevant IS shall be conducted as per approved Quality Plan.

6.0 Marking / Name Plate

The high mast shall be provided with “BSES” insignia with anodized aluminium plate. Anodized plate showing 24X7 customer care number shall also be provided. Name plate shall include manufacturer name, date of manufacturing, warranty period and other details as per standards.

Annexure A: Guaranteed Technical Parameters

Sl. No.	Particulars	Data by purchaser			Data by seller
1	Name and address of manufacturer				
2	Overall height of high mast	12 mtrs	16 mtrs	20 mtrs	
2.1	Make				
2.2	Material of construction of shaft	Grade S355 J O as per BSEN 10025 or equivalent			
2.2	Cross section of mast	20 sided, regular continuously tapered polygonal			
2.3	Number of sections	One	Two	Two	
2.3	Minimum thickness of shaft (mm)	4 mm	Bottom section: 5 mm Top section: 4mm	Bottom section: 5 mm Top section: 4mm	
2.4	Length of individual section (mm)	12000 mm	10900mm / 5850mm	10375mm / 10375mm	
2.5	Minimum Base and top diameter	340mm (A/F) and 150 mm (A/F)	450mm (A/F) and 150 mm (A/F)	500mm (A/F) and 150 mm (A/F)	
2.6	Type of joints	No site joints, mast should be delivered in a single section	Telescopic slip joint, stress fitted	Telescopic slip joint, stress fitted	
2.7	Length of overlap	N/A	750mm	750mm	
2.8	Metal protection treatment of fabricated mast section	Hot dip galvanization through single dipping process			
2.9	Thickness of	Minimum 85 microns as per IS:2629			

Sl. No.	Particulars	Data by purchaser			Data by seller
	galvanizations				
2.10	Size of opening door at base	Approx. 250 X 1200 mm			
2.11	Type of locking arrangement and door construction	Anti vandal type			
2.12	Details of struck board inside	Insulated base board			
2.13	Size , material and thickness of cable termination box				
2.14	Minimum size of base plate diameter	540 mm (min.)	650 mm (min.)	680 mm (min.)	
2.15	Minimum size of base plate thickness	25 mm thick			
2.16	Minimum size of anchor plate thickness	8 mm			
2.17	Details of template	Same as anchor plate but 2 mm thick			
3	Dynamic loading as prevailing at site				
3.1	maximum wind pressure (basic wind speed)	47m/s as per IS:875, p-3			
3.2	Maximum gust speed time	3 seconds			
3.3	Height above ground level at which wind speed is consider	10 mtrs			
3.4	Factor of safety for wind load	1.25			
3.5	Factor of safety for other load	1.15			
3.6	Application standard for mast design	Technical report #7:2000 by ILE, UK			
4	Foundation details				
4.1	Type of foundation	Open raft shallow footing or pile as applicable			
4.2	Size of foundation	as per design conforming to IS:456			
4.3	Design safety factor	2			
4.4	Considered wind speed	180 m /s			
4.5	Depth of foundation	As per requirement of design			
4.6	Average soil bearing capacity	As per site condition			
4.7	Numbers of foundation bolts	6 nos	8 nos		
4.8	PCD of foundation bolts	440 mm (min.)	550 mm (min.)	600 mm (min.)	
4.9	Type of foundation bolt	Tor steel			
4.10	Bolt diameter / length	25mm dia / 750 mm	32mm dia / 1325 mm	40mm dia / 1375 mm	
5	Lantern Carriage				

Sl. No.	Particulars	Data by purchaser			Data by seller
5.1	Diameter of Carriage Ring	Suitable to carry up to 4 nos. floodlights	1200 mm	1200 mm	
5.2	Construction	MS Channels / Tube, Hot dip galvanized	Channels 75X40X4mm thick	Channels 75X40X4mm thick	
5.3	Number of joints	As per manufacturer's standard design (2 segments as per CI no.4.5)	3 segments (2 segments as per CI no.4.5)	3 segments (2 segments as per CI no.4.5)	
5.4	Buffer arrangement between carriage and mast	Rubber padded guide ring provided			
5.5	Load carrying capacity	500 kg	750 kg	750 kg	
5.6	Total weight of assembly with fitting	as per design			
6	Winch				
6.1	Make of winch				
6.2	Number of drums/ winch	Double drum			
6.5	Gear Ratio				
6.3	Capacity	SWL 500 kg	SWL 750 kg		
6.4	Method of operation	Manual and Inbuilt power tool			
6.6	Operating speed				
6.7	Lubricant Arrangement	Permanent oil bath			
6.8	Type of lubricant				
6.9	Material of construction of gear	Phosphorus Bronze / EN 19			
6.10	Tested load per drum	500 kg	750 kg		
6.11	SWL of winch at 410 rpm	500 kg SWL	750 kg SWL		
7	Wire rope				
7.1	Make				
7.2	Grade	AISI 316			
7.3	Number of ropes	3 nos / 5mm (three wire rope)	3 nos / 6 mm (three wire rope)		
7.4	Construction	7./19			
7.5	Diameter of Wire rope	5mm	6mm		
7.6	Factor of safety	Not less than 5	Not less than 6		
7.7	Breaking capacity	Minimum 2350Kgs. X 2			
8	Cable				

Sl. No.	Particulars	Data by purchaser		Data by seller
8.1	Type	EPR coated PCP sheathed		
8.2	Material	Multicore copper conductor		
8.3	Make	Finolex, torrent, Polycab, KEI, Havells		
8.4	Current carrying capacity	As per IS 9968 (Part - 1), 1998		
8.5	conductor size	5CX2.5 sqmm.		
9	Torque limiter			
9.1	Lifting capacity	Upto 500 kg	Upto 750 kg	
9.2	Adjustable / non adjustable	Adjustable		
10	Lantern and Fixture			
10.1	Type Of Lamp	LED, Asymmetrical IP65 fitting		
10.1.1	Wattage	400W		
10.1.2	Make			
10.1.3	Model Number			
10.2	Housing	Single piece gravity die-cast		
10.2.1	Material	Aluminium alloy: LM6		
10.2.2	Ingress protection			
10.2.3	For optical compartment	IP:65/IP:66		
10.2.4	For control gear compartment	IP:54 or better		
10.2.5	Dimensions of lantern	As per design standard		
10.2.6	Weight of lantern with control gear	As per design standard		
10.3	Lamp Cover	Perspex/Toughened glass		
10.3.1	Toughened glass			
10.3.2	Class of glass	AA/SSQ		
10.3.3	Nominal thickness	5mm		
10.3.4	Perspex thickness	2.5mm+/-0.4 mm		
10.4	Material of gasket	Silicon Rubber/ Neoprene		
10.5	Lamp holder	Screw type/three pin type		
10.5.1	Material	Porcelain		
10.6	Ballast	Conventional/Open type/ VI/VPI		
10.6.1	Ballast voltage	240V AC		
10.6.2	Minimum open circuit voltage	198V		
10.6.3	Frequency	50 Hz		
10.6.4	Current output(A), at rated voltage			
10.6.5	Voltage to current ratio () +/-0.5%			
10.6.6	Watt loss (W)	To be specified		
10.7	Power factor of lantern	More than 0.95 lag		
10.7.1	Value of capacitor	To be specified		
10.8	Igniter	Three wire		
10.9	Reflector	Anodised/POT		

Sl. No.	Particulars	Data by purchaser			Data by seller
10.9.1	Angle of tilt of lamp	To be specified			
10.9.2	Downward light output ratio	More than 70%			
10.9.3	Angle of throw	As per clause 5.12.5			
10.9.4	Angle of spread	As per clause 5.12.6			
10.9.5	Luminous intensity in C = 0° plane at $\gamma = 90^\circ$	Less than 10 Cd/klm			
10.9.6	Luminous intensity in C = 0° plane at $\gamma = 80^\circ$	Less than 30 Cd/klm			
10.10	Make of fixture	Bajaj, GE, Philips and CGL			
10.10.1	Nos of fixture provided with high mast	4	5	6	
10.10.2	Type of fixture	Weather proof			
11	Others				
11.1	Make of 24 hour Differential Timer Switch	Legrand/ GE/ Schnider/ L&T			
11.2	Make of 32A TPN MCB	GE/ Hager/ Legrand/ Schnider			
11.3	Make of 32A Contactor	L&T/ Schnider/ GE			
11.4	Earth pit	Two numbers of treated earth pit with each mast			
12	GTP and Drawing Submitted	Yes/No			
13	Type Tests Submitted	Yes/ No			
14	Technical Brochure of luminaries submitted	YES / NO			
15	Operation and maintenance manual submitted	YES / NO			

TECHNICAL SPECIFICATION
FOR
PACKING & TRANSPORTATION

Prepared by			Rev: 0
Reviewed by			Date:
Approved by			

Volume-I Technical Specification Packing and Transportation

1.0 PACKING AND TRANSPORTATION

- 1.1 Packing shall be sturdy and adequate to protect all assemblies, components and accessories from injury by corrosion, dampness, heavy rains, breakage and vibration encountered during transportation, handling and storage at the plant site. All accessories, which are likely to get damaged during transit if transported mounted on the equipment, shall be removed, adequately packed and shipped separately. All openings shall be sealed. Spare parts shall be packed separately and clearly marked. They shall be specially packed for long storage without injury.
 - 1.2 The bidder shall after proper painting, pack and crate all plant equipment for sea shipment/air freight in a manner suitable for export to a tropical humid and saline air borne climate region as per Internationally accepted export practice in such a manner so as to protect it from damage and deterioration in transit by road, rail and/or sea and during storage at site till the time of erection. The bidder shall be held responsible for all damages due to improper packing.
 - 1.3 The bidder shall give complete shipping information concerning the weight, size, contents of each package including any other information the Owner may require. The weight and size of the package shall be such that they can be easily transported from the maker's works to the plant site by ship/air, road ways and railways.
 - 1.4 The bidder shall ascertain at an early date and definitely before the commencement of manufacture, any transport limitations such as weights, dimensions, road culverts, overhead lines, free access etc. from the manufacturing plant to the project site; and furnish to the Owner confirmation that the proposed packages can be safely transported, as normal or oversize packages, upto the plant site. Any modifications required in the infrastructure and cost thereof in this connection shall be done and borne by the bidder.
 - 1.5 The bidder shall prepare detailed packing list of all packages and containers, bundles and loose materials forming each and every consignment dispatched to 'site'. The bidder shall further be responsible, for making all necessary arrangements for loading, unloading and other handling right from his works; and from Indian port for equipment under the Off-shore Supply till the 'site' and also till the equipment is erected, tested and commissioned. The bidder shall be solely responsible for proper storage and safe custody of all equipment.
 - 1.6 All packages must be marked consecutively from number one upwards covering all shipments until completion of the plant equipment execution without repeating the same number. Each box, crate, case bundle or each piece of loose material shall be painted with a combination of one white band and one yellow band of a least 4 cm wide each, round the body of the box, crates, etc as the case be for easy identification.
- 2.0** GPS instrument must be installed for proper tracking of material during transit of major equipment like 11KV & 66 KV panels etc. of MAP my india make (asset tracking system)
-

Volume-I Technical Specification Packing and Transportation

3.0 DEVIATIONS

Deviation from this specification, if any, shall be clearly brought out in the offer. Unless owner explicitly accepts such deviations, it shall be considered that the offer fully complies with the specification.

TECHNICAL SPECIFICATION

FOR

MATERIALS WORKMANSHIP & TEST

Prepared by			Rev: 0
Reviewed by			Date:
Approved by			

Volume-I Technical Specification Materials Workmanship and Tests

1.0 MATERIAL, WORKMANSHIP & TESTS

1.1 General

All materials used in the manufacture of the offered plant equipment shall be of high grade, free from defects and imperfections, of recent manufacture and unused. Materials not specifically described elsewhere, shall as far as applicable and practicable conform to the latest specification of ISS where applicable and equivalent International Standards. Liberal factors of safety shall be used throughout the design for all parts of plant equipment when subjected to the most severe operating conditions. The working stress in all parts of the plant equipment shall be bestowed with ample margins for possible overstressing due to shock.

All work shall be performed and completed in accordance with the best modern shop practice in manufacture of high grade equipment.

Castings shall be free from blow-holes, flaws, cracks or other defects; and shall be smooth, close-grained and of true form and dimensions. No plugged or filled-up holes or other defects will be accepted. No casting shall be burned, plugged, patched or welded; and no repairs or defects will be accepted.

All materials, supplies, parts and assemblies supplied under this specification shall be tested as far as reasonably practical.

All welded joints shall be free from defects such as blow-holes, slag inclusions, lack of penetrations, under-cuts, cracks etc; and shall be made by qualified and tested welders. Slag shall be ground after joint completion; and well reinforced smooth welds shall be made.

1.2 Inspection, Testing program and Notification

Before manufacture commences, the contractor shall submit an outline of the proposed inspection and testing programmes (Quality Assurance Programme - QAP) for all major stages during manufacturing of major equipment. This inspection and testing programme shall include for the various items, the designation number, the kind of test, test standard and the extent of witness by the Owner/Engineer or third party.

The notification of the individual witness inspections made by the Owner/Engineer or the third party, shall be given by the contractor using facsimile or telex or e-mail in a format to be agreed upon. The contractor shall notify the Owner/Engineer within 21 days prior to the date on and the place at which item shall be ready for testing. If any postponement becomes necessary, the contractor shall provide written notification of same at least 72 hours prior to the originally scheduled date.

If the Owner/Engineer does not attend the test at the place and at the date which the contractor has stated in his notification, the contractor shall proceed with the test, which shall

Volume-I Technical Specification Materials Workmanship and Tests

be deemed to have been made in their presence and shall forthwith forward to them duly certified copies of the test readings.

Before erection commences, the contractor shall submit an outline of the proposed erection inspection and test programme during the erection of major systems. The individual testing procedure shall be submitted as progress of erection work of the equipment, systems and/or units, coordinated with relevant work of the complete plant.

Before commissioning commences, the contractor shall submit an outline of the proposed commissioning test procedure. The test programmes shall be maintained by the contractor during erection and commissioning.

1.3 Test : General

During manufacture, the Owner's representative shall have the right to expedite and/or inspect design, materials, workmanship and progress of manufacture of the contractor's and his sub-contractor's plant system equipment and may reject any defective materials considered unsuitable for the intended purpose or which does not comply with the intent of this specification. The contractor, upon any such rejection by the Owner or his representative, shall rectify or replace the defective or unsuitable material. The contractor shall provide every reasonable inspection facility to the Owner's inspector or representative at his own and his sub-contractor's works.

Material being furnished against this order shall only be shipped when factory inspection satisfactory to the Owner and/or his representative has been conducted. Such inspection and acceptance for shipment shall not however, relieve the contractor from entire responsibility for furnishing the plant system equipment conforming to the requirement of this specification nor shall prejudice any claim, right or privilege which the Owner may have, because of the use or supply of defective or unsatisfactory materials for the plant system equipment. Should the inspection be waived by the Owner, such waiver shall not also relieve the contractor in any way, from his entire obligations under this order.

The plant system equipment shall at factory or after installation be demonstrated capable of performing satisfactorily upto the contractor's guaranteed performance. All tests required by this specification, including retests and inspection, that may be necessary owing to failure to meet any tests specified, shall be made at the contractor's expense. Additional tests, as necessary, shall be made to locate any such failure and after determining the causes of failure and rectifying it, specified tests shall be repeated to establish that the rebuilt plant system equipment meets with the specification in every respect. Should the equipment ultimately fail to pass the tests specified, the Owner will have the option to reject the unit.

The bidder shall state in the proposal, the shop testing facilities available. Should full capacity testing equipment be not available, the bidder shall state the method proposed to be adopted with detailed computations and justification for adopting such a method to reliably ascertain the equipment characteristics corresponding to full capacity testing.

1.4 Test Certificate

Volume-I Technical Specification Materials Workmanship and Tests

In accordance with approved QCP, the results of the tests shall be certified by the Owner/Engineer or independent agency as applicable. As and when the item of the plant equipment has passed the tests, the Owner/Engineer shall furnish to the contractor a certificate in writing to that effect. The Quality Control Plan (QCP) shall be issued by the contractor within 1 months after NTP. Document files containing material certificates, test reports, etc shall be compiled for each QCP item of plant equipment; and shall be suitably identified (including equipment classification reference) and bound. Copies of compiled file shall be submitted as per distribution schedule

1.5 Tests at Manufacturers Works

The major equipment of the plant to be supplied under this contract shall be subjected to shop inspection and tests. After NTP, the contractor shall issue within 1 months a QCP indicating the kind and extent of inspection and tests to be carried out on the offered plant equipment components to prove whether the equipment fulfills the requirement of the contract in view of:

- Safety Conditions
- Consideration of the applied standards and regulations
- Execution of workmanship

SITE TESTS

Tests conducted at sites shall be indicated by bidder.

2.0 DEVIATIONS

Deviation from this specification, if any, shall be clearly brought out in the offer. Unless owner explicitly accepts such deviations, it shall be considered that the offer fully complies with the specification.

TECHNICAL SPECIFICATION
FOR
MISCELLANEOUS ACTIVITIES

Prepared by			Rev: 0
Reviewed by			Date:
Approved by			

Volume-I Technical Specification Misc Activities

1.0 SERVICE AFTER SALES

- 1.1 The bidder shall furnish in detail about his organization for rendering service after sales, covering deployment of personnel and supply of spares, for ensuring efficient operation and maintenance of the offered plant equipment. The details of spares and service facilities possessed by them should be elaborated.
- 1.2 The bidder shall guarantee furnishing of the following in respect of after sales services including spares:-
 - i) Providing services of his specialists on indent from the Owner for periodical or special maintenance of the plant; as well as for identifying sources of trouble, if any, reported and measures for immediate rectification.
 - ii) The bidder shall guarantee maintenance of adequate spares at his works to be supplied on indent from the Owner at short notice during the life of the plant.

2.0 BID DATA, DRAWINGS AND INFORMATION REQUIRED

- 2.1 Technical data sheets, drawings, schedules with supporting information incorporating the details in compliance to spec but not limited to the following shall be furnished along with the proposal:
 - 2.2 Duly filled in 'Schedule of Guaranteed and other Technical Particulars Schedules 'C' except for data which cannot be finally furnished with the Bid. The Price and Delivery Schedule-B duly filled in.
 - 2.3 Dimensioned outline drawings of the offered overall plant and separately for equipment including cross-sectional drawings showing dimensions, net weights, shipping weights and suggested arrangement layout of proposed plant & equipment with auxiliaries etc. Technical Literature/leaflets of the above plant equipment.
 - 2.4 Manufacturers' catalogues showing the construction details of various equipments should be furnished indicating clearly the technical preference of the offered equipment over the specified equipment.
 - 2.5 List of users of comparable plant equipment with the year in which the Diesel plant and other critical plant equipment was put actually into service. For technical acceptability of the bid, proven experience of the bidder in manufacture and satisfactory and trouble free performance of the critical plant equipment for at least three (3) years is essential for which the bidder shall furnish necessary documents in support of the above.
 - 2.6 A bar chart of design, engineering, procurement, manufacture, testing, delivery, installation, commissioning and site testing including civil structural and architectural works of the proposed plant equipment.
-

Volume-I Technical Specification Misc Activities

- 2.7 Technical description of the proposed plant equipment and materials particularly outlining any additional list out features proposed for safety & reliability. List out items of work & services not included and which has to be provided by the Owner for satisfactory commissioning of the offered plant equipment supplied.
- 2.8 The bid shall not be considered if the bidder fails to submit all the details asked for. Proposal should be complete without ambiguity and should be clearly written against each item.
- 2.9 Bidder shall furnish Quality Assurance Programme for design, manufacture, assembly, erection, testing & commissioning including civil, structural and architectural works along with the proposal for all equipment covered under this specification whether manufactured by the bidder or procured from other sources.
- 2.10 Technical deviations from the specification, if any, shall be clearly listed in the Schedule-E. In absence of any deviation given in Schedule-E and accepted by Owner, it will be bidder's responsibility and his contractual obligation to supply the Plant equipment as per specification to Owner/Engineer's approval.
- 2.11 List of shop and site tests, the bidder proposes to carry out including those pertaining to their sub-suppliers works shall be clearly brought out in Schedule – G. In addition to above tests, the bidder shall conduct any other tests, to Owner/Engineer's approval, which are considered important for satisfactory operation of plant equipment.
- 2.12 Bidder shall furnish all required mandatory and startup commissioning spare parts as well as maintenance tools and tackles with unit prices for the offered plant equipment.

3.0 POST CONTRACT DATA AND DRAWINGS

- 3.1 The contractor shall submit within thirty (30) days from the date of the order and Notice to Proceed (NTP) certified dimensioned drawings and technical schedules giving every detail of the offered plant equipment particularly the following:
 - 3.2 Completely filled in schedule of guaranteed particulars and other technical particulars.
 - 3.3 Single line diagrams; logic diagrams, dimensioned general arrangement and equipment layout drawings showing front and side elevations, plan and sectional views of the offered equipment forming part of the contractor's supply; The drawings should also indicate structures & supporting details including foundation outline and loading data etc.
 - 3.4 Final version of all drawings and data submitted along in the proposal mentioned above.
 - 3.5 Structural, thermodynamic and pressure part calculations showing compliance with specifications and codes as and when required.
 - 3.6 Any other drawings/details not specified herein and required by the Owner/Engineer to correctly coordinate the offered plant equipment with other contractor's work.
-

Volume-I Technical Specification Misc Activities

- 3.7 Civil design calculations.
- 3.8 Detailed specifications and data sheets of the plant equipment with auxiliaries.
- 3.9 Detail drawings of critical equipment units, assemblies, parts etc. as deemed necessary.
- 3.10 Design calculations of conductor sizing, cable sizing, main equipment sizing etc.
- 3.11 Schematic wiring diagrams along with write-ups for control, interlocks, instrumentation, protection, circuits. Terminal blocks and terminals arrangement drawings showing power & control cable connections.
- 3.12 Owner/Engineer will return to the contractor one (1) print of each drawing either.
 - (a) stamped approved or (b) marked up with the comments. In case of (a), no further submission of a drawing will be required. In case of (b), the contractor shall correct his original drawings to conform to comments made by the Owner/Engineer and resubmit within two (2) weeks of receipt of comments in the same manner as stated in the Distribution Schedule. The Owner/Engineer's approval shall not relieve the contractor from any of his obligation and responsibility to manufacture and supply equipment conforming to this specification, unless a written amendment to the specification is issued by the Owner.
- 3.13 After approval of the drawings, reproducible of each drawing shall be supplied. Final drawings shall be certified as Approved for Construction. Should any minor revision be made after approval the contractor shall re-distribute prints and reproducible as per the Distribution Schedule. Every revision shall be marked by a number, date and subject in a revision block provided in the drawing.
- 3.14 Reproducible shall be of quality to produce clear and legible prints and any inferior reproducible will be returned by the Owner for replacement with suitable reproducible. All reproducible shall be mailed rolled (not folded) on the outside of regular mailing tubes except for small sizes which can be mailed unfolded in envelope with a cardboard backing. The prints and reproducible shall be mailed in the most expeditious manner and shall be accompanied with a letter of transmittal.

4.0 INSTRUCTION MANUAL

- 4.1 At least one (1) month prior to the dispatch of the plant equipment, fifteen (15) copies of installation, testing and adjustments after installation, operation and maintenance manuals shall be furnished. These manuals shall be sturdily bound volumes and shall contain every drawings and information required for installation, testing, setting and adjustment of all components after installation, operation and maintenance of the equipment and all its components. Separate tabs shall be used for such instructions concerning each equipment control components, electrical and other accessories. The other data needed for servicing the components and ordering their spare parts.

Volume-I Technical Specification Misc Activities

- 4.2 Marked erection prints identifying the components parts of the equipment, as transported, with its assembly drawings.
- 4.3 Detailed dimensioned assembly and cross sectional drawings and description of all the plant system equipment with auxiliaries and drawings identifying all spare parts for re-order.
- 4.4 Documentation

Correspondence, drawings, progress reports, schedules, tests reports and instruction manuals shall be mailed in requisite copies in accordance with Distribution Schedule.

5.0 WORK SCHEDULE

- 5.1 Time being the essence of the proposal, preference will be given for the offers quoting earlier deliveries. The bidder shall include in his proposal his programme for furnishing and erecting the offered plant & equipment.
- 5.2 The programme shall be in the form of master network identifying the key phases in various areas of total plant work, such as design work, procurement of raw materials, manufacture of components & subassemblies; complete erection of equipment and all other field activities. The master network shall conform to completion of trial operation from the date of Letter of Award within a period of 4 months. The trial operations shall commence any day within 15 days prior to the date of completion indicated above.
- 5.3 This master network shall be discussed and agreed before the issue of letter of award. Engineering drawings as well as technical data sheets submission schedule shall also be discussed and finalized before the issue of letter of award. Provisions of the liquidated damages leviable for delays in completion of trial operation shall become effective after the above mentioned date.
- 5.4 After the contract award, the contractor shall plan the sequence of work of manufacture and erection including associated civil works to meet the Owner's power plant commissioning requirements; and shall ensure that all work/manufacture, shop testing, inspection & shipment of the equipment in accordance with the required construction/erection sequence.
- 5.5 Within seven (7) days of acceptance of the letter of award, the contractor shall submit, for review and approval, two copies (1 reproducible and 1 print) of Detailed Network schedules, based on the Master Network (mutually agreed by the Owner & contractor) to the Owner/Engineer showing the logic & duration of the activities in the following areas
 - i) Engineering, Procurement, Manufacturing & Supply Detailed engineering activities in regard to procurement of raw materials including bought out items, manufacture, dispatch/ shipment & receipt at site.
 - ii) Civil, Structural & Architectural Works:

Detailed engineering activities in regard to civil & structural works execution based on the offered equipment and approved drawings including detailed execution of execution activities covering the complete scope of work.
 - iii) Erection, Testing and Commissioning:

Volume-I Technical Specification Misc Activities

Detailed erection, testing and commissioning activities, covering the complete scope of work of the offered plant equipment coordinated with the civil and structural works executed.

5.6 Detailed Manufacturing Program

Detailed manufacturing PERT/PRIMAVERA programme for all the manufacturing activities of the offered plant equipment at contractor's/subcontractor's works shall be furnished within 7 days of letter of award.

The manufacturing network shall be supported by detailed procurement programme for critical bought out items/raw materials

Pre-erection Activity Programme

- A) Manpower Deployment
- B) Tools and plant mobilization plan
- C) Detailed Site Mobilization Plan

5.7 Within a week of approval of the Network schedule, the contractor shall forward to the owner/Engineer copies of the Computer initial run data in an acceptable manner

5.8 The network shall be updated every month; or as frequency as possible to mutual agreement. Within seven (7) days following the monthly review, a progress meeting shall be held at the work (possible) wherein the major items of the plant or equipment are being produced. The meeting will be attended by the Owner/Engineer and responsible representatives of the contractor. The contractor shall be responsible for minuting the proceedings of the meeting, a report of which shall reach the Owner or the Owner/Engineer not later than 7 days following the meeting.

5.9 Access to the contractor's and/or sub-contractor's work shall be granted to the Owner/Engineer at all reasonable times for the purpose of ascertaining the progress

6.0 PROGRESS REPORTS

During execution of the contract either in manufacture or erection/commissioning, the contractor shall furnish monthly progress report to the Owner or the Owner/Engineer in a format as specified indicating the progress achieved during the month, and total progress upto the month as against scheduled and anticipated completion dates in respect of key phase of work or manufacture and shipment such as release of drawings for fabrication, procurement of raw materials, inspection and testing. If called for by the Owner/Engineer, the contractor shall also furnish to the Owner or the Owner/Engineer resources data in a specified format and time schedule. The contractor shall also furnish any other information necessary to ascertain progress if called for by the Owner/Engineer

Volume-I Technical Specification Misc Activities

7.0 DEVIATIONS

Deviation from this specification, if any, shall be clearly brought out in the offer. Unless owner explicitly accepts such deviations, it shall be considered that the offer fully complies with the specification.



Specification for

66kV SOLIDCORE POST INSULATORS

Specification no. GN101-03-SP-49-00

Prepared by:		Checked by :		Approved by:		Rev	Date
Name	Sign	Name	Sign	Name	Sign		
Tanu		Meenakshi		K.K.Alla		00	31-July-14

General Specification**1.0 CODES & STANDARDS:**

Materials, equipment and methods used in the manufacture of Solid core post insulators shall conform to the latest edition of following –

National/International Standard

Standard Code	Standard Description
IS - 2544	Porcelain post insulators for system with nominal voltage greater than 1000 V
IS - 731	Porcelain insulators for overhead power lines with a nominal voltage greater than 1000 V
IEC - 62231	Composite station post insulators for substation with a.c. voltages greater than 1000 V upto 245 kV
IEC - 60273	Characteristic of indoor and outdoor post insulator for system with nominal voltage greater than 1000V
IEC - 60168	Tests on indoor & outdoor post insulators of ceramic material or glass for system with nominal voltage greater than 1000V
IEC - 60815	Selection and dimensioning of High voltage insulators for use in polluted conditions

The electrical installation shall meet the requirement of Indian Electricity Rules as amended upto date, relevant IS code of practice and Indian electricity act. In addition other rules & regulations applicable to the work shall be followed. In case of any discrepancy the most stringent & restrictive one shall be binding

2.0 MAJOR DESIGN CRITERIA

	Description	Requirement / Rating
2.1.0	System	66KV
2.1.1	Voltage	66KV \pm 10%
2.1.2	Frequency	50HZ \pm 5%
2.1.3	Fault level	31.5KA for 3secs.

Volume – I Technical Specification Post Insulator

2.1.4	Type	<ul style="list-style-type: none"> i) Post insulators for substation shall be of outdoor type suitable for operation under tropical condition with high temperature, humidity and rainfall. ii) Porcelain shall be sound, free from defects, thoroughly vitrified and smoothly glazed iii) Unless otherwise specified, the glaze shall be brown in color. The glaze shall cover all the porcelain parts of the insulators except those areas, which serve as supports during firing or left unglazed for the purpose of assembly. iv) The design of the insulator shall be such that stresses due to expansion and contraction in any part of the insulator shall not lead to deterioration. The porcelain shall not engage directly with hard metal. Shape of the insulator should be such that it facilitates easy cleaning by normal methods.
2.1.5	Protection against Corrosion	All malleable iron steel work, steel bolts and nuts and flanges shall be hot dip galvanized in accordance with IS:2629 with latest amendment thereof.

3.0 QUALITY ASSURANCE

3.1	Vendor quality plan	To be submitted for purchaser approval.
3.2	Inspection point	To be mutually identified and agreed in quality plan.

4.0 PROGRESS REPORTING

4.1	Out Line Document	To be submitted for purchase approval for outline of production, inspection, testing, inspection, packing, dispatch, documentation programme.
4.2	Detailed Progress Report	<p>To be submitted to purchaser once a month containing</p> <ul style="list-style-type: none"> i) Progress on material procurement ii) Progress on fabrication (As applicable) iii) Progress on assemble (As applicable) iv) Progress on internal stage inspection v) Reason for any delay in total

		<p>programme</p> <p>vi) Details of test failures if any in manufacturing stages</p> <p>vii) Progress on final box up constraints / Forward path</p>
--	--	---

5.0 DRAWING, DATA & MANUALS

5.1.0	To be submitted along with bid	<p>Seller has to be submitted :</p> <p>i) Tentative GA /cross sectional drawing of product showing all the views / sections</p> <p>ii) Detailed reference list of customers already using the offered product during the last 5 years with particular emphasis on units of similar design and rating</p> <p>iii) Completely filled GTP</p> <p>iv) Deviations from this specification. Only deviations approved in writing before award of contract shall be accepted.</p> <p>v) Details of manufacturer's quality assurance standards and programme and ISO 9000 series or equivalent national certification</p> <p>vi) Type test report from CPRI/ERDA shall be submitted for the type , size & rating of product / equipment offered along with bid in case the type test report for identical product is not available then type report of higher size / rating shall be submitted for review. They shall be considered valid 5 years from date of test.</p> <p>vii) Complete product catalogue and manual along with the bid.</p> <p>viii) Recommended spare parts and consumables items for 5 years of operation with prices and spare parts catalogue with list for future requirements.</p>
5.2.0	After award of contract, seller has	<p>i) Programme for production and</p>

Volume – I Technical Specification Post Insulator

	to submit mentioned drawings for buyer's Approval (A) / Reference (R)	testing (A) ii) Guaranteed Technical Particulars (A) iii) Calculations to substantiate choice of electrical , structural , mechanical component size / ratings (A) iv) Detailed dimensional drawing for all components, general arrangement drawing showing detailed component layout and the detailed schematic and wiring drawings for all components (like marshalling box) v) Terminal arrangement & cable box details etc. (as applicable) (A) vi) Drawing for major components (A) vii) Rating & Diagram plate (A) viii) Detailed loading drawing to enable the buyer to design and construct foundations (as applicable) (R) ix) Transport / Shipping dimensions with weights, wheel base details, untanking height etc. (As applicable) (R) x) List of makes of all fittings and accessories (A) xi) Detailed installation and commissioning instructions (R) xii) Quality plan
5.3.0	Submittals required prior to dispatch	i) Inspection and test reports, carried out in manufacturer's work (R) ii) Test certificates of all bought out items iii) Operation and maintenance instruction as well as trouble shooting chart / manuals. iv)
5.4.0	Drawing and document size	Standard size paper A0, A1 , A2, A3, A4
5.5.0	No of drgs./Documents required at different stages	As per Annexure A scope of supply

6.0 INSPECTION & TESTING

6.1.0	Inspection and Testing during manufacture	
6.2.0	Routine tests	Tests shall be carried out in accordance with IS 2544

Volume – I Technical Specification Post Insulator

6.3.0	Type Tests	<ul style="list-style-type: none"> a) On one post insulator of each rating and type tested from CPRI/ERDA, reports to be submitted. b) All the test as per IS 2544 c) In case the product is never type tested earlier, seller has to conduct the type tests from CPRI/ERDA test labs on BSES order at their own cost, before commencement of supply. d) Power frequency withstand test to be carried out on selected sample at the time of acceptance test.
6.4.0	Acceptance test	<p>To be performed in presence of Purchaser at manufacturer works:-</p> <ul style="list-style-type: none"> i) Verification of dimensions ii) Temperature cycle test iii) Mechanical strength test iv) Puncture test v) Porosity test vi) Galvanising test
6.5.0	Sampling	The number of post insulators or post insulator units to be selected at random from the lot for acceptance tests shall be in accordance with Table 3, IS 2544

7.0 PACKING , SHIPPING, HANDLING AND STORAGE

7.0.0	Packing	
7.1.1	Packing protection	Against corrosion , dampness, heavy rains, breakage and vibration
7.1.2	Packing for accessories and spares	Robust wooden non returnable packing case with all the above protection and identification labels.
7.1.3	Packing identification label	<p>In each packing case, following details are required :</p> <ul style="list-style-type: none"> i) Individual serial number ii) Purchaser's name iii) PO number (along with SAP item code , if any) & date iv) Equipment Tag no. (if any) v) Destination vi) Manufacturer / Supplier's name vii) Address of manufacturer's / supplier's its agent viii) Description and quantity ix) Country of origin x) Month and year of manufacturing xi) Case measurement xii) Minimum failing load in kg xiii) Gross and net weight in kilograms xiv) All necessary slinging and stacking instructions.
7.1.4	Shipping	<ul style="list-style-type: none"> i) The bidder shall ascertain at an early date and definitely before the commencement of

Volume – I Technical Specification Post Insulator

		<p>manufacture, any transport limitations such as weights, dimensions, road culverts, overhead lines, free access etc. from the manufacturing plant to the project site, and furnish to the purchaser confirmation that the proposed packages can be safely transported, as normal or oversize packages, upto the plant site. Any modification required in the infrastructure and cost thereof in this connection shall be brought to the notice of the Purchaser.</p> <p>ii) The seller shall be responsible for all transit damage due to improper packing.</p>
7.1.5	Handling and Storage	Manufacturer instruction shall be followed. Detail handling & storage instruction sheet / manual need to be furnished before commencement of supply.

8.0 DEVIATIONS

Deviation from this specification shall be started in writing with the tender by reference to the specification clause/ DTP/Drawing and a description of the alternative offer. In absence of such a statement, it will be assured by the Buyer that the seller complies fully with this specification.

Note: Bidder shall furnish MQP along with technical bid and shall submit required guaranteed technical particulars as per attached Annexure - C

Volume – I Technical Specification Post Insulator**Annexure –A Scope of supply**

1.0 The scope of supply shall include following

- 1.1 Design, engineering, manufacture, assembly, testing at manufacture's works, packing, transportation and delivery to site, supervision of erection, testing at site & commissioning and submission of complete documentation.

Sr. No.	Description	Scope of Supply
1.0	Fully assembled solid core post insulators with all major parts	YES
1.2	Fixing Bolts for insulators	YES
1.3	Routine testing as per this specification	YES
1.4	Type testing as per this specification	YES
1.5	Submission of Documentation as detailed below	YES

1.2 Supervision of testing & commissioning of post insulators on site

1.3 BOQ as following-

Sr. No.	Purchaser Equipment Tag No. / SAP code	Location / Substation name	Unit	Quantity
1		e.g. Santacruz	No	e.g. 1
2		e.g. Alaknanda	No	e.g. 1
3				
4				
5				

2.0 Submission of documents

Submission of drawing, calculations, manual, catalogues, test report shall be as follows

	Along with offer	For Approval after award of contract	Final after approval	Remarks
Drawing	3 copies (Typical drgs)	4 copies	6 copies + 1 soft copy in CD	See clause 5.0 for various drawing required
Calculations	3 copies (Typical)	4 copies	6 copies + 1 soft copy in CD	See clause 5.0 for details
Catalogues	1 copy		6 copies + 1 soft copy in CD	
Instruction manual	1 copy		6 copies + 1 soft copy in CD	
Test Report	2 copy		6 copies + 1 soft copy in CD	Type test and sample routine test reports

3.0 Delivery Schedule

- | | | | |
|-----|-----------------------------|---|--|
| 3.1 | Delivery Period start date | - | from data of purchase order |
| 3.2 | Delivery Period end date | - | as agreed with supplier |
| 3.3 | Material dispatch clearance | - | after inspection by purchaser and written dispatch Clearance for purchaser |

Annexure – B SERVICE CONDITIONS

2.0.0	Delhi Atmospheric conditions	
a)	Average grade atmosphere	Heavy polluted , dry
	Maximum altitude above sea level	1000 M
b)	Ambient Air temperature	Highest 50 deg C, Average 40 deg C
	Maximum ambient air temperature	0 deg C
c)	Relative Humidity	100 % Max
d)	Thermal Resistivity of Soil	150 deg. C cm/W
e)	Seismic Zone	4 as per IS 1893
f)	Rainfall	750 mm concentrated in four months
g)	Wind Pressure	195 Kg/m ² up to 90 M elevation as per IS 875-1975

Annexure C: GURANTEED TECHNICAL PARTICULARS FOR 66 KV Solid Core Post Insulators

Sr. No.	Description	Data By Purchaser	Data By Supplier
1.0	Highest system voltage	72.5 kV	
2.0	Height of unit	As per IS 2544 and IS 5350	
3.0	Bending Strength (min.failing load)	As per IS 2544	
4.0	Tensile Strength	As per IS 2544	
5.0	Compression Strength	As per IS 2544	
6.0	Torsion Strength	As per IS 2544	
7.0	Power frequency flashover voltage a.) DRY b.) WET	As per IS 2544 a.) 150kV b.) 140kV	
8.0	Impulse Flashover Voltage	325 kV	
9.0	One minute power frequency Voltage a.) DRY b.) WET	As per IS 2544	
10.0	Power frequency puncture voltage	As per IS 2544	
11.0	Visible discharge Voltage	As per IS 2544	
12.0	Creepage distance a.) TOTAL b.) PROTECTED	31 mm/kV	
13.0	Diameter of insulating part		
14.0	Top metal fitting pitch circle diameter (PCD)		
15.0	Bottom metal fitting pitch circle diameter (PCD)		
16.0	All ferrous parts hot dip galvanised (as per IS 2629)	YES	
17.0	Suitable for hot line washing	YES	

Annexure –D RECOMMENDED SPARES (DATA BY SUPPLIER)

List of recommended spares as following –

Sr. No.	Description of spare part	Unit	Quality
1			
2			
3			
4			
5			
6			

TECHNICAL SPECIFICATION FOR SPARES AND MAINTENANCE TOOLS & TACKLES

Prepared by	Abhinav Srivastava		Rev: 1
Reviewed by	Vijay Panpalia		Date: 28.03.2017
Approved by	Vijay Panpalia		

Volume – I Technical Specification for Spares and maintenance tools and tackles

1.0 Spares Requirement: Following Spares shall be supply shall be in scope of Vendor for each package in addition to spares mentioned in individual equipment specifications, however in case of duplicity/repetition only once shall be considered with quantity most stringent one quantity.

1. Spare Relay for CRP Panels
 - a. O/C and E/F Relay- 2 Nos
 - b. Master Trip Relay- 2 Nos
 - c. Transformer Monitoring Relay (Eberle)- 1 No.
 - d. Differential Relay (with distance and line differential relay feature)- 1 No
 - e. Trip Circuit Supervision relay- 2 No.
 - f. Transformer Differential Relay- 1 No.
2. Spare Relay for 11kV Panels
 - a. O/C and E/F Relay- 2 Nos
 - b. Master trip Relay- 2 Nos
 - c. Trip circuit supervision Relay– 2 Nos
 - d. REF protection relay – 1 No
3. Communication cable and Probes one of each type
4. Spare Media Converters (Optical to Digital) -1 No
5. 11 kV Board – Spares
 - a. Earthing Truck- 1 No for Each
 - b. CT and PT – 6 Nos each type
 - c. Allen Keys-2 Nos
 - d. Tool Kits-2 Nos
 - e. Discharge Rod suitable for 66kV- 2 Nos
 - f. PT Fuse HRC – 10 Nos
 - g. Vacuum Bottle for 2000A, 1250A and 800A breaker- 2 of each type
 - h. Terminal Jaws – 4 Nos
 - i. Test Terminal Block for Relays-4 Nos
6. Indication lamp for CRP and HT panel each colour- 10 Nos
7. TNC Switches- 2 Nos each type
8. Voltmeter- 2 Nos each type
9. Ammeter- 2 Nos Each type
10. Push buttons for CRP and HT panels- 5 Nos for each type
11. MCB – 2 Nos for each type in loose.
12. Laptop – i7 1TB 8GB RAM of Dell/Lenovo- 1 No
13. Each Transformer NIFPS shall be provided with its cables, one extra N2 cylinder and extra valves
14. Gas filling kit 66KV SF6 C.B with all accessories-1Kit
15. SF6 GAS CYLINDERS 5Kgs-2Nos

Volume – I Technical Specification for Spares and maintenance tools and tackles

2.0 Maintenance tools and tackles: Following supply shall be in scope of Vendor for each package in addition to maintenance tools and tackles mentioned in individual equipment specifications, however in case of duplicacy/repetition only once shall be considered with quantity most stringent one quantity.

1. Cable Spiking tool (UV Make)---1 No
2. Torque Spanners---4 Nos
3. Three Phase Secondary Injection Kit (as per specs) of Omicron make– 1 No

Note: Approval of Model no and make wherever not defined shall be done at the time of Bid evaluation

TECHNICAL SPECIFICATION

GRID TRIVECTOR ENERGY METER

Prepared by	Abhinav Srivastava		Rev: 1
Reviewed by	Vijay Panpalia		Date: 28.03.2017
Approved by	Vijay Panpalia		

Volume – I Technical Specification for Grid Trivector Energy Meter

Grid Meter Technical Specifications -/1 Amp

ISI marked, class- 0.2S, three phase three wire, 4 quadrant, 110 Volts phase to phase, 1 Amp static (Electronic) trivector energy meter confirming to IS: 14697/1999, IEC: 62053-22 and CBIP report no 88, with latest amendment.

1. SCOPE:-

This specification covers design, manufacturer, testing and supply of high precision three phase, 3 wire static trivector energy meter of accuracy class 0.2 S capable of performing functions of energy audit in EHV /sub transmission system.

2. STANDARD APPLICABLE:

The meters shall be of class 0.2 S class accuracy and shall meet all the requirements specified in standard specifications IS: 14697/1999.

3. TECHNICAL REQUIRMENT & DESIGN CRITERION:

- 3.1 Meters are required for installation at substations, The basic system parameters wherein these meters will; be installed shall be as under : -
Secondary voltages : 110V Volts for 3 phase 3 wire
Secondary current : 1 Amp
- 3.2 The meter shall be designed for 1 Amp. CT secondary and 200% overloading.
- 3.3 Accuracy -0.2S as per IS14697
- 3.4 The meters shall make use of non volatile memory for storage of billing and tamper data there shall be no battery back up for the retaining of data.
- 3.5 Computation of demand shall be on the basis of Real Time Clock of the meter itself.
- 3.6 Meters covered under this specification shall be fully static type with non volatile memory to register various billing parameters and complete with other features as detailed out in this specifications. Any other design meeting technical specification requirements or features / accuracy etc. better than this specification requirement manufactured as per relevant IEC /TS shall also be acceptable.
- 3.7 Meters shall be suitable for accurate measurement and display of energy and other billing parameters within the specified limits of errors under balanced and unbalanced loads conditions in a poly phase network.
- 3.8 POWER FACTOR RANGE : Meters shall be suitable for measurement of billing parameters with specified accuracy for full power factor range i.e. zero lag unity zero lead.
- 3.9 KVAh computation shall be on the basis of power factor lag + lead principle.
- 3.10 Multiplying factor for the CTs & PTs ratios shall be external.

Volume – I Technical Specification for Grid Trivector Energy Meter

- 3.11 The display of energy & also demand shall have minimum seven digits with fixed decimal. The energy and demand shall be displayed in KWh & KVA respectively.
- 3.12 The meter shall be fully programmable by the user for billing dates, MD resetting option etc.
- 3.13 Once finalised the meter constants shall be freezed and it shall not be possible by the manufacturer or the user to alter the meter constants at factory or at site.
- 3.14 Provision shall be made to read various billing parameters and also load survey data through a meter reading instrument, This arrangement can be through an optical coupler or any other suitable device galvanically isolated from meter circuit. Provision shall be made to seal the optical coupler to ensure proper security.
- 3.15 Meters shall be designed for satisfactory operation with the following supply voltage / frequency 50 Hz).
- Voltage – V. ref +20% to -30 %
- Frequency – 47.5 Hz to 52.5 Hz (ref. frequency 50 Hz)
- (For above voltage and frequency range the meters shall measure, register and display various parameters accurately).
- 3.16 **DISPLAY PARAMETERS:-**
- The data shall be displayed on LCD display which shall be clearly visible from distance in 7 segment 7 digit.
- The display parameters on Auto Scroll as well as Push Button shall be as per Annexure A
- 3.17 **Meter Reading at Power Outage :-**
- Provision to read the meter in No Power Condition shall be provided.
- 3.18. **MAXIMUM DEMAND REGISTRATION:-**
- Maximum demand computation shall be based on block interval concept with integration period of 15 minutes.
- 3.19 The MD integration cycle shall be on the basis of real time.
- 3.20. **TAMPER FEATURES:**
- Missing potential** – to indicate loss of potential in any or two phases of potential supply. The identification of phase date and time of first occurrence, date and time of last tamper restore and cumulative number of tampering shall be indicated.
-

Volume – I Technical Specification for Grid Trivector Energy Meter

Current unbalance – to indicate there has been unbalance of current beyond the prescribed limits.

Voltage unbalance – to indicate there has been unbalance of Voltage beyond the prescribed limits

CT Short / Open : The meter shall be capable of detecting and recording occurrences and restoration of shorting (bypassing) / opening of any one or two phases of CT when the meter is connected to a 3 phase 4 wire system.

Snapshots (numerical values) of voltage, current, power factor and active import & apparent energy readings as well as the date and time of logging of the occurrence and restoration of all tamper events, subject to meter-memory space as described herein under, should be logged in the meter-memory and available for retrieving through the meter's optical port via MRI and downloading to the BCS.

Minimum 100 events (occurrence and restoration where occurrence and restoration shall be counted as separate events) of all tampers with date and time shall be available in the meter memory on first-in, first-out basis.

The values for voltage, current and P.F. etc. for the purpose of logging occurrence and restoration of various types of tamper shall be mentioned.

Properly designed meter tamper logic should be provided. The tamper logic should be capable of discriminating the system abnormalities from source side and load side and it should not log/record tamper due to source side abnormalities.

Logics for design of above indicated tamper the value of voltage current time etc to be selected for design of tamper logics shall be in consultation with the purchaser,

- 3.21 Auto reset date of MD shall be indicated at the time of finalizing GTP. Provision should be made for automatic reset of max demand at the end of pre-defined period even after installation of meter at site.

- 3.22 Load Survey capability:-

It should be possible to store previous data of **38** days for interval of 15 minutes for parameters as per **and snapshots of energies at 24.00hours** as per **Annexure B**

- 3.23 It should be possible to down load view parameters, daily midnight readings and load survey data on the compatible computer and obtain full details of demand and consumption

- 3.24 Meters shall be four quadrant meters capable of recording active reactive and apparent energy and also demand in all the four quadrants.

- 3.25 **COMMUNICATION:** -For the output ports available in the meter standard communication interface shall only be adopted. The Meters shall conform to either open protocol standard IEC-62056 duly certified by the CPRI/ Modbus protocol or the meter should be API compliant duly certified by competent authority. In case

Volume – I Technical Specification for Grid Trivector Energy Meter

any proprietary protocol is used in the meter, it will be obligatory on the part of the bidders to furnish complete details of proprietary protocol to the purchasers so that there may not be any difficulty in extraction of data from the meter through the available ports when connected to the communication bus (prepared for some other data communication purpose). Details of protocol used are necessarily required to be intimated/ furnished by the supplier to the purchaser. **The supplier shall integrate the meter with the existing communication system and set-up used in BRPL. The supplier has to provide an Undertaking in this regard.**

The energy meter shall have a galvanically isolated optical communication port, so that it can be easily connected to hand held common meter reading instrument for data transfer to or from meter reading instrument with proper security and without error and a hardwired port with RS232 port so that meter is subsequently hooked to a remote metering device such as GSM modem CDMA Modem, PSTN Modem etc and a mandatory RS485 port for to connect meters through daisy chaining. The optical port shall be located in front of the meter and shall have adequate sealing arrangement to seal it. Serial communication protocol shall be adopted for data communication. Meters covered under this tender will be employed for metering at or sub stations. In this case the instantaneous parameters load survey data and tamper information etc will be monitored remotely through computer installed in central station. The data from meter will be transferred to the central station through the either GSM / CDMA / PSTN/ Fiber communication links as meter are required to be completed with capability of remote meter reading.

It shall be possible to download the parameters as per **Annexure C** from Remote location at a frequency of 15 minutes

- 3.26 Output device : The meters shall have a test out put in the form of a blinking of LED for testing of the meters accuracy. Testing shall also be possible through optical port accessible from the front and can be monitored with meter reading instrument having high resolution display. The meters shall give high resolution energy values directly to meter reading instruments. The resolution will be sufficient to enable conduction of the starting current and accuracy test in less time.
- 3.27 Meter shall operate and record satisfactorily independent of phase sequence of input supply so long as phase association between voltage and current circuit is in order.
- 3.28 The performance of meter should not be affected by the external electromagnetic interference such as Electricals discharge of cable and capacitor, harmonics, electrostatic discharges, external magnetic field and injection of DC current in AC circuits etc.
- 3.29 The basic meter shall be designed for overloading up to 200%.
- 3.30 No setting point/ setting register etc, shall be provided for adjustment of measurement errors.

4. CONSTRUCTION OF THE METER:-

Volume – I Technical Specification for Grid Trivector Energy Meter

Body of the meter shall be designed suitable for projection mounting. The meter should be made of high quality raw material to ensure higher reliability and longer life. The meter should be compact and reliable in design. e.g. to transport and immune to vibration and shocks involved in transportation / handling. The construction of the meter shall be suitable for this purpose in all respects and shall given assurance of stable and consistent performance under all conditions especially during dust storm / heavy rains / very hot days. All insulating material used in the construction of the meter shall be non hygroscopic non ageing and of tested quality. All parts that are likely to develop corrosion shall be effectively protected against corrosion. The construction of the meter shall be such as to be sealed independently and prevent unauthorized tampering. The meter cover should be ultrasonically welded with the base.

5. COMPONENT SPECIFICATIONS

Ser No	Component Function	Requirement	Makes and Origin
5.1	Current Transformers	The Meters should be with the current transformers as measuring elements. The current transformer should withstand for the clauses under 5.2.h	The current transformer should withstand for the clauses under 5.2.h
5.2	Measurement or computing chips	The Measurement or computing chips used in the Meter should be with the Surface mount type along with the ASICs.	USA: Analog Devices, Cyrus Logic, Atmel, Phillips, Texas Instruments. South Africa: SAMES Japan: NEC
5.3	Memory chips	The memory chips should not be affected by the external parameters like sparking, high voltage spikes or electrostatic discharges.	USA: Atmel, National Semiconductors, Texas Instruments, Phillips, ST, Microchip Japan: Hitachi or Oki
5.4	Display modules	a) The display modules should be well protected from the external UV radiations. b) The display visibility should be sufficient to read the Meter mounted at height of 0.5 meter as well as at the height of 2 meters (refer 3.2.d for Viewing angle). c) The construction of the modules should be such that the displayed quantity should not disturbed with the life of display (PIN Type). d) It should be trans-reflective HTN or	Hongkong: Genda Singapore: Bonafied Technologies Korea: Advantek China: Sucess Japan: Hitachi, Sony Holland / Korea: Phillips

Volume – I Technical Specification for Grid Trivector Energy Meter

Ser No	Component Function	Requirement	Makes and Origin
		STN type industrial grade with extended temperature range.	
5.5	Communication modules	Communication modules should be compatible for the two RS 232 ports (one for optical port for communication with Meter reading instruments & the other - for the hardwired RS 232 port to communicate with various modems for AMR)	<u>USA:</u> National Semiconductors, HP, Optonica, ST, Holland / Korea: Phillips <u>Japan:</u> Hitachi <u>Taiwan:</u> Ligitek <u>Germany:</u> Siemens
5.6	Optical port	Optical port should be used to transfer the meter data to meter reading instrument. The mechanical construction of the port should be such to facilitate the data transfer easily.	<u>USA:</u> National Semiconductors, HP <u>Holland / Korea:</u> Phillips <u>Japan:</u> Hitachi, <u>Taiwan:</u> Ligitek
5.7	Power Supply	The power supply should be with the capabilities as per the relevant standards. The power supply unit of the meter should not be affected in case the maximum voltage of the system appears to the terminals due to faults or due to wrong connections.	SMPS Type (It should take care of clause 3.1 and 3.5)
5.8	Electronic components	The active & passive components should be of the surface mount type & are to be handled & soldered by the state of art assembly processes.	<u>USA:</u> National Semiconductors, Atmel, Phillips, Texas Instruments, ST, Onsemi <u>Japan:</u> Hitachi, Oki, AVX or Ricoh <u>Korea:</u> Samsung
5.9	Mechanical parts	a) The internal electrical components should be of electrolytic copper & should be protected from corrosion, rust etc. b) The other mechanical components should be protected from rust, corrosion etc. by suitable plating/painting methods.	
5.10	Battery	Lithium with guaranteed life of 15 years	Varta, Tadiran, Sanyo or National
5.11	RTC & Micro controller	The accuracy of RTC shall be as per relevant IEC / IS standards	USA: Philips, Dallas Atmel, Motorola, Microchip Japan: NEC or Oki
5.12	P.C.B.	Glass Epoxy, fire resistance grade FR4, with minimum thickness 1.6 mm	

6. SEALING OF THE METER:-

Volume – I Technical Specification for Grid Trivector Energy Meter

Proper sealing arrangements shall be provided on the meter to make it tamper proof and avoid mishandling by unauthorized person. Atleast two (2) seals on the body, two (2) seal on the terminals blocks and one seal each on communication ports could be provided. All the seals shall be provided on the front side only.

The meter body cover should be ultrasonically welded with the base such that it would not be opened without breaking / damaging the meter body.

7. CONNECTION DIAGRAM AND TERMINAL MARKING:

The connection diagram of the meter shall be clearly shown on inside portion of terminal cover and shall be of permanent nature, Meter terminals shall also be marked and this marking should appear in the above diagram. The holes for lead sealing wire may be 2 mm, one hole should be provided in the head and one in the thread to portion.

Meter shall have a name plate clearly visible effectively secured against removal and indelibly and distinctly marked with all the essential particulars as per relevant standards
i.e.

Manufacturer's name and trademark
Manufacturer's serial number
type and description
Rated current voltage and frequency
Relevant ISS/IEC No should be printed along with ISI certification mark.
Manufacturer's meter constant shall invariably be indicated duly printed.
Name of the owner, purchase order no. and date and month / year of manufacturing. Guarantee period

8.0 TESTS

Type Testing of Meter : -The offered meter should be strictly in conformance to the tender specifications. The offered meters should be fully type tested at NABL accredited Laboratory only in accordance with Tender specifications, IS 14697 with latest amendments to be read along with CBIP Report 1988 with latest amendments. The Type test report should not be more than 2 years old. The attested photocopy of the Type Test results should be enclosed with the offer.

8.1 Acceptance test : -All acceptance test as per IS:14697/1999 with latest amendments, CBIP report No. 88 with latest amendments and IEC 687 with latest amendments ,shall be carried out in the meter

8.2 Routine Test : -All routine tests as per IS:14697/1999 with latest amendments, CBIP report No. 88 with latest amendments and IEC 687 with latest amendments ,shall be carried out in the meter

8.3 PRE DESPATCH INSPECTION:-All acceptance tests and inspection of meter / software

Volume – I Technical Specification for Grid Trivector Energy Meter

shall be carried out at the place of manufacture unless otherwise specially agreed upon by the manufacturer and purchaser at the time of purchases. The manufacturer shall offer to the inspector representing the purchaser all the reasonable facilities, free of charge for inspection and testing to satisfy him that the materials is being supplied in accordance with this specifications. The Company's representative / Engineer attending the above testing will carry out testing as per IEC: 687, IS 14697 and CBIP report No. 88 and this specification and issue test certificate approval to the manufacturer and given clearance for despatch.

- 8.4 GUARANTEE :-**The meter shall be guaranteed for the period of five years from the date of commissioning or two and half year from the date of despatch, whichever is earlier. The meters found defective within the above guarantee period shall be replaced / repaired by the supplier free of cost within one month of receipt of intimation. If the defective meters / software / MRIs are not replaced / repaired within the specified period above the Company shall recover an equivalent amount from any the bills of the supplier.

MINIMUM TESTING FACILITIES:-Manufacturer should posses fully computerized meter test bench system for carrying out routine and acceptance tests as per IEC: 687, IS 14697 and CBIP report No. 88. In addition this facility should produce test reports for each and every meter.

9. MANUFACTURING ACTIVITIES:

Meter should be manufactured using SMT (surface mount technology) component and by deploying automatic SMT pick and place machine and reflow solder process. Further the bidder should own or have assured access (though hire, lease or subcontract) of above facility.

Quality should be ensured at the following stages.

- (a) At PCB manufacturing stage, each Company shall be subjected to computerized bare Company testing.
- (b) At insertion stage all components should under go computerized testing for confirming to design parameters and orientation.
- (c) Complete assembled and soldered PVC should under go functional testing using automatic test equipments (ATEs).
- (d) Prior to final testing and Calibration all meters shall be subjected to aging test
(i.e. metes will be kept in ovens for 72 hours at 55 deg. cent temperature and atmospheric humidity under real life condition at its full load current. After 72 hours meters should works satisfactorily) to eliminate infant mortality.

The calibration of meters shall be done in house. The bidders should submit the list of all components used in meter alongwith the offer.

10. PACKING:-

Each meter may be suitably packed in the first instant to prevent ingress of moisture and dust and than placed in cushioned carton of a suitable material to prevent damage due to shocks during transit. The lid of the carton may be suitably sealed. Each meter be packed in separate cushioned carton. A suitable number of selected cartons may be packed in a

Volume – I Technical Specification for Grid Trivector Energy Meter

case of adequate strength with extra cushioning if considered necessary. The cases may be properly sealed against accidental opening in transit. The packing cases should be marked to indicate the fragile nature of the contents.

- 11. DRAWING & TECHNICAL LEAFLETS:** -Detailed dimensional drawing along with the circuit diagram and detailed technical leaflets showing clearly the quantity or the material used for meters and its constructional features should be furnished along with the offer.
- 12. AFTER SALES SERVICE:** -In order to provide prompt and smooth after sales support / service etc. It shall be preferred to post / engage an engineer / technician in Delhi by the manufacturer, to attend any minor defects immediately and to educate the user about proper installation of meter and programming of MRI base computer taking reading billing data load survey tamper information etc. through MRI and download to PCs to get printouts etc.

Volume – I Technical Specification for Grid Trivector Energy Meter

ANNEXURE –A

DISPLAY SEQUENCE

1. LCD SEGMENT CHECK
 2. METER SERIAL NUMBER
 3. REAL DATE AND TIME
 4. INCOMING ACTIVE ENERGY (TOTAL)
 5. OUTGOING ACTIVE ENERGY (TOTAL)
 6. INCOMING REACTIVE ENERGY (TOTAL)
 7. OUTGOING REACTIVE ENERGY (TOTAL)
 8. INCOMING APPARENT ENERGY (TOTAL)
 9. OUTGOING APPARENT ENERGY (TOTAL)
 10. THREE PHASE POWER FACTOR (INSTANTANEOUS) WITH SIGN
 11. LINE CURRENT L1 (INSTANTANEOUS)
 12. LINE CURRENT L3 (INSTANTANEOUS)
 13. LINE VOLTAGE L1 (INSTANTANEOUS)
 14. LINE VOLTAGE L3 (INSTANTANEOUS)
 15. FREQUENCY
 16. INCOMING ACTIVE DEMAND (INSTANTANEOUS)
 17. OUTGOING ACTIVE DEMAND (INSTANTANEOUS)
 18. INCOMING APPARENT DEMAND (INSTANTANEOUS)
 19. OUTGOING APPARENT DEMAND (INSTANTANEOUS)
 20. INCOMING REACTIVE DEMAND (INSTANTANEOUS)
 21. OUTGOING REACTIVE DEMAND (INSTANTANEOUS)
 22. INCOMING MAXIMUM ACTIVE DEMAND (AT TIME T)
 23. OUTGOING MAXIMUM ACTIVE DEMAND (AT TIME T)
 24. INCOMING MAXIMUM REACTIVE DEMAND (AT TIME T)
 25. OUTGOING MAXIMUM REACTIVE DEMAND (AT TIME T)
 26. INCOMING MAXIMUM APPARENT DEMAND (AT TIME T)
 27. OUTGOING MAXIMUM APPARENT DEMAND (AT TIME T)
-

Volume – I Technical Specification for Grid Trivector Energy Meter

ANNEXURE 'B'

LOAD SURVEY PARAMETERS (15 MINUTES INTEGRATION for last 38 days)

S.NO	Description
1	AVERAGE ACTIVE DEMAND (OUTGOING)
2	AVERAGE ACTIVE DEMAND (INCOMING)
3	AVERAGE APPARENT DEMAND (OUTGOING)
4	AVERAGE APPARENT DEMAND (INCOMING)
5	PHASE VOLTAGE (INSTANTANEOUS) L1
6	PHASE VOLTAGE (INSTANTANEOUS) L3
7	PHASE CURRENT (INSTANTANEOUS) L1
8	PHASE CURRENT (INSTANTANEOUS) L3

LOAD SURVEY PARAMETERS (Snapshot at 24:00 hours for last 38 days)

1	Active Energy (Import)
2	Active Energy (Export)
3	Reactive Energy (Import)
4	Reactive Energy (Export)
5	Apparent Energy (Import)
6	Apparent Energy (Export)

Volume – I Technical Specification for Grid Trivector Energy Meter

ANNEXURE 'C'

INSTANTANEOUS BILLING PARAMETERS IN AMR		
Frequency- every 15 minutes		
S.NO	DESCRIPTION	Unit
1	METER SERIAL NUMBER
2	REAL DATE & TIME
3	INCOMING AVERAGE DEMAND (ACTIVE POWER) IN LAST INTEGRATION PERIOD	kW
4	OUTGOING AVERAGE DEMAND (ACTIVE POWER) IN LAST INTEGRATION PERIOD	kW
5	INCOMING AVERAGE DEMAND (REACTIVE POWER) IN LAST INTEGRATION PERIOD	kVAr
6	OUTGOING AVERAGE DEMAND (REACTIVE POWER) IN LAST INTEGRATION PERIOD	kVAr
7	INCOMING AVERAGE DEMAND (APPARENT POWER) IN LAST INTEGRATION PERIOD	kVA
8	OUTGOING AVERAGE DEMAND (APPARENT POWER) IN LAST INTEGRATION PERIOD	kVA
9	INCOMING MAXIMUM ACTIVE DEMAND (AT TIME T)	kW
10	OUTGOING MAXIMUM ACTIVE DEMAND (AT TIME T)	kW
11	INCOMING MAXIMUM APPARENT DEMAND (AT TIME T)	kVA
12	OUTGOING MAXIMUM APPARENT DEMAND (AT TIME T)	kVA
13	INCOMING MAXIMUM REACTIVE DEMAND (AT TIME T)	kVAr
14	OUTGOING MAXIMUM Reactive DEMAND (AT TIME T)	kVAr
15	INCOMING ACTIVE ENERGY (TOTAL)	kWh
16	OUTGOING ACTIVE ENERGY (TOTAL)	kWh
17	INCOMING REACTIVE ENERGY (TOTAL)	kVArh
18	OUTGOING REACTIVE ENERGY (TOTAL)	kVArh
19	INCOMING APPARENT ENERGY (TOTAL)	kVAh
20	OUTGOING APPARENT ENERGY (TOTAL)	kVAh
21	THREE PHASE POWER FACTOR (INSTANTANEOUS) WITH SIGN	
22	PHASE CURRENT L1 (INSTANTANEOUS)	AMP
23	PHASE CURRENT L3 (INSTANTANEOUS)	AMP
24	Line VOLTAGE L1 (INSTANTANEOUS)	VOLT
25	Line VOLTAGE L3 (INSTANTANEOUS)	VOLT
26	FREQUENCY (INSTANTANEOUS)	Hz
27	INCOMING ACTIVE DEMAND (INSTANTANEOUS)	kW
28	OUTGOING ACTIVE DEMAND (INSTANTANEOUS)	kW
29	INCOMING APPARENT DEMAND (INSTANTANEOUS)	kVA
30	OUTGOING APPARENT DEMAND (INSTANTANEOUS)	kVA
31	INCOMING REACTIVE DEMAND (INSTANTANEOUS) WITH SIGN("+" for LAG "-" for Lead)	kVAr
32	OUTGOING REACTIVE DEMAND (INSTANTANEOUS) WITH SIGN("+" for LAG "-" for Lead)	kVAr



Specification for
OUTDOOR
POTENTIAL TRANSFORMER
(33 & 66KV)

Specification no. SP-PTLU-01-R1

Prepared by:		Checked by :		Approved by:		Rev	Date
Name	Sign	Name	Sign	Name	Sign		
DS		HPB		DG		01	29 -Jan-05
Tanu		Meenakshi		K.K.Alla		02	16-July-14

Volume – I Technical Specification for 66KV Outdoor PT

Record of Revision

Sl. no.	Revision no.	Clause No.	Nature of change	Approved by
1.	R1	2.3.2	Material of tank construction shall be hot dip galvanized with minimum thickness of 610gm/sq mm	MDB/KKA
2.	R1	3.0.0	ABIL included in approved makes of insulators	MDB/KKA
3.	R1	6.1.1	Type Test to be conducted from CPRI/ERDA	MDB/KKA
4.	R1	Annexure C, 10.4	Accuracy class of metering core shall be 0.2	MDB/KKA

Volume – I Technical Specification for 66KV Outdoor PT

General Specification

1.0 CODES & STANDARDS:

Materials, equipment and methods used in the manufacture of Potential Transformer shall conform to the latest edition of following –

National Standard

Standard Code	Standard Description
IS-3156 (Part I to IV)	Specification for Voltage transformer.
IS-4146	Application guide for voltage transformer.
IS-2099	High voltage porcelain bushings
IS-731	Insulator for O/H power line
IS-335	New insulating oil for transformer and switchgear.
IS-9676	Reference ambient temperature of electrical equipment
IS-5561	Specification of electric power connectors
IS-5621	Hollow insulator for use in electrical equipments
IS-3156 (Part I to IV)	Specification for Voltage transformer.
IS-4146	Application guide for voltage transformer.
IS-2099	High voltage porcelain bushings
IS-731	Insulator for O/H power line
	Indian Electricity Rules (relevant safety regulation of CEA)
	Indian electricity act
	CBIP manual

2.0 MAJOR DESIGN CRITERIA & PARAMETERS OF THE PT

	Description	Requirement / Rating	
2.1.0	System	66KV	33KV
2.1.1	Voltage	66KV \pm 10%	33KV \pm 10%
2.1.2	Frequency	50HZ \pm 5%	50HZ \pm 5%
2.1.3	Fault level	31.5KA for 3secs.	26.3KA for 3secs.
2.1.4	Earthing	Solidly grounded	
2.2.1	Type	Single phase, outdoor, dead tank type, oil immersed, self cooled type.	
2.2.2	Construction feature	Oil immersed PT shall be hermetically sealed to eliminate breathing and to prevent ingress of air and moisture.	
2.3.0	Major Parts		
2.3.1	Tank		
2.3.2	Material of Construction	Tank shall be of Galvanized Steel. Minimum galvanizing thickness shall be 610gm/sq mm	
2.3.3	Tank Feature	The tank shall be provided with oil draining plug, Oil level gauge glass.	

Volume – I Technical Specification for 66KV Outdoor PT

2.3.4	Oil Expansion	Stainless steel bellow or diaphragm shall be provided to take care of oil expansion
2.3.5	Core	High grade, non ageing, low loss, high permeability, cold rolled grain oriented silicon steel lamination.
2.4.0	Winding	
2.4.1	Material	Electrolytic Copper
2.4.2	Winding Insulating material	Class A, non catalytic, inert to transformer oil, free from compounds liable to ooze out, shrink or collapse.
2.4.3	Winding Insulation	Uniform
2.4.4	Design features	Winding shall be capable of desired output as per specified limits without exceeding permissible temperature rise.
2.5.0	Insulating oil	
2.5.1	Type	Class 1 new mineral insulating oil as per IS 335, shall be certified not to contain PCBs. Anti oxidant inhibitor if recommended shall be subject to Purchaser's approval.
2.6.0	Bushings and Terminations	
2.6.1	Type	Porcelain bushing
2.6.2	Termination on HV side bushing	The HV Terminal shall be of copper. Termination shall be by bimetallic of Aluminum alloy grade A6 suitable for Twin Zebra ACSR conductor..
2.6.3	Termination of LV side	The secondary terminals shall be provided in IP55 Box with Brass/copper stud type terminals accessible from front with removable cover.
2.6.4	Termination of Earth terminal of HV winding	The earth terminal of HV winding shall be brought out in secondary Terminal box by bushing. This shall be connected with body earth terminal with flexible copper lead through a link.
2.6.5	Terminal marking	Terminals shall be marked as per IS 3156
2.7.1	Minimum creepage distance of bushing	31 mm/KV
2.8.1	Protected creepage distance	At least 50 % of total creepage distance
2.9.1	Over Voltage factor	1.2 times for continuous rating and 1.5 times for 30 seconds.
2.10.1	Atmospheric protection for clamp and fitting of iron and steel	Hot dip galvanizing as per IS 2633
2.10.2	Gland Plate	Min. 3 mm thick detachable with three knockout holes of 3/4 inch.
2.10.3	Cable entry	Bottom for all cables
2.11.1	Earthing	The PT assembly comprising of the chasis, frame work and fixed parts of metal casing shall be provided with two separate body earthing terminals.

Volume – I Technical Specification for 66KV Outdoor PT

3.0 FITTINGS & ACCESSORIES ON POTENTIAL TRANSFORMER

3.1.0	Rating and Diagram Plate	Required
3.1.1	Material	Anodized Aluminum 16SWG
3.1.2	Background	SATIN SILVER
3.1.3	Letters, diagram & border	Black
3.1.4	Process	Etching
3.2.5	Name plate details	Required
3.3.6	Terminal marking of Primary and secondary terminals.	Required
3.4.0	Drain Plug on tank Base	Required

4.0 APPROVED MAKE OF COMPONENTS

4.1.0	Insulator	CJI/JSI/WSI/Modern/Saravana/BHEL/ABIL
-------	-----------	---------------------------------------

5.0 QUALITY ASSURANCE

5.1	Vendor quality plan	To be submitted for purchaser approval.
5.2	Inspection point	To be mutually identified and agreed in quality plan.

6.0 PROGRESS REPORTING

6.1	Out Line Document	To be submitted for purchase approval for outline of production, inspection, testing, inspection, packing, dispatch, documentation programme.
6.2	Detailed Progress Report	To be submitted to purchaser once a month containing <ul style="list-style-type: none"> i) Progress on material procurement ii) Progress on fabrication (As applicable) iii) Progress on assemble (As applicable) iv) Progress on internal stage inspection v) Reason for any delay in total programme vi) Details of test failures if any in manufacturing stages

Volume – I Technical Specification for 66KV Outdoor PT

		vii) Progress on final box up constraints / Forward path
--	--	--

7.0 DRAWING, DATA & MANUALS

7.1.0	To be submitted along with bid	<p>Seller has to be submitted :</p> <ul style="list-style-type: none"> i) Tentative GA /cross sectional drawing of product showing all the views / sections ii) Detailed reference list of customers already using the offered product during the last 5 years with particular emphasis on units of similar design and rating iii) Completely filled GTP iv) Deviations from this specification. Only deviations approved in writing before award of contract shall be accepted. v) Details of manufacturer's quality assurance standards and programme and ISO 9000 series or equivalent national certification vi) Type test report shall be submitted for the type , size & rating of product / equipment offered along with bid in case the type test report for identical product is not available then type report of higher size / rating shall be submitted for review. They shall be considered valid 5 years from date of test. vii) Complete product catalogue and manual along with the bid. viii) Recommended spare parts and consumables items for 5 years of operation with prices and spare parts catalogue with list for future requirements.
7.2.0	After award of contract, seller has to submit mentioned drawings for buyer's Approval (A) / Reference (R)	<ul style="list-style-type: none"> i) Programme for production and testing (A) ii) Guaranteed Technical Particulars (A) iii) Calculations to substantiate choice of electrical , structural , mechanical

Volume – I Technical Specification for 66KV Outdoor PT

		<p>component size / ratings (A)</p> <p>iv) Detailed dimensional drawing for all components, general arrangement drawing showing detailed component layout and the detailed schematic and wiring drawings for all components (like marshalling box)</p> <p>v) Terminal arrangement & cable box details etc. (as applicable) (A)</p> <p>vi) Drawing for major components (A)</p> <p>vii) Rating & Diagram plate (A)</p> <p>viii) Detailed loading drawing to enable the buyer to design and construct foundations (as applicable) (R)</p> <p>ix) Transport / Shipping dimensions with weights, wheel base details, untanking height etc. (As applicable) (R)</p> <p>x) List of makes of all fittings and accessories (A)</p> <p>xi) Detailed installation and commissioning instructions (R)</p> <p>xii) Quality plan</p>
7.3.0	Submittals required prior to dispatch	<p>i) Inspection and test reports, carried out in manufacturer's work (R)</p> <p>ii) Test certificates of all bought out items</p> <p>iii) Operation and maintenance instruction as well as trouble shooting chart / manuals.</p> <p>iv)</p>
7.4.0	Drawing and document size	Standard size paper A0, A1 , A2, A3, A4
7.5.0	No of drgs./Documents required at different stages	As per Annexure A scope of supply

8.0 INSPECTION & TESTING

8.1.0	Inspection and Testing during manufacture	
8.2.0	Tank	<p>i) Checking of dimensions as per approved drawing.</p> <p>ii) Checking for leakage by pressure testing.</p> <p>iii) Thickness of Galvanization shall be 610gm/ sq mm</p>
8.3.0	Porcelain	<p>i) Check dimension.</p> <p>ii) Check finish of sealing surface.</p>

Volume – I Technical Specification for 66KV Outdoor PT

		iii) iv) v)	Check creepage distance. Check for routine electrical test. Check for porosity and temperature cycle test.
8.4.0	Insulating Materials	i) ii) iii)	Sample check for physical properties of materials. Check for dielectric strength. Visual and dimensional checks.
8.5.0	Copper conductor	i) ii) iii) iv)	Check for dimension. Check for elongation. Check for unidirectional scrap. Check for heat shock.
8.6.0	Oil	i) ii) iii) iv) v) vi) vii) viii) ix)	Check for break down voltage. Check for density. Check for flash point. Check for moisture content. Check for neutralization value. Check for inter facial tension at 27 Deg c. Check for sludge content. Check for specific resistance. Check for pour point.
8.7.0	Secondary terminals	i)	Check for one min AC Test
8.8.0	Routine tests		Tests shall be carried out in accordance with IS 3156
8.9.0	Type Tests	a) b)	On one PT of each rating and type tested from CPRI/ERDA All the test as per IS 3156
		c)	In case the product is never type tested earlier, seller has to conduct the type tests from CPRI/ERDA test labs on BSES order at their own cost, before commencement of supply.
8.10.0	Acceptance test		To be performed in presence of Purchaser at manufacturer works:- i) Physical inspection of dimensions and BOM. ii) Verification of terminal marking and polarity. iii) Power frequency dry withstand tests on primary winding. iv) Power frequency dry withstand tests on secondary winding. v) Partial discharge test (this shall be only for future reference) vi) Determination of ratio and phase angle errors according to the appropriate designation or accuracy class.

9.0 PACKING , SHIPPING, HANDLING AND STORAGE

9.0.0	Packing	
9.1.1	Packing protection	Against corrosion , dampness, heavy rains, breakage and vibration
9.1.2	Packing for accessories and spares	Robust wooden non returnable packing case with all the above protection and identification labels.

Volume – I Technical Specification for 66KV Outdoor PT

9.1.3	Packing identification label	In each packing case, following details are required : i) Individual serial number ii) Purchaser's name iii) PO number (along with SAP item code , if any) & date iv) Equipment Tag no. (if any) v) Destination vi) Manufacturer / Supplier's name vii) Address of manufacturer's / supplier's its agent viii) Description and quantity ix) Country of origin x) Month and year of manufacturing xi) Case measurement xii) Gross and net weight in kilograms xiii) All necessary slinging and stacking instructions.
9.1.4	Shipping	i) The bidder shall ascertain at an early date and definitely before the commencement of manufacture, any transport limitations such as weights, dimensions, road culverts, overhead lines, free access etc. from the manufacturing plant to the project site, and furnish to the purchaser confirmation that the proposed packages can be safely transported, as normal or oversize packages, upto the plant site. Any modification required in the infrastructure and cost thereof in this connection shall be brought to the notice of the Purchaser. ii) The seller shall be responsible for all transit damage due to improper packing.
9.1.5	Handling and Storage	Manufacturer instruction shall be followed. Detail handling & storage instruction sheet / manual need to be furnished before commencement of supply.

10.0 DEVIATIONS

Deviation from this specification shall be started in writing with the tender by reference to the specification clause/ DTP/Drawing and a description of the alternative offer. In absence of such a statement, it will be assured by the Buyer that the seller complies fully with this specification.

Annexure –A Scope of supply

1.0 The scope of supply shall include following

1.1 Design, manufacture, assembly, testing at storages of manufacturing as per C I. 12 of this specification, final testing at manufacturer works on completely assembled transformer

Volume – I Technical Specification for 66KV Outdoor PT

before dispatch, packing delivery and submission of all documentation for the Power transformer with all accessories as below

Sr. No.	Description	Scope of Supply
1.0	Fully assembled PT with all major parts like Tank, bushing, Primary terminal with connector and secondary terminal box.	YES
1.1	Galvanised steel structure for PT	NO
1.2	Fixing Bolts for PT	YES
1.3	Routine testing as per this specification	YES
1.4	Type testing as per this specification	YES
1.5	Submission of Documentation as detailed below	YES

1.2 Supervision of testing & commissioning of PT as site

1.3 BOQ as following-

Sr. No.	Purchaser Equipment Tag No. / SAP code	Location / Substation name	Unit	Quantity
1		e.g. Santacruz	No	e.g. 1
2		e.g. Alaknanda	No	e.g. 1
3				
4				
5				

2.0 Submission of documents

Submission of drawing, calculations, manual, catalogues, test report shall be as follows

	Along with offer	For Approval after award of contract	Final after approval	Remarks
Drawing	3 copies (Typical drgs)	4 copies	6 copies + 1 soft copy in CD	See clause 5.0 for various drawing required
Calculations	3 copies (Typical)	4 copies	6 copies + 1 soft copy in CD	See clause 5.0 for details
Catalogues	1 copy		6 copies + 1 soft copy in CD	
Instruction manual for the transformer	1 copy		6 copies + 1 soft copy in CD	
Test Report	2 copy		6 copies + 1 soft copy in CD	Type test and sample routine test reports

3.0 Delivery Schedule

- 3.1 Delivery Period start date - from data of purchase order
- 3.2 Delivery Period end date - as agreed with supplier

Volume – I Technical Specification for 66KV Outdoor PT

- 3.3 Material dispatch clearance - after inspection by purchaser and written dispatch clearance for purchaser

Annexure – B SERVICE CONDITIONS

1.0.0	Mumbai Atmospheric conditions	
a)	Average grade atmosphere	Heavy polluted , salt Laden, dusty, humid with possibility of condensation
	Maximum altitude above sea level	1000 M
b)	Ambient Air temperature	Highest 45 deg C, Average 35 deg C
	Maximum ambient air temperature	20 deg C
c)	Relative Humidity	100 % Max
d)	Thermal Resistivity of Soil	150 deg. C cm/W
e)	Seismic Zone	3 as per IS 1893
f)	Rainfall	3000 mm concentrated in four months

2.0.0	Delhi Atmospheric conditions	
a)	Average grade atmosphere	Heavy polluted , dry
	Maximum altitude above sea level	1000 M
b)	Ambient Air temperature	Highest 50 deg C, Average 40 deg C
	Maximum ambient air temperature	0 deg C
c)	Relative Humidity	100 % Max
d)	Thermal Resistivity of Soil	150 deg. C cm/W
e)	Seismic Zone	4 as per IS 1893
f)	Rainfall	750 mm concentrated in four months
g)	Wind Pressure	195 Kg/m ² up to 90 M elevation as per IS 875-1975

Volume – I Technical Specification for 66KV Outdoor PT

Annexure C1 GURANTEED TECHNICAL PARTICULARS FOR 66 KV PT

Sr. No.	Description	Data By Purchaser	Data By Supplier
1.0	Location of Equipment	Project specific to be filled up	
2.0	Name of Manufacturer		
3.0	Address & Contact details		
4.0	Type	Single phase, outdoor, dead tank type, oil immersed, self-cooled hermetically sealed type.	
5.0	Manufacturer Model No		
6.0	Reference design ambient temperature	50 Deg C	
7.0	Reference Standard	IS: 3156 (Part1 to 4)	
8.0	Nominal system voltage	66KV	
9.0	Highest system voltage	72.5KV	
10.0	Basic Insulation level	325KVp	
11.0	Power frequency voltage	140KV	
12.0	Type of cooling	ONAN	
13.0	Rated frequency (Hz)	50 Hz	
14.0	Insulation Class	A	
15.0	Rated Primary voltage	66KV / $\sqrt{3}$	
16.0	Rated secondary voltage	110V / $\sqrt{3}$	
17.0	Number of secondary cores	Two	
18.0	CORE Specifications		
18.1	Core - 1		
18.2	Purpose	Metering	
18.3	Rated Output	50 VA	
18.4	Class of accuracy	0.2	
18.5	Ratio error	As per IS	
18.6	Phase angle error	As per IS	
19.0	Core - 2		
19.1	Purpose	Protection	
19.2	Rated Output	50 VA	
19.3	Class of accuracy	3P	
19.4	Ratio error	As per IS	
19.5	Phase angle error	As per IS	
20.0	Rated over voltage factor		
20.1	- Continuous	1.2 times	
20.2	- 30 Seconds	1.5 times	
21.0	Temperature rise above an ambient of 50Deg C at 1.2 times voltage factor for 30 seconds rating		
21.1	- For Winding	50 Deg C	

Volume – I Technical Specification for 66KV Outdoor PT

21.2	- For Oil	40 Deg C	
22.0	Temperature rise above an ambient of 50Deg C at 1.5 times voltage factor for 30 seconds rating		
22.1	- For Winding	50 Deg C	
22.2	- For Oil	40 Deg C	
23.0	One minute power frequency dry withstand voltage for 66 kV PT (KV rms)		
24.0	One minute power frequency wet withstand voltage for 66 kV PT (KV rms)		
25.0	1.2/50 microsecond impulse withstand test voltage for 66 KV PT (KV rms)	325 KVp	
26.0	One minute Power frequency withstand voltage on secondary winding	3KV	
27.0	Minimum creepage distance in mm for 66KV PT	2250 mm	
28.0	Protective creepage distance in mm for 66KV PT	1125 mm	
29.0	Partial discharge test, whether will be carried out Yes / No		
30.0	Weight of core		
31.0	Weight of oil		
32.0	Total weight		
33.0	Mounting details		
34.0	Overall dimensions		

Volume – I Technical Specification for 66KV Outdoor PT

Annexure –D RECOMMENDED SPARES (DATA BY SUPPLIER)

List of recommended spares as following –

Sr. No.	Description of spare part	Unit	Quality
1			
2			
3			
4			
5			
6			



Specification for
66KV OUTDOOR
CAPACITIVE VOLTAGE TRANSFORMER
(CVT)

Specification no. SP-CVT-01-R0

Prepared by:		Checked by :		Approved by:		Rev	Date
Name	Sign	Name	Sign	Name	Sign		
Tanu		Meenakshi		K.K.Alla		02	16-July-14

Volume – I Technical Specification for 66KV Outdoor CVT

1.0 CODES & STANDARDS:

Materials, equipment and methods used in the manufacture of Potential Transformer shall conform to the latest edition of following –

National Standard

Standard Code	Standard Description
IS-3156 (Part I to IV)	Specification for Voltage transformer.
IS-4146	Application guide for voltage transformer.
IS-2099	High voltage porcelain bushings
IS-731	Insulator for O/H power line
IS-335	New insulating oil for transformer and switchgear.
IS-9676	Reference ambient temperature of electrical equipment
IS-5561	Specification of electric power connectors
IS-5621	Hollow insulator for use in electrical equipments
IS-3156 (Part I to IV)	Specification for Voltage transformer.
IS-4146	Application guide for voltage transformer.
IS-2099	High voltage porcelain bushings
IS-731	Insulator for O/H power line
	Indian Electricity Rules (relevant safety regulation of CEA)
	Indian electricity act
	CBIP manual

2.0 MAJOR DESIGN CRITERIA & PARAMETERS OF THE CVT

	Description	Requirement / Rating
2.1.0	Rated Voltage	66KV
2.1.1	Highest System Voltage	72.5kV
2.1.2	Frequency	50HZ \pm 5%
2.1.3	Fault level	31.5KA for 3secs.
2.1.4	Earthing	Solidly grounded
2.2.1	Type	Single phase, outdoor, dead tank type, oil immersed, self cooled type.
2.2.2	Construction feature	Oil immersed CVT shall be hermetically sealed to eliminate breathing and to prevent ingress of air and moisture.

Volume – I Technical Specification for 66KV Outdoor CVT

2.3.0	Features	<p>a) Shall comprise a capacitor divider unit and an electromagnetic unit such that secondary voltage of electromagnetic unit is substantially proportional to and in phase with the primary voltage applied to capacitor divider units.</p> <p>b) Capacitors shall be oil impregnated type enclosed in inert gas atmosphere, hermetically sealed.</p> <p>c) The material and construction and assembly of CVT shall be such that the capacitance does not change with time and the effect of temperature is minimum.</p> <p>d) Provided with an over voltage suppressor</p> <p>e) No radio interference when operated at maximum service voltage</p> <p>f) Reactance to be provided to minimize draining of carrier signal in electromagnetic unit</p> <p>g) No radio interference when operated at maximum service voltage</p> <p>h) The CVT shall be designed to cover its rated output range without any adjustment of its electromagnetic unit.</p> <p>i) Material used in insulation and assembly of the winding shall be insoluble, non catalytic and chemically inactive in hot transformer oil and shall not be subjected to a shrinking and seasoning process</p> <p>j) CVT shall provide designed transient response requirement as per IEC / IS i.e. during transient oscillations following a short circuit on primary side, the secondary side output voltage shall not fall to a value less than 10% of peak value before short circuit within 20 milliseconds</p> <p>k) The secondary terminal box shall include necessary HRC fuses for protection of secondary circuits and both the sides of fuse shall be terminated on terminal block for fuse supervision.</p>
2.4.0	Major Parts	
2.4.1	Tank	
2.4.2	Material of Construction	Tank shall be of high quality steel and shall be Hot Dip Galvanized with galvanizing thickness of 610gm/sq mm minimum.
2.4.3	Tank Feature	The tank shall be provided with oil draining plug, Oil level gauge glass.
2.4.4	Oil Expansion	Stainless steel bellow or diaphragm shall be provided to take care of oil expansion
2.4.5	Core	High grade, non ageing, low loss, high

Volume – I Technical Specification for 66KV Outdoor CVT

		permeability, cold rolled grain oriented silicon steel lamination.
2.5.0	Winding	
2.5.1	Material	Electrolytic Copper
2.5.2	Winding Insulating material	Class A, non catalytic, inert to transformer oil, free from compounds liable to ooze out, shrink or collapse.
2.5.3	Winding Insulation	Uniform
2.5.4	Design features	Winding shall be capable of desired output as per specified limits without exceeding permissible temperature rise.
2.6.0	Insulating oil	
2.6.1	Type	Class 1 new mineral insulating oil as per IS 335, shall be certified not to contain PCBs. Anti oxidant inhibitor if recommended shall be subject to Owner's approval.
2.7.0	Bushings and Terminations	
2.7.1	Type	Porcelain bushing
2.7.2	Termination on HV side bushing	The HV Terminal shall be of copper. Termination shall be by bimetallic of Aluminum alloy grade A6 suitable for Twin Zebra ACSR conductor/ 3inch Pipe Bus.
2.7.3	Termination of LV side	The secondary terminals shall be provided in IP55 Box with Brass/copper stud type terminals accessible from front with removable cover.
2.7.4	Termination of Earth terminal of HV winding	The earth terminal of HV winding shall be brought out in secondary Terminal box by bushing. This shall be connected with body earth terminal with flexible copper lead through a link.
2.7.5	Terminal marking	Terminals shall be marked as per IS 3156
2.8.1	Minimum creepage distance of bushing	31 mm/KV
2.8.1	Protected creepage distance	At least 50 % of total creepage distance
2.9.1	Over Voltage factor	1.2 times for continuous rating and 1.5 times for 30 seconds.
2.10.1	Atmospheric protection for clamp and fitting of iron and steel	Hot dip galvanizing as per IS 2633
2.10.2	Gland Plate	Min. 3 mm thick detachable with three knockout holes of 3/4 inch.
2.10.3	Cable entry	Bottom for all cables
2.11.1	Earthing	The CVT assembly comprising of the chassis, frame work and fixed parts of metal casing shall be provided with two separate body earthing terminals.
2.12.1	External finish	Shall be Hot Dip galvanized

Volume – I Technical Specification for 66KV Outdoor CVT

3.0 FITTINGS & ACCESSORIES ON POTENTIAL TRANSFORMER

3.1.0	Rating and Diagram Plate	Required
3.1.1	Material	Anodized Aluminum 16SWG
3.1.2	Background	SATIN SILVER
3.1.3	Letters, diagram & border	Black
3.1.4	Process	Etching
3.2.5	Name plate details	Required
3.3.6	Terminal marking of Primary and secondary terminals.	Required
3.4.0	Drain Plug on tank Base	Required

4.0 APPROVED MAKE OF COMPONENTS

4.1.0	Insulator	CJI/JSI/WSI/Modern/Saravana/BHEL/ABIL
-------	-----------	---------------------------------------

5.0 TESTING & INSPECTION

5.1.0	Inspection and Testing during manufacture	
5.2.0	Tank	i) Checking of dimensions as per approved drawing. ii) Checking for leakage by pressure testing. iii) Thickness of Paint or Galvanization, as applicable
5.3.0	Porcelain	i) Check dimension. ii) Check finish of sealing surface. iii) Check creepage distance. iv) Check for routine electrical test. v) Check for porosity and temperature cycle test.
5.4.0	Insulating Materials	i) Sample check for physical properties of materials. ii) Check for dielectric strength. iii) Visual and dimensional checks.
5.5.0	Copper conductor	i) Check for dimension. ii) Check for elongation. iii) Check for unidirectional scrap. iv) Check for heat shock.
5.6.0	Oil	i) Check for break down voltage. ii) Check for density. iii) Check for flash point. iv) Check for moisture content. v) Check for neutralization value. vi) Check for inter facial tension at 27 Deg c. vii) Check for sludge content. viii) Check for specific resistance. ix) Check for pour point.
5.7.0	Secondary terminals	i) Check for one min AC Test
5.8.0	Routine tests	Tests shall be carried out in accordance with IS 3156
5.9.0	Type Tests	a) On one CVT of each rating and type (In CPRI/ERDA) b) All the test as per IS 3156

Volume – I Technical Specification for 66KV Outdoor CVT

		b) In case the product is never type tested earlier, seller has to conduct the type tests from CPRI/ERDA test labs on BSES order at their own cost, before commencement of supply.
5.10.0	Acceptance test	<p>To be performed in presence of Owner at manufacturer works:-</p> <ul style="list-style-type: none"> i) Physical inspection of dimensions and BOM. ii) Verification of terminal marking and polarity. iii) Power frequency dry withstand tests on primary winding. iv) Power frequency dry withstand tests on <ul style="list-style-type: none"> • <i>secondary winding</i> • <i>Capacitor voltage divider</i> • <i>Low-voltage terminal of the capacitor voltage divider.</i> • <i>Electromagnetic unit</i> v) Partial discharge test (this shall be only for future reference) vi) Determination of ratio and phase angle errors according to the appropriate designation or accuracy class.

6.0 DEVIATIONS

Deviation from this specification, if any, shall be clearly brought out in the offer. Unless owner explicitly accepts such deviations, it shall be considered that the offer fully complies with the specification.

Volume – I Technical Specification for 66KV Outdoor CVT

Annexure –A Scope of supply

1.0 The scope of supply shall include following

1.1 Design, manufacture, assembly, testing at storages of manufacturing as per C I. 12 of this specification, final testing at manufacturer works on completely assembled transformer before dispatch, packing delivery and submission of all documentation for the Power transformer with all accessories as below

Sr. No.	Description	Scope of Supply
1.0	Fully assembled PT with all major parts like Tank, bushing, Primary terminal with connector and secondary terminal box.	YES
1.1	Galvanised steel structure for PT	NO
1.2	Fixing Bolts for PT	YES
1.3	Routine testing as per this specification	YES
1.4	Type testing as per this specification	YES
1.5	Submission of Documentation as detailed below	YES

1.2 Supervision of testing & commissioning of PT as site

1.3 BOQ as following-

Sr. No.	Purchaser Equipment Tag No. / SAP code	Location / Substation name	Unit	Quantity
1		e.g. Santacruz	No	e.g. 1
2		e.g. Alaknanda	No	e.g. 1
3				
4				
5				

2.0 Submission of documents

Submission of drawing, calculations, manual, catalogues, test report shall be as follows

	Along with offer	For Approval after award of contract	Final after approval	Remarks
Drawing	3 copies (Typical drgs)	4 copies	6 copies + 1 soft copy in CD	See clause 5.0 for various drawing required
Calculations	3 copies (Typical)	4 copies	6 copies + 1 soft copy in CD	See clause 5.0 for details
Catalogues	1 copy		6 copies + 1 soft copy in CD	
Instruction manual for the transformer	1 copy		6 copies + 1 soft copy in CD	

Volume – I Technical Specification for 66KV Outdoor CVT

Test Report	2 copy		6 copies + 1 soft copy in CD	Type test and sample routine test reports
-------------	--------	--	---------------------------------	---

3.0 Delivery Schedule

- | | | | |
|-----|-----------------------------|---|--|
| 3.1 | Delivery Period start date | - | from data of purchase order |
| 3.2 | Delivery Period end date | - | as agreed with supplier |
| 3.3 | Material dispatch clearance | - | after inspection by purchaser and written dispatch clearance for purchaser |

Volume – I Technical Specification for 66KV Outdoor CVT

Annexure – B SERVICE CONDITIONS

1.0.0	Mumbai Atmospheric conditions	
a)	Average grade atmosphere	Heavy polluted , salt Laden, dusty, humid with possibility of condensation
	Maximum altitude above sea level	1000 M
b)	Ambient Air temperature	Highest 45 deg C, Average 35 deg C
	Maximum ambient air temperature	20 deg C
c)	Relative Humidity	100 % Max
d)	Thermal Resistivity of Soil	150 deg. C cm/W
e)	Seismic Zone	3 as per IS 1893
f)	Rainfall	3000 mm concentrated in four months

2.0.0	Delhi Atmospheric conditions	
a)	Average grade atmosphere	Heavy polluted , dry
	Maximum altitude above sea level	1000 M
b)	Ambient Air temperature	Highest 50 deg C, Average 40 deg C
	Maximum ambient air temperature	0 deg C
c)	Relative Humidity	100 % Max
d)	Thermal Resistivity of Soil	150 deg. C cm/W
e)	Seismic Zone	4 as per IS 1893
f)	Rainfall	750 mm concentrated in four months
g)	Wind Pressure	195 Kg/m ² up to 90 M elevation as per IS 875-1975

Volume – I Technical Specification for 66KV Outdoor CVT

**Annexure – C: Guaranteed Technical Particulars 66 KV OUT DOOR CAPACITIVE
VOLTAGE TRANSFORMER**

	Description	Data By Purchaser	Data By Supplier
1.0	Location of Equipment	Project specific to be filled up	
2.0	Name of Manufacturer		
3.0	Address & Contact details		
4.0	Type	Single phase, outdoor, dead tank type, oil immersed, self-cooled, hermetically sealed type	
5.0	Manufacturer Model No		
6.0	Reference design ambient temperature	50 Deg C	
7.0	Reference Standard	IS: 3156 (Part1 to 4)	
8.0	Nominal system voltage	66KV	
9.0	Highest system voltage	72.5KV	
10.0	Basic Insulation level	325KVp	
11.0	Power frequency voltage	140KV	
12.0	Type of cooling	ONAN	
13.0	Rated frequency (Hz)	50 Hz	
14.0	Insulation Class	A	
15.0	Rated Primary voltage	66KV / $\sqrt{3}$	
16.0	Rated secondary voltage	110V / $\sqrt{3}$	
17.0	Number of secondary cores	Two	
18.0	CORE Specifications		
18.1	Core - 1		
18.2	Purpose	Metering	
18.3	Rated Output	50 VA	
18.4	Class of accuracy	0.2	
18.5	Ratio error	As per IS	
18.6	Phase angle error	As per IS	
19.0	Core - 2		
19.1	Purpose	Protection	
19.2	Rated Output	50 VA	
19.3	Class of accuracy	3P	
19.4	Total Simultaneous Burden		
19.5	Total Thermal Burden		
19.4	Ratio error	As per IS	
19.5	Phase angle error	As per IS	
20.0	Rated over voltage factor		
20.1	- Continuous	1.2 times	
20.2	- 30 Seconds	1.5 times	
21.0	Capacitor Divider		
21.1	High voltage Capacitor	C1(pf)	
21.2	Intermediate Voltage Capacitor	C2(pf)	

Volume – I Technical Specification for 66KV Outdoor CVT

21.3	Total Equivalent Capacitance	Pf	
21.4	Rated temperature at which above values are indicated.	Deg C	
21.5	Capacitance temperature coefficient		
21.6	Tan delta value of capacitance		
21.7	Carrier frequency coupling	Pf	
21.8	Rated Intermediate Voltage		
22.0	Natural frequency of coupling	kHz	
23.0	Band Width	kHz	
24.0	Series reactance/choke rated Voltage & power frequency withstand voltage		
24.0	Temperature rise above an ambient of 50Deg C at 1.2 times voltage factor for 30 seconds rating		
24.1	- For Winding	Deg C	
24.2	- For Oil	Deg C	
25.0	Temperature rise above an ambient of 50Deg C at 1.5 times voltage factor for 30 seconds rating		
25.1	- For Winding	Deg C	
25.2	- For Oil	Deg C	
26.0	One minute power frequency dry& wet withstand voltage of capacitor	140kVrms	
27.0	One minute power frequency withstand voltage of H.F terminal		
28.0	1.2/50 microsecond impulse withstand test voltage	325 KVp	
29.0	One minute Power frequency withstand voltage on secondary winding	3KV	
30.0	Corona extinction voltage	kV	
31.0	Max Radio Interference voltage at $1.1 \times U_m / \sqrt{3}$	V	
32.0	Minimum creepage distance in mm	2250 mm	
33.0	Protective creepage distance in mm	1125 mm	
34.0	Partial discharge test, whether will be carried out Yes / No		
35.0	Weight of core		

Volume – I Technical Specification for 66KV Outdoor CVT

36.0	Weight of oil		
37.0	Total weight		
38.0	Mounting details		
39.0	Overall dimensions		

Annexure –D RECOMMENDED SPARES (DATA BY SUPPLIER)

List of recommended spares as following –

Sr. No.	Description of spare part	Unit	Quality
1			
2			
3			
4			
5			
6			



Specification

OUTDOOR CURRENT TRANSFORMER

(33 & 66 KV)

Specification no. SP-CTLU-01-R1

Prepared by:		Checked by :		Approved by:		Rev	Date
Name	Sign	Name	Sign	Name	Sign		
DS		HPB		DG		01	29 -Jan-05
Tanu		Meenakshi		K.K.Alla		02	16-July-14

Volume – I Technical Specification for 66KV Outdoor CT

Record of Revision

Sl. no.	Revision no.	Clause No.	Nature of change	Approved by
1.	R1	2.2	All ferrous parts, CT tank and other metallic parts exposed to atmosphere shall be hot dip galvanised with galvanising thickness of 610gm/sqmm minimum.	MDB/KKA
2.	R1	3.0.0	ABIL included in approved makes of insulators	MDB/KKA
3.	R1	6.1.1	Type Test to be conducted from CPRI/ERDA	MDB/KKA
4.	R1	Annexure C, 10.4	Accuracy class of metering core shall be 0.2s	MDB/KKA
5.	R1	Annexure C, 10.7	Knee point voltage & corresponding exciting current (project specific) shall be greater than or equal to 40 (RCT+8)	MDB/KKA
6.	R1	Annexure C, 10.8	Magnetizing current at $V_k/2$ (project specific) shall be less than or equal to 30 mA	MDB/KKA

Volume – I Technical Specification for 66KV Outdoor CT

1.0 CODES & STANDARDS:

The current transformer shall be designed, manufactured and tested in accordance with the latest applicable Indian Standard, IEC standard and CBIP manuals as listed below –

National Standard

Standard Code	Standard Description
Indian electricity act	
CBIP manual	
IS- 335	New insulating oil
IS-2705 (Part I to V)	Specification for current transformer.
IS-4201	Application guide for current transformer.
IS-2099	High voltage porcelain bushings
IS-731	Insulator for O/H power line
IS-335	New insulating oil for transformer and switchgear.
IS-9676	Reference ambient temperature of electrical equipment
IS-5561	Specification of electric power connectors
IS-9676	Summation current transformer
IS-4201	Application guide for current transformer
IS-2099	High voltage porcelain bushings
IS-5621	Hollow insulator for use in electrical equipment

International Standard

Standard Code	Standard Description
IEC: 137	Bushing for alternating current above 1000V
IEC: 185	Specification for current transformers
IEC: 439	Specification for Terminal box / Marshalling box

2.0 DESIGN FEATURES

	Description	Requirement / Rating
2.1	Type	Shall be dead tank type; oil immersed, self-cooled outdoor type.
2.2	Construction	a) Oil immersed CT shall be hermetically sealed to eliminate breathing and to prevent air and moisture. The core and winding shall be provided in porcelain bushing. Provision for oil expansion without breathing to be provided (diaphragm or bellow as per manufacturer design). b) All ferrous parts, CT tank and other metallic parts exposed to atmosphere shall be hot dip galvanized. c) Galvanising thickness shall be 610gm/sqmm minimum
2.3	Core	The core shall be of high-grade non-ageing, electrical silicon laminated steel of low hysteresis loss and high permeability to ensure high accuracy at both normal and over current conditions. The saturation factor of the core shall be low enough not to cause any damage to measuring instruments in the event of maximum short circuit current.
2.4	Winding	The winding shall be suitable for simultaneous 100% full load continuous rating. The winding shall be capable of desired output as per specified limit.
2.5	Insulation	The current transformer shall withstand satisfactorily the

Volume – I Technical Specification for 66KV Outdoor CT

		dielectric test voltage corresponding to basic insulation level specified.
2.6	Insulation Oil	The quantity of insulating oil in each current transformer shall be best available and the complete specification of the oil shall be furnished with the tender. The current transformer offered shall be hermetically sealed completely filled with insulating oil with provision to replace the oil. Oil level indication shall be provided.
2.7	Bushing	Porcelain used in bushing manufacture shall be homogenous, free from laminations, cavities and other flaws or imperfections that might affect the mechanical or dielectric quality. Glazing of the porcelain shall be uniform brown color free blisters, burns and similar defects. The bushing shall be designated to have ample insulation, mechanical strength and rigidity.
2.8	Creepage distance	Not less than 31mm /KV
2.9	Terminal Connectors	
2.9.1	Primary	The current transformers offered shall be supplied with Aluminum- alloy terminal connector with bimetallic sleeve, suitable for connection with single/double ACSR conductor.
2.9.2	Secondary	All the secondary terminals shall be bought in IP55 box with brass/ copper stud type terminals. The secondary terminals shall be shorted by brass/copper links before dispatch. Terminal box to be provided with earthing stud
2.10	Terminal Marking	Terminal marking shall be as per IS 2705

3.0 APPROVED MAKE OF COMPONENTS

3.1.0	Insulator	JSI/WSI/Modern/Saravana/BHEL/ABIL
3.2.0	Terminals	Connectwell / Elmex

4.0 NAME PLATE & TERMINAL MARKING

4.1.0	Name Plate	
4.1.1	Material	Anodized Aluminium 16SWG
4.1.2	Background	SATIN SILVER
4.1.3	Letters, diagram & border	Black
4.1.4	Process	Etching
4.1.5	Name plate details	Manufacturer name & address, year of manufacturer, Serial number and type designation, Rated Primary & secondary current, rated frequency, rated output and accuracy class, Highest system voltage, Rated Insulation level, Rated short-time thermal current or short time factor with rated time, Rated dynamic current, Reference Standard.
4.2.0	Danger plate on front & rear side	Not required

5.0 QUALITY ASSURANCE

5.1.0	Vendor quality plan	To be submitted for purchaser approval
5.2.0	Inspection points	To be mutually identified & agreed in quality plan

Volume – I Technical Specification for 66KV Outdoor CT

6.0 INSPECTION & TESTING

6.1.0	Test	Test shall be carried out in accordance with IS-2705 / IEC-185
6.1.1	Type test	<p>a) Following type test shall be carried out on current transformer-</p> <ul style="list-style-type: none"> - Short-time current test - Temperature-rise test - Lightning impulse test - HV power frequency wet withstand voltage test on CT - Determination of errors <p>b) Current transformer must be of type tested from CPRI/ERDA and reports shall be submitted.</p> <p>c) In case the product is never type tested earlier, seller has to conduct the type tests from CPRI/ERDA at their own cost, before commencement of supply.</p>
6.1.2	Routine test	Test shall be carried out in accordance with IS-2705 / IEC-185
6.1.3	Acceptance test	Test shall be carried out in accordance with IS-2705 / IEC-185
6.2.0	Test on fitting and accessories	As per manufacturer's standard
6.3.0	Inspection and Testing	a) The buyer reserves the right to witness all tests specified on completed product
		b) The buyer reserves the right to inspect the product at the seller's works at any time prior to dispatch, to verify compliance with the specifications.
		c) In-process and final inspection call intimation shall be given, 10 days in advance to Purchaser.

7.0 DRAWINGS, DATA & MANUALS

7.1.0	To be submitted along with bid	<p>The seller has to be submit :</p> <ul style="list-style-type: none"> a-1) Complete assembly, GA drawing outdoor current transformer showing plan, elevation and typical section view. a-2) Typical connection diagram and winding connection of current transformer. a-3) Secondary box details a-4) Structural drawing for CT mounting arrangement a-5) Rating plate diagram a-6) Drawings of terminal connectors b) Detailed reference list of customers already using the offered product during the last 5 years with similar design and rating. c) Completely filled GTP d) Deviations from this specification. Only deviations approved in writing before award of contract shall be accepted. e) Details of manufacturer's quality assurance standards and program and ISO 9000 series or equivalent national
-------	--------------------------------	---

Volume – I Technical Specification for 66KV Outdoor CT

		<p>certification</p> <p>f) Type test report shall be submitted for the type, size & rating of product / equipment offered along with bid. They shall be considered valid for 5 years from date of test performed on product / equipment.</p> <p>g) Complete product catalogue and manual along with the bid.</p> <p>h) Recommended spare parts and consumable items for 5 years of operation with prices and spare parts catalogue with list for future requirements.</p>
7.2.0	After award of contract, seller has to submit mentioned drawings for buyer's Approval (A) / Reference (R)	<p>a) Programme for production and testing (A)</p> <p>b) Guaranteed Technical Particulars (A)</p> <p>c) Calculations to substantiate choice of electrical , mechanical component size / ratings (A)</p> <p>d-1) General arrangement drawing of the current transformer (A)</p> <p>d-2) Typical connection diagram and winding connection of current Transformer (A).</p> <p>d-5) Terminal connector drawings (A)</p> <p>d-7) General arrangement drawing secondary terminal box (A)</p> <p>e) Detailed installation and commissioning instructions (R)</p> <p>f) Quality plan</p>
7.3.0	Submittals required prior to dispatch	<p>a) Inspection and test reports, carried out in manufacturer's work (R)</p> <p>b) Test certificates of all bought out items</p> <p>c) Operation and maintenance instruction as well as trouble shooting charts / manuals.</p>
7.4.0	Drawing and document sizes	Standard size paper A0, A1 , A2, A3, A4
7.5.0	No of drgs./Documents required at different stages	As per Annexure A

8.0 PACKING , SHIPPING, HANDLING AND STORAGE

8.0.0	Packing	
8.1.1	Packing protection	Against corrosion , dampness, heavy rains, breakage and vibration
8.1.2	Packing for accessories and spares	Robust wooden non returnable packing case with all the above protection and identification labels.

Volume – I Technical Specification for 66KV Outdoor CT

8.1.3	Packing identification label	In each packing case, following details are required : a) Individual serial number b) Purchaser's name c) PO number (along with SAP item code , if any) & date d) Equipment Tag no. (if any) e) Destination f) Manufacturer / Supplier's name g) Address of manufacturer's / supplier's its agent h) Description and quantity i) Country of origin j) Month and year of manufacturing k) Case measurements l) Gross and net weight in kilograms m) All necessary slinging and stacking instructions.
8.1.4	Shipping	a) The bidder shall furnish the confirmation that the proposed packages can be delivered safely upto the site. b) The seller shall be responsible for all transit damage due to improper packing.
8.1.5	Handling and Storage	Manufacturer instruction shall be followed. Detail handling & storage instruction sheet / manual need to be furnished before commencement of supply.

9.0.0 PROGRESS REPORTING

9.1.0	Outline Document	To be submitted for purchase approval for outline of production, inspection, testing, inspection, packing, dispatch, documentation programme.
9.2.0	Detailed Progress Report	To be submitted to purchaser once a month containing a) Progress on material procurement b) Progress on fabrication (As applicable) c) Progress on assemble (As applicable) d) Progress on internal stage inspection e) Reason for any delay in total programme f) Details of test failures if any in manufacturing stages g) Progress on final box up constraints / forward path

Volume – I Technical Specification for 66KV Outdoor CT

10.0.0 DEVIATIONS

10.0.0	Deviation from the specification	Deviation from the specification shall be started in writing with the tender by reference to the specification clause/GTP/Drawing and a description of the alternative offer. In absence of such a statement. It will be assumed by the Buyer that the seller complies fully with this specification.
--------	----------------------------------	---

Volume – I Technical Specification for 66KV Outdoor CT

Annexure – A Scope of supply

1.0 The scope of supply shall include following

- 1.1 Design, manufacture, assembly, testing at manufacturer's works before dispatch, packing, delivery and submission of all documentation of outdoor current transformer.
- 1.2 Terminal connector.
- 1.3 Supervision of testing & commissioning of current transformer at site
- 1.4 BOQ as following –

Sr no.	Purchaser Equipment Tag No / SAP code	Equipment Description	Location Substation name	Unit	Quantity
1					
2					
3					
4					
5					
6					
7					

2.0 Submission of documents

Submission of drawing, calculations, manual , catalogues, test report shall be as follows

	Along with offer	For Approval after award of contract	Final after approval	Remarks
Drawing	3 copies (Typical drgs)	4 copies	6 copies + 1 soft copy in CD	See clause 5.0 for various drawing required
Calculations	3 copies (Typical)	4 copies	6 copies + 1 soft copy in CD	See clause 5.0 for details
Catalogues	1 copy		6 copies + 1 soft copy in CD	
Instruction manual for the transformer	1 copy		6 copies + 1 soft copy in CD	
Test Report	2 copy		6 copies + 1 soft copy in CD	Type test and sample routine test reports

3.0 Delivery schedule

- 3.1 Delivery period start date - from date of purchase order
- 3.2 Delivery period end date - as agreed with supplier
- 3.3 Material dispatch clearance - after inspection by purchaser and written dispatch clearances for purchaser

Volume – I Technical Specification for 66KV Outdoor CT
Annexure – B SERVICE CONDITIONS

1.0.0	Mumbai Atmospheric conditions	
a)	Average grade atmosphere	Heavy polluted , salt Laden, dusty, humid with possibility of condensation
b)	Maximum altitude above sea level	1000 M
c)	Ambient Air temperature	Highest 45 deg C, Average 35 deg C
d)	Maximum ambient air temperature	20 deg C
e)	Relative Humidity	100 % Max
f)	Thermal Resistivity of Soil	150 deg. C cm/W
g)	Seismic Zone	3
h)	Rainfall	3000 mm concentrated in four months

2.0.0	Delhi Atmospheric conditions	
a)	Average grade atmosphere	Heavy polluted , dry
b)	Maximum altitude above sea level	1000 M
c)	Ambient Air temperature	Highest 50 deg C, Average 40 deg C
d)	Maximum ambient air temperature	0 deg C
e)	Relative Humidity	100 % Max
f)	Thermal Resistivity of Soil	150 deg. C cm/W
g)	Seismic Zone	4
h)	Rainfall	750 mm concentrated in four months

Volume – I Technical Specification for 66KV Outdoor CT

Annexure – C1: Guaranteed Technical Particulars (33KV , 800-400/1/1/1/1A)

	Description	Data By Purchaser				Data By Supplier			
1	Name of Manufacturer								
2	Address and contact details								
3	Type								
4	Rated Nominal Voltage	33 kV							
5	Highest System Voltage	36 kV							
6	Rated Frequency	50 Hz							
7	Rated Primary Current	800 - 400 A							
8	Rated Secondary current	1A							
9	Number of cores								
10.0		Core-1	Core-2	Core-3	Core-4				
10.1	Secondary Current	1A	1A	1A	1A				
10.2	Purpose /Application	Metering	Protection (O/C & E/F)	Protection (Bus Bar)	Protection (Spare)				
10.3	Rated output (project specific)	30 VA	30 VA						
10.4	Class of accuracy	0.2s	5P	PS	PS				
10.5	Instrument security factor	≤ 5							
10.6	Accuracy limit factor		20						
10.7	Knee point voltage & corresponding exciting current (project specific)			\approx 40 (RCT+8)	\approx 40 (RCT+8)				
10.8	Magnetizing current at $V_k/2$ (project specific)			≤30 mA	≤30 mA				
10.9	Resistance of the secondary winding at 75 deg C								
10.10	Secondary limiting voltage								
11	Short time thermal rating of primary								
11.1	One Seconds								
11.2	Three seconds	26.3 kA							
12	Rated dynamic current of primary								
13	Rated continuous thermal current								
14	Temp rise at an ambient of 50 deg C								
14.1	Winding								
14.2	Oil at the top								
14.3	Exposed current carrying parts								

Volume – I Technical Specification for 66KV Outdoor CT

15	One minute power frequency dry withstand voltage (KV rms)	70 kV rms	
16	One minute power frequency wet withstand voltage (KV rms)	70 kV rms	
17	1.2/50 microsecond impulse withstand test voltage KV peak	170 kVp	
18	Minimum creepage distance in mm	31 mm/kV	
19	Protective creepage distance in mm		
20	Magnetization curve of CT core		
21	Variations in ratio and phase angle error due to variation in		
21.1	Voltage by 1 Volt		
21.2	Frequency by 1Hz		
22	Current density in primary winding		
23	Weight of oil		
24	Total weight		
25	Mounting details		
26	Overall dimensions		
27	Terminal Connector		

Volume – I Technical Specification for 66KV Outdoor CT

Annexure – C2: Guaranteed Technical Particulars (33KV, 2000-1000/1/1/1A)

	Description	Data By Purchaser				Data By Supplier			
1	Name of Manufacturer								
2	Address and contact details								
3	Type								
4	Rated Nominal Voltage	33kV							
5	Highest System Voltage	36 kV							
6	Rated Frequency	50 Hz							
7	Rated Primary Current	2000-1000 A							
8	Rated Secondary current	1A							
9	Number of cores								
10.0		Core-1	Core-2	Core-3	Core-4				
10.1	Secondary Current	1A	1A	1A	1A				
10.2	Purpose /Application	Metering	Protection (O/C & E/F)	Protection (Bus Bar)	Protection (Spare)				
10.3	Rated output (project specific)	30 VA	30 VA						
10.4	Class of accuracy	0.2s	5P	PS	PS				
10.5	Instrument security factor	≤ 5							
10.6	Accuracy limit factor		20						
10.7	Knee point voltage & corresponding exciting current (project specific)			≥ 40 (RCT+8)	≥ 40 (RCT+8)				
10.8	Magnetizing current at Vk/2 (project specific)			≤30 mA	≤30 mA				
10.9	Resistance of the secondary winding at 75 deg C								
10.10	Secondary limiting voltage								
11	Short time thermal rating of primary								
11.1	One Seconds								
11.2	Three seconds	26.3kA							
12	Rated dynamic current of primary								
13	Rated continuous thermal current								
14	Temp rise at an ambient of 50 deg C								
14.1	Winding								
14.2	Oil at the top								
14.3	Exposed current carrying parts								
15	One minute power frequency dry withstand voltage (KV	70 kV rms							

Volume – I Technical Specification for 66KV Outdoor CT

	rms)		
16	One minute power frequency wet withstand voltage (KV rms)	70 kV rms	
17	1.2/50 microsecond impulse withstand test voltage KV peak	170 kVp	
18	Minimum creepage distance in mm	31 mm/kV	
19	Protective creepage distance in mm		
20	Magnetization curve of CT core		
21	Variations in ratio and phase angle error due to variation in		
21.1	Voltage by 1 Volt		
21.2	Frequency by 1Hz		
22	Current density in primary winding		
23	Weight of oil		
24	Total weight		
25	Mounting details		
26	Overall dimensions		
27	Terminal Connector		

Volume – I Technical Specification for 66KV Outdoor CT
Annexure – D1 : Guaranteed Technical Particulars (66KV , 400-200/1/1/1/1A)

	Description	Data By Purchaser				Data By Supplier			
1	Name of Manufacturer								
2	Address and contact details								
3	Type								
4	Rated Nominal Voltage	66kV							
5	Highest System Voltage	72.5 kV							
6	Rated Frequency	50 Hz							
7	Rated Primary Current	400-200 A							
8	Rated Secondary current	1A							
9	Number of cores								
10.0		Core-1	Core-2	Core-3	Core-4				
10.1	Secondary Current	1A	1A	1A	1A				
10.2	Purpose /Application	Metering	Protection (O/C & E/F)	Protection (Bus Bar)	Protection (Spare)				
10.3	Rated output (project specific)	30 VA	30 VA						
10.4	Class of accuracy	0.2s	5P	PS	PS				
10.5	Instrument security factor	≤ 5							
10.6	Accuracy limit factor		20						
10.7	Knee point voltage & corresponding exciting current (project specific)			≥ 40 (RCT+8)	≥ 40 (RCT+8)				
10.8	Magnetizing current at Vk/2 (project specific)			≤30 mA	≤30 mA				
10.9	Resistance of the secondary winding at 75 deg C								
10.10	Secondary limiting voltage								
11	Short time thermal rating of primary								
11.1	One Seconds								
11.2	Three seconds	31.5kA							
12	Rated dynamic current of primary								
13	Rated continuous thermal current								
14	Temp rise at an ambient of 50 deg C								
14.1	Winding								
14.2	Oil at the top								
14.3	Exposed current carrying parts								
15	One minute power frequency dry withstand voltage (KV rms)	140 kV rms							

Volume – I Technical Specification for 66KV Outdoor CT

16	One minute power frequency wet withstand voltage (KV rms)	140 kV rms	
17	1.2/50 microsecond impulse withstand test voltage KV peak	325 kVp	
18	Minimum creepage distance in mm	31 mm/kV	
19	Protective creepage distance in mm		
20	Magnetization curve of CT core		
21	Variations in ratio and phase angle error due to variation in		
21.1	Voltage by 1 Volt		
21.2	Frequency by 1Hz		
22	Current density in primary winding		
23	Weight of oil		
24	Total weight		
25	Mounting details		
26	Overall dimensions		
27	Terminal Connector		

Volume – I Technical Specification for 66KV Outdoor CT
Annexure – D2: Guaranteed Technical Particulars (66KV, 800-400/1/1/1/1A)

	Description	Data By Purchaser				Data By Supplier			
1	Name of Manufacturer								
2	Address and contact details								
3	Type								
4	Rated Nominal Voltage	66kV							
5	Highest System Voltage	72.5 kV							
6	Rated Frequency	50 Hz							
7	Rated Primary Current	800-400 A							
8	Rated Secondary current	1A							
9	Number of cores								
10.0		Core-1	Core-2	Core-3	Core-4				
10.1	Secondary Current	1A	1A	1A	1A				
10.2	Purpose /Application	Metering	Protection (O/C & E/F)	Protection (Bus Bar)	Protection (Spare)				
10.3	Rated output (project specific)	30 VA	30 VA						
10.4	Class of accuracy	0.2s	5P	PS	PS				
10.5	Instrument security factor	≤ 5							
10.6	Accuracy limit factor		20						
10.7	Knee point voltage & corresponding exciting current (project specific)			≥ 40 (RCT+8)	≥ 40 (RCT+8)				
10.8	Magnetizing current at Vk/2 (project specific)			≤30 mA	≤30 mA				
10.9	Resistance of the secondary winding at 75 deg C								
10.10	Secondary limiting voltage								
11	Short time thermal rating of primary								
11.1	One Seconds								
11.2	Three seconds	31.5kA							
12	Rated dynamic current of primary								
13	Rated continuous thermal current								
14	Temp rise at an ambient of 50 deg C								
14.1	Winding								
14.2	Oil at the top								
14.3	Exposed current carrying parts								
15	One minute power frequency dry withstand voltage (KV rms)	140 kV rms							

Volume – I Technical Specification for 66KV Outdoor CT

16	One minute power frequency wet withstand voltage (KV rms)	140 kV rms	
17	1.2/50 microsecond impulse withstand test voltage KV peak	325 kVp	
18	Minimum creepage distance in mm	31 mm/kV	
19	Protective creepage distance in mm		
20	Magnetization curve of CT core		
21	Variations in ratio and phase angle error due to variation in		
21.1	Voltage by 1 Volt		
21.2	Frequency by 1Hz		
22	Current density in primary winding		
23	Weight of oil		
24	Total weight		
25	Mounting details		
26	Overall dimensions		
27	Terminal Connector		

Volume – I Technical Specification for 66KV Outdoor CT
Annexure – D3: Guaranteed Technical Particulars (66KV, 1600-800/1/1/1/1A)

	Description	Data By Purchaser				Data By Supplier			
1	Name of Manufacturer								
2	Address and contact details								
3	Type								
4	Rated Nominal Voltage	66 kV							
5	Highest System Voltage	72.5 kV							
6	Rated Frequency	50 Hz							
7	Rated Primary Current	1600-800 A							
8	Rated Secondary current	1A							
9	Number of cores								
10.0		Core-1	Core-2	Core-3	Core-4				
10.1	Secondary Current	1A	1A	1A	1A				
10.2	Purpose /Application	Metering	Protection (O/C & E/F)	Protection (Bus Bar)	Protection (Spare)				
10.3	Rated output (project specific)	30 VA	30 VA						
10.4	Class of accuracy	0.2s	5P	PS	PS				
10.5	Instrument security factor	≤ 5							
10.6	Accuracy limit factor		20						
10.7	Knee point voltage & corresponding exciting current (project specific)			≥ 40 (RCT+8)	≥ 40 (RCT+8)				
10.8	Magnetizing current at V _k /2 (project specific)			≤ 30 mA	≤ 30 mA				
10.9	Resistance of the secondary winding at 75 deg C								
10.10	Secondary limiting voltage								
11	Short time thermal rating of primary								
11.1	One Seconds								
11.2	Three seconds	31.5 kA							
12	Rated dynamic current of primary								
13	Rated continuous thermal current								
14	Temp rise at an ambient of 50 deg C								
14.1	Winding								
14.2	Oil at the top								
14.3	Exposed current carrying parts								
15	One minute power frequency dry withstand	140 kV rms							

Volume – I Technical Specification for 66KV Outdoor CT

	voltage (KV rms)		
16	One minute power frequency wet withstand voltage (KV rms)	140 kV rms	
17	1.2/50 microsecond impulse withstand test voltage KV peak	325 kVp	
18	Minimum creepage distance in mm	31 mm/kV	
19	Protective creepage distance in mm		
20	Magnetization curve of CT core		
21	Variations in ratio and phase angle error due to variation in		
21.1	Voltage by 1 Volt		
21.2	Frequency by 1Hz		
22	Current density in primary winding		
23	Weight of oil		
24	Total weight		
25	Mounting details		
26	Overall dimensions		
27	Terminal Connector		

Volume – I Technical Specification for 66KV Outdoor CT
Annexure –D Recommended spares (Data by Supplier)

List of recommended spares as following –

Sr. No.	Description of spare part	Unit	Quality
1			
2			
3			
4			
5			
6			

TECHNICAL SPECIFICATION
FOR
OUTDOOR
DISCONNECTING SWITCH

Prepared by	Supriya Raina		Rev: 0
Reviewed by	Meenakshi		Date:
Approved by	Kiran Kumar Alla		

Volume – I Technical Specification for Disconnecting Switch

1.0 CODES & STANDARDS:

Materials, equipment and methods used in the manufacture of outdoor disconnecting switch shall confirm to the latest edition of following standard: -

National Standard

Standard Code	Standard Description
	Indian Electricity Rules (relevant safety regulation of CEA)
	Indian Electricity Act 2003
	CBIP manual
IS : 9921 - Part I to V	Specification for Alternating Current Disconnectors (Isolators) and Earthing Switches
IS : 0996 -1979	Single phase small AC and Universal Electric Motors.
IS : 7572 -1974	Guide for testing single phase AC and Universal motors.
IS : 4237 -1967	General Requirement for switchgear for voltage not exceeding 1.1 kV.
IS : 2147 -1962	Degree of protection provided by enclosure for low-voltage switchgear control gear
IS : 2544	Porcelain Post Insulator
IS : 2629 -1985	Recommended Practice for Hot-Dip Galvanizing of Iron and Steel
IS : 6639 - 1972	Specification for Hexagon Bolts for Steel Structures

2.0 DESIGN FEATURES

S No	Description	Requirement / Rating
2.1.0	Disconnect Switch Type & Mechanism	Motor operated, central rotating double break with turn and twist mechanism, triple pole, outdoor type for installation and operation in horizontal plane with or without earth switches, as required complete in all respects.
2.1.1	Motor assembly	Suitable for 3 phase 415V, 50 Hz. Provided with a quick electro-mechanical brake on high speed shaft for rapid braking.
2.2.0	Earth Switch Mechanism	Manually operated
2.3.0	Disconnect Switch Controls	
2.3.1	Remote electrical control	Required
2.3.2	Local Manual control	Required
2.3.3	Local electrical control	Required from integral Local Control Cabinet
2.4.0	Interlock with circuit breakers	Electrical interlock suitable for 220 V DC
2.5.0	Interlock with Earth Switch	Mechanical & Electrical interlock
2.6.0	Padlock for Earth Switch	Padlock & keys for both positions i.e. when earth switch is grounded and when earth switch is un-grounded.
2.7.0	Fixed Contacts	
2.7.1	Type of contacts	Spring loaded with smooth surface, silver plated

Volume – I Technical Specification for Disconnecting Switch

2.7.2	Current carrying castings	Non corrodible, non ferrous material
2.7.3	Current carrying Springs	Made of non aging, non magnetic stainless steel with life long spring action strength
2.8.0	Insulators	
2.8.1	Construction	Comprising of cylindrical solid core post insulators. The porcelain used in the insulators shall be homogeneous, free from laminations, cavities or any other defect which may affect its mechanical and dielectric qualities and shall be thoroughly vitrified, tough and impervious to moisture. The glazing of the porcelain shall be of uniform brown colour, free from blisters, burrs and other defects.
2.8.2	Fasteners	All metal caps, jointing flanges, bolts and nuts shall be made of high grade cast iron or malleable steel casting, machine faced and hot-dip galvanized.
2.9.0	Moving Contacts	
2.9.1	Type of contacts	High pressure relieving copper contacts, silver plated
2.9.2	Wiping Action	Required during opening & closing. Shall be adequate to remove any oxide film formed without causing scouring or abrasion on the contact surfaces.
2.10.0	Current carrying Springs	Made of non aging, non magnetic stainless steel with life long spring action strength
2.11.0	Fault Current rating	Earth switch shall be able to carry same Fault Current as assigned to the disconnecting switch.
2.12.0	Disconnecting Switch contacts movement	90 deg from full open to full close in order to ensure a distinct break and clear visibility.
2.13.0	Corona Effect	Shall be free from visible corona discharge in both open & close positions at visible discharge test voltages.
2.14.0	Control cabinet	
2.14.1	Enclosure	Weather-proof, water-shedding, corrosion-proof IP-55 steel cabinet
2.14.2	Cabinet Door	Neoprene Gasketed, hinged access door shall have a mechanical indicator fitted to clearly indicate fully opened and fully closed positions of the disconnection switch.
2.14.3	Wiring	Control wiring shall be done using 1.1KV grade 2.5 sq.mm stranded copper conductor, PVC insulated, cables laid in GI conduits.
2.14.4	Locking arrangement	Padlocking arrangement to be provided.
2.14.5	Incomer	A local TPN MCB to be provided in cabinet at power supply incoming point.
2.14.6	Outgoing Control Wiring	All outgoing control wiring shall terminate on terminal blocks, inside the cabinet so as to have maximum access to all conductor terminals.
2.14.7	Aux. Contacts	All auxiliary contacts of the disconnection switch and earthing switches shall be supplied duly wired up to the terminal blocks.
2.14.8	Terminals	Stud type terminals with at least twenty (20) percent spare terminals shall be provided over and above the number actually required.
2.14.9	Paint Shade	Polyurethane Paint Shade no. 692 of IS-5.

Volume – I Technical Specification for Disconnecting Switch

2.14.10	Local Controls	A local/ remote changeover switch shall be fitted inside the cabinet together with open/ close push buttons for local control.
2.15.0	Manual Operation	Manual operation of disconnection switch by means of crank handle disconnecting power supply to the 3-pole operating mechanism on insertion into its socket. The height of socket shall be about 1.2 meter above the finished ground level of the substation.
2.16.0	Disconnection switches with Earth switch	Switch shall have three (3) grounding blades forming integral part of the isolator. These blades shall be capable of being fitted on either side of the blades. Flexible heavily tinned copper braids of adequate cross-sectional area with connector suitable for the specified short circuit current shall be provided on the hinged end of the grounding blade for connection to the station grounding grid.
2.17.0	Grounding Blades Operation	Manually operated and interlocked with disconnection switch so that the grounding blades can be closed only when the disconnection switch is open.
2.18.0	Pivot bearings	Shall be maintenance-free and corrosion resistant. Double tapered-roller bearings located 150 mm apart suitable for ensuring smooth and dependable operation of the disconnection switch shall be located at the base of the supporting insulators. The earthing switch shaft shall also be provided with necessary bearings. The bearings shall be suitable for effective operation of disconnection switch and earthing switches even after long periods of their remaining in closed/ open position.
2.19.0	Disconnection Switch Poles & base	Each pole of the disconnection switch shall be provided with a complete galvanized steel base designed for mounting on a supporting structure/ gantry. The base shall be rigid and self-supporting and shall require no guying or cross bracing between phases. The group operated isolators shall have a common supporting structure for all the three (3) poles.
2.20.0	Grounding Pads	Each pole of disconnection switch shall be provided with two (2) grounding pads of non-corrodible material brazed to the channel base at opposite ends. Flexible tinned copper (15-25 microns) connectors shall be provided for a) Connection of earthing pad of each pole, b) Operating handle, c) Earthing switches.
2.21.0	Counter-Balancing Springs/ Weights	Springs/ weights of non-rusting alloy composition shall be provided for counter-balancing the earthing switch blades to prevent impact at the end of travel both on opening and closing of the earthing switch.
2.22.0	Name Plates	Corrosion-proof nameplates giving all the relevant mandatory as well as optional information as stipulated in IS shall be provided on disconnection switches, earthing switches and operating devices as per the Owner's/ Consulting Engineer's approval.

Volume – I Technical Specification for Disconnecting Switch

3.0 APPROVED MAKE OF COMPONENTS

3.1.0	Motors	ABB / Siemens / Crompton
3.2.0	Insulators	JSI / WSI / Modern / BHEL/CJI
3.3.0	Switch	Kaycee / L&T (Salzer)
3.4.0	HRC Fuse Links	Alstom / Siemens / L&T
3.5.0	AC Contactors & O/L Relay	L&T / Siemens / Schneider
3.6.0	Terminals	Connectwell / Elmex
3.7.0	Push buttons / Actuator	L&T / Teknic / Siemens
3.8.0	MCB	Merlin Gerin / Siemens / Schneider

4.0 TESTING & INSPECTION

4.1.0	Internal Test	Manufacturer shall carry out comprehensive inspection and testing during manufacturing of the equipment.
4.2.0	Type test	The product must be of type tested quality. Type test reports shall be submitted for the type, size & rating of equipment offered along with bid. If the manufacturer's lab is accredited by govt./ authorized body then it shall be acceptable for type testing.
4.3.0	Routine test	As per relevant IS / IEC.
4.4.0	Acceptance test	As per relevant IS / IEC.
4.5.0	Test Witness	
4.5.1		The Buyer reserves the right to witness all tests specified on completed product.
4.5.2		The Buyer reserves the right to inspect the product at the Sellers works at any time prior to dispatch, to verify compliance with the specifications.
4.5.3		In-process and final inspection call intimation shall be given in advance to Owner.
4.6.0	Tests on fitting and Accessories	As per Manufacturer's Standards and relevant IS / IEC.

5.0 DEVIATIONS

Deviation from this specification, if any, shall be clearly brought out in the offer. Unless owner explicitly accepts such deviations, it shall be considered that the offer fully complies with the specification.


TECHNICAL SPECIFICATION OF IT DEVICES FOR GRID COMMUNICATION

DOCUMENT NO.: BRPL-IT-SCADA-0001

Rev.: 00



BSES RAJDHANI POWER LIMITED
BSES Bhawan, Nehru Place,
New Delhi - 1100049

 BSES BSES Rajdhani Power Limited	Technical Specification of IT devices for Grid communication
---	---

DOCUMENT CONTROL SHEET

DOCUMENT : TECHNICAL SPECIFICATION OF IT DEVICES FOR GRID COMMUNICATION

DOCUMENT NO. : BRPL-IT-SCADA-001

REV. NO. : 00

ENDORSEMENT

00	05.02.2019	First issue	Suman Kumar	Mrityunjay Kumar
Rev No.	Date	Description	GM - IT	HOD - IT
			Prepared by	Approved By
			BSES Rajdhani Power Limited	

(This document is a property of BSES Rajdhani Power Limited. This is not transferable and shall not be used for any purpose other than for which it is issued)

BRPL-IT-SCADA-0001, Rev. 00	Technical Specification	Page 2 of 8
-----------------------------	-------------------------	-------------

Contents

Sr. No.	Clause No.	Description	Page no.
1.	1.0	INTENT OF SPECIFICATION	4
2.	2.0	SCOPE OF SUPPLY AND SERVICES	5
3.	2.1	IT RACK ROOM REQUIREMENT	5
4.	2.2	POWER SUPPLY REQUIREMENTS	5
5.	2.3	EARTHING REQUIREMENTS	5
6.	2.4	IT RACK SPECIFICATION	6
7.	2.5	IT devices	7
8.	3.0	Terminal Points	7
9.	4.0	Exclusions	7
10.	5.0	Bill of Quantity and vendor list of each item per rack for each grid	7

POINTS TO BE CONSIDERED DURING DESIGNING OF NEW GRID**1.0 INTENT OF SPECIFICATION**

- 1.1 Tender Specification is intended to cover design, engineering, manufacture, assembly, inspection, shop testing, supply, packing, forwarding to site, unloading, storage and preservation, handling at site, insurance, erection & supervision of erection, pre-commissioning, testing & commissioning, completion of facilities, conducting reliability run tests and performance guarantee tests and handing over the complete IT system to IT department of BSES Rajdhani power limited.

The scope shall also cover the following activities and services in respect of all the equipment and works specified in various sections of this specification.

- a) Basic engineering of all equipment and equipment systems.
- b) Detailed design of all the equipment and equipment system(s).
- c) Providing engineering drawings, data, instruction manuals, as built drawings and other information for owner's review, approval and records.
- d) Compliance with statutory requirements and obtaining clearances from statutory authorities, wherever required.
- e) Complete manufacturing including shop testing.
- f) Packing and transportation from the manufacturer's works to the site including customs clearance, port charges, if any.
- g) Receipt, movement to proper storage, storage, preservation and conservation of equipment at the site, movement from storage area to interim/ final foundation location.
- h) Supply of spares as per specified list.
- i) All items and equipment though not specifically mentioned in the specification, but needed to complete the system to meet the intent of the specification shall be deemed to be included in the scope of the bidder.

It is not the intent to completely specify all details of design and construction, but only to lay down broad sizing and quality criteria for the major equipment and systems and it is expected that the equipments shall conform in all respects to high standards of engineering, design and workmanship and shall be capable of performing in continuous commercial operation up to the contractor's guarantee in a specified manner acceptable to the owner.

2.0 SCOPE OF SUPPLY AND SERVICES

The scope of supply and services shall be complete but not limited to the following:

2.1 IT RACK ROOM REQUIREMENT

- 2.1.1 Air conditioned room shall be provided for proper functioning of all IT devices. The temperature shall be maintained to 22⁰ to 24⁰ C
- 2.1.2 Room size shall be minimum as –
 - a) Length – 3.5 mtrs
 - b) Width – 2.5 mtrs.
 - c) Height – 3 mtrs.
- 2.1.3 Cable trench/ duct – 200mm wide cable trench/ duct shall be provided below the finished floor for proper routing of cables up to IT rack. 100mm size conduit shall be provided for cable entry from outside of the building to inside cable trench/ duct. The cable trench / duct shall be connected to nearest DCDB for proper power cable routing up to IT rack.
- 2.1.4 Room door width shall be minimum 4 ft. for ease of rack entry and height shall be as per standard norms. Door shall have locking arrangement.
- 2.1.5 Room's front side shall be provided with glass partition to have the clear view of IT rack from outside the room.
- 2.1.6 Towers (2nos.) for communication link shall be installed at the roof the building. The area required for base of the tower shall be 5 ft X 5 ft and the tower load shall be maximum 250 kg. Link shall be delivered by RCOM/ Airtel/ Sify ISPs. These links delivery shall be directly taken care by owner. Bidder to provide the suitable platform as motioned in the clause for tower erection.

2.2 POWER SUPPLY REQUIREMENTS

- 2.2.1 Required power supply for communication devices inside the IT rack shall be provided. Two numbers 48V DC power through suitable MCB shall be provided for owner's use in the IT rack this power supply shall be used for communication link's POE devices.
- 2.2.2 All internal wiring of rack for various ratings of power supply required by other devices i.e switch, routers, cooling fan, light etc shall be provided.
- 2.2.2 All communication equipments/ devices inside the IT rack shall be on DC supply .

2.3 EARTHING REQUIREMENTS

- 2.3.1 Dedicated electronic earthing shall be provided for IT rack and their devices. The earth pit resistance should be between 0.6 ohm to 1 ohm.

- 2.3.2 Electronic Earthing cable from earth pit to IT rack shall be of minimum 16 sq.mm multi stranded copper cable PVC insulated and internal devices shall be done with minimum of 06 sq.mm multi stranded copper cable PVC insulated.

2.4 IT RACK SPECIFICATION

- 2.4.1 The design of IT rack and layout of all equipment, terminal blocks etc. shall be based on human engineering considerations, fully keeping in view the convenience of operation and maintenance personnel and shall be subject to Owner's approval during detailed engineering.
- 2.4.2 Rack shall be free standing type and have bottom/ top entry for cables to be decided application wise during detailed engineering. The bottom of rack shall be sealed with bottom plate, double compression cable glands and fire proof sealing material to prevent ingress of dust and propagation of fire.
- 2.4.3 Rack size shall be 12U and made of CRCA sheet with 1.6 mm thickness. The rack shall be of front and back opening with 2 mm thick door frame. Front and back door shall have full length of 3 mm thick glass panel for clear view of inside equipments. Cable gland plate shall be detachable type and of 2mm thickness. Door hinges and locks shall be as per manufacturer standards. Special key type locks are not acceptable. Rack colour shade shall be powder coated RAL 7035.
- 2.4.4 Two nos. adjustable height tray shall be provided in the rack for routers and ISP devices.
- 2.4.5 Following are the minimum equipment/ accessories shall be provided in the rack however same shall be decided during detail engineering –
1. DC Power supply converter -
 - i) Input source – 48V DC – 1 no.
 - ii) Output – 12V DC - 4 nos., 5VDC – 2 nos.
 - iii) Input and output connection shall be of terminal type.
 - iv) Input terminals - suitable for 4 sq.mm cable
 - v) Output terminals - suitable for 2.5 sq.mm cable
 2. AC power supply extension board -
 - i) Input source – 230V AC – 1 no.
 - ii) Output sockets with individual switch – 230V AC – 5 nos.
 3. Rack Fan and filter – size 6"
 4. MCB and Terminal blocks – MCB DP type and terminals shall be mounted on DIN rail. Minimum four nos. MCB shall be provided in the rack. One no. for 48 V DC (20A), one no.

for 230V AC (10A) and one no. of each rating shall be kept as spare. Terminal blocks shall be fused type and suitable to respective voltage rating and intended cable size mentioned elsewhere in the specification.

2.4.6 All inter panel wiring shall be with FRLS type wires with proper routing inside the cable alley. Cross ferruling shall be provided for easy identification of wires. Cable shall have proper cable tagging.

2.4.7 Panel name plate shall be provided at top portion of front and back doors. It shall be engraved type and made of acrylic plate.

2.5 IT devices

2.5.1 Router – Router shall have minimum 2 nos. WAN ports and 8 nos. LAN port. Router shall also support the 3G/ 4G dongle connectivity.

2.5.2 Switch – Switch shall have minimum 12 LAN ports. Switch shall be provided with all mounting accessories.

3.0 Terminal Points

3.1 Power supply – From PDB to IT rack including cable supply, erection and termination at both end (PDB and IT rack). PDB details shall be part of Electrical section of technical specification

3.2 LAN cabling – From RTU to IT rack router/ switch including CAT 6 cable (armour type) supply, erection and termination at both end (RTU and IT rack).

3.3 Communication link – Shall be provided by respective ISP upto router WAN ports.

4.0 Exclusions –

4.1 Communication tower and link.

5.0 Bill of Quantity and vendor list of each item per rack for each grid –

Sr. No.	Item Description	Make / Model No.	Quantity (in nos.)
1	Rack – 12U	Rittal / Pyrotech	01
2	Router	Fortigate / CISCO	01
3	Switch	CISCO	01
4	Power Supply converter	Meanwell/ Phoenix	01
5	MCB	Havells / Legrand	04
6	Terminal blocks	Wago/ phoenix	1 lot

7	AC extension board	Havells / Anchor	1
8	Wires for Internal wiring	RR cable, Finolex, Havells	1 lot
9	Spare Terminal blocks with fuses (mounted in the rack)	Wago/ phoenix	20%
10	Terminal fuses of each rating (loose supply)		20%



TECHNICAL SPECIFICATION

FOR

CABLE SEAL SOLUTION

Specification No- SP-GMS-01-R0

Prepared by	Javed Ahmed		Rev: 0
Reviewed by	Abhinav Srivastava		
Approved by	Sheshadri Krishnapura		Date: 16 th April 2018

Registered Office: BSES Bhavan, Nehru Place, Delhi - 110019

Index

1.0	Scope
2.0	Basic Features
3.0	Service Conditions
4.0	System Design
5.0	Installation, Testing and Commissioning
6.0	Maintenance
7.0	Approved Makes.
8.0	Drawing and Data submission
9.0	Shipping
10.0	Handling and Storage
11.0	Quality
12.0	Deviation
13.0	Testing and Inspection
14.0	Training

1.0. SCOPE:

This specification covers design, engineering, manufacture, assembly, stage testing, inspection & testing before supply & delivery at site and installation testing and commissioning including handover the system to BRPL after successful execution of Cable Seal Solution

This Scope includes the following

- a) Supply of Cable Seal System including its transportation to BRPL Site
- b) Installation testing commissioning of Cable seal solutions with all the accessories including minor civil work if any.

2.0. Basic Features:

Following requirements shall be fulfilled and supported with valid test reports/certificates:

1. Minimum IP 65 Protection level Certificate for protection from Dust and Water.
2. Heat sink test report of Cable transit system.
3. Certificate/ Test Report for Protection from Rats and Rodents.
4. ATEX, PESO Approval for Explosive atmosphere.
5. NEMA Certificate as per UL 508A for the safety of Cabinets & Enclosures mandatory.
6. Material of Frame shall be of Aluminum (Grade EN AC 44300)/Stainless Steel.
7. System must have Bonding & grounding (Armour Earthing) feature as per IS 3043-1987 using a suitable Tin Plated Copper Braid to be used wherever required. It should be also tested for Impulse withstands as per IEC 62305-1 for minimum 50kA for 1 sec.
8. Manufacturer should have direct presence in India with all the after Sale & Service support from last 10 years.
9. Cable sealing system should have been tested for F- Rating Fire for 3 hrs as per UL 1479/ EN, Insulation and Integrity for 120 mins as mentioned in Indian National Building Code(EI 120) Certificate from BS 476 are mandatory.
10. Cable sealing system should have been tested for GAS tightness of 2.5 bar pressure.
11. EPDM modules in System must have Halogen content less than 200ppm with low smoke index-F1 Classification as per NF16-101 & NF16-102, Heat Radiation test in compliance with M2 classification, UV Ageing Test as per ISO-4892-2:2006 & ISO-815- 1:2008, Oxygen Index Test as per ASTM D 2863-00, Shock & Vibration Test as per NES 510.
12. System must have Bonding & grounding (Armour Earthing) feature as per IS 3043-1987 using a suitable Tin Plated Copper Braid to be used wherever required. It should be also tested for Impulse withstand as per IEC 62305-1 for minimum 50kA for 1 sec.
13. Smoke Index shall be low. Type test reports for the same shall be provided by the supplier.
14. Shelf life of module - 25 Years
15. Solubility – Insoluble in water.

3.0. SERVICE CONDITIONS:

S.No	Particulars	Data
1	Design Ambient temperature	0°C to 50 °C
2	Seismic Condition	Zone IV as per IS 1893
3	Wind Pressure	195 kg/M ² upto elevation of 30 M as per IS 875
4	Maximum Relative Humidity	100%
5	Maximum Altitude above Sea level	1000M
6	Rainfall	750mm (concentrated in 4 months)
7	Pollution level	Heavy/Dry
8	Average of no thunderstorm days	40 per annum

4.0. SYSTEM DESIGN

1. Modules with concentric peel able/removable layered multi-diameter cable sealing system consisting of frames, blocks and accessories shall be installed where the cables enter or leave any type of Electrical Panel/Cabinet/Transformer cable box. Each concentric module shall have a minimum of 10 mm range between smallest and largest adaptable diameter. System should be designed with minimum +/- 3 mm design margin. System should have provision for usable spares of 30% with no loose/ hanging / add layer / plug in type or to be stored components of modules / seals, each spare module should be concentric peelable/removable multi-diameter layered with complete range installed on Frame and solid Block are not acceptable..

2. It Shall cover following openings

For all Cable entry from outside to control room building and between room to room

5.0. MAINTENANCE

Bidder shall furnish a maintenance manual and support maintenance activity.

6.0. APPROVED MAKES

Roxtec, MCT Brattberg

7.0. APPROVED MAKES

8.1	Submissions along with the bid	
8.1.1	Duly filled GTP and	2 copies + 1 soft copy

	copy specification	of	
--	-----------------------	----	--

8.0. SHIPPING

9.1	Shipping	<p>The bidder shall ascertain at an early date and definitely before the commencement of manufacture, any transport limitations such as weights, dimensions, road culverts, Overhead lines, free access etc. from the Manufacturing plant to the project site. Bidder shall furnish the confirmation that the proposed Packages can be safely transported, as normal or oversize packages, up to the site.</p> <p>Any modifications required in the infrastructure and cost thereof in this connection shall be brought to the notice of the Purchaser.</p> <p>The Bidder shall be responsible for all transit damage due to improper packing.</p>
-----	----------	--

9.0. HANDLING AND STORAGE

10.0	Handling and Storage	Manufacturer instruction shall be followed. Detail handling & storage instruction sheet / manual needs to be furnished before commencement of supply.
------	----------------------	---

10.0. QUALITY

11.1	Vendor quality plan	To be submitted for purchaser approval
11.2	Inspection points	To be mutually identified & agreed in quality plan

11.0. DEVIATION

12.1	Deviation	Deviations from this Specification shall be stated in writing with the tender by reference to the Specification clause/GTP/Drawing and a description of the alternative offer. In absence
------	-----------	---

		of such a statement, it will be assumed that the bidder complies fully with this specification. No deviation will be acceptable post order.
--	--	---

12.0. TESTING AND INSPECTION

Shall be as per latest relevant standards

13.0. TRAINING

Training on installation, commissioning, operation and maintenance shall be included in the proposal.

- at factory/site- 1 Manday

TECHNICAL SPECIFICATION TRAINING AND INSPECTION

Prepared by	Anupam Kumar		Rev: 1
Reviewed by	Abhinav Srivastava		Date: 19.04.2017
Approved by	Vijay Panpalia		

Volume – I Technical Specification for Training and Inspections

Training and Inspection

The Scope includes training and inspection of BRPL Officials at site and at OEM's factory on overall product and all its sub-components. Cost of travel by flight and

1. Training of BRPL officials

The Scope includes training of BRPL Officials at site and at OEM's factory on overall product and all its sub-components.

BRPL official will include departmental personnel from Operation & Maintenance, Protection, SCADA and Engineering.

Training will include, but not limited to, verbal and written communication on aspects ranging from operation, maintenance, safety, features and functions.

It will be the responsibility of contractor to arrange the following:

- i) To arrange Air travel and Taxi for local conveyance at the contractors cost for the engineers/ officers deputed for carrying out the inspection of the material.
- ii) To arrange the minimum 4 star accommodation at the contractors cost for the boarding/ lodging and meals thereof for the engineers/ officers deputed for carrying out the inspection of the material.
- ii) To depute his competent representative to impart training of the material.

Following Table defines mandays required for training of each equipment.

S. No.	Equipment	Training at Site (No. of Days)	Training at Factory (No of Days)	No. of BRPL Representatives for Factory Visit
1	C&R Panels	6	2	3
2	11 kV Panels	3	2	3
3	SCADA – RTU	3	2	2
4	Battery Bank	1	1	1
5	Battery Charger	1	1	1
6	11kV APFC with Controller	3	2	3
7	Fire suppression System	1	0	0
8	Video Surveillance System	1	0	0
9	Fire Detection System	1	0	0
10	66kV Isolator	1	0	0
11	CT, PT and CVT	1	0	0

Volume – I Technical Specification for Training and Inspections

2. Inspection & Testing

2.1 Independent Inspection

BRPL may at his discretion delegate inspection and testing of material to an independent inspector.

2.2. Dates for Inspection and Testing

The Contractor shall give the Owner reasonable notice (minimum 10 days) in writing of the date and the place at which any material will be ready for testing as provided in the Contract and Owner shall attend at the place so named within fifteen (15) days of the date, which the Contractor has stated in his notice. The Owner shall give the Contractor twenty four (24) hours notice in writing of his intention to attend the tests. The above notices shall be given at first by the quickest possible means and confirmed later in writing.

If on receipt of the Contractor's notice of testing, the Owner's representative does not find the material to be ready for testing, the costs incurred for re-deputation of inspector and re-inspection shall also be in Contractor's Scope.

2.3 Inspection charges:

Detailed breakup of no. of inspectors for each inspection is as under.

S.No	Equipment	No of Inspectors
1	CRP	3
2	RTU	2
3	HT Panels	2
4	For all other equipments	1
5	For all Stage inspections	1

It will be the responsibility of contractor to arrange the following:

i) Cost of all the inspections within India and abroad (including re inspections) including flight Tickets, local conveyance, Boarding and lodging (Minimum 4 Star Hotel for India and Minimum 5 Star for Abroad) shall be in scope of Vendor. The Factory visits will be held at OEM Factory only.

ii) To depute his authorized representative to associate during the inspection of the material.

In case of fake call or rejection of material or any other cause, the Owner is

Volume – I Technical Specification for Training and Inspections

not liable for reimbursement of the expenditure so incurred by the contractor.

2.4 Rejection

If as-a-result of the inspection, examination or testing as per approved QAP, the Owner decides that any equipment is defective or otherwise not in accordance with the Contract, he may reject such equipment and shall notify the Contractor there-of, immediately. The notice shall state the Owner's objections with reasons.

The Contractor shall then with all speed make good the defect or ensure that any rejected equipment complies with the Contract.

If the Owner requires such Equipment to be re-tested, the tests shall be repeated under same terms and conditions. All costs incurred for re-deputation of inspector and re-inspection shall also be in Contractor's Scope.

TECHNICAL SPECIFICATION

APPROVED MAKES & VENDORS

Prepared by	Abhinav Srivastava		Rev: 1
Reviewed by	k.Sheshadri		Date: 22.07.2018
Approved by	k.Sheshadri		

Volume-I Technical Specification for Approved Makes & Vendors

1.0 APPROVED MAKES & VENDORS

S NO.	Vendors
1.0	Power Transformer
1.1	BHARAT BIJLEE LIMITED
1.2	ABB LIMITED
1.3	SCHNEIDER ELECTRIC LIMITED.
1.4	BHEL
1.5	CGL
2.0	Station Transformers
2.1	SCHNEIDER ELECTRIC LIMITED.
2.2	TOSHIBA
2.3	DANISH
2.4	CGPISL
3.0	LT Control, Communication and special cables
3.1	POLYCAB
3.2	PARAMOUNT COMMUNICATIONS LIMITED
3.3	TARUNA METALS PVT. LIMITED.
3.4	ALPHA COMMUNICATION
3.5	KEI INDUSTRIES LIMITED.
4.0	LT(1.1 KV grade) XLPE Insulated Power Cables
4.1	PARAMOUNT COMMUNICATIONS LIMITED
4.2	KEI INDUSTRIES LIMITED.
4.3	HINDUSTAN VIDYUT PRODUCTS LIMITED
4.4	GEMSCAB INDUSTRIES LIMITED
4.5	KRISHNA ELECTRICAL INDUSTRIES LIMITED
4.6	POLYCAB WIRES PRIVATE LIMITED
4.8	KEC INTERNATIONAL LIMITED (RPG CABLES LIMITED)
4.9	HAVELLS
5.0	11KV 500MVA Indoor Switchboard
5.1	SIEMENS LIMITED
5.2	ABB LIMITED
5.3	SCHNEIDER ELECTRIC LIMITED.
6.0	66KV Outdoor Circuit Breakers
6.1	ABB LIMITED
6.2	SIEMENS LIMITED
6.3	GE
6.4	CGPISL
7.0	66KV & 11KV Outdoor CT/PT
7.1	CROMPTON GREAVES LIMITED
7.2	KAPCO ELECTRIC PVT. LIMITED.

Volume-I Technical Specification for Approved Makes & Vendors

7.3	GE
7.4	MEHRU ELECTRICAL & MECHANICAL ENGINEERS P LIMITED.
7.5	ABB LIMITED
7.6	BHEL
8.0	CVT
8.1	CROMPTON GREAVES LIMITED
8.2	ABB LIMITED
8.3	MEHRU
8.4	GE
8.5	SIEMENS
8.0	33&66KV Lightening Arrestor
8.1	ALSTOM
8.2	OBLUM ELECTRICAL INDUSTRIES PVT. LIMITED.
8.3	LAMCO INDUSTRIES PVT. LIMITED.
8.4	ABB LIMITED
8.5	CROMPTON GREAVES LIMITED.
8.6	ELECTROLYTE
8.7	RAYCHEM
9.0	66KV Isolators
9.1	ABB LIMITED.
9.2	SIEMENS LIMITED.
9.3	CROMPTON GREAVES LIMITED.
10.0	66KV Control & Relay Panel
10.1	ABB LIMITED.
10.2	SCHNEIDER ELECTRIC LIMITED.
10.3	SIEMENS LIMITED.
11.0	11KV Capacitor Bank
11.1	UNIVERSAL CABLES LIMITED.
11.2	SHREEM ELECTRIC LIMITED
11.3	ABB LIMITED
11.4	LARSEN & TOUBRO LIMITED
11.5	EPCOS INDIA PVT. LIMITED
12.0	ACDB & BMK
12.1	NEPTUNE
12.2	CMKL
12.3	NEC
12.4	EATHUN
12.5	POPULAR SWITCHGEAR
12.6	SHIVALIC

Volume-I Technical Specification for Approved Makes & Vendors

13.0	St. through jointing and Termination Kits – 1.1KV,11KV
13.1	RAYCHEM RPG LIMITED
13.2	3M ELECTRO & COMM. INDIA (P) LIMITED.
13.3	DENSON
14.0	St. through jointing and Termination Kits – 66KV
14.1	RAYCHEM RPG LIMITED
14.2	3M ELECTRO & COMM. INDIA (P) LIMITED.
15.0	LED/HPSV/Fluorescent Lamps, Ballasts, Starters / Igniters, Fittings, Lamp Holder
15.1	PHILIPS ELECTRONICS INDIA LIMITED
15.2	CROMPTON GREAVES LIMITED
15.3	BAJAJ ELECTRICALS LIMITED
15.4	SURYA ROSHNI LIMITED
16.0	Transformer oil
16.1	APAR INDUSTRIES LIMITED
16.2	SAVITA OIL TECHNOLOGIES LIMITED
16.3	RAJ PETRO SPECIALITIES PVT. LIMITED.
17.0	Protective Relays (Refer Technical specification for details)
17.1	SIEMENS LIMITED
17.2	A-EBERLE
17.4	ABB LIMITED
17.5	SCHNEIDER ELECTRIC
17.6	GE
18.0	Overhead Line accessories e.g. Clamps, Connectors, Line Hardware fitting
18.1	RAYCHEM RPG PVT.LIMITED
18.2	RASHTRA UDHYOG LIMITED.
18.3	KLEMMEN ENGINEERING
18.4	LEGION
18.5	BURMA
19.0	Disc and Pin Insulators
19.1	ADITYA BIRLA INSULATORS
19.2	MORDEN INSULATORS LIMITED.
19.3	BHEL
19.4	IEC
19.5	W.S. INDUSTRIES
20.0	STEEL TUBULAR POLES
20.1	FABRICO (INDIA) PVT. LIMITED.
20.2	ADVANCE STEEL TUBES LIMITED.
20.3	GOOD LUCK STEEL TUBES LIMITED.

Volume-I Technical Specification for Approved Makes & Vendors

20.4	RAMA STEEL TUBES LIMITED.
21.0	ACSR Conductors
21.1	HINDUSTAN VIDYUT PRODUCTS LIMITED
21.2	GUPTA POWER
21.3	LUMINO INDUSTRIES LIMITED
21.5	POLYCAB WIRES PRIVATE LIMITED
22.0	Battery Bank
22.1	PANASONIC
22.2	SAMSUNG
22.3	OKAYA
22.4	COSTLITE
23.0	Battery Charger cum DC DB
23.1	MASS-TECH CONTROLS PRIVATE LIMITED
23.2	CALDYNE AUTOMATICS LIMITED.
23.3	CHABI ELECTRICALS
24.0	PAINTS & CHEMICALS
24.1	BERGER PAINTS INDIA LIMITED BRITISH PAINTS DIVISION
24.2	SHALIMAR PAINTS LIMITED.
24.3	NEROLAC PAINTS LIMITED.
24.4	ASIAN PAINTS LIMITED.
25.0	CEMENT
25.1	ACC
25.2	ULTRA TECH
26.0	STEEL
26.1	TATA
26.2	SAIL
27	NIFPS
27.1	CTR
28	HIGH MAST
28.1	BAJAJ ELECTRICALS LTD.
29	CABLE SEAL
29.1	ROXTEC
29.2	MCT Brattberg
30	EOT Crane
30.1	REVA
30.2	DEMAG
31	GIS Gas Handling kit(Gas filling, filter and evacuation kit)
31.1	DILO

Volume-I Technical Specification for Approved Makes & Vendors

VOLUME – II

SCHEDULE AND ANNEXURE

SCHEDULE – A

GENERAL PARTICULARS

(This shall form part of Technical Bid)

1.0 Bidder

- | | | |
|-----|--|---|
| 1.1 | Name | : |
| 1.2 | Postal Address | : |
| 1.3 | Telegraphic Address | : |
| 1.4 | Telex number / Answer back code | : |
| 1.5 | Phone(s) | : |
| 1.6 | Name and Designation of the person who should be contacted in case of clarifications / details etc. not received expeditiously from the officer mentioned in item 1.6 above | : |
| 1.7 | Brief write-up giving details of the organization, years of establishment and commercial production activities, manufacturing, fabrication, shop testing, erection, testing, commissioning and after-sales service facilities, key personnel with their qualifications and experience, collaboration agreements, if any number of employees in various categories and last three (3) years turn over | : |

2.0	Bid Validity	:
------------	--------------	---

3.0	All the Schedules filled-in	:	Yes
------------	-----------------------------	---	-----

4.0	All the Deviations brought out in Schedule – E1 and E2	:	Yes
------------	--	---	-----

5.0	All the drawings, write-ups, literature, leaflets, calculations, details, etc as called for in the specification attached	:	Yes
------------	---	---	-----

6.0	Is the Bidder agreeable to undertake this contract, if deviations stipulated by him are not acceptable to the Purchaser	:	Yes/No
------------	---	---	--------

Volume – 2 Schedules & Annexure

Schedule A

Seal of Company

Bidders Name : _____

Signature : _____

Name : _____

Designation : _____

Date : _____

SCHEDULE – B1
11KV INDOOR SWITCHGEAR

Sr. No.	Description	Incomer	Bus coupler	Outgoing	Capacitor	Transformer
1	Switchgear assembly					
1.1	Make					
1.2	Type					
1.3	Reference standard					
1.4	Voltage (normal / Max. KV)					
1.5	Frequency (HZ)					
1.6	Short circuit rating					
1.7	Short time current and duration					
A	Impulse withstand (KV peak)					
B	1min. Power freq. withstand test(KV rms)					
2	Construction					
2.1	Metal clad construction (Yes / No)					
2.2	Degree of Portion					
2.3	Minimum thickness of sheet metal used (mm)					
2.4	Draw out feature provided for					
A	Breaker with service, test & isolated position - Yes /No					
B	Voltage Transformer- Yes / No					
C	Protection relays -Yes /No					
2.5	Breaker cubicle					
A	Cubical door can be closed with breaker in test and isolated position -Yes / No					
B	Working zone units from floor level (mm)					
2.6	All meters, switchgear & relays flush mounted type -Yes /No					
2.7	Minimum clear space required					
A	Front for breaker withdrawal (mm)					

Volume – 2 Schedules & Annexure

Schedule B1

B	Rear (mm)					
2.8	Typical vertical section					
A	Overall dimensions					
	i. Length (mm)					
	ii. Breath (mm)					
	iii. Height (mm)					
B	Weight (Kg)					
3	Bus Bar					
3.1	Make					
3.2	Material & grade					
3.3	Reference standard					
3.4	Cross section area (mm ²)					
3.5	Bus connection (joints)					
A	Silver plated -Yes /No					
B	Conventional made with anti oxide grease -Yes /No					
3.6	Rated continuous current amps					
3.7	Maximum temp. rise at rated continuous current DFG C					
3.8	Short time current and duration KA ... secs					
3.9	DC resistance at 85 DEG C ($\Omega/m/\varnothing$)					
3.10	Minimum clearance of bus bar and connection					
A	Phase to phase (mm)					
B	Phase to earth (mm)					
3.11	Bus bar provided with					
A	Insulation sleeve					
B	Phase barriers					
C	Cast resin shrouds for joint					
3.12	Bus bar supported spacing (mm)					
3.13	Bus bar insulators					
A	Make					
B	Type					
C	Reference standard					
D	Voltage class (KV)					
E	Min. creepage distance (mm)					
F	Cantilever strength Kg/mm ²					
G	Net weight (Kg)					

Volume – 2 Schedules & Annexure

Schedule B1

4	Circuit Breaker					
4.1	Make					
4.2	Type					
4.3	Reference standard					
4.4	Related Voltage					
4.5	Related frequency					
4.6	Related current and its reference ambient temp					
A	Continuous current to limit the max. temp. rise to 55DEG C for silver plated connections and 40DEG C for conventional connections					
4.7	Related operating duty					
4.8	Symmetrical breaking capacity at rated voltage & operating duty KA rms.					
4.9	Rated making current (Kap)					
4.10	Short time current and duration KA ... secs					
4.11	Insulation level					
A	Impulse voltage withstand on 1/50 full wave					
A	1min. Power freq. withstand test(KV rms)					
4.12	Maximum overvoltage factor while switching off					
A	Un loaded transformer					
B	Loaded transformer					
C	Un loaded CABLES					
D	Capacitor					
E	Motors					
4.13	Opening time max. No load condition (ms)					
4.14	Number of permissible breaker operation under vacuum loss					
4.15	At 100% breaking capacity					
A	Opening time Max. (ms)					
B	Arcing time max (ms)					
C	Total break time (ms)					
4.16						
A	Make time (Max) (ms)					
B	Total closing time (ms)					

Volume – 2 Schedules & Annexure

Schedule B1

4.17	Total length of contact travel (mm)					
4.18	No. of breaker operation permission without requiring inspection, replacement of contacts and other main parts.					
A	At 100% rated current					
B	At 100% rated breaking current					
4.19	Types of contents					
4.20	Maximum clearance in air (mm) from live part					
4.21	Between phases					
A	Between live parts and ground					
B	Type of arc control device provided					
4.22	Operating mechanism closing					
4.23	Type					
A	No. of breaker operations stored					
B	Trip free or fixed trip					
C	Anti pumping features provided					
4.24	Operating mechanism tripping					
A	Type					
B	No. of breaker operations stored					
C	Trip free or fixed trip					
D	Anti pumping features provided					
4.25	Spring charging motor					
A	Rating					
B	Make					
C	Voltage and permissible variation(%)					
4.26	Closing coil					
A	Voltage (V)					
B	Permissible voltage variation (%)					
C	Closing current at rated voltage (A)					
D	Power at rated voltage (w)					
4.27	Trapping Coil					

Volume – 2 Schedules & Annexure

Schedule B1

A	Voltage (V)					
B	Permissible voltage variation (%)					
C	Tripping current rated voltage (A)					
D	Power at rated voltage (w)					
4.28	Breaker / Accessories Accessories such as control switch indication lamps etc. furnished as specified. (Please attach separate sheet giving details of all Accessories, inter locks and safety shutters)					
A	Mechanical safety interlock					
B	Automatic safety interlock					
C	Operational interlock					
D	Emergency manual trip					
E	Operation counter					
F	Change / discharge indicator					
G	Manual spring charging facility					
H	Auxiliary switch with 6 No + 6 NC for owner's use					
I	Contacts wear indicator					
4.29	Auxiliary Switch					
A	Switch contacts type					
B	Contacts rating at					
	1) Make & Continuous (Amps)					
	2) Break (Inductive) (Amps)					
4.30	Net weighting of the breaker (Kg)					
4.31	Impact load foundation design (to include dead load plus impact value on opening at maximum interrupting rating) (Kg)					
4.32	On vacuum loss (Amps)					
A	Possible load current breaker (Amps)					
B	Possible fault current breaker (Amps)					
4.33	Overall dimensions					

Volume – 2 Schedules & Annexure

Schedule B1

A	Length (mm)					
B	Breath (mm)					
C	Height (mm)					
4.34	Type test report omidentical breaker furnished					
5	Control & Indications					
5.1	Push Button Make					
A	Type & Catalog No.					
B	Contact rating at 110V/220V.D.C					
C	Make & continuous (Amps)					
5.2	LED lamps: Make:					
A	Type & Catalog No.					
B	Watts /Voltage					
C	Lamps & lens replaceable from front with glass cover					
5.3	Selector switch: Make:					
A	Type & Catalog No.					
B	Contact rating					
C	Make & continuous (Amps)					
D	Break (Inductive)(Amps)					
6	Current Transformer					
6.1	Make					
6.2	Types & Voltage Level					
6.3	Reference standard					
6.4	C.T ratio as specified					
6.5	Short circuit withstand short time current for 1 sec. - KA rms Dynamic current -KA peak					
6.6	Class of insulation					
6.7	Temperature rise					
6.8	Basic insulation level					
6.9	For metering & protection					
A	CT ratio					
B	Class of accuracy					
C	Rated burden VA					
D	Knee point voltage V					
E	Excitation current at $V_K / 4$					
F	Rated saturating current Amp					
6.10	For differential & restricted earth fault protection					

Volume – 2 Schedules & Annexure

Schedule B1

A	CT ratio					
B	Class of accuracy					
C	Rated burden VA					
D	Knee point voltage V					
E	Excitation current at $V_K / 4$					
F	Rated saturating current Amp					
6.11	For restricted earth fault protection					
A	CT ratio					
B	Class of accuracy					
C	Rated burden VA					
D	Knee point voltage V					
E	Excitation current at $V_K / 4$					
F	Rated saturating current Amp					
G	Secondary resistance (Ω)					
6.12	For stand by earth fault protection					
A	CT ratio					
B	Class of accuracy					
C	Rated burden VA					
D	Knee point voltage V					
E	Excitation current at $V_K / 4$					
F	Rated saturating current Amp					
G	Over current rating continuous % over load (%)					
6.13	For sensitive by earth fault protection (CBCT)					
A	CT ratio					
B	Class of accuracy					
C	Rated burden VA					
D	Knee point voltage V					
E	Excitation current at $V_K / 4$					
F	Rated saturating current Amp					
G	Over current rating continuous % over load (%)					
7	Potential Transformer					
7.1	Make					
7.2	Types & Voltage Level					
7.3	Reference standard					

Volume – 2 Schedules & Annexure

Schedule B1

7.4	Voltage ratio					
7.5	Accuracy					
A	Corer-1					
B	Corer-2					
7.6	Rated burden					
A	Corer-1					
B	Corer-2					
7.7	Over voltage factor					
A	Continuous					
B	30 Seconds					
7.8	Class of insulation					
7.9	Temperature rise over ambient (° C)					
7.10	Basic impulse level (KV peak)					
7.11	Winding connection					
A	Primary					
B	Secondary					
7.12	Fuses					
A	Continuous rating HV / LV (Amp)					
B	Symmetrical fault rating HV /LV KA rms					
C	Make					
7.13	Maximum ratio error at					
A	90% to 100% of rated voltage and 25% to 100% of rated secondary burden at unity power factor					
B	90% to 106% of rated voltage and 10% to 50% of rated secondary burden at 0.2 p.f.					
7.14	Maximum Phase difference at					
A	90% to 106% of rated voltage and 10% to 50% of rated secondary burden at 0.2 p.f.					
B	90% to 106% of rated voltage and 10% to 50% of rated secondary burden at 0.2 p.f.					
7.15	E=Weight (Kg)					
8	Relay					
8.1	Manufacture					
8.2	Model Type					

Volume – 2 Schedules & Annexure

Schedule B1

8.3	Draw out type with built in test facilities. Yes/ No					
8.4	Built in test facility Yes /No					
8.5	Type of mounting					
8.6	Reference standard					
8.7	All relays furnished as per drawing and specification					
8.8	All relevant relay leaflets and catalogue furnished					
8.9	Communication port type					
8.10	Auxiliary Supply					
8.11	Measurement and data acquisition feature					
8.12	Control and supervision					
A	IEC protocol					
B	Open protocol feature					
C	Programming facility					
D	Separate output for individual element					
E	Event recording facility number of events					
F	Required software offered					
8.13	C.T.secondary current					
8.14	Self diagnostic feature					
8.15	Modular design					
8.16	Relay details					
8.16.1	Over current					
A	Make					
B	Type					
C	Characteristic available					
D	Range of setting i. Current ii. Time					
E	Range of setting i. Current ii. Time					
F	Rated burden					
8.16.2	Synchronizing check relay					
A	Make					
B	Type					
C	Setting range					
8.16.3	Earth fault					
A	Make					
B	Type					
C	Characteristic available					

Volume – 2 Schedules & Annexure

Schedule B1

D	Range of setting i. Current ii. Time					
E	Rated burden					
8.16.4	Over current (Directional)					
A	Make					
B	Type					
C	Characteristic available					
D	Range of setting i. Current ii. Time					
E	Rated burden					
8.16.5	Earth fault (Directional) if applicable					
A	Make					
B	Type					
C	Characteristic available					
D	Range of setting i. Current ii. Time					
E	Rated burden					
8.16.6	Neutral unbalance relay					
A	Make					
B	Type					
C	Characteristic available					
D	Range of setting i. Current ii. Time					
E	Rated burden					
8.16.7	Under voltage relay					
A	Make					
B	Type					
C	Range of setting i. Current ii. Time					
D	Rated burden					
8.16.8	Over voltage relay					
A	Make					
B	Type					
C	Range of setting i. Current ii. Time					
D	Rated burden					
8.16.9	Busbar differential relay					
A	Make					

Volume – 2 Schedules & Annexure

Schedule B1

B	Type					
C	High impedance / low impedance					
D	Facility of CT ratio adjustment possible through software. Yes / No					
E	CT supervision facility available. Yes /No					
8.16.10	Transformer differential relay					
A	Make					
B	Type					
C	High impedance / low impedance					
D	Facility of CT ratio adjustment possible through software. Yes / No					
E	Facility of transformer vector group adjustment possible through software. Yes/ No					
F	Setting range					
G	Rated burden					
8.16.11	Restricted earth fault relay					
A	Make					
B	Type					
C	Combined with differential relay. Yes / No					
D	Setting range					
E	Rated burden					
8.16.12	Stand by earth fault relay					
A	Make					
B	Type					
C	Characteristics					
D	Setting range					
E	Rated burden					
9	Meters					
9.1	ammeter					
A	Make					
B	Type					
C	Reference standard					
D	Size					
E	Scale					
F	Accuracy class					
9.2	Voltmeter					
A	Make					

Volume – 2 Schedules & Annexure

Schedule B1

B	Type					
C	Reference standard					
D	Size					
E	Scale					
F	Accuracy class					
9.3	Energy Meter					
A	Make					
B	Type					
C	Reference standard					
D	Size					
E	Scale					
F	Accuracy class					
G	Measurement					
H	kWh					
I	kVARh					
J	kVAh					
K	Any Other					
L	Data stored capability					
M	Pulse output facility					
N	Data down loading facility					
10	Secondary Wiring					
10.1	Type of insulation					
10.2	Voltage grade					
10.3	Conductor material					
10.4	Conductor Size (minimum) and insulation wiring					
A	Potential circuit					
B	Control & current circuit					
11	Terminal Block					
11.1	Make					
11.2	Type					
11.3	Catalog No.					
11.4	20% spare terminal furnished					
12	Cable Termination					
12.1	Clearance for power cable termination					
12.2	Removable gland plate					
A	Material for multicore cable					
B	Material for single core cable					
C	Thickness of plate					
13	Name Plate					
13.1	Material					

Volume – 2 Schedules & Annexure

Schedule B1

13.2	Thickness					
13.3	Size for					
A	Breaker cubicle					
B	Instrument / devices					
14	Space heater / plug socket					
14.1	Cubicle heater					
A	Thermostat controlled					
B	Wattage					
C	Voltage					
D	Resistance (ohms)					
E	Thermostat range					
14.2	Plug Socket					
A	Type					
B	Rating					
14.3	Cubical heater & plug socket circuit provided with MCB's					
15	A.C. /D.C. Supply					
15.1	Isolated switches for incoming supply					
A	A.C. Type & rating					
B	D.C. Type & rating					
15.2	Isolated switches at each cubicle					
A	A.C. Supply type & rating					
B	D.C. Supply type & rating					
16	Tropical Protection					
16.1	Any Special treatment for tropical protection					
17	Painting					
17.1	Finish of switchgear					
A	Inside					
B	Outside					
18	No. of Accessories furnished					
A	Breaker lifting & handling trolley					
B	Any other					
19	Tests					
19.1	Reference standard					
19.2	Routine test to be performed on switchgear					
19.3	Type test certificates submitted					
20	Drawing / Data					

Volume – 2 Schedules & Annexure

Schedule B1

20.1	General arrangement for panel board					
20.2	Foundation Panel					
20.3	Bill of material					
20.4	Cross sectional drawing for every type of switchgear (Add sheets if necessary)					

	Bidders Name	:	_____
	Signature	:	_____
	Name	:	_____
	Designation	:	_____
Seal of Company	Date	:	_____

SCHEDULE – B2
66 kV CONTROL & RELAY PANEL

	Parameter	Technical Particulars	
1.00.00	CONTROL PANEL BOARD		
1.01.00	Make		
1.02.00	Type		
1.03.00	Reference Standard		
1.04.00	Construction		
1.04.01	Degree of protection		
1.04.02	Sheet metal thickness mm		
1.04.03	Floor channel sills, vibration damping pads and kick plate furnished?		
1.05.00	Equipment Mounting		
1.05.01	All relays, meters and switches are flush mounted?		
1.05.02	Relays furnished in draw out cases with built in test facilitate?		
1.06.00	Name plate		
1.06.01	Material		
1.06.02	Thickness		
1.06.03	Size for:-		
	Equipment		
	Panels		
1.07.00	Mimic		
1.07.01	Material		
1.07.02	Width		
1.08.00	Internal Illumination		
1.08.01	Volt		
1.08.02	Watt		
1.08.03	Door switched controlled		
1.09.00	Space Heater		
1.09.01	Volt		
1.09.02	Watt		
1.09.03	Thermostat Controlled?		
1.10.00	Plug Socket		
1.10.01	Type		
1.10.02	Rating		
1.11.00	Panel Illumination, space heater & plug socket circuits provided with individual switch fuse units?		
1.12.00	AC/DC Supply - Type & rating of isolating switch fuse units for		
1.12.01	Incoming AC Supply		
1.12.02	Incoming DC Supply		
1.13.00	Internal Wiring		
1.13.01	Wire Type		
1.13.02	Voltage Grade		

Volume – 2 Schedules & Annexure

Schedule B2

1.13.03	Conductor Material		
1.13.04	Conductor Size for		
	i) Current / control circuit		
	ii) Voltage Circuit		
1.13.05	Wires identified at both ends with ferrules?		
1.14.00	Terminal block		
1.14.01	Make		
1.14.02	Type / Catalogue No		
1.14.03	20% spare terminals furnished?		
1.15.00	Ground Bus		
1.15.01	Materials		
1.15.02	Size (mm)		
1.16.00	Painting		
1.16.01	Type of finish		
1.16.02	Colour Shade - Inside/Outside		
1.16.03	Details of Painting procedure finished?		
2.00.00	BREAKER CONTROL SWITCH		
2.01.00	Make		
2.02.00	Type		
2.03.00	Reference Standard		
2.04.00	Contact Rating	220V DC	240V AC
2.04.01	Make & Continuous (A)		
2.04.02	Break (inductive) (A)		
3.00.00	ISOLATING CONTROL SWITCH		
3.01.00	Make		
3.02.00	Type		
3.03.00	Reference Standard		
3.04.00	Contact Rating	220V DC	240V AC
3.04.01	Make & Continuous (A)		
3.04.02	Break (inductive) (A)		
4.00.00	METER SELECTOR SWITCH		
4.01.00	Make		
4.02.00	Type		
4.03.00	Reference Standard		
4.04.00	Contact Rating	220V DC	240V AC
4.04.01	Make & Continuous (A)		
4.04.02	Break (inductive) (A)		
5.00.00	PUSH BUTTON		
5.01.00	Make		
5.02.00	Type		
5.03.00	Reference Standard		
5.04.00	Contact Rating		
5.04.01	Make & Continuous (A)		
5.04.02	Break (inductive) (A)		
5.05.00	NO & type of Contacts provided per button		
6.00.00	LAMPS		
6.01.00	Make		
6.02.00	Type		
6.03.00	Reference Standard		
6.04.00	Rating:		

Volume – 2 Schedules & Annexure

Schedule B2

6.04.01	Volt		
6.04.02	Watt		
6.04.03	Series Resistance		
6.05.00	10 % Extra lamps furnished?		
6.06.00	Size of lens		
7.00.00	SEMAPHORE INDICATORS		
7.01.00	Make		
7.02.00	Type		
7.03.00	Diameter of the Disc		
7.04.00	Operating voltage		
7.05.00	Burden (Watt DC)		
7.06.00	Whether latch in type or supply Failure type		
8.00.00	INDICATING INSTRUMENT	Ammeter	Voltmeter
8.01.00	Make		
8.02.00	Type		
8.03.00	Reference Standard		
8.04.00	Type of Movement		
8.05.00	Accuracy Class		
8.06.00	Scale in Degrees		
8.07.00	VA Burden		
9.00.00	MULTIFUNCTION METER		
9.01.00	Make		
9.02.00	Type		
9.03.00	Reference Standard		
9.04.00	Furnished in Draw out Case or not		
9.05.00	Type of Register		
9.06.00	Accuracy Class		
9.07.00	VA Burden		
9.07.01	Current Coil		
9.07.02	Voltage Coil		
10.00.00	ANNUNCIATOR		
10.01.00	Make		
10.02.00	Type		
10.03.00	Reference Standard		
10.04.00	No. of Annunciator groups furnished?		
10.05.00	No. of Windows per group		
10.06.00	Overall Dimension of a group (mm)		
10.07.00	Detailed Write-up on Scheme furnished?		
11.00.00	TRANSDUCERS		
11.01.00	Whether provided as per specification		
11.02.00	Make		
11.03.00	Type		
11.04.00	Output		
11.05.00	Accuracy		
11.06.00	Response Time		
11.07.00	Power Supply		
11.08.00	Isolation		
11.09.00	Catalogue furnished		

Volume – 2 Schedules & Annexure

Schedule B2

12.00.00	RELAYS	Make	Type
12.01.00	Relays furnished in draw out cases with built in test facilitates?		
12.02.00	Line Protection Panel		
12.03.00	Transformer Panel		
12.04.00	Bus coupler Panel		
12.05.00	Miscellaneous Auxiliary Relays		
12.06.00	Auxiliary Relay, Voltage Operated with		
	4 pair of contacts		
	8 pair of contacts		
12.07.00	Auxiliary Relay, Current Operated with		
	4 pair of contacts		
12.08.00	Catalogue of all relays submitted with bid		

Seal of Company

Bidders Name : _____
Signature : _____
Name : _____
Designation : _____
Date : _____

SCHEDULE – B3

Li_Ion Battery

S.NO.	Description	Data to be filled by Manufacturer
1	Battery (as per scope of supply annexure A) - Yes / No	
2	Manufacturing battery type	
3	Conformance to design standards as per specification clause no. 2.0 - Yes / No	
4	Conformance to design feature as per specification clause no. 3.0 & 4.0 - Yes / No	
5	Submitted of deviation sheet for each specification clause no - Yes / No	
6	Battery GA drawing submitted - Yes / No	
6.1	Battery selection / sizing calculation submitted - Yes / No	
7	Battery rating (C5) offered in Ahr	
7.1	Rating at temperature 27 deg C as per IS	
7.2	Rating at temperature 20 deg C as per IEC	
8	Battery race type offered -steel or FRP	
8.1	Number of steps in a tire	
8.2	Number of tires in a rack	
9	Battery bank dimensions in mm (length x depth x height)	
10	Battery cell weight in kg	
11	Battery cell anode --- no. of plates & thickness in mm	
12	Battery cell cathode --- no. of plates & thickness in mm	
13	Battery cell nominal voltage	
13.1	Battery cell float charge voltage	
14	Battery cell maximum boost charge voltage	
15	Battery cell end cell voltage	
16	Total battery bank float charging voltage required in volts	
17	Total battery bank boost charging voltage required volts	
17.1	Total time required for boost charging from and cell voltage to rated voltage /capacity.	
18	Battery internal resistance (in Ohms) at fully charged condition	
19	Heat generated by battery at rated full load (in Kw)	
20	Electrolyte chemical name	
21	Electrolyte specific gravity at 27 deg C	
22	Recommended topping up frequency (in weeks or months)	
23	Amount of gas evolution in one full charge discharge cycle (in liter / Ahr)	
24	Type of separators used in battery cell	

Volume – 2 Schedules & Annexure

Schedule B3

25	Shelf life period (to retain 90% of energy from full charge condition at 27 deg C)	
26	Total battery bank short circuit fault level (in KA)	
27	Battery bank terminal bus bar with insulating shrouds - Yes /No	

	Bidders Name	:	_____
	Signature	:	_____
	Name	:	_____
	Designation	:	_____
Seal of Company	Date	:	_____

SCHEDULE – B4
BATTERY CHARGER with DCDB

Sr. No.	Description	Data to be filled by manufacturer
1	Manufacturer equipment type	
2	Conformance to design standards as per specification Yes / No	
3	Conformance to design features as per specification Yes / No	
4	Submitted to deviation sheet for each specification clause no - Yes / No	
5	Panel dimension in mm (length x depth x height)	
6	Panel weight in kg	
7	Panel enclosure protection offered	
8	Voltage regulation as per specification (value to be specified)	
9	Boost charging DC current adjustment range (Value to be specified)	
10	Amount of Ripple in DC in % - output with battery - without battery	
11	Charger efficiency offered	
12	Max temperature rise above ambient	
13	Power factor at rated load	
14	Rectifier bridge as per specification	
15	Heat generated by the panel in Kw	
16	AC MCCB - Make , rating	
17	DC MCCB - Make , rating	
18	Rectifier transformer - Make , rating	
19	Semiconductor rectifier - Make , rating	
20	DC conductor - Make , rating	
21.1	DCDB integral part of charger or separate?	
21.2	MCB for DC distribution boards - Make, rating	
22	Conformance to metering & indication as per specification	
23	Conformance to make of component as per specification	
24	Conformance to mimic diagram, labels & finish as per specification	
25	Submission of component catalogue - Yes / No	
26	DC charger nominal output current - (battery trickle charge + DC load)	
27	DC charger boost charge current	

Volume – 2 Schedules & Annexure

Schedule B4

28	DC battery	
29	DC battery duty cycle	
30	DC distribution board output DP MCB feeders required	
30.1	63 amp DP MCB	
30.2	40 amp DP MCB	
30.3	25 amp DP MCB	
30.4	16 amp DP MCB	
30.5	10 amp DP MCB	

Seal of Company

Bidders Name : _____
Signature : _____
Name : _____
Designation : _____
Date : _____

SCHEDULE –B5
11kV AUTO-SWITCHED CAPACITOR BANK

S.No.	Description	
1	Manufacturer equipment type/make	
2	Conformance to design standards as per	
	specification Yes/No	
	- Capacitor Unit	
	- Series Reactor	
	- LA	
	- Isolator	
	- NCT	
3	Conformance to capacitor design requirements as per specification clause no.3.0 to 7.0 - Yes/No	
4	Submission of deviation sheet for each specification clause no. -Yes/No	
5	APP type capacitors offered?	
6	Capacitor bank arrangement / scheme conforming to specification?	
7	Capacitor bank (3 phase system)	
7.1	Capacitor bank (Rated capacitance at 50Hz)	
7.2	Capacitor bank rated voltage – 12Kv	
7.3	Capacitor bank KVAR at 11kV	
7.4	Capacitor bank KVAR at 12kV	
7.5	Capacitor bank line current at rated voltage, continuous operation	
7.6	Designed short circuit withstand capacity for 3sec	
7.7.1	Capacitor bank insulation level at 50Hz	

Volume – 2 Schedules & Annexure

Schedule B5

7.7.2	Capacitor bank impulse voltage withstand	
7.8	One spare single phase capacitor unit offered?	
8	Capacitor single phase unit	
8.1	Capacitor single unit capacitance at 50Hz	
8.2	Capacitor single unit rated operating voltage	
8.3	Capacitor KVAR (at rated voltage)	
8.4	Capacitor single unit continuous operating rated current	
8.5	Designed short circuit withstand capacity of single capacitor unit for 3sec	
8.6	Capacitor unit temperature category (required +5/ C)	
9	Single capacitor unit construction	
9.1	Enclosure sheet metal CRCA	
9.2	Enclosure sheet metal thickness in mm	
9.3	Hermetic sealing method (pressure welding/gas welding/sealant/ if any other pl. specify)	
9.4	Dimensions of a single capacitor unit	
	Height	
	Length	
	Width	
9.5	Weight of a single capacitor unit	
9.6	Single capacitor unit bushings	
	Type of insulator	
	Creepage distance	
	Clearance between two terminals	
9.7	No. of series group/unit	
9.8	No. of parallel elements/ series group	
9.9	No. of APP layers -double/triple	

Volume – 2 Schedules & Annexure

Schedule B5

9.10	Thickness of APP film	
9.11	Width of APP film	
9.12	Thickness of Al foil	
9.13	Width of Al foil	
9.14	Active width of Al foil	
9.15	Maximum voltage stress per APP layer	
9.16	Element connection method	
9.17	Discharge device	
10	Capacitor bank maximum permissible over voltage	
11	Capacitor power loss at rated voltage	
12	Capacitor tan delta (Tangent of power loss angle) at maximum operating conditions	
13	Guaranteed temperature rise of capacitor above ambient temperature	
14.1	Type of discharge device – internal resistor	
14.2	Discharge device material	
14.3	Value of discharge device	
14.4	Discharge time required to attain residual voltage equal to 50 volts	
15	Capacitor bank overall dimensions	
	Height x Length x Width	
16	Capacitor bank total weight	
17	Capacitor bank clearances	
	i)Phase to Phase	
	ii)Phase to neutral	
	iii)Phase to earth	
18	Tinned copper Bus bar cross-section in sq. mm	

Volume – 2 Schedules & Annexure

Schedule B5

19	Tinned copper Bus bar continuous rating	
20	Bus bar short time withstand capacity in kA for 3sec	
21	Flexible tinned copper connector rating	
22.1	Bus bar support insulator make & type	
22.2	Bus bar support insulator voltage class	
23	Bus bar provided with insulating sleeve and phase barriers?	
24	Neutral Current transformer	
24.1	Neutral current transformer make	
24.2	Neutral current transformer outdoor type	
24.3	Cast resin type NCT offered?	
24.4	Neutral current transformer ratio	
24.5	Neutral current transformer accuracy class (0.5 & 5P10min)	
24.6	Neutral current transformer rating(10 & 15VA)	
24.7	Neutral current transformer terminal box ingress protection (IP55min)	
24.8	Residual Voltage Transformer	
25	Series Reactor	
25.1	Series reactor make	
25.2	Continuous current rating of series reactor	
25.3	Series reactor kVAr rating per phase per star	
25.4	Series reactor rated voltage	
25.5	Type –dry air cooled	
25.6	Short time withstand current capacity for 3sec (min 16 times capacitor rated current at 130% rated voltage)	
25.7	Series reactor single phase unit connected between single phase capacitor units and neutral star pint	

Volume – 2 Schedules & Annexure

Schedule B5

25.8	Series reactor power frequency withstand voltage 28Kv MIN	
25.9	Series reactor lightening impulse withstand voltage 75kv min	
26	Lightning Arrestor	
26.1	Name of manufacturer	
26.2	Type – Gapless ZnO	
26.3	Rated voltage	
26.4	Nominal Discharge Current	
26.5	Class - III	
26.6	Insulation withstand voltage	
26.7	Crrepage distance	
27	Vacuum Contactor / switch for Auto Switching	
27.1	Rated Voltages	
27.2	Rated Continuous Current	
27.3	Rated Capacitor Switching Current	
27.4	Frequency	
27.5	Control supply	
27.6	Type	
27.8	Installation	
27.9	Mechanical Endurance	
27.10	Electrical Endurance	
27.11	Mechanical Indicator	
27.12	Trip lever	
27.13	Closing lever	
28	Isolator	

Volume – 2 Schedules & Annexure

Schedule B5

28.1	Name of manufacturer	
28.2	Isolator ratings	
28.3	Type of operation	
28.4	Type	
28.5	Operating mechanism	
28.6	Voltage rating	
28.7	Rated current	
28.8	No.of poles	
28.9	Rated short time current	
28.10	Type of mounting	
28.11	Construction	
28.12	Earth switch provided	
28.13	Auxiliary contacts provided	
28.14	Electrical interlocks	
28.15	Mechanical interlocks	
28.16	Creepage distance	
28.17	Insulation level - Power frequency withstand Voltage - Impulse withstand voltage	
28.18		
	Terminal arrangement a) Incoming suitable for b) Outgoing suitable for	
28.19	Overload capacity	
28.20	Control voltage	
29	Name plate and labels as per specification?	

Volume – 2 Schedules & Annexure

Schedule B5

30	Painting of capacitor and mesh enclosure	
30.1	Shade RAL 7032	
30.2	Material – Pure polyester grade A	
30.3	Minimum thickness (80 microns)	
31	Power cable terminal suitable for 3CX300Sqmm XLPE HT	
32	Space provided for future capacity	

	Bidders Name	:	_____
	Signature	:	_____
	Name	:	_____
	Designation	:	_____
Seal of Company	Date	:	_____

SCHEDULE – B6
LT POWER CABLES

For each size / rating separate GTP need to be furnished.			
S.No.	Description	Buyer's requirement	Seller's Data
1	Make	
2	Type (AS PER IS)	A2XFY (Multicore)	
3	Voltage Grade (KV)	1.1	
4	Maximum conductor temperature		
A	Continuous (° C)	90 °C	
B	Short time (° C)	250 °C	
5	Conductor		
A	Size (mm ²)	4CX300,4CX50, 4CX25, 4CX10 & 2CX10 Sqmm	
B	No. of wire in each conductors Nos.	As per Manufacturer standard	
C	Dia of wires in each conductors before compaction (mm)	As per Manufacturer standard	
D	Shape of conductor	As per specification	
E	Diameter over conductor (mm)	
F	Maximum conductor resistance at 20 ⁰ C (ohm / km)	As per table 2 of IS -7098 Part -1	
6	Insulation		
A	Nominal thickness (mm)	As per table 3 of IS -7098 Part -1	
B	Minimum thickness (mm)	
C	Diameter over insulation (mm) Approx	
7	Inner Sheath		
A	Minimum thickness	As per table 5 of IS -7098 Part -1	
B	Approx dia over sheath (mm) Approx	
8	Galvanized steel Armour	As per table 6 of IS -7098 Part -1	
A	Number of strips	As per manufacturer Std.	
B	Size (Thickness X width) in mm	0.8 x 4	
C	Dia of wire for 2CX10sqmm	1.4mm Min	
D	Dia over Armour -Approx	
9	Outer Sheath	As per table 8 of IS -7098 Part -1	
A	Thickness (Minimum)		
B	Colour	Yellow	
C	Weather proof paint (applicable for 2c x 10 sqmm and 4c x 10 sqmm only)	
10	Approx. overall dia (mm)	
11	End Cap	Required	
12	Continuous current rating for standard I.S. condition laid Direct		

Volume – 2 Schedules & Annexure

Schedule B6

	a. In ground 30 °C Amps	
	a. In duct 30 °C Amps	
	a. In air 40 °C Amps	
13	Short circuit current for 1 sec of conductor (KAmp)	
14	Electrical Parameters at Maximum operating temperature		
A	Resistance (Ohm / Km) (AC Resistance)	
B	Resistance AT 50 C/s (Ohm / Km)	
C	Impedance (Ohm / Km)	
D	Capacitance (Micro farad /Km)	
15	Recommended minimum bending radius X O/D	
16	De-rating factor for following Ambient Temperature in	Ground /Air	
	a. At 30 °C		
	a. At 35 °C		
	a. At 40 °C		
	a. At 45 °C		
	a. At 50 °C		
17	Group factor for following Nos. of cables laid	Touching Trefoil	
A	3 Nos.		
B	4 Nos.		
C	5 Nos.		
D	6 Nos.		
18	Process of cross linking of polyethylene	Dry cure	

Bidders Name : _____

Signature : _____

Name : _____

Designation : _____

Seal of Company

Date : _____

SCHEDULE – B7
CONTROL CABLES

Sr.	Description	Buyers's requirement	Seller's Data
1.0	Make		
2.0	Type (As per IS-1554 part-1)	YWY	
3.0	Voltage Grade (kV)	1.1	
4.0	Maximum conductor temperature		
A	Continuous (°C)	70°C	
B	Short time (°C)	160°C	
5.0	Conductor		
A	Size (mm ²)	10CX2.5, 6CX2.5Sqmm	
B	No. of wire in each conductor Nos.	As per Manufacturer standard	
C	Dia. of wires in each conductors before compaction (mm)	As per Manufacturer standard	
D	Shape of conductor	As per the specification	
E	Maximum conductor resistance at 20°C (Ω/Km.)	As per Table 2 of IS 8130	
F	Number of conductor core		
6.0	Insulation		
A	Nominal thickness (mm)	As per CI & table 2 of IS-1554 Part-1	
B	Minimum thickness (mm)		
C	Diameter over insulation (mm) approx.		
7.0	Inner Sheath		
A	Minimum thickness	As per Table 4 of IS-1554 Part-1	
B	Approx. dia Over sheath (mm) approx.		
8.0	Galvanized steel armour	a) As per CI 13.2 of IS 1554 Part-1: Galvanized steel round wire armour. b) Minimum area of coverage of armouring shall be 90%.	
A	Number of wire/strip	As per Manufacturer standard	
B	Size (Dia/thickness x width) in mm		
C	Dia over Armour -Approx		
9.0	Outer Sheath		
A	Thickness (Minimum)	As per Table 7 of IS-1554 Part-1	
B	Colour	Black	
10.0	Approx overall dia (mm)		
11.0	End Cap	Required	
12.0	Drums provide with MS Spindle plate & nut bolts arrangement	Required	

Volume – 2 Schedules & Annexure

Schedule B7

13.0	Continuous current rating for standard I.S. condition laid Direct		
	a) In ground 30°C Amps		
	b) In duct 30°C Amps		
	c) In air 40°C Amps		
14.0	Recommended minimum bending radius	12 x O/D	
15	Minimum Armour Coverage	90% minimum	
16	Lay Ratios		
16.1	Main Conductor		
16.2	Armour		

Seal of Company

Bidders Name : _____
Signature : _____
Name : _____
Designation : _____
Date : _____

SCHEDULE – B8
ILLUMINATION SYSTEM

1	General			
+1.01	Make			
*1.02	Applicable Standards			
*1.03	Degree of protection			
2	Lighting Panel /Feeder Pillarm Box (LP/ELP/DLP/FPB/EPB/LDB/ELDB/ Construction Features)			
2.01	Make			
2.02	Rated Value (V)			
*2.03	Busbar continuous current rating (A)			
*2.04	Busbar material and cross section	1	2	3
3	Minimum current breakers :			
+3.01	Service			
3.02	Make			
+3.03	Type			
*3.04	No. of poles			
*3.05	Rated continuous current (A)			
*3.06	Short time current rating (Ka)			
*3.07	Related Voltage (V)			
*3.08	Breaking Current (Ka)			
4	Load Breaking Switches			
4.01	Service			
+4.02	Make			
+4.03	Type			
*4.04	No. of poles			
*4.05	Related Voltage (V)			
*4.06	Rated continuous current (A)			
*4.07	Rated making current (Ka peak)			
*4.08	Rated breaking current (Ka)			
*4.09	Rated short time one (1) second current (Ka)			
*4.10	Rated dynamic current (kApeak)			
5	Fuses			
5.01	Service			
+5.02	Make			
*5.03	Type			
*5.04	Standard applicable			
*5.05	Related Voltage (V)			
*5.06	Rated current (A)			
*5.07	Fusing factor			

Volume – 2 Schedules & Annexure

Schedule B8

*5.08	Category of duty			
*5.09	Rupturing capacity (prospective current) (Ka)			
6	Earth Leakage current Breaker			
+6.01	Make			
+6.02	Type			
*6.03	No. of poles			
*6.04	Rated continuous current (A)			
6.05	Short time current rating (Ka)			
6.06	Rated Tripping current			
7	Lighting Fixtures	Type A	B	C
+7.01	Manufacturer			
+7.02	Type			
7.03	Description of different types			
*7.04	Type and wattage of lamp			
*7.05	Rated life of the lamp			
*7.06	Applicable standards			
	Note:- In case luminaries other than the ones specified in specification are offered, all the deviations shall be listed out otherwise these shall be considered as being fully in line with luminaries specified.			
8	Receptacles with Switches	1	2	3
+8.01	Make			
+8.02	Type			
+8.03	Related Voltage (V)			
*8.04	Rated current (A)			
8.05	Technical brochures (Attach brochures and state brochure Nos.)			
9	Cables / Wire	1	2	3
9.01	Service			
+9.02	Make			
+9.03	Type			
*9.04	Voltage Grade (V)			
*9.05	Conductor Material			
*9.06	Size of conductors (mm ²)			
*9.07	Current rating of conductors (A)			
9.08	Applicable Standards			
10	Conduits and Accessories			
10.01	Make			
10.02	Type			
10.03	Material			
10.04	Applicable Standards			
11	Lamp and Luminaries	Incandescent Lamps	Fluorescent Tubes	HPSV Lamps
11.01	Make			

Volume – 2 Schedules & Annexure

Schedule B8

11.02	Type			
*11.03	Lumen output throughout life (Lumen)			
*11.04	Derating factor due to temperature			
*11.05	Derating factor due to aging			
12	Lighting Poles / Towers			
12.01	Manufacturer			
12.02	Applicable Standards			
12.03	Material and Painting			
12.04	Height			

Notes :

1. Single asterisk (*) marked particulars are guaranteed.
2. Other particulars are bonafide and may vary slightly upon completion of detailed design.
3. Particulars against items marked * and + shall be furnished with the Bid.

	Bidders Name	:	_____
	Signature	:	_____
	Name	:	_____
	Designation	:	_____
Seal of Company	Date	:	_____

SCHEDULE – B9
AC DISTRIBUTION BOARDS

S.No	Description	Buyers Requirement	Sellers Data
1	Panel Construction		
1.1	Enclosure Type	Free standing, indoor, Fully compartmentalized, Metal clad, Vermin Proof	
1.2	Enclosure degree of protection	IP 5X	
1.3	Enclosure Material	CRCA steel	
1.4	Load bearing members	Minimum 2.5 mm thick	
1.5	Doors and covers	Minimum 2.0 mm thick	
1.6	Gland Plate (detachable type)	3.0mm MS detachable type or Aluminum 5.0mm for single core cables	
1.7	Separate compartment for	Bus bar, circuit breaker, incoming cable, outgoing cable PT, LV instruments.	
1.8	Breaker compartment door	Separate with lockable handle	
1.9	Fixing arrangement i. Doors ii. Covers iii. Gasket	Concealed hinged Bolted with SS bolts Neoprene	
1.10	Panel Base Frame	Steel base frame as per manufacturer's standard.	
1.11	Handle	Removable bolted covers for cable chamber and busbar chamber shall be provided with "C" type handles	
1.12	Space Heater	Required	
1.13	Panel extension possibility	Required	
2	MCCB		
2.1	Mounting	Flush Mounted	
2.2	Rated Operational Voltage(V)	415 volt	
2.3	Ultimate breaking Capacity		
2.3.1	630A MCCB	As per requirement	
2.3.2	100A MCCB	As per requirement	
2.4	Rated Service breaking capacity at rated voltage Ics	Ics =100% Icu	
2.5	Rotary handle	Required	
2.6	Interlocking arrangement	Between Incomer MCCBs	
2.7	Trip time	As per requirement	
2.8	Test Certificates	Should have test certificates for breaking capacities from independent test authorities	

Volume – 2 Schedules & Annexure

Schedule B9

		CPRI / ERDA or equivalent	
3	MCB		
3.1	Rated Operational Voltage(V)	415 VAC 50 Hz	
3.2	Protection relay/Release	Magnetic thermal release for over current and short circuit protection	
3.3	Breaking capacity	Shall not be less than 10 KA at 415 VAC	
3.4	Mounting	Din mounted	
3.5	MCB classification	As required	
3.6	ISI Marked	The complete range shall be ISI marked	

Bidders Name : _____

Signature : _____

Name : _____

Designation : _____

Seal of Company

Date : _____

SCHEDULE – B10

HIGH MAST

Sl. No.	Particulars	Data by purchaser			Data by seller
1	Name and address of manufacturer				
2	Overall height of high mast	12 mtrs	16 mtrs	20 mtrs	
2.1	Make				
2.2	Material of construction of shaft	Grade S355 J O as per BSEN 10025 or equivalent			
2.2	Cross section of mast	20 sided, regular continuously tapered polygonal			
2.3	Number of sections	One	Two	Two	
2.3	Minimum thickness of shaft (mm)	4 mm	Bottom section: 5 mm Top section: 4mm	Bottom section: 5 mm Top section: 4mm	
2.4	Length of individual section (mm)	12000 mm	10900mm / 5850mm	10375mm / 10375mm	
2.5	Minimum Base and top diameter	340mm (A/F) and 150 mm (A/F)	450mm (A/F) and 150 mm (A/F)	500mm (A/F) and 150 mm (A/F)	
2.6	Type of joints	No site joints, mast should be delivered in a single section	Telescopic slip joint, stress fitted	Telescopic slip joint, stress fitted	
2.7	Length of overlap	N/A	750mm	750mm	
2.8	Metal protection treatment of fabricated mast section	Hot dip galvanization through single dipping process			
2.9	Thickness of galvanizations	Minimum 85 microns as per IS:2629			
2.10	Size of opening	Approx. 250 X 1200 mm			

Volume – 2 Schedules & Annexure

Schedule B10

Sl. No.	Particulars	Data by purchaser			Data by seller
	door at base				
2.11	Type of locking arrangement and door construction	Anti vandal type			
2.12	Details of struck board inside	Insulated base board			
2.13	Size , material and thickness of cable termination box				
2.14	Minimum size of base plate diameter	540 mm (min.)	650 mm (min.)	680 mm (min.)	
2.15	Minimum size of base plate thickness	25 mm thick			
2.16	Minimum size of anchor plate thickness	8 mm			
2.17	Details of template	Same as anchor plate but 2 mm thick			
3	Dynamic loading as prevailing at site				
3.1	maximum wind pressure (basic wind speed)	47m/s as per IS:875, p-3			
3.2	Maximum gust speed time	3 seconds			
3.3	Height above ground level at which wind speed is consider	10 mtrs			
3.4	Factor of safety for wind load	1.25			
3.5	Factor of safety for other load	1.15			
3.6	Application standard for mast design	Technical report #7:2000 by ILE, UK			
4	Foundation details				
4.1	Type of foundation	Open raft shallow footing or pile as applicable			

Volume – 2 Schedules & Annexure

Schedule B10

Sl. No.	Particulars	Data by purchaser			Data by seller
4.2	Size of foundation	as per design conforming to IS:456			
4.3	Design safety factor	2			
4.4	Considered wind speed	180 m /s			
4.5	Depth of foundation	As per requirement of design			
4.6	Average soil bearing capacity	As per site condition			
4.7	Numbers of foundation bolts	6 nos	8 nos		
4.8	PCD of foundation bolts	440 mm (min.)	550 mm (min.)	600 mm (min.)	
4.9	Type of foundation bolt	Tor steel			
4.10	Bolt diameter / length	25mm dia / 750 mm	32mm dia / 1325 mm	40mm dia / 1375 mm	
5	Lantern Carriage				
5.1	Diameter of Carriage Ring	Suitable to carry up to 4 nos. floodlights	1200 mm	1200 mm	
5.2	Construction	MS Channels / Tube, Hot dip galvanized	Channels 75X40X4mm thick	Channels 75X40X4mm thick	
5.3	Number of joints	As per manufacturer's standard design (2 segments as per CI no.4.5)	3 segments (2 segments as per CI no.4.5)	3 segments (2 segments as per CI no.4.5)	
5.4	Buffer arrangement between carriage and mast	Rubber padded guide ring provided			
5.5	Load carrying capacity	500 kg	750 kg	750 kg	
5.6	Total weight of assembly with	as per design			

Volume – 2 Schedules & Annexure

Schedule B10

Sl. No.	Particulars	Data by purchaser		Data by seller
	fitting			
6	Winch			
6.1	Make of winch			
6.2	Number of drums/ winch	Double drum		
6.5	Gear Ratio			
6.3	Capacity	SWL 500 kg	SWL 750 kg	
6.4	Method of operation	Manual / Inbuilt power tool		
6.6	Operating speed			
6.7	Lubricant Arrangement	Permanent oil bath		
6.8	Type of lubricant			
6.9	Material of construction of gear	Phosphorus Bronze / EN 19		
6.10	Tested load per drum	500 kg	750 kg	
6.11	SWL of winch at 410 rpm	500 kg SWL	750 kg SWL	
7	Wire rope			
7.1	Make			
7.2	Grade	AISI 316		
7.3	Number of ropes	3 nos / 5mm (three wire rope)	3 nos / 6 mm (three wire rope)	
7.4	Construction	7./19		
7.5	Diameter of Wire rope	5mm	6mm	
7.6	Factor of safety	Not less than 5	Not less than 6	
7.7	Breaking capacity	Minimum 2350Kgs. X 2		
8	Cable			
8.1	Type	EPR coated PCP sheathed		
8.2	Material	Multicore copper conductor		
8.3	Make	Finolex, torrent, Polycab, KEI, Havells		
8.4	Current carrying capacity	As per IS 9968 (Part - 1), 1998		

Volume – 2 Schedules & Annexure**Schedule B10**

Sl. No.	Particulars	Data by purchaser			Data by seller
8.5	conductor size	5CX2.5 sqmm.			
9	Torque limiter				
9.1	Lifting capacity	Upto 500 kg	Upto 750 kg		
9.2	Adjustable / non adjustable	Adjustable			
10	Lantern and Fixture				
10.1	Type Of Lamp	LED			
10.1.1	Wattage	250W			
10.1.2	Make				
10.1.3	Model Number				
10.2	Housing	Single piece gravity die-cast			
10.2.1	Material	Aluminium alloy: LM6			
10.2.2	Ingress protection				
10.2.3	For optical compartment	IP:65/IP:66			
10.2.4	For control gear compartment	IP:54 or better			
10.2.5	Dimensions of lantern	As per design standard			
10.2.6	Weight of lantern with control gear	As per design standard			
10.3	Lamp Cover	Perspex/Toughened glass			
10.3.1	Toughened glass				
10.3.2	Class of glass	AA/SSQ			
10.3.3	Nominal thickness	5mm			
10.3.4	Perspex thickness	2.5mm+/-0.4 mm			
10.4	Material of gasket	Silicon Rubber/ Neoprene			
10.5	Lamp holder	Screw type/three pin type			
10.5.1	Material	Porcelain			
10.6	Ballast	Conventional/Open type/ VI/VPI			
10.6.1	Ballast voltage	240V AC			
10.6.2	Minimum open circuit voltage	198V			
10.6.3	Frequency	50 Hz			
10.6.4	Current output(A), at rated voltage				
10.6.5	Voltage to current ratio () +/-0.5%				
10.6.6	Watt loss (W)	To be specified			

Volume – 2 Schedules & Annexure

Schedule B10

Sl. No.	Particulars	Data by purchaser			Data by seller
10.7	Power factor of lantern	More than 0.95 lag			
10.7.1	Value of capacitor	To be specified			
10.8	Igniter	Three wire			
10.9	Reflector	Anodised/POT			
10.9.1	Angle of tilt of lamp	To be specified			
10.9.2	Downward light output ratio	More than 70%			
10.9.3	Angle of throw	As per clause 5.12.5			
10.9.4	Angle of spread	As per clause 5.12.6			
10.9.5	Luminous intensity in C = 0° plane at $\gamma = 90^\circ$	Less than 10 Cd/klm			
10.9.6	Luminous intensity in C = 0° plane at $\gamma = 80^\circ$	Less than 30 Cd/klm			
10.10	Make of fixture	Bajaj, GE, Philips and CGL			
10.10.1	Nos of fixture provided with high mast	4	5	6	
10.10.2	Type of fixture	Weather proof			
11	Others				
11.1	Make of 24 hour Differential Timer Switch	Legrand/ GE/ Schnider/ L&T			
11.2	Make of 32A TPN MCB	GE/ Hager/ Legrand/ Schnider			
11.3	Make of 32A Contactor	L&T/ Schnider/ GE			
11.4	Earth pit	Two numbers of treated earth pit with each mast			
12	GTP and Drawing Submitted	Yes/No			
13	Type Tests Submitted	Yes/ No			

Volume – 2 Schedules & Annexure

Schedule B10

Sl. No.	Particulars	Data by purchaser	Data by seller
14	Technical Brochure of luminaries submitted	YES / NO	
15	Operation and maintenance manual submitted	YES / NO	

Seal of Company

Bidders Name : _____
Signature : _____
Name : _____
Designation : _____
Date : _____

SCHEDULE – B11
GROUNDING & LIGHTNING PROTECTION SYSTEM

S.No.	Description	Unit	Data by vendor
1	Earth mat		
a	Material		
b	Size of conductor		
c	Fault withstand current & duration		
2	Equipment Earthing		
a	Material		
b	Size of conductor		
3	Earth Electrode		
a	Material		
b	Size		
c	Length		
4	Lightning Protection System		
a	Material and size of horizontal air termination		
b	Material and size of vertical air termination		
c	Material and size of down conductor		
d	Size of test link		
e	Material of enclosure for test link		
f	Material and size of earth electrode		

Bidders Name : _____

Signature : _____

Name : _____

Designation : _____

Seal of Company

Date : _____

SCHEDULE – B12
CABLE ACCESSORIES

1	Cable Accessories	
1.01	Makes	
1.02	Termination kits	
1.03	Straight through joint kits	
1.04	Cable glands	
1.05	Cable lugs	
1.06	Termination blocks	
1.07	Types	
1.08	Termination kits	
1.09	Straight through joints	
1.1	Cable glands	
1.11	Cable lugs	
1.12	Terminal blocks	

Bidders Name : _____

Signature : _____

Name : _____

Designation : _____

Seal of Company

Date : _____

SCHEDULE – B13
66 KV OUT DOOR CURRENT TRANSFORMER

A) 66 kV, 400-200/1/1/1/1A

	Description	Data By Purchaser				Data By Supplier			
1	Name of Manufacturer								
2	Address and contact details								
3	Type								
4	Rated Nominal Voltage	66 kV							
5	Highest System Voltage	72.5 kV							
6	Rated Frequency	50 Hz							
7	Rated Primary Current	400-200 A							
8	Rated Secondary current	1A							
9	Number of cores								
10.0		Core-1	Core-2	Core-3	Core-4				
10.1	Secondary Current	1A	1A	1A	1A				
10.2	Purpose /Application	Metering	Protection (O/C & E/F)	Protection (Bus Bar)	Protection (Spare)				
10.3	Rated output (project specific)	30 VA	30 VA						
10.4	Class of accuracy	0.5 0.2s for Line Feeder	5P	PS	PS				
10.5	Instrument security factor	≤ 5							
10.6	Accuracy limit factor		20						
10.7	Knee point voltage & corresponding exciting current (project specific)			40 (RCT+8)	40 (RCT+8)				
10.8	Magnetizing current at $V_k/2$ (project specific)			30 mA	30 mA				
10.9	Resistance of the secondary winding at 75 deg C								
10.10	Secondary limiting voltage								
11	Short time thermal rating of primary								
11.1	One Seconds								
11.2	Three seconds	31.5 kA							

Volume – 2 Schedules & Annexure

Schedule B13

12	Rated dynamic current of primary		
13	Rated continuous thermal current		
14	Temp rise at an ambient of 50 deg C		
14.1	Winding		
14.2	Oil at the top		
14.3	Exposed current carrying parts		
15	One minute power frequency dry withstand voltage (KV rms)	140 kV rms	
16	One minute power frequency wet withstand voltage (KV rms)	140 kV rms	
17	1.2/50 microsecond impulse withstand test voltage KV peak	325 kVp	
18	Minimum creepage distance in mm	31 mm/kV	
19	Protective creepage distance in mm		
20	Magnetization curve of CT core		
21	Variations in ratio and phase angle error due to variation in		
21.1	Voltage by 1 Volt		
21.2	Frequency by 1Hz		
22	Current density in primary winding		
23	Weight of oil		
24	Total weight		
25	Mounting details		
26	Overall dimensions		
27	Terminal Connector		

Volume – 2 Schedules & Annexure

Schedule B13

B) 66 kV 1600-800/1/1/1/1A

	Description	Data By Purchaser				Data By Supplier			
1	Name of Manufacturer								
2	Address and contact details								
3	Type								
4	Rated Nominal Voltage	66 kV							
5	Highest System Voltage	72.5 kV							
6	Rated Frequency	50 Hz							
7	Rated Primary Current	1600-800 A							
8	Rated Secondary current	1A							
9	Number of cores								
10.0		Core-1	Core-2	Core-3	Core-4				
10.1	Secondary Current	1A	1A	1A	1A				
10.2	Purpose /Application	Metering	Protection (O/C & E/F)	Protection (Bus Bar)	Protection (Spare)				
10.3	Rated output (project specific)	30 VA	30 VA						
10.4	Class of accuracy	0.5 0.2s for Line Feeder	5P	PS	PS				
10.5	Instrument security factor	≤ 5							
10.6	Accuracy limit factor		20						
10.7	Knee point voltage & corresponding exciting current (project specific)			40 (RCT+8)	40 (RCT+8)				
10.8	Magnetizing current at Vk/2 (project specific)			30 mA	30 mA				
10.9	Resistance of the secondary winding at 75 deg C								
10.10	Secondary limiting voltage								
11	Short time thermal rating of primary								
11.1	One Seconds								
11.2	Three seconds	31.5 kA							
12	Rated dynamic current of primary								
	Description	Data By Purchaser				Data By Supplier			
13	Rated continuous thermal current								

Volume – 2 Schedules & Annexure

Schedule B13

14	Temp rise at an ambient of 50 deg C		
14.1	Winding		
14.2	Oil at the top		
14.3	Exposed current carrying parts		
15	One minute power frequency dry withstand voltage (KV rms)	140 kV rms	
16	One minute power frequency wet withstand voltage (KV rms)	140 kV rms	
17	1.2/50 microsecond impulse withstand test voltage KV peak	325 kVp	
18	Minimum creepage distance in mm	31 mm/kV	
19	Protective creepage distance in mm		
20	Magnetization curve of CT core		
21	Variations in ratio and phase angle error due to variation in		
21.1	Voltage by 1 Volt		
21.2	Frequency by 1Hz		
22	Current density in primary winding		
23	Weight of oil		
24	Total weight		
25	Mounting details		
26	Overall dimensions		
27	Terminal Connector		

Bidders Name : _____

Signature : _____

Name : _____

Designation : _____

Seal of Company

Date : _____

SCHEDULE – B14

66 KV OUT DOOR POTENTIAL TRANSFORMER & CVT

	Description	Data By Purchaser	Data By Supplier
1.0	Location of Equipment	Project specific to be filled up	
2.0	Name of Manufacturer		
3.0	Address & Contact details		
4.0	Type	Single phase, outdoor, dead tank type, oil immersed, self-cooled type.	
5.0	Manufacturer Model No		
6.0	Reference design ambient temperature	50 Deg C	
7.0	Reference Standard	IS: 3156 (Part1 to 4)	
8.0	Nominal system voltage	66KV	
9.0	Highest system voltage	72.5KV	
10.0	Basic Insulation level	325KVp	
11.0	Power frequency voltage	140KV	
12.0	Type of cooling	ONAN	
13.0	Rated frequency (Hz)	50 Hz	
14.0	Insulation Class	A	
15.0	Rated Primary voltage	66KV / $\sqrt{3}$	
16.0	Rated secondary voltage	110V / $\sqrt{3}$	
17.0	Number of secondary cores	Two	
18.0	CORE Specifications		
18.1	Core - 1		
18.2	Purpose	Metering	
18.3	Rated Output	50 VA	
18.4	Class of accuracy	0.2S	
18.5	Ratio error	As per IS	
18.6	Phase angle error	As per IS	
19.0	Core - 2		
19.1	Purpose	Protection	
19.2	Rated Output	50 VA	
19.3	Class of accuracy	3P	
19.4	Ratio error	As per IS	
19.5	Phase angle error	As per IS	
20.0	Rated over voltage factor		
20.1	- Continuous	1.2 times	
20.2	- 30 Seconds	1.5 times	
21.0	Temperature rise above an ambient of 50Deg C at 1.2 times voltage factor for 30 seconds rating		
21.1	- For Winding	50 Deg C	

Volume – 2 Schedules & Annexure

Schedule B14

21.2	- For Oil	40 Deg C	
22.0	Temperature rise above an ambient of 50Deg C at 1.5 times voltage factor for 30 seconds rating		
22.1	- For Winding	50 Deg C	
22.2	- For Oil	40 Deg C	
23.0	One minute power frequency dry withstand voltage for 66 kV PT (KV rms)		
24.0	One minute power frequency wet withstand voltage for 66 kV PT (KV rms)		
25.0	1.2/50 microsecond impulse withstand test voltage for 66 KV PT (KV rms)	325 KVp	
26.0	One minute Power frequency withstand voltage on secondary winding	3KV	
27.0	Minimum creepage distance in mm for 66KV PT	2250 mm	
28.0	Protective creepage distance in mm for 66KV PT	1125 mm	
29.0	Partial discharge test, whether will be carried out Yes / No		
30.0	Weight of core		
31.0	Weight of oil		
32.0	Total weight		
33.0	Mounting details		
34.0	Overall dimensions		

Bidders Name : _____

Signature : _____

Name : _____

Designation : _____

Date : _____

Seal of Company

SCHEDULE – B15
66 KV OUT DOOR CIRCUIT BREAKER

Sl. No.	Item Description	Data By Purchaser	Data By Supplier
1.0	Name of manufacturer		
2.0	Manufacturer's type and designation		
3.0	Governing standard	As per Clause 1.0.0 of the specification	
4.0	Type of circuit breaker	SF6	
5.0	Installation	Outdoor	
6.0	No. of phase & no. of pole	3 (Three), 3 (Three)	
7.0	Rated voltage (kV)	66KV	
8.0	Highest System voltage (kV)	72.5 KV	
9.0	System neutral	Solidly earthed	
10.0	Rated insulation level	325KVp	
11.0	Frequency (Hz)	50 Hz	
12.0	Class		
13.0	Normal current rating (amps)		
13.1	Under standard conditions	2000 A	
13.2	Under site conditions overload rating a) 1 Hour b) 3 Hour		
13.3	Derating Factor, if any, for site condition		
13.4	Temperature rise at 150% rating for 3 Hours		
14.0	Short time current rating (kA) a) For 1 sec b) For 3 sec	31.5 kA for 3 Sec	
15.0	Maximum temperature rise over highest ambient (refer annexure-B) due to rated current in main contacts, measured after breaking test	40 deg C	
16.0	Rated short circuit breaking current		
16.1	Rated short circuit current (AC component)		
16.2	Percentage DC component at KV		

Volume – 2 Schedules & Annexure

Schedule B15

16.3	Asymmetrical breaking Current (including DC Component)		
16.4	Making capacity (KA peak) - at KV		
17.0	Rated operating sequence	O-0.3Sec-CO-3Min-CO	
18.0	Total break time (Milli-seconds):		
18.1	For interruption of 10% of the rated capacity	60ms (max)	
18.2	For interruption of 30% of the rated capacity	60ms (max)	
18.3	For interruption of 60% of the rated capacity	60ms (max)	
18.4	For interruption of the full rated capacity	60ms (max)	
19.0	Arcing time (Milli-seconds)		
20.0	Opening time (Milli-seconds)		
21.0	Break time (Milli-seconds)		
22.0	Closing time (Milli-seconds)	60ms (max)	
23.0	Minimum reclosing time at rated interrupted capacity from the instant of the trip coil energisation (Milli-seconds)		
24.0	Minimum dead time for		
24.1	3 phase reclosing (Milli-seconds)		
24.2	Limit of adjustment of dead time for 3- phase reclosing		
25.0	Data on re-striking voltage for 100%, 50% or 30% rated capacity	100% 50% 30%	
25.1	Phase factor		
25.2	Amplitude factor		
25.3	Natural frequency		
25.4	Rate of rise of re-striking voltage (V/micro sec)		
26.0	Rated out-of phase breaking current		
27.0	Rated line charging breaking current		
28.0	Maximum line charging current: breaking capacity and corresponding over-voltage recorded in test: c) On supply side d) On line side		

Volume – 2 Schedules & Annexure

Schedule B15

29.0	Maximum cable charging current breaking capacity and corresponding over voltage recorded in test: a) On supply side b) On line side		
30.0	Rated single capacitor bank:		
30.1	Capacity in rush current handling, capability		
30.2	Capacitive breaking current capability		
31.0	Rated small inductive breaking current and the corresponding over voltage		
32.0	first pole clear factor	1.5	
33.0	Rated transient recovery voltage for terminal faults		
34.0	Rated characters for short line faults is rate of rise		
34.1	Rated short circuit breaking current		
35.0	Dry 1-minute power frequency test withstand voltage, for complete circuit breaker		
35.1	Between line terminal and grounded parts (KV rms)	140kV (rms)	
35.2	Between terminals with breaker contact open (KV rms)	140kV (rms)	
36.0	Wet 1-minute power frequency test withstand voltage:		
36.1	Between line terminal and grounded parts (KV rms)	140kV (rms)	
36.2	Between terminals with breaker contact open (KV rms)	140kV (rms)	
36.3	Between poles		
37.0	1.2/50 microsecond wave impulse withstand test voltage for complete circuit breaker:		
37.1	Between line terminal and ground (KV peak)	325kVp	
37.2	Between terminals with breaker contact open (KV rms)	325kVp	
37.3	Between poles		
38.0	Minimum clearance in air		
38.1	Between phases (mm)	630mm (min)	
38.2	Live parts and earth (mm)	630mm (min)	

Volume – 2 Schedules & Annexure

Schedule B15

38.3	Live parts to ground level (mm)	4000mm (min)	
39.0	Number of operation possible without maintenance		
39.1	At full rated interrupting capacity		
39.2	At 150% of rated current		
39.3	At 100% of rated current		
39.4	At 50% of rated current		
40.0	Supporting Insulator		
40.1	Make and type		
40.2	Insulation class	A	
40.3	Weight		
40.4	Transport dimensions		
40.5	Visible corona discharge voltage		
40.6	Dry-1 minute power frequency flashover voltage	140kV rms	
40.7	Wet-1 minute power frequency flashover voltage	140kV rms	
40.8	1.2/50 microsecond impulse flashover voltage	325kVp	
40.9	Creepage distance to ground (mm) c) Total d) Protected	31mm/kV	
41.0	No. of breaks per pole	1 (one)	
42.0	Total length or breaks per phase (mm)		
43.0	Type of main contact		
44.0	Material of main contacts	Silver plated copper	
45.0	Whether main contacts silver plated (Yes/No) Thickness of silver coating on main contacts(mm)	15 +/- 5 microns (min)	
46.0	Contact pressure on arcing contacts (kg/m2)		
47.0	Type of arcing contacts		
48.0	Contact pressure on main contact (kg/m2)		
49.0	Type of auxiliary switches		
50.0	Whether all contacts silver plated (Yes/No)		
51.0	No of auxiliary switch contacts operating with all three poles of breaker		
51.1	Which are closed when breaker is closed		

Volume – 2 Schedules & Annexure

Schedule B15

51.2	Which are open when breaker closed		
51.3	Those adjustable with respect to the position of main contacts		
52.0	No of spare auxiliary switch contacts operation with all three poles of breaker		
52.1	Which are closed when breaker is closed	6 (Six)	
52.2	Which are open when breaker is closed	6 (Six)	
52.3	Those adjustable with respect to the position of main contacts		
53.0	Total number of terminal block		
54.0	Number of spare terminal Block	20%	
55.0	Mounting flange details: a) Opening b) Closing		
56.0	Tripping and closing circuit voltage (V)	50V/110V/220V DC	
57.0	Power required for trip coil		
58.0	Power required for closing coil		
59.0	Rated voltage for spring charging motor	240V AC	
60.0	Rated voltage of space heater and socket	240V AC	
61.0	Contingencies for which alarm provided		
62.0	Design data for supporting structure		
63.0	Weight of supporting steel structure for breaker		
64.0	Descriptive leaflets enclosed (Yes/No)		
65.0	For SF6 gas circuit breaker		
65.1	Rated pressure of SF6 Gas in the gas cylinder (kg/sq cm)		
65.2	Quantity of SF6 gas required per single pole unit (kg)		
65.3	Quantity of SF6 gas required cylinder (kg)		
65.4	Weight of empty cylinder (kg)		
65.5	Quantity of absorbent required per pole(kg)		

Volume – 2 Schedules & Annexure

Schedule B15

65.6	Recommended interval for renewal of absorbent in case of outdoor circuit breakers operating in tropical conditions.		
65.7	Chemical composition of the absorbent		
65.8	Quantity of absorbent covered in the scope of supply. (including spare qty.) (kg)		
65.9	Limit of gas pressure for proper operation of circuit breaker		
65.10	Pressure and temperature at which temperature at which the temperature compensated gas pressure switch will: a) Give alarm b) Cut off		
65.11	Name of SF6 supplier and country of origin		
65.12	Quantity of SF6 gas supplied for: a) Actual use in breaker (kg) b) As spare (kg)		
65.13	Chemical composition of gas: a) Qty of air by weight (ppm) b) Qty of H2O by weight (ppm) c) Qty of CF4 by weight (ppm)		
66.0	Operating Mechanism		
66.1	Type of operating mechanism offered		
66.2	Manufacturer's type designation		
66.3	Material of control cabinet enclosure		
66.4	Thickness of sheet metal enclosure	3.0mm for bottom and 2.5mm elsewhere	
66.5	Painting & colour shade	Polyurthane paint, 692 of IS-5	
66.6	Enclosure protection	IP 55	
66.7	Pad locking facility provided (yes/No)		
66.8	Wiring a) Control wire size b) Insulation c) Colour	1.5 Sqmm 650V Grey for control, Black for AC and Green for earth.	

Volume – 2 Schedules & Annexure

Schedule B15

66.9	Normal power consumption at rated voltage (Watt)		
66.10	Normal power spring charging motor		
66.11	Number of close/open operation possible after failure of AC supply to motor		
66.12	Time required to charge the closing spring		
66.13	Whether indication of spring charged condition provided in central control cabinet (Yes/No)		
66.14	Dimension of the control cabinets		
66.15	Weight of control cabinet		
67.0	Details of safety interlock provided		
68.0	Whether supporting structure for circuit breaker provided (Yes/No)		
68.1	Thickness of galvanizing (mm)		
68.2	Size of foundation bolts		
69.0	Material of nuts & bolts	Stainless steel	
70.0	Weight of 3-phase breaker complete with operating mechanism, insulating support frame work, etc.		
71.0	Impact loading for foundation design to include load plus impact value on operating at maximum interrupting ratings in terms of equivalent of static load.		
72.0	Weight of heaviest package		

Bidders Name : _____

Signature : _____

Name : _____

Designation : _____

Seal of Company

Date : _____

SCHEDULE – B16
66 KV OUT DOOR LIGHTNING ARRESTER

Sr. No.	Description	Data By Purchaser	Data by Supplier
1	Name of manufacturer		
2	Type	Gapless, ZnO type, single pole, heavy duty, station class, pedestal mounted	
3	Model		
4	No. of units.		
5	Installation	Outdoor	
6	Application	Protection of Transformers, circuit breakers, lines and other outdoor S/S equipment.	
7	LA connection to system	Phase to earth	
8	Type of Conductor	ACSR Zebra / Goat	
9	Construction	Single Phase	
10	Rated voltage of arrester (KVrms)	60 KV	
11	Nominal discharge current (Amps) (8x20 micro sec. wave) peak value	10KA	
12	System Particulars		
i)	Highest System Voltage	72.5 KV	
ii)	Frequency	50HZ \pm 5%	
iii)	System neutral	Solidly earthed	
iv)	Max. value of temporary over voltage & its max. duration		
	- Insulation level of equipment to be protected	325 KVp	
	- System short circuit level	31.5KA for 3 seconds.	
13	Maximum continuous operating voltage (MCOV)	52KV	
14	Impulse withstand current	100KAp	
15	Long Duration discharge class	3	
16	Minimum single impulse energy capability		
17	Maximum residual voltage at switching impulse current of 1KA _p (30/60 micro sec. wave)	136 KVp	

Volume – 2 Schedules & Annexure**Schedule B16**

Sr. No.	Description	Data By Purchaser	Data by Supplier
18	Max. residual voltage (1x20 micro sec. wave)		
i)	At 05 KAp		
ii)	At 10 KAp		
iii)	At 20 KAp		
19	Minimum creepage distance	31 mm/KV	
20	Pressure relief class	40KA	
21	Reference current (mA)		
22	Leakage current at COV (mA)		
	Resistive		
	Capacitive		
23	Dry and wet power frequency withstand voltage of arrester insulation (KVrms)		
24	Virtual steepness for front of wave for above (KV/micro sec.)		
25	Ratio of system voltage withstand level to protection level of surge arrester		
26	High current impulse withstand 4/10 micro second peak value (KV)		
27	Long duration current Impulse		
i)	Current peak.		
ii)	Virtual duration.		
28	Temporary Over Voltage Capacity (KVp)		
i)	At 0.1 Sec.		
ii)	At 1.0 Sec.		
iii)	At 10.0 Sec.		
iv)	At 100.0 Sec.		
29	Weight of complete unit (Kg)		
30	Height of complete unit from base to the line side (mm)		
31	Minimum recommended spacing between arresters Centro to Centro (mm)		
32	Clearance required from ground equipment at various heights of arresters unit (mm)		

Volume – 2 Schedules & Annexure**Schedule B16**

Sr. No.	Description	Data By Purchaser	Data by Supplier
33	Earthing arrangement provided for earthing side of arresters.		
34	Mounting flanges dimensional details.		
35	Type and range of milli-ampere meter.		
36	Type and specifications of the surge connectors.		
37	Surge counter min. current for recording a lightning stroke	200 Amp	
38	Surge counter max. disch. Current withstand	100KA peak for 4/10 wave shape.	
39	Range of continuous leakage current at rated voltage with variation due to change in temperature & frequency		
40	Size and length of flexible Cu cable for connection between LA & surge counter		
41	Voltage time curve for thermal stability of LA after a stroke	To be provided	
42	Paint shade of surge counter housing	Polyurethane, 692 of IS-5	

Bidders Name : _____

Signature : _____

Name : _____

Designation : _____

Seal of Company

Date : _____

SCHEDULE – B17

66 KV OUT DOOR DISCONNECTING SWITCH

Sr. No.	Description	Data By Purchaser	Data by Supplier
1	Name of manufacturer		
2	Type	Motor operated, central rotating double break with turn & twist mechanism.	
3	Model		
4	No. of units.		
5	Installation	Outdoor horizontal	
6	System Particulars		
i)	Highest System Voltage	72.5 kV	
ii)	Rated frequency	50 Hz \pm 5%	
iii)	System Neutral	Solidly Earthed	
7	Rated Insulation Data		
7.1	1.2/50 μ s lighting impulse withstand voltage (Positive and negative polarity)		
i)	To earth	325 kV	
ii)	Across the isolating distance	375 kV	
7.2	Rated One minute power frequency withstand voltage		
i)	To earth	140 kV	
ii)	Across the isolating distance	160 kV	
8	Main Switch Current Capacity		
i)	Rated normal current	1250 A	
ii)	Rated Short time withstand Current	31.5 kA for 3 Sec.	
iii)	Rated peak withstand current	2.5 times of short time withstand current	
iv)	Maximum magnetizing current (Make/ break capacity)	6 - 8 Amps.	
9	Earthing switch current capacity		
i)	Rated Short time withstand Current	31.5 kA for 3 Sec.	
ii)	Rated peak withstand current	2.5 times of short time withstand current	
iii)	Making capacity for discharging line charge		
10	Minimum clearances		
i)	In air between live parts and earth	630 mm	
ii)	In air between Phase to phase	630 mm	
iii)	Minimum ground clearance	4000 mm	

Volume – 2 Schedules & Annexure**Schedule B17**

Sr. No.	Description	Data By Purchaser	Data by Supplier
11	Phase spacing	2000 mm (Project Specific)	
12	No. of breaks per circuit pole	Two for double break	
13	Nos. of insulators pedestal	Three stacks per phase of heavy duty post type insulators	
14	Main Switch Contacts		
i)	Type of Contact	High pressure relieving copper contacts (rotating blade features of twist mechanism). The moving arm enters the fixed female contact assembly developing high pressure.	
ii)	Material for rotating blade	Electrolytic tinned copper	
iii)	Material of contact	Silver plated electrolytic copper.	
15	Earth Switch Contacts		
i)	Type of Contact of Earth switch	High pressure banging type	
ii)	Material for earth switch blade	Electrolytic tinned copper	
iii)	Material of earth switch contact	Silver plated electrolytic copper.	
16	Thickness of Silver Coating	15 - 25 microns.	
17	Maximum current density	1.5 A /sq mm	
18	Type of bearing for rotating insulator stocks		
19	Number of auxiliary contacts		
i)	Isolator operating mechanism	10 NO + 10 NC	
ii)	Earthing Device	4 No + 4 NC	
20	Temperature rise	As per IS 9921	
21	Control supply voltage	220 V / 110 V / 50 V DC	
22	AC Aux. Supply (4 wire)	415 V \pm 10%	
23	Inter Locking arrangement	Electrical and mechanical	

Volume – 2 Schedules & Annexure

Schedule B17

Sr. No.	Description	Data By Purchaser	Data by Supplier
24	Terminal connectors	Suitable for twin ACSR Zebra conductor	
25	Minimum creepage distance of insulator		
26	Type of control for		
i)	Disconnection switch	Motorised with Manual Facility	
ii)	Earthing switch	Manual	
27	Locking arrangement		
28	Rated mechanical terminal loads in addition to wind load acting on the equipment and short-circuit forces		
29	Total operating time of disconnection switch including that of its operating mechanism		
30	Weight of Isolators		
31	Post insulators		
i)	Make & type		
ii)	Height		
iii)	Voltage level		
iv)	Cantilever Strength		
v)	Torsional Strength		
vi)	Creepage Distance	Min 31mm/KV	
vii)	Basic insulation level (1 min. power frequency flashover voltage)		
	a) Dry	140 KV rms	
	b) Wet	140 KV rms	
viii)	Visible corona discharge voltage		
ix)	1.2/50 micro second impulse flashover voltage	325 KVp	
x)	Insulation class	A	
32	Drive Motor		
i)	Make		
ii)	KW Rating / rpm		
iii)	Rated current		
iv)	Frame size		
v)	Rated Voltage	415 V AC	
vi)	Degree of Protection	IP-55	
vii)	Insulation Class	B/F	
viii)	Duty		

Volume – 2 Schedules & Annexure

Schedule B17

	Bidders Name	:	_____
	Signature	:	_____
	Name	:	_____
	Designation	:	_____
Seal of Company	Date	:	_____

SCHEDULE – B18
CABLE TRAYS, ACCESSORIES AND TRAY SUPPORT, CONDUITS, PIPES
AND DUCTS

1	General	
a	Name of the Contractor	
b	Name of sub contractors, if any	
c	Applicable standards	
2	Cable Trays and Fittings	
a	Cable Trays and Fittings	
i.	Make	
ii.	Type	
iii.	Material	
	1. Thickness (mm)	
	2. Thickness of galvanization (microns)	
	3. Zinc coating per sq meter (gms)	
3	Conduits , Fitting and Accessories	
a	Pipes with fitting	
i.	Make	
ii.	Type	
iii.	Material	
	1. Thickness (mm)	
	2. Thickness of galvanization (microns)	
b	Flexible conduits with fittings and accessories	
i.	Make	
ii.	Type	
iii.	Material	
	1. Thickness (mm)	
	2. Thickness of galvanization (microns)	

Bidders Name : _____

Signature : _____

Name : _____

Designation : _____

Seal of Company

Date : _____

SCHEDULE – B19
66 KV ALUMINUM PIPE BUS BAR

S. No.	Particulars	Unit	Data by Purchaser	Data by Supplier
1	Make			
2	Type			
3	Reference Standard		As per applicable IS/IEC	
4	Type of substation		Outdoor	
5	Bus Bar arrangement		Double Bus	
6	Type of Bus bar		Rigid Bus	
7	Material of Bus bar		Aluminum / Aluminum Alloy	
8	Type of Conductor		Aluminum Pipe	
9	Nominal Diameter	mm	100	
10	Wall thickness	mm		
11	Minimum height of bus bar	M	6.4	
12	Minimum spacing between bus bar	M	2	
13	Bay width	M	7.6	
14	Bus bar configuration		Horizontal	
15	Maximum continuous current at 40 °C rise above ambient temperature	A	2000	
16	Rated Short time withstand current for 3 sec.	kA	31.5	
17	Insulation details			
17.1	Creepage distance	mm/kV	31	
17.2	Basic Insulation level	kV	325	
17.3	Power frequency withstand voltage	kV	140	
17.4	Lightening impulse	μs	1.2/50	

Bidders Name : _____

Signature : _____

Name : _____

Designation : _____

Seal of Company

Date : _____

SCHEDULE – C1

TECHNICAL DEVIATIONS FROM THE SPECIFICATION

(This shall form part of Technical Bid)

All the technical deviation from the tender specification shall be listed out by the Bidder, para by para in this schedule. Deviation taken in covering letter, standard terms and/or body of the Bid but not listed herein will make the Bid liable for rejection as 'Irresponsive'

S.No.	Section/Sub-Section	Part	Para	Deviation	
Justification					
1	2	3	4	5	6

Certified that above are the only technical deviations from the tender Specification

Name of Firm : _____
Signature of Bidder : _____
Designation : _____
Date : _____

Seal of Company

SCHEDULE – C2

COMMERCIAL DEVIATIONS FROM THE SPECIFICATION

(This shall form part of Technical Bid)

All the commercial deviation from the tender specification shall be listed out by the Bidder, para by para in this schedule. Deviation taken in covering letter, standard terms and/or body of the Bid but not listed herein will make the Bid liable for rejection as 'Irresponsive'.

S.No.	Section/Sub-Section Justification	Part	Para	Deviation	
1	2	3	4	5	6

Certified that above are the only technical deviations from the tender Specification

Name of Firm : _____
Signature of Bidder : _____
Designation : _____
Date : _____

Seal of Company

SCHEDULE – D

LIST OF DRAWINGS ENCLOSED WITH BID

(This shall form part of Technical Bid)

S.No.	Drawing No	Title
1	2	3

Name of Firm : _____

Signature of Bidder : _____

Designation : _____

Date : _____

Seal of Company

Volume – 2 Schedules & Annexure

SCHEDULE – E

SCHEDULE OF TEST

(This shall form part of Technical Bid)

Tests as per the relevant Indian Standard except as modified and/or as additionally called for in the tender specification shall be performed. Detailed list of the type test certificates enclosed for the various equipments offered shall be listed in the schedule.

S.No.	Type of test	Equipment	Description
1	2	3	4

1.0 TYPE TESTS

2.0 TESTS
– DURING MANUFACTURE

3.0 ROUTINE TESTS
– ON COMPLETION OF MANUFACTURE

Name of Firm : _____

Signature of Bidder : _____

Designation : _____

Date : _____

Seal of Company

Volume – 2 Schedules & Annexure

SCHEDULE – F
LIST OF INSTRUMENTS, TESTING EQUIPMENTS, TOOLS AND TACKLES
FOR ERECTION AND MAINTANANCE

(This shall form part of Technical Bid)

S.No.	Description	Capacity	Quantity	Delivery
(1)	(2)	(3)	(4)	(5)

1.0 INSTRUMENTS, TESTING EQUIPMENT, TOLLS & TACKLES FOR ERECTION

(To be taken back by the Bidder after completion of job)

2.0 INSTRUMENTS, TESTING EQUIPMENT, TOOLS & TACKLES FOR MAINTENANCE

(To be taken back by the Bidder after completion of job)

3.0 SPECIAL INSTRUMENTS, TSTING EQUIPMENT, TOOLS & TACKLES FOR ERECTION

(To be taken back by the Bidder after completion of job)

4.0 SPECIAL INSTRUMENTS, TSTING EQUIPMENT, TOOLS & TACKLES FOR MAINTENANCE

(To be taken back by the Bidder after completion of job)

Name of Firm : _____

Signature of Bidder : _____

Designation : _____

Date : _____

Seal of Company

Volume – 2 Schedules & Annexure

Schedule G

SCHEDULE – G
LIST OF INSTALLATIONS

S.No.	Purchaser	Project	PF Ref.	Brief Description	Value	Target Commissioning	Commissioned	Performance	Person to whom reference may be made	Remarks
1	2	3	4	5	6	7	8	9	10	11

Seal of Company

Bidders Name : _____
Signature : _____
Name : _____
Designation : _____
Date : _____

SCHEDULE – H
DELIVERY TERMS AND CONDITIONS

1	Quoted for all the items & in the manner as called for in Specification	*Yes/No
1.1	If not, furnish details of deviations	
2	Price FOR site delivery basis	
2.1	Freight:	
	1 Applicable rate	* Not included/included
2.2	Transit Insurance including forty five(45) days storage	
	1 Applicable rate	* Not included/included
2.3	Excise duty	
	1 Applicable rate	* Not included/included
2.4	Sales tax	
	1 Applicable rate	* Not included/included
2.5	Are quoted price firm	*Yes/No
3	Delivery from LOI	
3.1	Supply	
3.2	Erection	
3.3	Testing & commissioning	
3.4	Whether penalty clause acceptable	*Yes/No
4	Validity	
5	Terms of payment	
5.1	As per tender specification	*Yes/No
5.2	If not, give details	
6	Guarantee period	
6.1	Is it as per the tender specification	*Yes/No
6.2	If not, state alternative guarantee period acceptable	
7	Earnest money furnished	*Yes/No
8	Agreeable to furnish security deposit as per the tender specification	*Yes/No
8.1		*Yes/No
9	Agreeable to furnish performance Bank as per the tender specification	*Yes/No
10	Correspondence, drawings, test certificates, instruction manuals, BAR/PERT charts progress reports etc. shall be furnished in number of copies as per distribution schedule attached to the tender specification	*Yes
11	Agreeable to approval of above documents in our (4) weeks from date of receipt as per tender specification	Yes
12	Agreeable to commercial as well as technical terms & conditions of the tender specification, unless listed deviations are accepted	Yes
13	Commencing & completion of submission of drawings from LOI	

Seal of Company

Bidders Name : _____
Signature : _____
Name : _____
Designation : _____
Date : _____

SCHEDULE – I

SCHEDULE OF RECOMMENDED SPARES

Bidder shall offer the prices for spares for destination, rate of taxes & duties to be considered shall be indicated.

S.No.	Description	Quantity	Unit Price	Total Price
1	2	3	4	5

Seal of Company

Bidders Name : _____
Signature : _____
Name : _____
Designation : _____
Date : _____

SCHEDULE – J

DECLARATION

(This shall form part of Technical Bid)

I, _____ certify that all the typed data & information pertaining to the subject tender specification are correct & are true representation of the equipment covered by our formal Bid No _____ dated _____.

I hereby, certify that I am duly authorized representative of the Bidder whose name appears above my signature.

Bidders Name : _____

Authorized Representative
Signature : _____

Authorized Representative
Name (Typed) : _____

Authorized Representative
Designation : _____

Seal of Company Date : _____

Bidder's Intent : The bidder hereby agrees to fully comply with the requirements & intents of the subject tender specification for the price(s) indicated

Authorized Representative
Signature : _____

Annexure - L

I. Technical specification for New Grids 24 x 7 Operational & after Sale service support for a period of 6 Months

Scope:

24x7 (8 hours per shift) Operational & After Sale service support for equipment supplied by Contractor after handing over of Grid by Contractor to BRPL

The Contractor shall depute 24x7 trained Operational staff in three shifts to work under the direction of BRPL System Operation.

Each shift consists of One Operator (Minimum ITI qualified) & one helper (skilled worker).

Qualification documents of Manpower assigned shall be submitted to BRPL for approval.

On call trained After Sale staff to take care of any After Sale service requirement, shall be kept available 24x7

It shall cover the following:

Operation:

- Knowledge of sequence of operation (bidder to provide flow chart for the same in laminated form so that the same may be pasted on grid notice board).
- Competency level of deputed staff in electrical as well as mechanical operations.
- All necessary Tools & tackles and measuring & testing instruments shall be available with the Operation team

Maintenance:

- Scheduled After Sale services as per the OEM recommendation to be taken care by the contractor


Breakdown:

- Attending any breakdown in equipment supplied and replacement of faulty parts (within 10-12 hrs).
- Presence of experienced engineer during entire restoration sequence till equipment gets energized.
- All necessary Tools & tackles and measuring & testing instruments shall be available with the Breakdown team

General Guidance:

- Work force required to attend the outages – built a QRT (Quick Response Team to attend breakdown during that tenure).
- Special Tools & tackles and spares necessary for attending outage. - One set of special tools & tackles to be handed over to user during HOTO.
- Skill level suitable to carry out the operation for 66kVkv.

ROAD

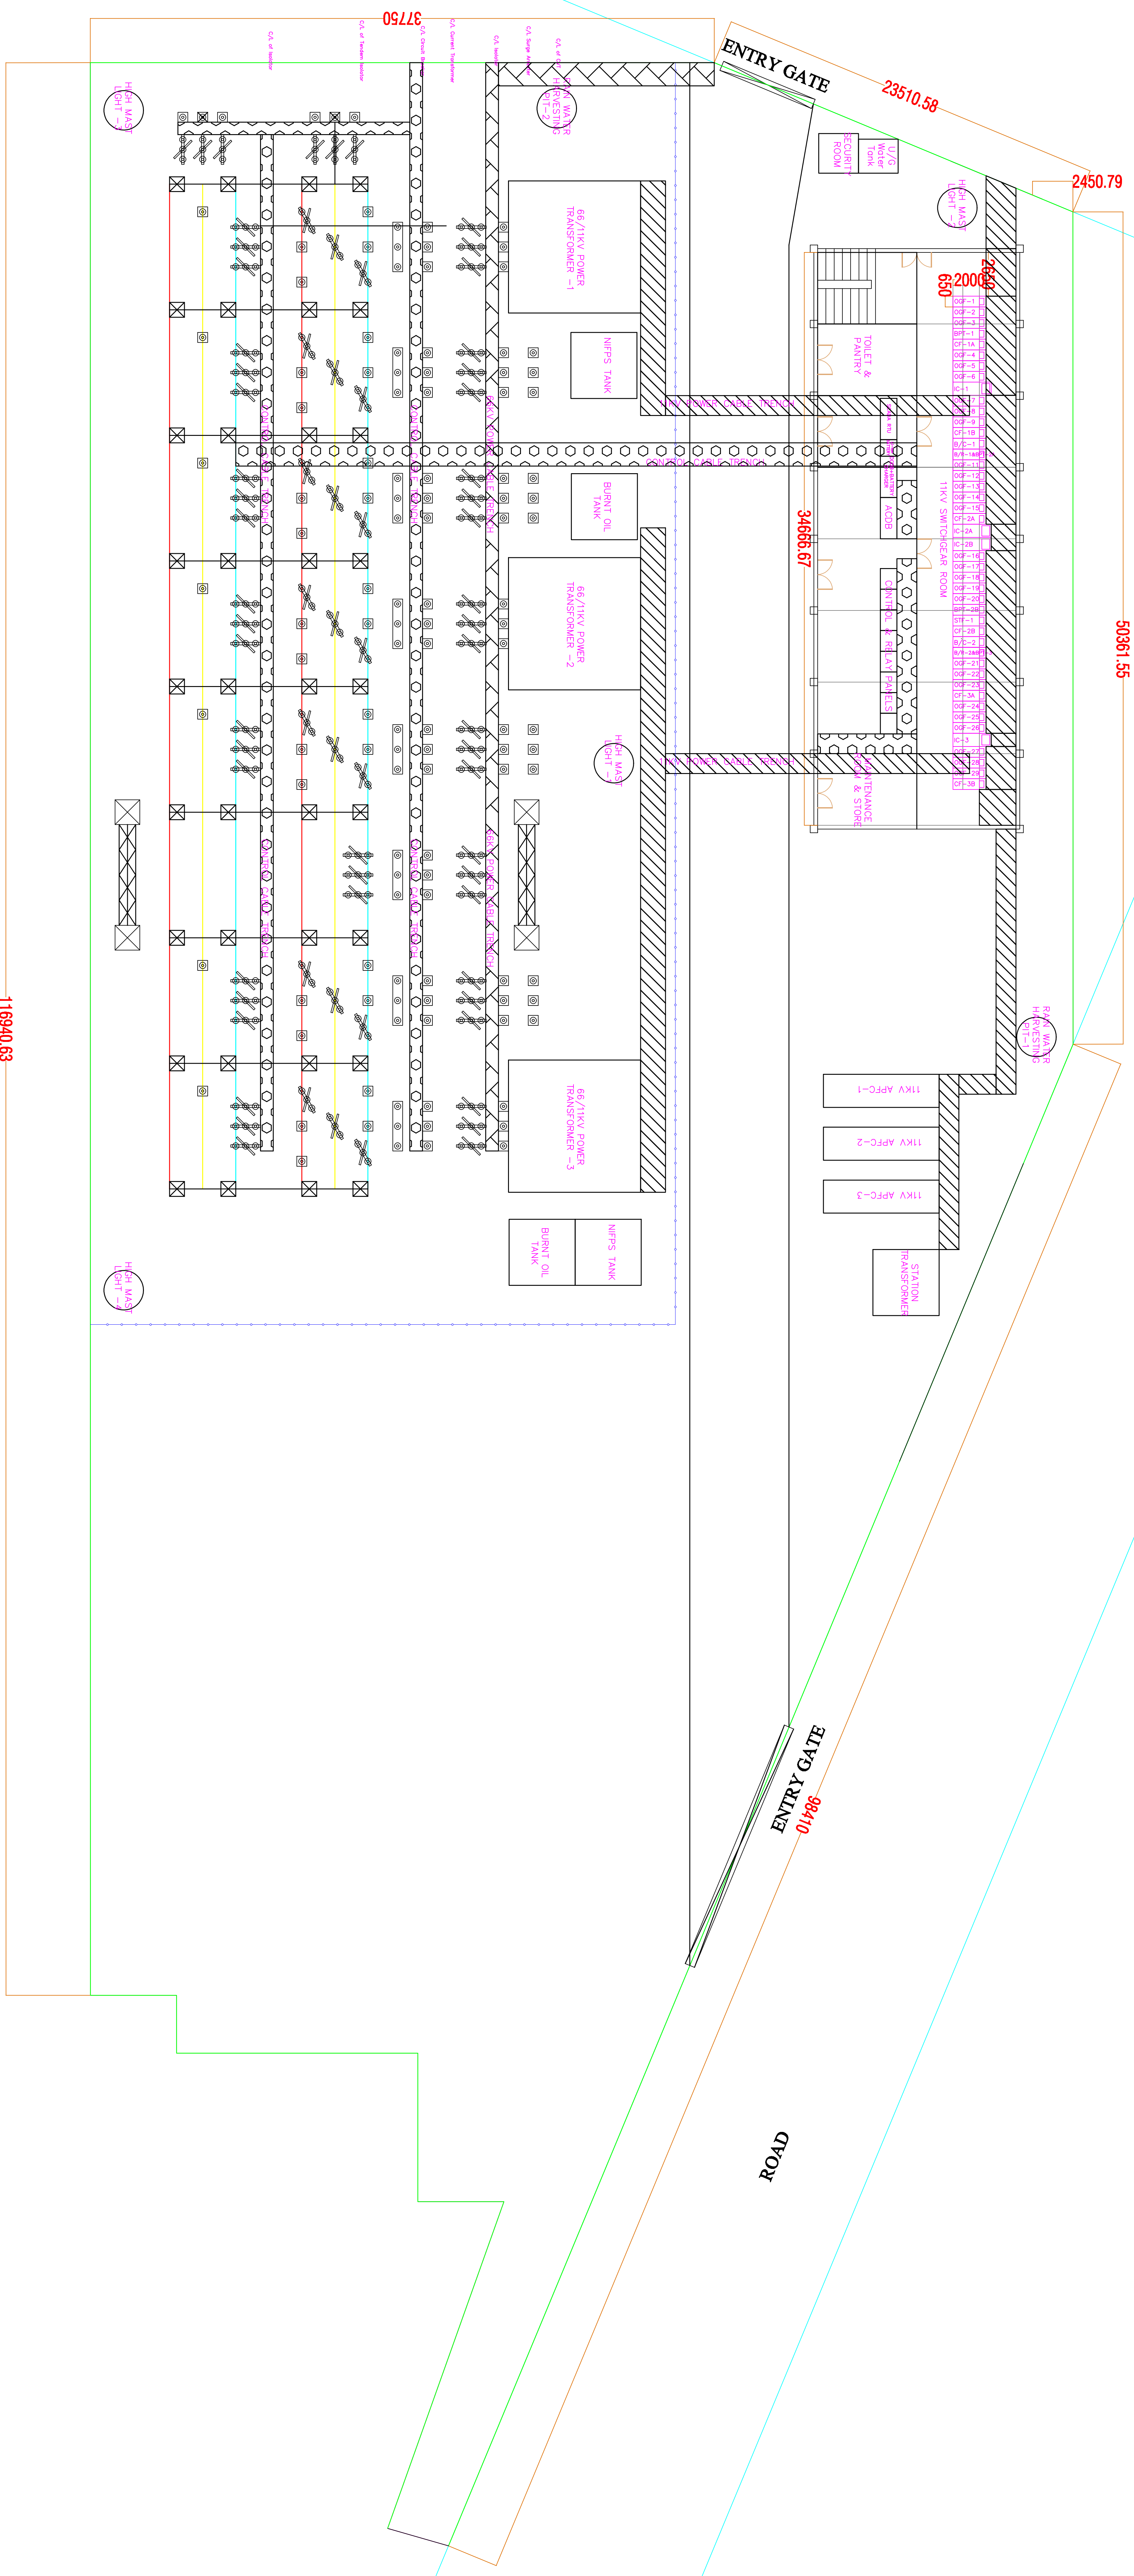

REVISED LAYOUT OF GOYALA KHURD GRID SUBSTATION



GEO TECHNICAL REPORT

PROPOSED 66 kV GRID SUBSTATION PROJECT AT GOYLA KHURD, NEW DELHI

SUBMITTED TO:

M/S. BSES RAJDHANI POWER LIMITED

1st Floor, C-Block, BSES Bhawan, Nehru Place, Delhi – 110 019.

Project No. 19078

Dated. June, 2019

Revision-0

RAO ENGINEERING ENTERPRISES

Geotechnical Consultants, Land Surveyors, Piling Contractor & GPR Surveyors

Address:

91-D-3, Street-1, East Moti Bagh, Old Rohtak Road,
Sarai Rohilla, New Delhi - 110007

Phone :

011-23698806, 23691434
9310502435, 9811108174

E-mail :

raogr@yahoo.com,
raoraoengg@rediffmail.com



June 01st, 2019

Project No. 19078

M/s. BSES Rajdhani Power Limited

1st Floor, C-Block, BSES Bhawan,
Nehru Place, Delhi – 110 019

Sub: Final Report on Soil Investigation Work for Proposed 66 kV Grid Substation Project at Goyla Khurd, New Delhi

We have carried out the soil investigation work in accordance with your Work Order No. SER/DSC/23561899 dated May 9th, 2019. We thank you for your business, and hope that you are satisfied with our services rendered.

This Final Report presents our findings based on the soil investigation conducted by us at the project site. This report presents the field and laboratory test data along with our engineering recommendations, which shall help you in deciding the optimum foundation arrangement for use on site.

We have prepared this report based on our findings on site as well as our experience gained in our previous projects completed over the past 15 years. We appreciate the opportunity to perform this investigation for you and have pleasure in submitting this report. Please contact us when we can be of further service to you.

Yours faithfully,
RAO ENGINEERING ENTERPRISES

(G.R.RAO)



TABLE OF CONTENTS

		<u>Page No</u>
1.0	INTRODUCTION	1
1.1	Project Description	1
1.2	Aim of Soil Investigation	1
1.3	Scope of Work	1
2.0	FIELD INVESTIGATIONS	1
2.1	Soil Borings	1
2.2	Groundwater	2
2.3	Electrical Resistivity Tests	2
3.0	LABORATORY TESTS	3
4.0	GENERAL SITE CONDITIONS	3
4.1	Site Stratigraphy	3
4.2	Groundwater	4
5.0	FIELD TEST RESULTS	4
5.1	Electrical Resistivity Test Result	4
6.0	FOUNDATION ANALYSIS	4
6.1	General	4
6.2	Liquefaction Susceptibility Assessment	5
6.3	Foundation Type and Depth	5
6.4	Allowable Bearing Pressure	6
6.5	Sample Calculations (Open Foundation)	6
6.6	Definition of Gross and Net Bearing Pressure	7
7.0	RECOMMENDATIONS	7
8.0	CHEMICAL ATTACK	8
9.0	VARIABILITY IN SUBSURFACE CONDITIONS	9

ILLUSTRATIONS

<u>Caption</u>	<u>Sheet No.</u>
Soil Profiles	1 to 5
Summary of Borehole Profiles	6
Standard Penetration Test Results	7 & 8
Electrical Resistivity Test Results	9 & 10
Grain Size Test Results	11 to 15
Chemical Test Results	16



1.0 **INTRODUCTION**

1.1 **Project Description**

This soil investigation work, whose results are being presented herewith, has been carried out for Proposed 66 kV Grid Substation Project at Goyla Khurd, New Delhi. M/s. Rao Engineering Enterprises has been retained by M/s. BSES Rajdhani Power Limited for carrying out the Geotechnical Investigation at the project site.

1.2 **Aim of Soil Investigation**

Soil investigation has been conducted at the site in order to evaluate the parameters required for design of foundations. These parameters are:

- a) Type of foundation on which the proposed super structure will be supported.
- b) Depth of foundation, and
- c) Allowable bearing pressure at the founding level.

To evaluate these parameters, following engineering properties of the Sub-Soil have been studied:

Sub-soil penetration resistance characteristics which have been determined insitu. Properties like particle size distribution, atterberg's limits, bulk density, moisture content, and shear strength parameters; which have been determined in the laboratory by conducting testing of both disturbed as well as undisturbed samples.

1.3 **Scope of Work**

The stipulated scope of work comprised of the following:

1. Mobilization of equipment and personnel to the site and back.
2. Sinking five (5) boreholes to 10.0 m depth or refusal whichever is encountered earlier, observing ground water table levels, conducting required field and laboratory tests and their analysis.
3. conducting one (1) electrical resistivity test (ERT's) to provide data for the grounding systems;
4. Preparation and submission of technical report in triplicate.

2.0 **FIELD INVESTIGATIONS**

2.1 **Soil Borings**

The boreholes were progressed using mechanized shell and auger drilling rig to the specified depth. The diameter of the borehole was 150 mm. Where caving of the borehole occurred, casing was used to keep the borehole stable. The work was in general accordance with IS: 1892-1979.



Standard Penetration Tests (SPT) were conducted in the boreholes at 1.5 m depth interval up to 15 m depth. The tests were conducted by connecting a split spoon sampler to 'A' rods and driving it by 45 cm using a 63.5 kg hammer falling freely from a height of 75 cm. The tests were conducted in accordance with IS: 2131-1981.

The number of blows for each 15 cm of penetration of the split spoon sampler was recorded. The blows required to penetrate the initial 15 cm of the split spoon for seating the sampler is ignored due to the possible presence of loose materials or cuttings from the drilling operation. The cumulative number of blows required to penetrate the balance 30 cm of the 45 cm sampling interval is termed the SPT value or the 'N' value.

Where the split spoon sampler did not penetrate the initial 15 cm seating in a total of 100 blows, it is indicated "Ref" for an indicated amount of penetration. The 'N' values are presented on the soil profile for each borehole.

Disturbed samples were collected from the split spoon after conducting SPT. The samples were preserved in transparent polythene bags. Undisturbed soil samples were collected by attaching 75 mm diameter thin walled 'Shelby' tubes and driving the sampler by light-hammering using a 63.5 kg hammer in accordance with IS: 2132-1986. The tubes were sealed with wax at both ends. All samples were transported to our laboratory for further examination and testing.


2.2 Groundwater

Groundwater level was measured in the boreholes after drilling and sampling was completed. The measured water levels are recorded on the individual soil profiles.

2.3 Electrical Resistivity Tests

Electrical resistivity of the substratum (soil) at the site was determined at specified locations. The electrical resistivity test is used for shallow subsurface exploration by means of electrical measures made at the ground surface. Resistivity measurements are made by driving four electrodes about 10 to 15 cm in to the ground at pre-selected electrode spacing. We used the Wenner's electrode configuration for this study.

The schematic arrangement of electrodes is shown below:

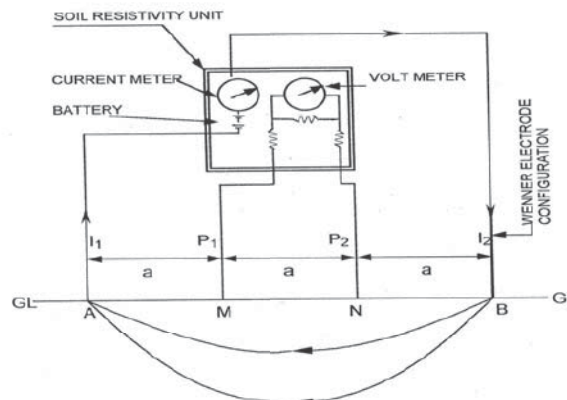

NOTE: I_1 AND I_2 ARE CURRENT ELECTRODES
 P_1 AND P_2 ARE POTENTIAL ELECTRODES



The four electrodes were spaced at equal distance along a line. The test procedure is in accordance with IS: 3043:1987 RA 2006.

Measurements are made by causing a current, 'I', to pass through the earth and distribute within a relatively large hemispherical earth mass. The portion of the current that flows along the surface produces a voltage drop, 'V'. The resistance 'R', ratio of voltage drop 'V' to current 'I' is directly measured by Digital Earth Resistance Tester. The resistivity is determined from the following equation:

$$\rho = 2 \pi a R$$

where:

ρ = apparent resistivity, ohm-m

a = spacing between the electrodes, meter

R = resistance, ohms

Results are presented as semi-logarithmic plot of apparent resistivity versus electrode spacing, as well as in the form of polar curves, as specified by IS: 3043:1987 RA 2006.

3.0 LABORATORY TESTS

Laboratory tests have been conducted on various selected soil samples in the laboratory:

Laboratory Test		IS Code Referred
Bulk Density		By calculations
Natural Moisture Content		IS : 2720 (Part-2)-1973, RA-2010
Specific Gravity		IS : 2720 (Part-3)-1980, RA-2007
Grain Size Analysis		IS : 2720 (Part-4)-1985, RA-2010
Liquid Limit and Plastic Limit		IS : 2720 (Part-5)-1985, RA-2010
Unconfined Compression Test		IS : 2720 (Part-10)-1991, RA-2010
Unconsolidated Undrained Triaxial Shear Test		IS : 2720 (Part-11)-1993, RA-2007
Consolidated Drained Direct Shear Test		IS : 2720 (Part-13)-1986, RA-2010
Chemical Analysis of water	pH value	IS : 3025 (Part-11)-1983, RA-2006
	Sulphates	IS : 3025 (Part-24)-1986, RA-2009
	Chlorides	IS : 3025 (Part-32)-1988, RA-2009
Chemical Analysis of soil	pH value	IS : 2720 (Part 26)-1987, RA-2007
	Sulphates	IS : 2720 (Part-27)-1977, RA-2010
	Chlorides	IS : 3025 (Part-32)-1988, RA-2009

4.0 GENERAL SITE CONDITIONS

4.1 Site Stratigraphy

The surficial soils at the site consist of sandy silt to about 2.0-5.0 m depth below EGL. Below this, silty sand was encountered to the final explored depth of 10.45 m below EGL.



The field SPT N-values generally range from 10 to 21 to about 5 m depth. Below this, field SPT-N value range from 28 to 55 to the final explored depth of 10.45 m below EGL.

All test results are presented on the individual soil profiles on Sheet No. 1 to 5. A summary of the borehole profiles is illustrated on Sheet No. 6. Plots of field and corrected SPT values versus depth are presented on Sheet No. 7 & 8, respectively.

4.2 Groundwater

Based on our measurements in the completed boreholes, groundwater was not met to final explored depth of 10.45 m below EGL during the period of our field investigations (May, 2019). Fluctuations may occur in the measured ground levels due to seasonal variations in rainfall, surface evaporation rates.

5.0 FIELD TEST RESULTS

5.1 Electrical Resistivity Test Result

One (1) electrical resistivity test was conducted at the project site as per IS: 3043-1987. The test was conducted using the Wenner's configuration. The apparent resistivity value obtained has been analyzed to generate the polar curve. The polar curve is used to compute the mean resistivity.

Mean resistivity value at the electrical resistivity test (ERT) location is summarized in the table below:

Test Designation	Mean Resistivity, ohm-m	Corrosion potential*	Presentation of Results
ERT-1	13.4	Severely Corrosive	Sheet No. 9 & 10

* As per Clause 8.6.1 of Amendment No. 2 to IS: 3043-1987, dated January 2010.

The above value may be used for design of the electrical grounding system. The data may also be used to assess the corrosion potential for buried utility lines as per the guideline given in IS 3043-1987.

6.0 FOUNDATION ANALYSIS

6.1 General

For designing the foundation system, the following parameters are required:

- Suitable type of foundation on which the proposed super-structure can be supported.
- Depth of these foundations, and
- Allowable bearing pressure at the founding level corresponding to various footing sizes.

A suitable foundation for any structure should have an adequate factor of safety against exceeding the bearing capacity of the supporting soils. Also, the vertical movements due to



compression of the soils should be within tolerable limits for the structure. We consider that foundation designed in accordance with the recommendations given herein will satisfy these criteria.

6.2 Liquefaction Susceptibility Assessment

Liquefaction is defined as the transformation of a granular material from a solid to a liquefied state as a consequence of increased pore-water pressure and reduced effective stress (Marcuson, 1978)⁽¹⁾. Increased pore pressure may be induced by the tendency of granular materials to compact when subjected to cyclic shear deformation, such as in the event of an earthquake.

As per IS: 1893-2016, liquefaction is likely in loose fine sand (SP) below water table. The following points are highlighted for the soils encountered at the site, with reference to the liquefaction susceptibility.

- As discussed in section 4.1, the soil at the site consist of silty sand / sandy silt to the final explored depth of 10.45 m depth below EGL.
- The sandy silt stratum is not likely to liquefy in the event of earthquake due to high fines content.
- Groundwater was not met at the time of our field investigation (May, 2019).

Based on our initial assessment, reviewing the all soil parameters like in-situ density, groundwater level, fines content, SPT values, etc., we are of the opinion that soils at the site are not likely to liquefy at the project site in the event of the earthquake.

According to Fig.1 of IS: 1893 (Part1)-2016 showing seismic zones, the proposed site falls under Zone-IV. The design for seismic forces should be done considering the project in Zone-IV.

6.3 Foundation Type and Depth

Type of foundation to be adopted for a particular structure depends upon the loading intensity at the foundation level and the configuration of loading points.

Reviewing the stratigraphy of the site on the basis of boreholes data, SPT values & laboratory test results, we are of the opinion that open foundation is feasible foundation scheme to support the structural load.

Our recommended values of net allowable bearing pressures at minimum 1.5 m depth (at least 0.5 m into the natural strata) for open foundation are presented in Section 7.0.

Interconnecting beams should be provided either at plinth level or at foundation level in order to restrict differential settlements and to provide rigidity to the structure during earthquakes.

⁽¹⁾ Marcuson, W.F. (III) (1978), "Definition of terms related to liquefaction", J. Geotech Engg. Div., SCE, 104(9), 1197-1200.



6.4 Allowable Bearing Pressure

Following criterion have been considered for evaluating the bearing capacity values:

- (a) Settlement criteria
- (b) Shear failure criterion

Shear failure condition as per I.S. 6403 has been considered for allowable bearing pressure computation. Allowable settlement value of 40 mm & 50 mm has been considered for deducing shear strength value.

6.5 Sample Calculations (Open Foundation)

Type of foundation	Open foundation
Depth of foundation	1.5 m below EGL
Width of foundation	3.0 X 3.0 m

I. SETTLEMENT CRITERIA (AS PER IS - 8009, PART-1, 1976, FIG.9, PAGE-17)

Weighted Average minimum Corrected 'N' value	11
Settlement undergone by footing per unit pressure	29.8 mm
Total Settlement undergone by footing (considering water table Correction factor taken as 0.6 for Worst condition)	49.8 mm
Allowable bearing pressure Corresponding to 50 mm allowable Settlement.	11.0 T/m ²

III. SHEAR FAILURE CRITERION

The bearing capacity equation used is as follows:

$$q_{net\ safe} = \frac{1}{F} [cN_c\zeta_c d_c + q(N_q - 1)\zeta_q d_q + 0.5 B \gamma N_\gamma \zeta_\gamma d_\gamma R_w]$$

Where:

- $q_{net\ safe}$ = safe net bearing capacity of soil based on the shear failure criterion.
- q = overburden pressure
- R_w = water table correction factor
- F = Factor of safety, taken as equal to 2.5 in accordance with IS: 1904-1986.
- $\zeta_c, \zeta_q, \zeta_\gamma$ = Shape factors. For Strip footings, $\zeta_c = \zeta_q = \zeta_\gamma = 1$
For Square footing, $\zeta_c = 1.3$, $\zeta_q = 1.2$, $\zeta_\gamma = 0.6$



$d_c, d_q, d_\gamma =$ Depth factors

For $\phi \leq 10$, $d_c = 1 + 0.2 \tan (45 + \phi / 2) D / B$, $d_q = d_\gamma = 1$

For $\phi > 10$, $d_q = d_\gamma = 1 + 0.1 \tan (45 + \phi / 2) D / B$

Cohesion, $c = 0.0 \text{ T/m}^2$

Angle of shearing resistance, $\phi = 27 \text{ degrees}$

Bearing Capacity factors:

General Shear Failure :	$N_c =$	23.94	$N_q =$	13.20	$N_\gamma =$	14.47
Local Shear Failure :	$N'_c =$	13.73	$N'_q =$	5.66	$N'_\gamma =$	4.53

Density at Foundation Level, $\gamma = 1.75 \text{ gms/cc}$

Net Safe Bearing Capacity, $q_{\text{net safe}} = 15.6 \text{ T/m}^2$

(considering average of local & general shear criteria)

6.6 Definition of Gross and Net Bearing Pressure

For the purposes of this report, the net allowable bearing pressure should be calculated as the difference between total load on the foundation and the weight of the soil overlying the foundation divided by the effective area of the foundation. The gross bearing pressure is the total pressure at the foundation level including overburden pressure and surcharge load.

The following equations may be used –

$$q_{\text{net}} = [(P_s + W_f + W_s) / A_f] - S_v$$

$$q_{\text{gross}} = q_{\text{net}} + S_v = (P_s + W_f + W_s) / A_f$$

where:

- q_{net} = net allowable bearing pressure
- q_{gross} = gross bearing pressure
- P_s = superimposed static load on foundation
- W_f = weight of foundation
- W_s = weight of soil overlying foundation
- A_f = effective area of foundation
- S_v = overburden pressure at foundation level prior to excavation for foundation.

It may please be noted that safe bearing pressures recommended in this report refer to “**net values**”. Where filling is done, it should be treated as a surcharge over the foundation.

7.0 RECOMMENDATIONS

The following table presents our recommended values of net allowable bearing pressures for open foundations bearing at 1.5-2.0 m depth below EGL:



Foundation Depth below EGL, m	Recommended Net Allowable Bearing Pressure, T/m ²	
	Total Settlement = 40 mm	Total Settlement = 50 mm
1.5	8.8	11.0
2.0	9.6	12.0

The above values include a safety factor of 2.5. The appropriate value of net bearing pressure may be selected as per the permissible settlement criterion.

Net bearing pressure for foundations at intermediate depths may be interpolated linearly between the values given above. Fill placed above EGL should be treated as surcharge load. Foundation should be seated 0.5 m into natural soil.

In order to restrict the influence of adjacent footings on each other, the lateral edge-to-edge spacing between the foundations should at least be equal to "0.8B" where "B" is the width of the larger footing.

8.0 **CHEMICAL ATTACK**

Results of chemical test on selected soil and groundwater samples are presented on Sheet No. 16.

The results indicate that the soils contain 0.10-0.13 percent sulphates and 0.12-0.14 percent chlorides. The pH value of soil is 7.5-7.7.

IS: 456-2000 recommends that precautions should be taken against chemical degradation of concrete if

- sulphates content of the soils exceeds 0.2 percent, or
- groundwater contains more than 300 mg /litre of sulphates (SO₃).

Comparing the test results with these specified limits, the sulphate content of the soil is in the specified limit. Groundwater was not encountered and is not likely to influence foundation concrete. Therefore, strata at the site may be treated in Class-1 category as described on IS: 456-2000.

In our opinion, the soils at site are not aggressive to foundation concrete. We recommend the following as a good practice to limit the potential for chemical attack:


- (1) The cement content in concrete for open foundation should be at least 280 kg/m³.
- (2) Water cement ratio in foundation concrete should generally not exceed 0.55.
- (3) A clear concrete cover over the reinforcement steel of at least 50 mm should be provided for all foundations.
- (4) Foundation concrete should be densified adequately using a vibrator so as to form a dense impervious mass.



9.0 **VARIABILITY IN SUBSURFACE CONDITIONS**

Subsurface conditions encountered during construction may vary somewhat from the conditions encountered during the site investigation. In case significant variations are encountered during construction, we request to be notified so that our engineers may review the recommendations in this report in light of these variations.

SOIL PROFILE: BH-1







		Project:		Proposed 66 kV Grid Substation Project at Goyla Khurd, New Delhi				Water Table, m :		Project No.		19078									
				Date of Start:		26-May-19		Date of Completion:		Termination Depth, m :		Not met									
												10.45									
Depth, m	From	To	Sample No.	Field SPT 'N' Value	Symbol	SOIL DESCRIPTION	Depth of Strata, (m)	Grain Size Analysis				Atterberg Limits		Density and Moisture			Shear Tests				
								Gravel (%)	Sand (%)	Silt (%)	Clay (%)	Liquid (%)	Plastic (%)	Plasticity Index (%)	Specific Gravity	Bulk Density (gms/cm ³)	Dry Density (gms/cm ³)	Moisture Content (%)	Type of Test	Cohesion Intercept, 'c' (kg/cm ³)	Angle of Internal Friction, f (degrees)
0.50	1.00	DS-1		10		Light grey silty sand (SM)	1.00	0	66	34	0	19.1									
1.50	1.95	SPT-1				Light brown sandy silt of non plasticity (ML)	3.00	0	42	55	3										
2.25	2.55	UDS-1						0	76	24	0										
3.00	3.45	SPT-2		18																	
4.50	4.95	SPT-3		20																	
5.25	5.55	UDS-2				Light grey silty sand (SM)	7.50														
6.00	6.45	SPT-4		31																	
7.50	7.95	SPT-5		31		Light brown sandy silt of non plasticity (ML)	9.00	3	31	62	4	20.2									
8.25	8.55	UDS-3																			
9.00	9.45	SPT-6		44				0	68	32	0										
10.00	10.45	SPT-7		49		Light grey silty sand (SM)	10.45														

UUT : Unconsolidated Undrained Triaxial Shear Test

DST: Drained Direct Shear Test, UCS : Unconfined Compressive Strength

Remoulded Sample +

SOIL PROFILE: BH-2













		Project:	Proposed 66 kV Grid Substation Project at Goyla Khurd, New Delhi				Water Table, m :		Project No.		19078										
			Date of Start:		26-May-19		Date of Completion:		26-May-19			Termination Depth, m :	Not met								
														10.45							
Depth, m	Sample No.	Field SPT 'N' Value	Symbol	SOIL DESCRIPTION	Depth of Strata, (m)	Grain Size Analysis				Atterberg Limits		Specific Gravity	Density and Moisture			Shear Tests					
						Gravel (%)	Sand (%)	Silt (%)	Clay (%)	Liquid (%)	Plastic (%)		Plasticity Index (%)	Bulk Density (gms/cm ³)	Dry Density (gms/cm ³)	Moisture Content (%)	Type of Test	Cohesion Intercept, 'c' (kg/cm ²)	Angle of Internal Friction, ϕ (degrees)		
0.50	DS-1	11		Light brown sandy silt of low plasticity (ML-CL)	2.00	4	21	70	5	23.2	17.1	6.1	2.65	1.58	1.55	8.2	DST	0.00	28		
1.50	SPT-1					0	56	44	0												
2.25	UDS-1																				
3.00	SPT-2	12		Light grey silty sand (SM)	7.50																
4.50	SPT-3																				
5.25	UDS-2																				
6.00	SPT-4	58				0	57	43	0				2.64	1.79	1.66	7.8					
7.50	SPT-5	43		Light brown sandy silt of non plasticity (ML)	9.00					19.6											
8.25	UDS-3																				
9.00	SPT-6																				
10.00	SPT-7	48		Light grey silty sand (SM)	10.45	0	57	43	0				2.64	1.84	1.65	11.3	DST	0.00	31		

UUT : Unconsolidated Undrained Triaxial Shear Test

DST: Drained Direct Shear Test, UCS : Unconfined Compressive Strength

Remoulded Sample +

SOIL PROFILE: BH-3


		Project:	Proposed 66 kV Grid Substation Project at Goyla Khurd, New Delhi				Water Table, m :		Project No.	19078														
			Date of Start:		27-May-19	Date of Completion:	27-May-19	Termination Depth, m :																
											10.45													
Depth, m	Sample No.	Field SPT 'N' Value	Symbol	SOIL DESCRIPTION	Depth of Strata, (m)	Grain Size Analysis				Atterberg Limits		Specific Gravity	Density and Moisture			Shear Tests								
						Gravel (%)	Sand (%)	Silt (%)	Clay (%)	Liquid (%)	Plastic (%)		Plasticity Index (%)	Bulk Density (gms/cm ³)	Dry Density (gms/cm ³)	Moisture Content (%)	Type of Test	Cohesion Intercept, 'c' (kg/cm ³)	Angle of Internal Friction, ϕ (degrees)					
0.50	1.00	DS-1		Light brown sandy silt of low plasticity (ML-CL)	4.00	0	36	58	6	23.6	18.4	5.2	2.65	1.72	1.56	10.3	UCS	0.62	-					
1.50	1.95	SPT-1																						
2.25	2.55	UDS-1																						
3.00	3.45	SPT-2																						
4.50	4.95	SPT-3		Light grey silty sand (SM)	10.45	0	58	42	0	23.2	17.4	5.8	2.63	1.77	1.62	9.5	DST	0.00	32					
5.25	5.55	UDS-2																						
6.00	6.45	SPT-4																						
7.50	7.95	SPT-5																						
8.25	8.55	UDS-3												1.86	1.69	10.1								
9.00	9.45	SPT-6				0	62	38	0	17.2	N.P		2.62											
10.00	10.45	SPT-7																						

UUT : Unconsolidated Undrained Triaxial Shear Test

DST: Drained Direct Shear Test, UCS : Unconfined Compressive Strength

Remoulded Sample +

SOIL PROFILE: BH-4










		Project:	Proposed 66 kV Grid Substation Project at Goyla Khurd, New Delhi				Water Table, m :		Project No.	19078										
			Date of Start:		Date of Completion:		Termination Depth, m :													
			27-May-19		27-May-19		10.45													
Depth, m	Sample No.	Field SPT 'N' Value	Symbol	SOIL DESCRIPTION	Depth of Strata, (m)	Grain Size Analysis				Atterberg Limits		Density and Moisture			Shear Tests					
						Gravel (%)	Sand (%)	Silt (%)	Clay (%)	Liquid (%)	Plastic (%)	Plasticity Index (%)	Specific Gravity	Bulk Density (gms/cm ³)	Dry Density (gms/cm ³)	Moisture Content (%)	Type of Test	Cohesion Intercept, 'c' (kg/cm ²)	Angle of Internal Friction, ϕ (degrees)	
0.50	DS-1	18		Light brown sandy silt of low plasticity (ML-CL)	1.00	0	38	57	5	24.1	17.8	6.3	2.66	1.71	1.56	9.6	UCS	0.66	-	
1.50	SPT-1	14		Light grey sandy silt of low plasticity (ML-CL)	5.00	0	26	68	6	24.5	18.4	6.1	2.64	1.78	1.64	8.5	DST	0.00	30	
2.25	UDS-1	18				0	63	37	0	18.9	N.P	2.62	1.84	1.69	9.1					
3.00	SPT-2	28		Light grey silty sand (SMf)	10.45	0	62	38	0											
4.50	SPT-3	42																		
5.25	UDS-2	55																		
6.00	SPT-4	64																		
7.50	SPT-5																			
8.25	UDS-3																			
9.00	SPT-6																			
10.00	SPT-7																			

UUT : Unconsolidated Undrained Triaxial Shear Test

DST: Drained Direct Shear Test, UCS : Unconfined Compressive Strength

Remoulded Sample +


SOIL PROFILE: BH-5

		Project:	Proposed 66 kV Grid Substation Project at Goyla Khurd, New Delhi				Water Table, m :		Project No.	19078										
			Date of Start:		Date of Completion:		Termination Depth, m :													
			27-May-19		27-May-19		10.45													
Depth, m	Sample No.	Field SPT 'N' Value	Symbol	SOIL DESCRIPTION	Depth of Strata, (m)	Grain Size Analysis				Atterberg Limits		Specific Gravity	Density and Moisture			Shear Tests				
						Gravel (%)	Sand (%)	Silt (%)	Clay (%)	Liquid (%)	Plastic (%)		Plasticity Index (%)	Bulk Density (gms/cm ³)	Dry Density (gms/cm ³)	Moisture Content (%)	Type of Test	Cohesion Intercept, 'c' (kg/cm ²)	Angle of Internal Friction, φ (degrees)	
0.50	DS-1	12		Light brown sandy silt of low plasticity (ML-CL)	1.00	0	23	72	5	24.2	17.8	6.4		1.75	1.57					
1.50	SPT-1			Light grey sandy silt of low plasticity (ML-CL)	4.50	3	26	66	5	23.5	17.3	6.2							10	
2.25	UDS-1											20.1	N.P							
3.00	SPT-2	18		Light brown sandy silt of non plasticity (ML)	6.00	0	37	60	3					1.82	1.65	10.5	DST	0.00	30	
4.50	SPT-3	21						0	57	43	0									
5.25	UDS-2			Light grey silty sand (SM)	10.45															
6.00	SPT-4	48																		
7.50	SPT-5	39																		
8.25	UDS-3																			
9.00	SPT-6	46																		
10.00	SPT-7	58				0	66	34	0	17.3	N.P		2.63							

UUT : Unconsolidated Undrained Triaxial Shear Test

DST: Drained Direct Shear Test, UCS : Unconfined Compressive Strength

Remoulded Sample +

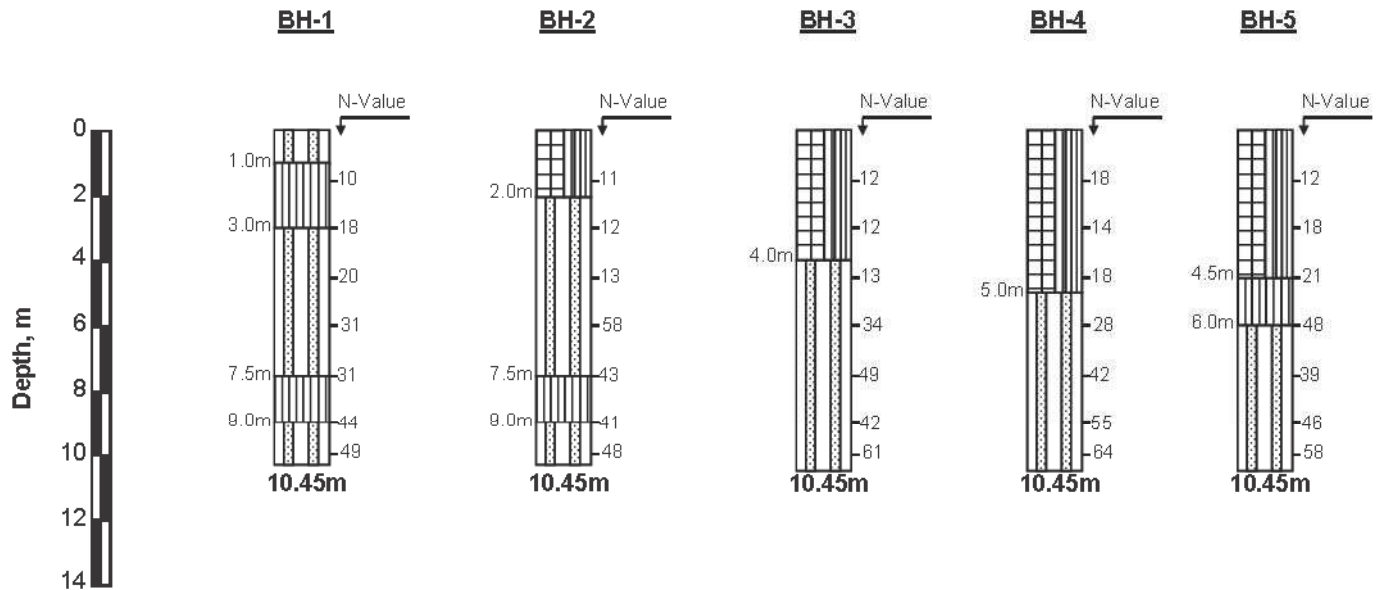

LEGEND	
SYMBOL	DESCRIPTION
	Sandy silt (ML)
	Silty sand (SM)
	Sandy silt (ML-CL)

Summary of Borehole Profiles


Proposed 66 kV Grid Substation Project at Goyla Khurd, New Delhi



Standard Penetration Test

IS : 2131-1981, RA-2007

Borehole Details	
Symbol	Borehole Number
○	BH-1
●	BH-2
▲	BH-3
▲	BH-4
□	BH-5

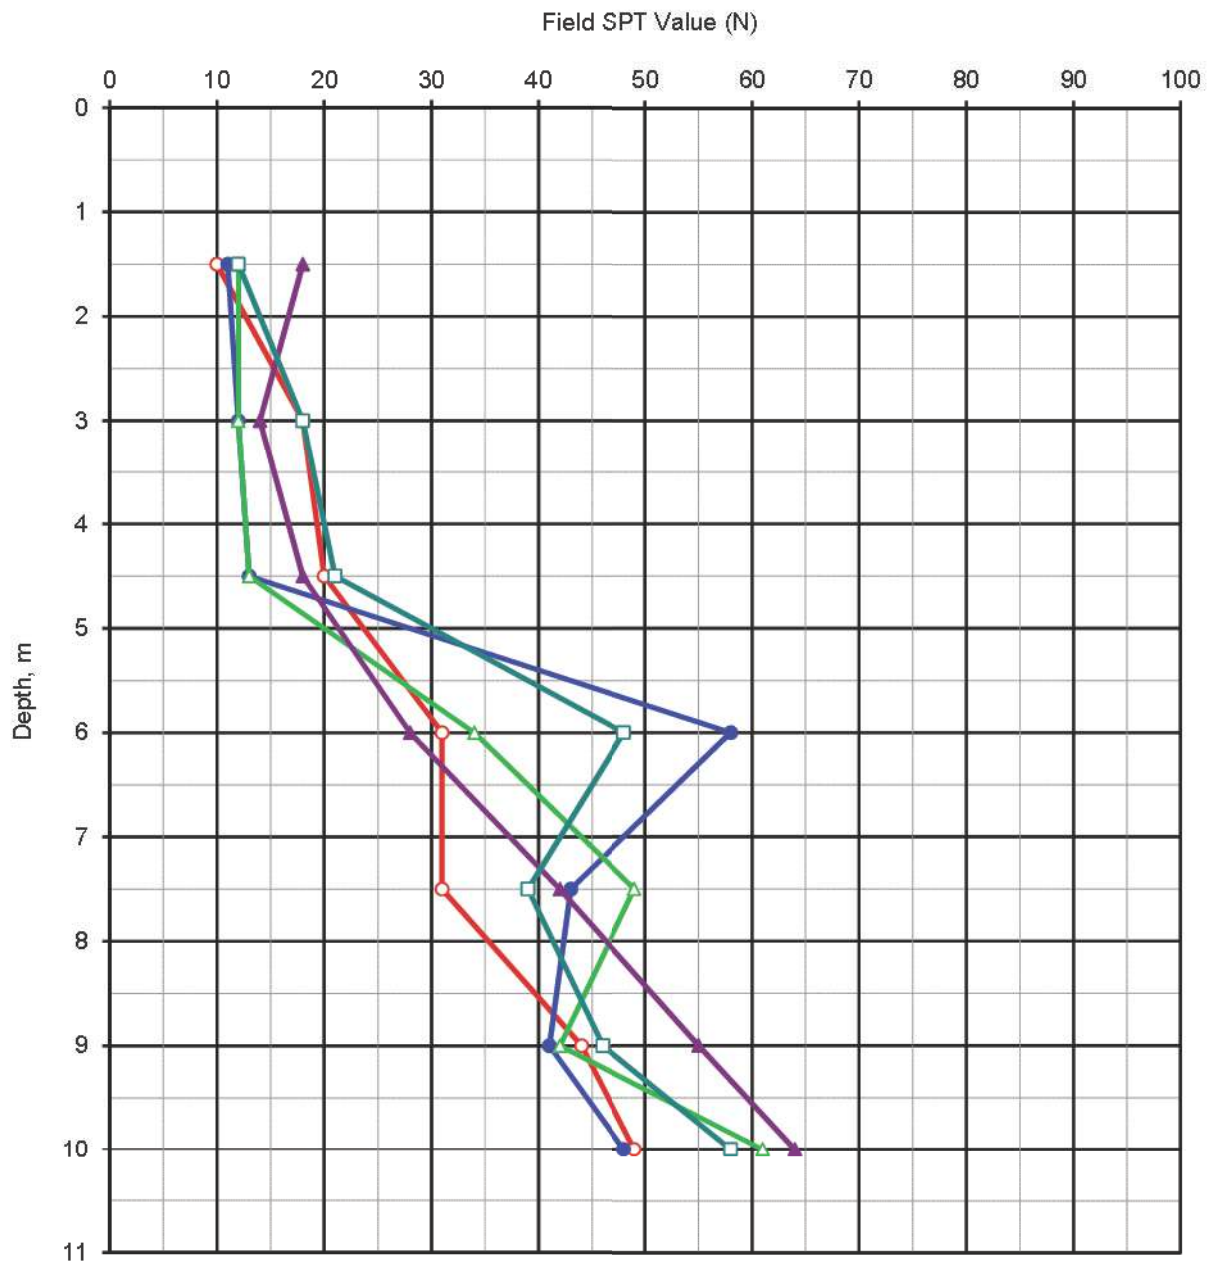


Field SPT Values vs. Depth



Standard Penetration Test

IS : 2131-1981, RA-2007

Borehole Details	
Symbol	Borehole Number
○	BH-1
●	BH-2
▲	BH-3
▲	BH-4
□	BH-5

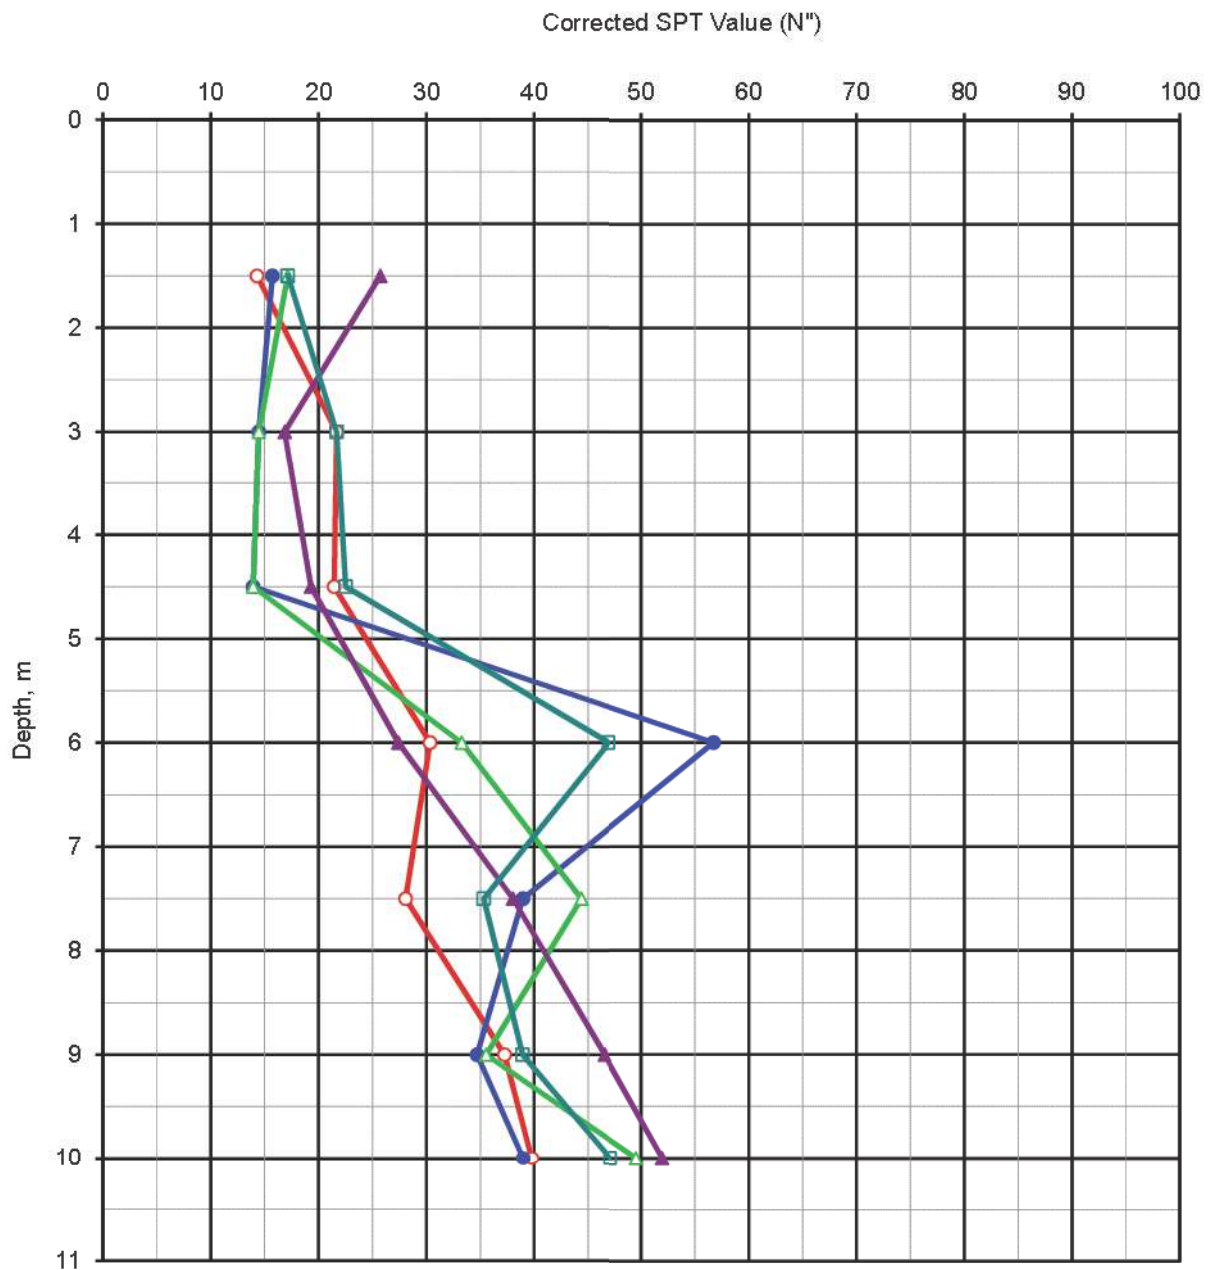




Electrical Resistivity Test No.: ERT-1

IS: 3043-1987, RA-2006

Test Details

Test Designation : ERT-1

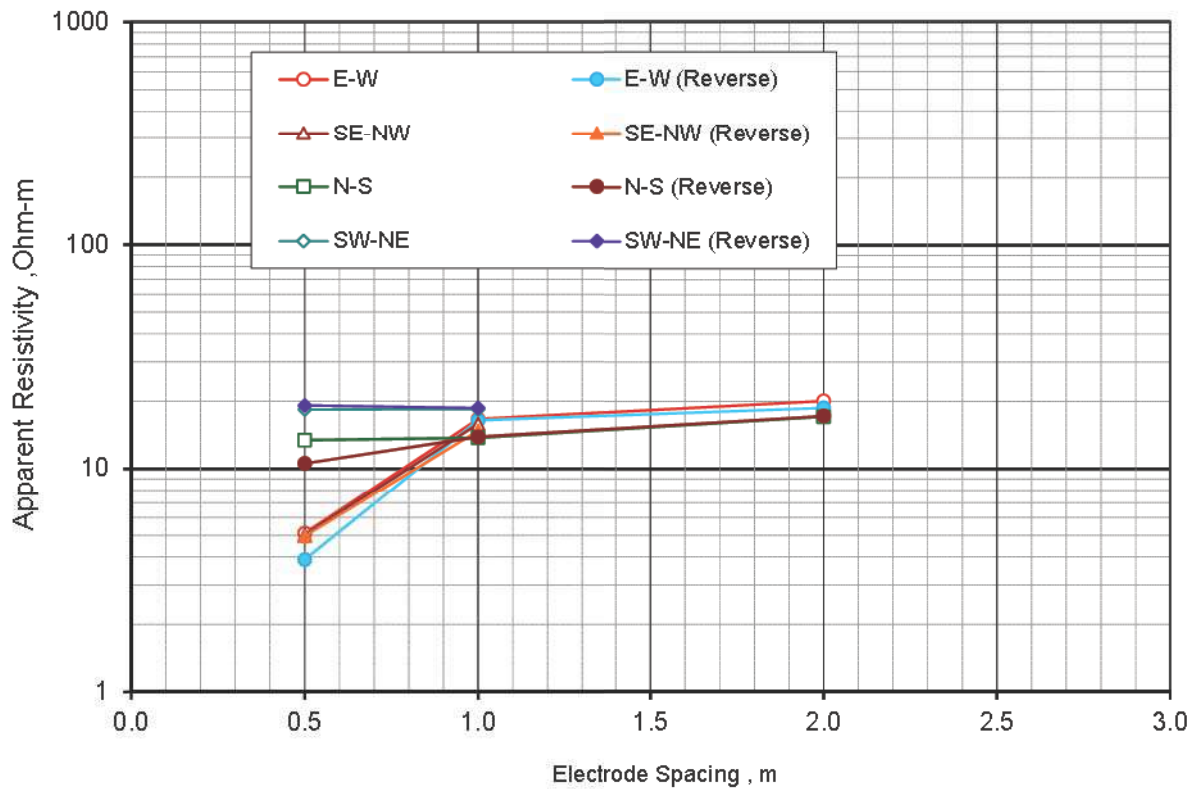

Electrode Spacing, m	Apparent Resistivity, Ohm-m							
	E-W	E-W (Reverse)	SE-NW	SE-NW (Reverse)	N-S	N-S (Reverse)	SW-NE	SW-NE (Reverse)
0.5	5.1	3.9	5.0	5.0	13.4	10.6	18.4	19.2
1.0	16.7	16.5	15.8	14.8	13.8	13.9	18.5	18.7
2.0	20.1	18.7			17.1	17.2		
4.0	Space not Available							
6.0								
8.0								
Mean Resistivity	14.0	13.0	10.4	9.9	14.8	13.9	18.5	18.7

Mean Resistivity Value, ohm-m : 13.4 ohm-m


Apparent Resistivity Values (ERT-1)



Electrical Resistivity Test No.: ERT-1

IS: 3043-1987, RA-2006


Test Details
Test Designation : ERT-1

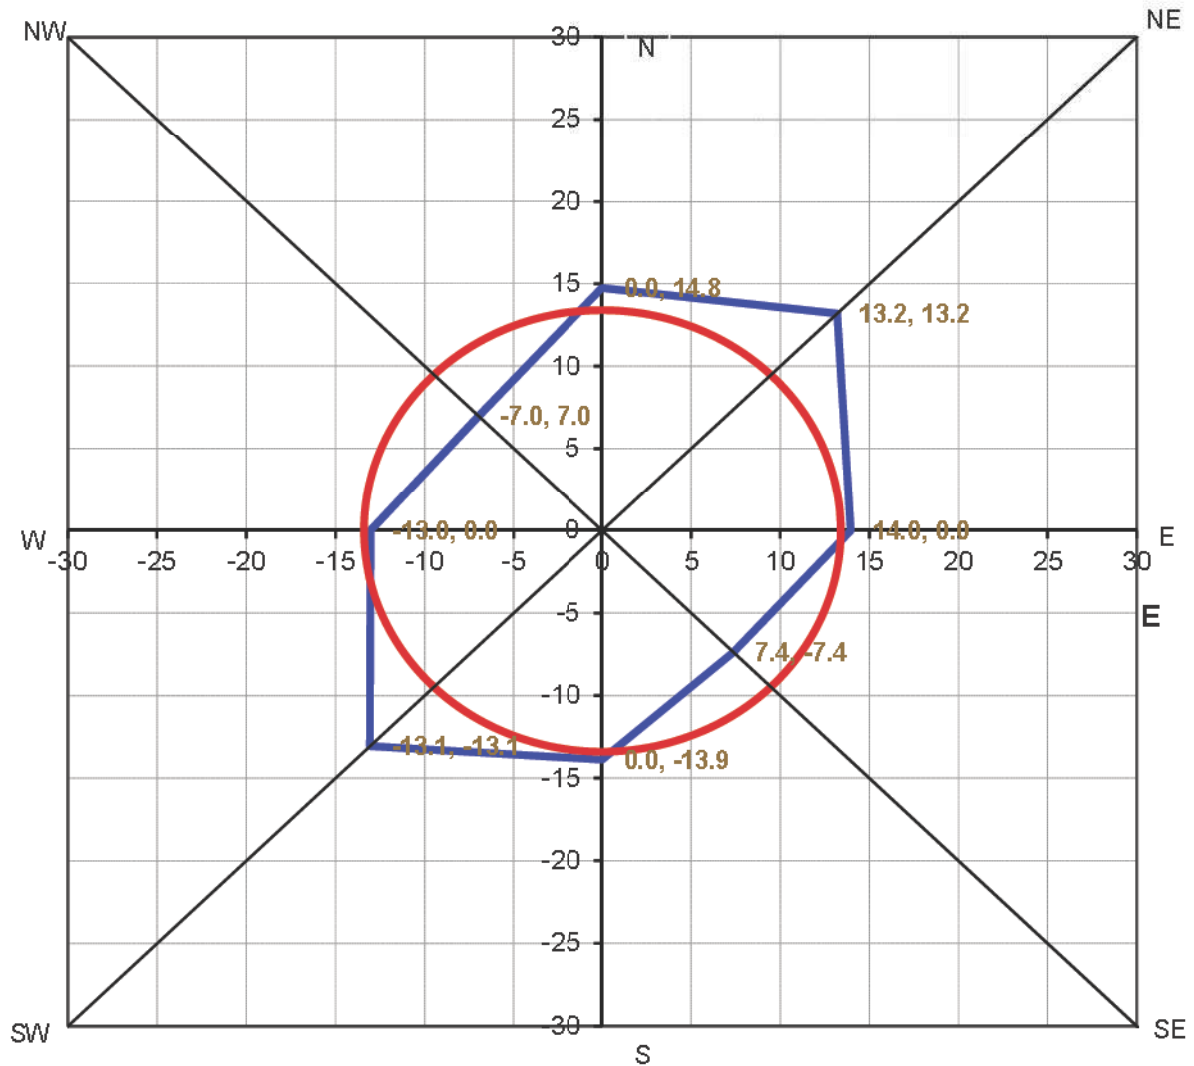

Total Area of Polygon : 565

Radius of Equivalent Circle=Mean Resistivity : 13.4 ohm-m


Polar Resistivity Curves (ERT-1)

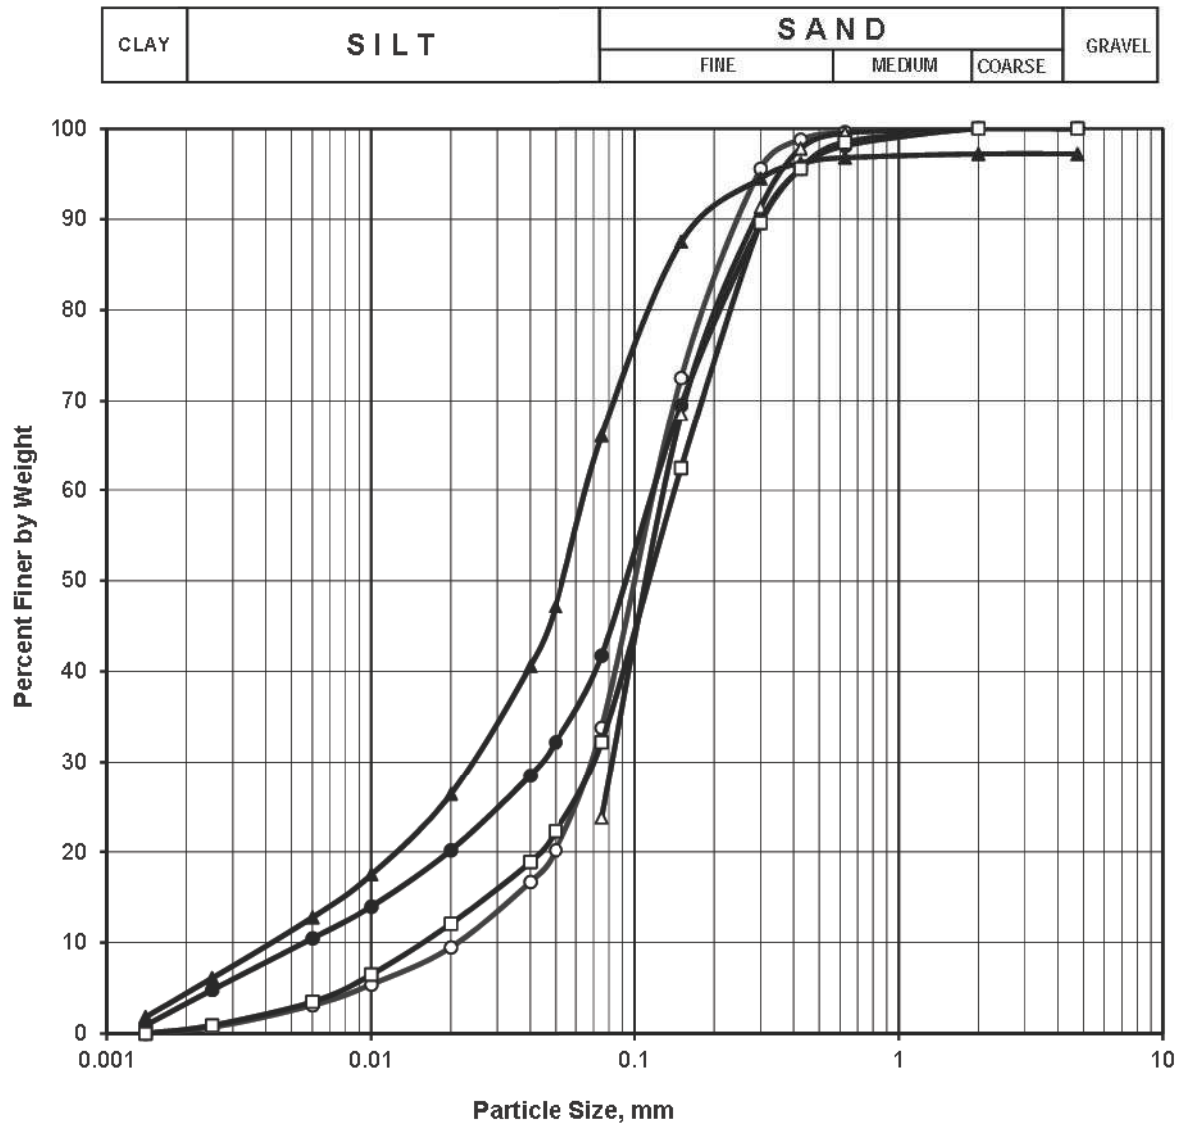

SYMBOL	BH	DEPTH (m)	DESCRIPTION	GRAVEL %	SAND %	SILT %	CLAY %
	1	1.50	Silty sand (SM)	0	66	34	0
	1	5.25	Sandy silt (ML)	0	42	55	3
	1	8.25	Silty sand (SM)	0	76	24	0
	1	11.25	Sandy silt (ML)	3	31	62	4
	1	13.50	Silty sand (SM)	0	68	32	0

Grain Size Analysis


Proposed 66 kV Grid Substation Project at Goyla Khurd, New Delhi

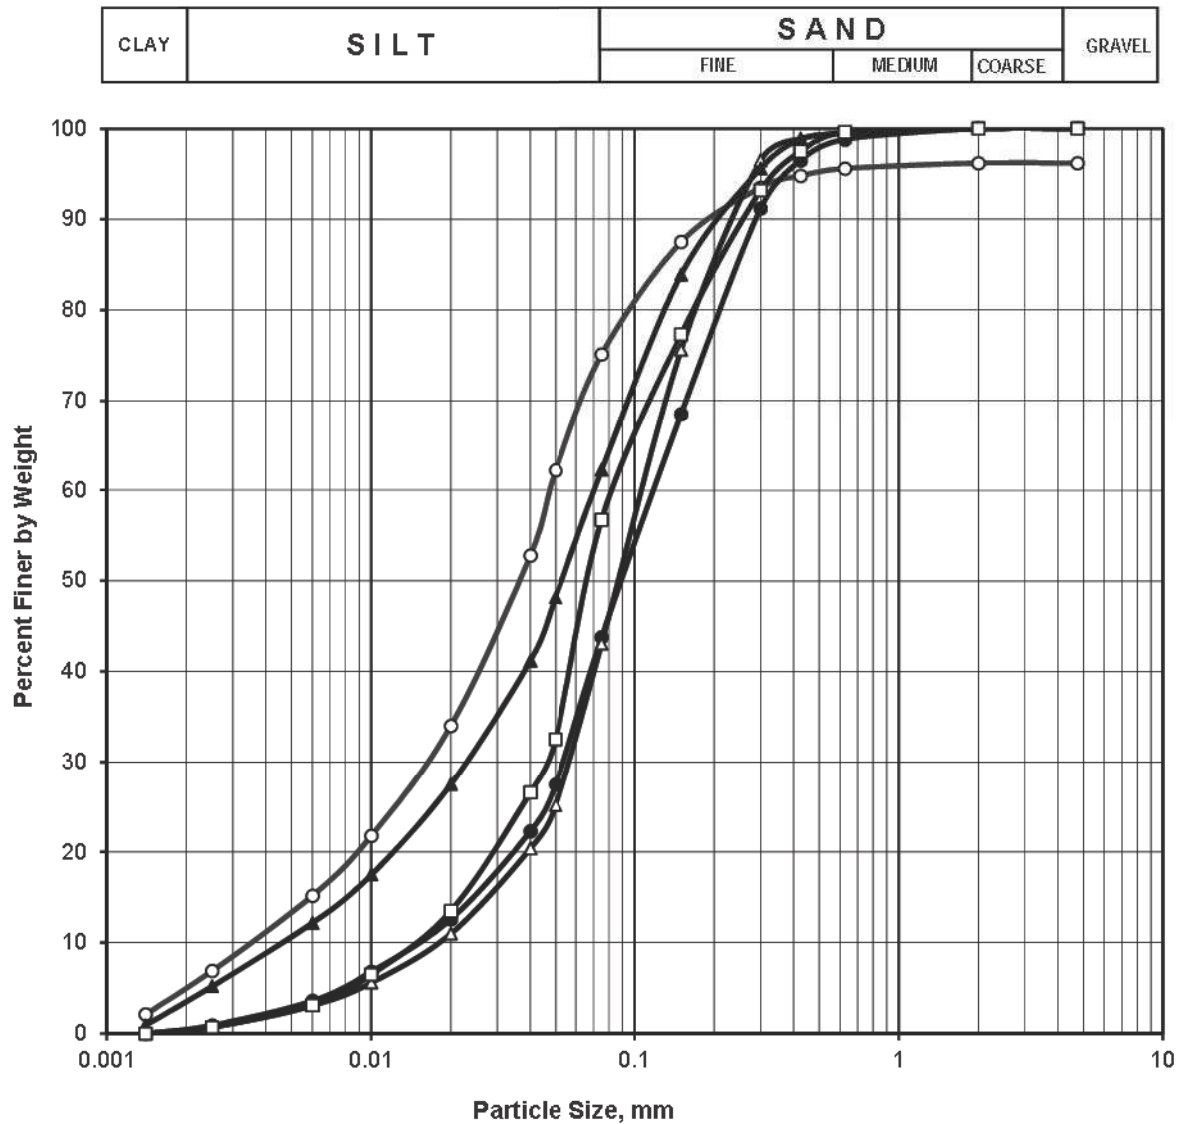




SYMBOL	BH	DEPTH (m)	DESCRIPTION	GRAVEL %	SAND %	SILT %	CLAY %
	2	1.50	Sandy silt (ML-CL)	4	21	70	5
	2	2.25	Silty sand (SM)	0	56	44	0
	2	5.25	Silty sand (SM)	0	57	43	0
	2	8.25	Sandy silt (ML)	0	38	59	3
	2	10.00	Silty sand (SM)	0	57	43	0

Grain Size Analysis

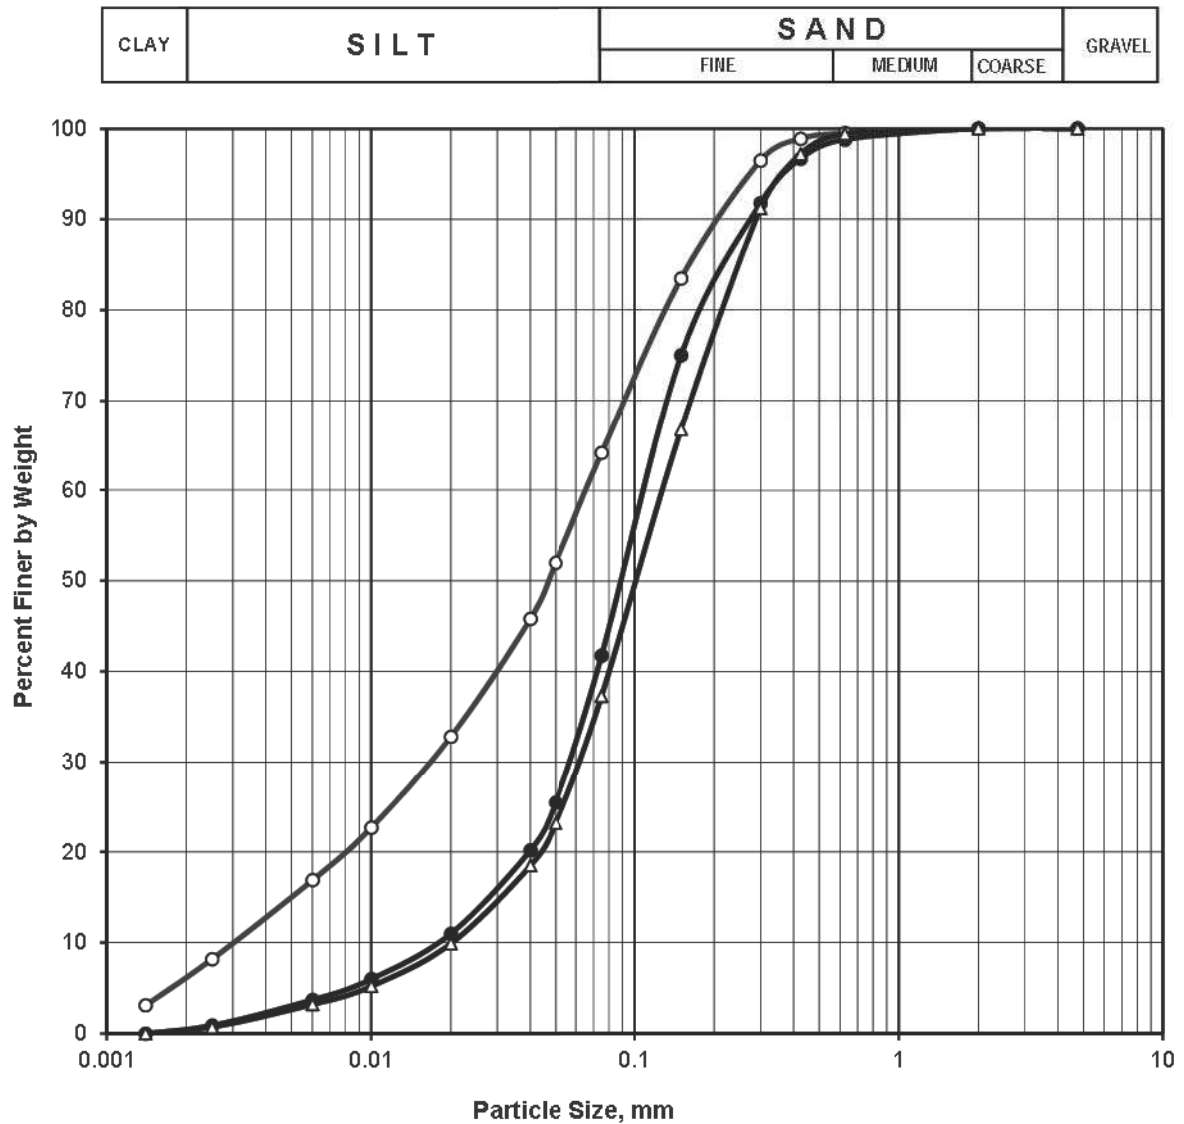
Proposed 66 kV Grid Substation Project at Goyla Khurd, New Delhi







SYMBOL	BH	DEPTH (m)	DESCRIPTION	GRAVEL %	SAND %	SILT %	CLAY %
	3	1.50	Sandy silt (ML-CL)	0	36	58	6
	3	4.50	Silty sand (SM)	0	58	42	0
	3	9.00	Silty sand (SM)	0	62	38	0

Grain Size Analysis

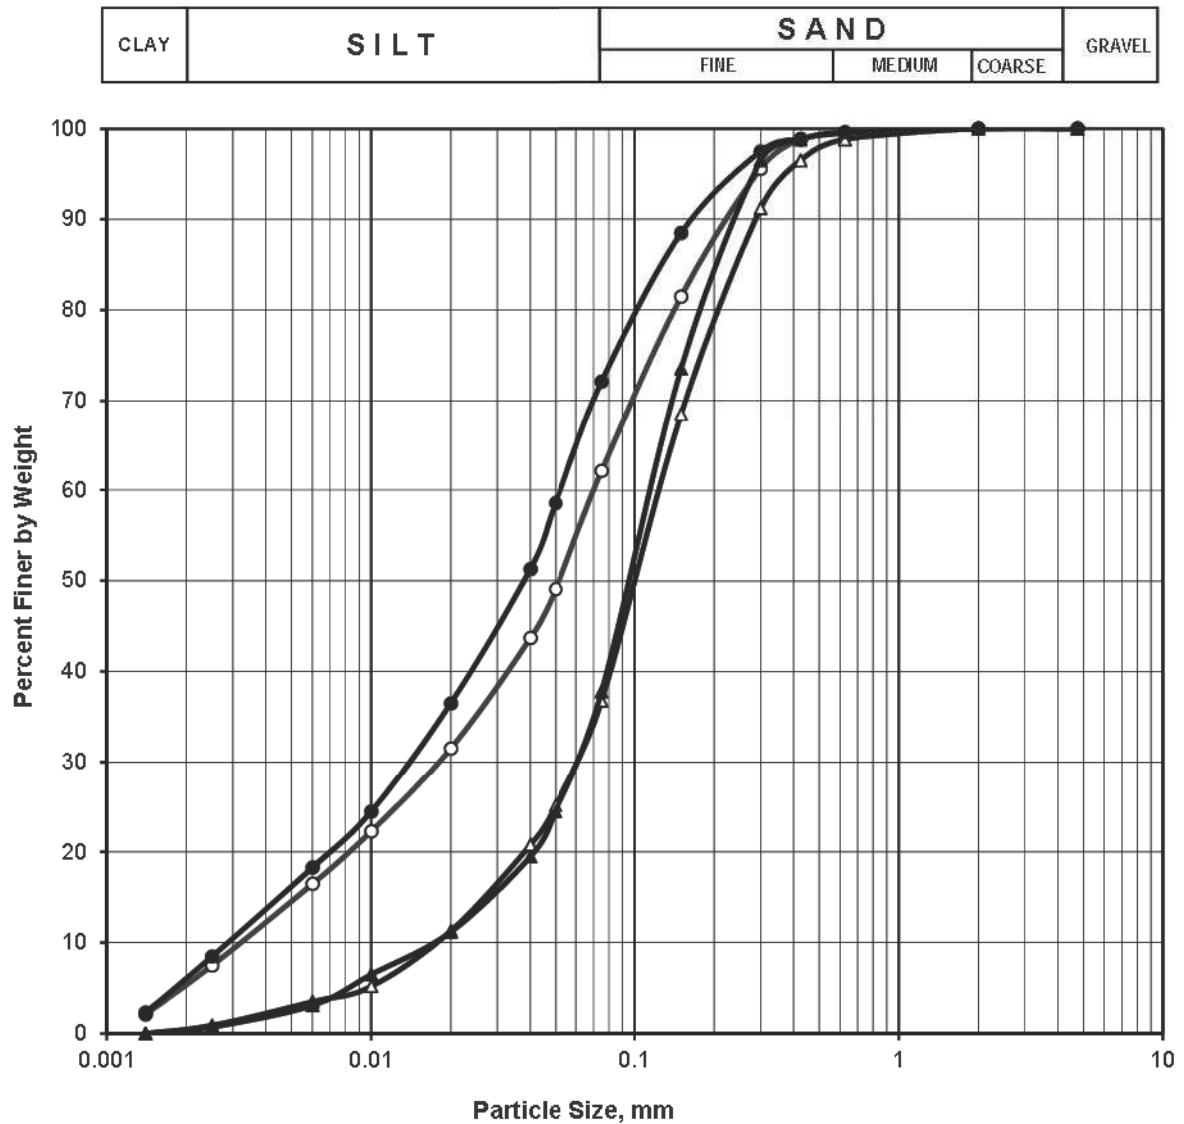
Proposed 66 kV Grid Substation Project at Goyla Khurd, New Delhi



SYMBOL	BH	DEPTH (m)	DESCRIPTION	GRAVEL %	SAND %	SILT %	CLAY %
	4	0.50	Sandy silt (ML-CL)	0	38	57	5
	4	2.25	Sandy silt (ML-CL)	0	28	66	6
	4	5.25	Silty sand (SM)	0	63	37	0
	4	9.00	Silty sand (SM)	0	62	38	0

Grain Size Analysis

Proposed 66 kV Grid Substation Project at Goyla Khurd, New Delhi

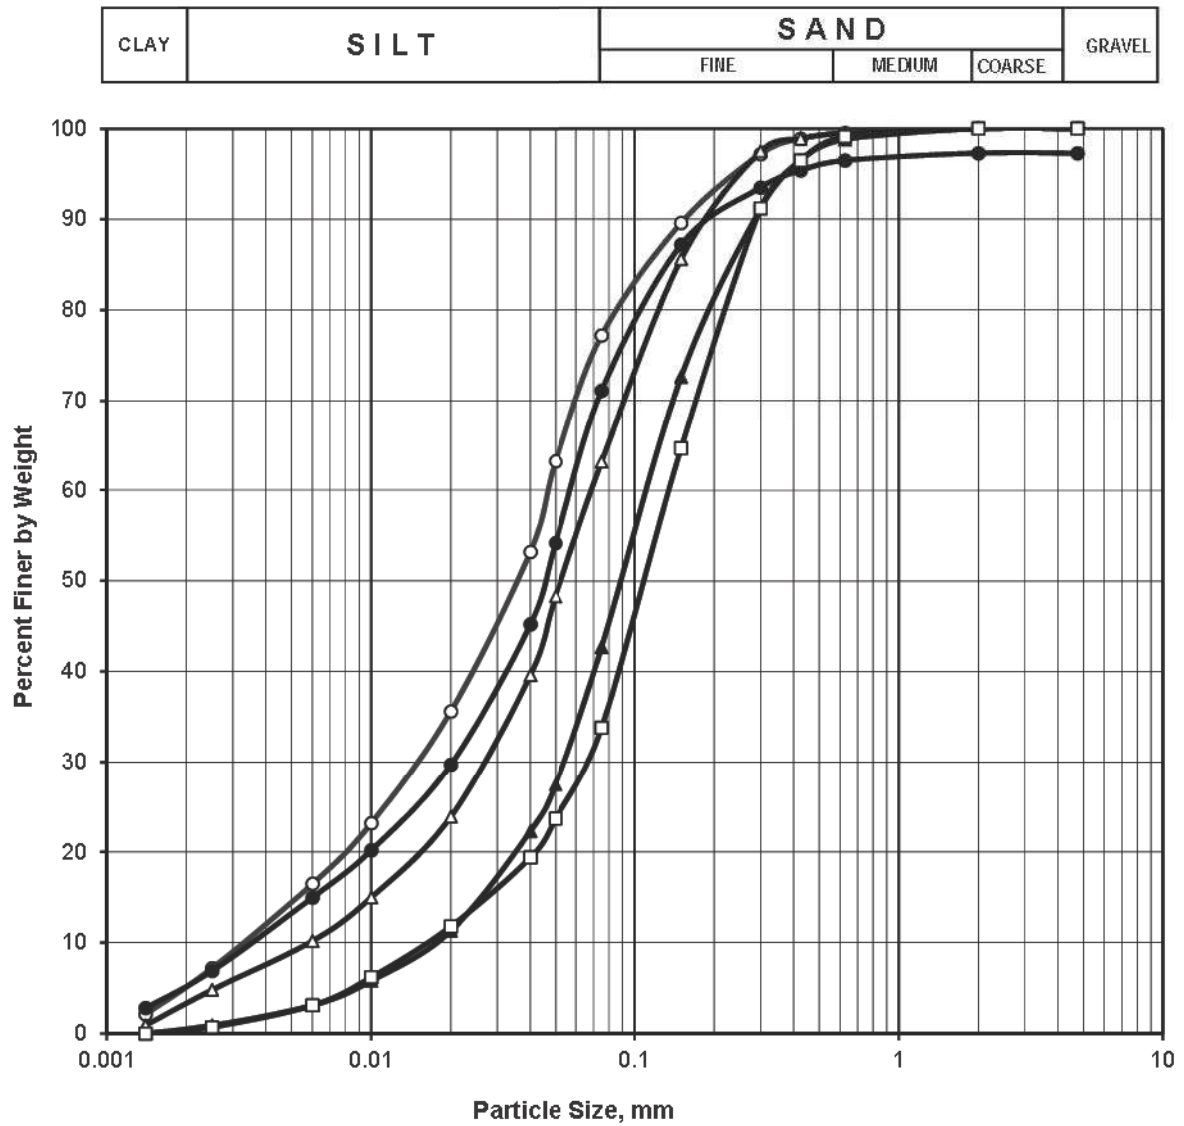

SYMBOL	BH	DEPTH (m)	DESCRIPTION	GRAVEL %	SAND %	SILT %	CLAY %
	5	0.50	Sandy silt (ML-CL)	0	23	72	5
	5	2.25	Sandy silt (ML-CL)	3	26	66	5
	5	5.25	Sandy silt (ML)	0	37	60	3
	5	6.00	Silty sand (SM)	0	57	43	0
	5	10.00	Silty sand (SM)	0	66	34	0

Grain Size Analysis


Proposed 66 kV Grid Substation Project at Goyla Khurd, New Delhi



CHEMICAL TEST RESULTS

SOIL-EXTRACT WATER:

Borehole No.	Depth, m	Sulphate Content (SO ₃), %	Chloride Content (CL), %	pH Value
1	1.50	0.13	0.12	7.5
2	4.50	0.12	0.14	7.6
3	3.00	0.10	0.13	7.5
4	2.25	0.11	0.13	7.6
5	4.50	0.12	0.12	7.7

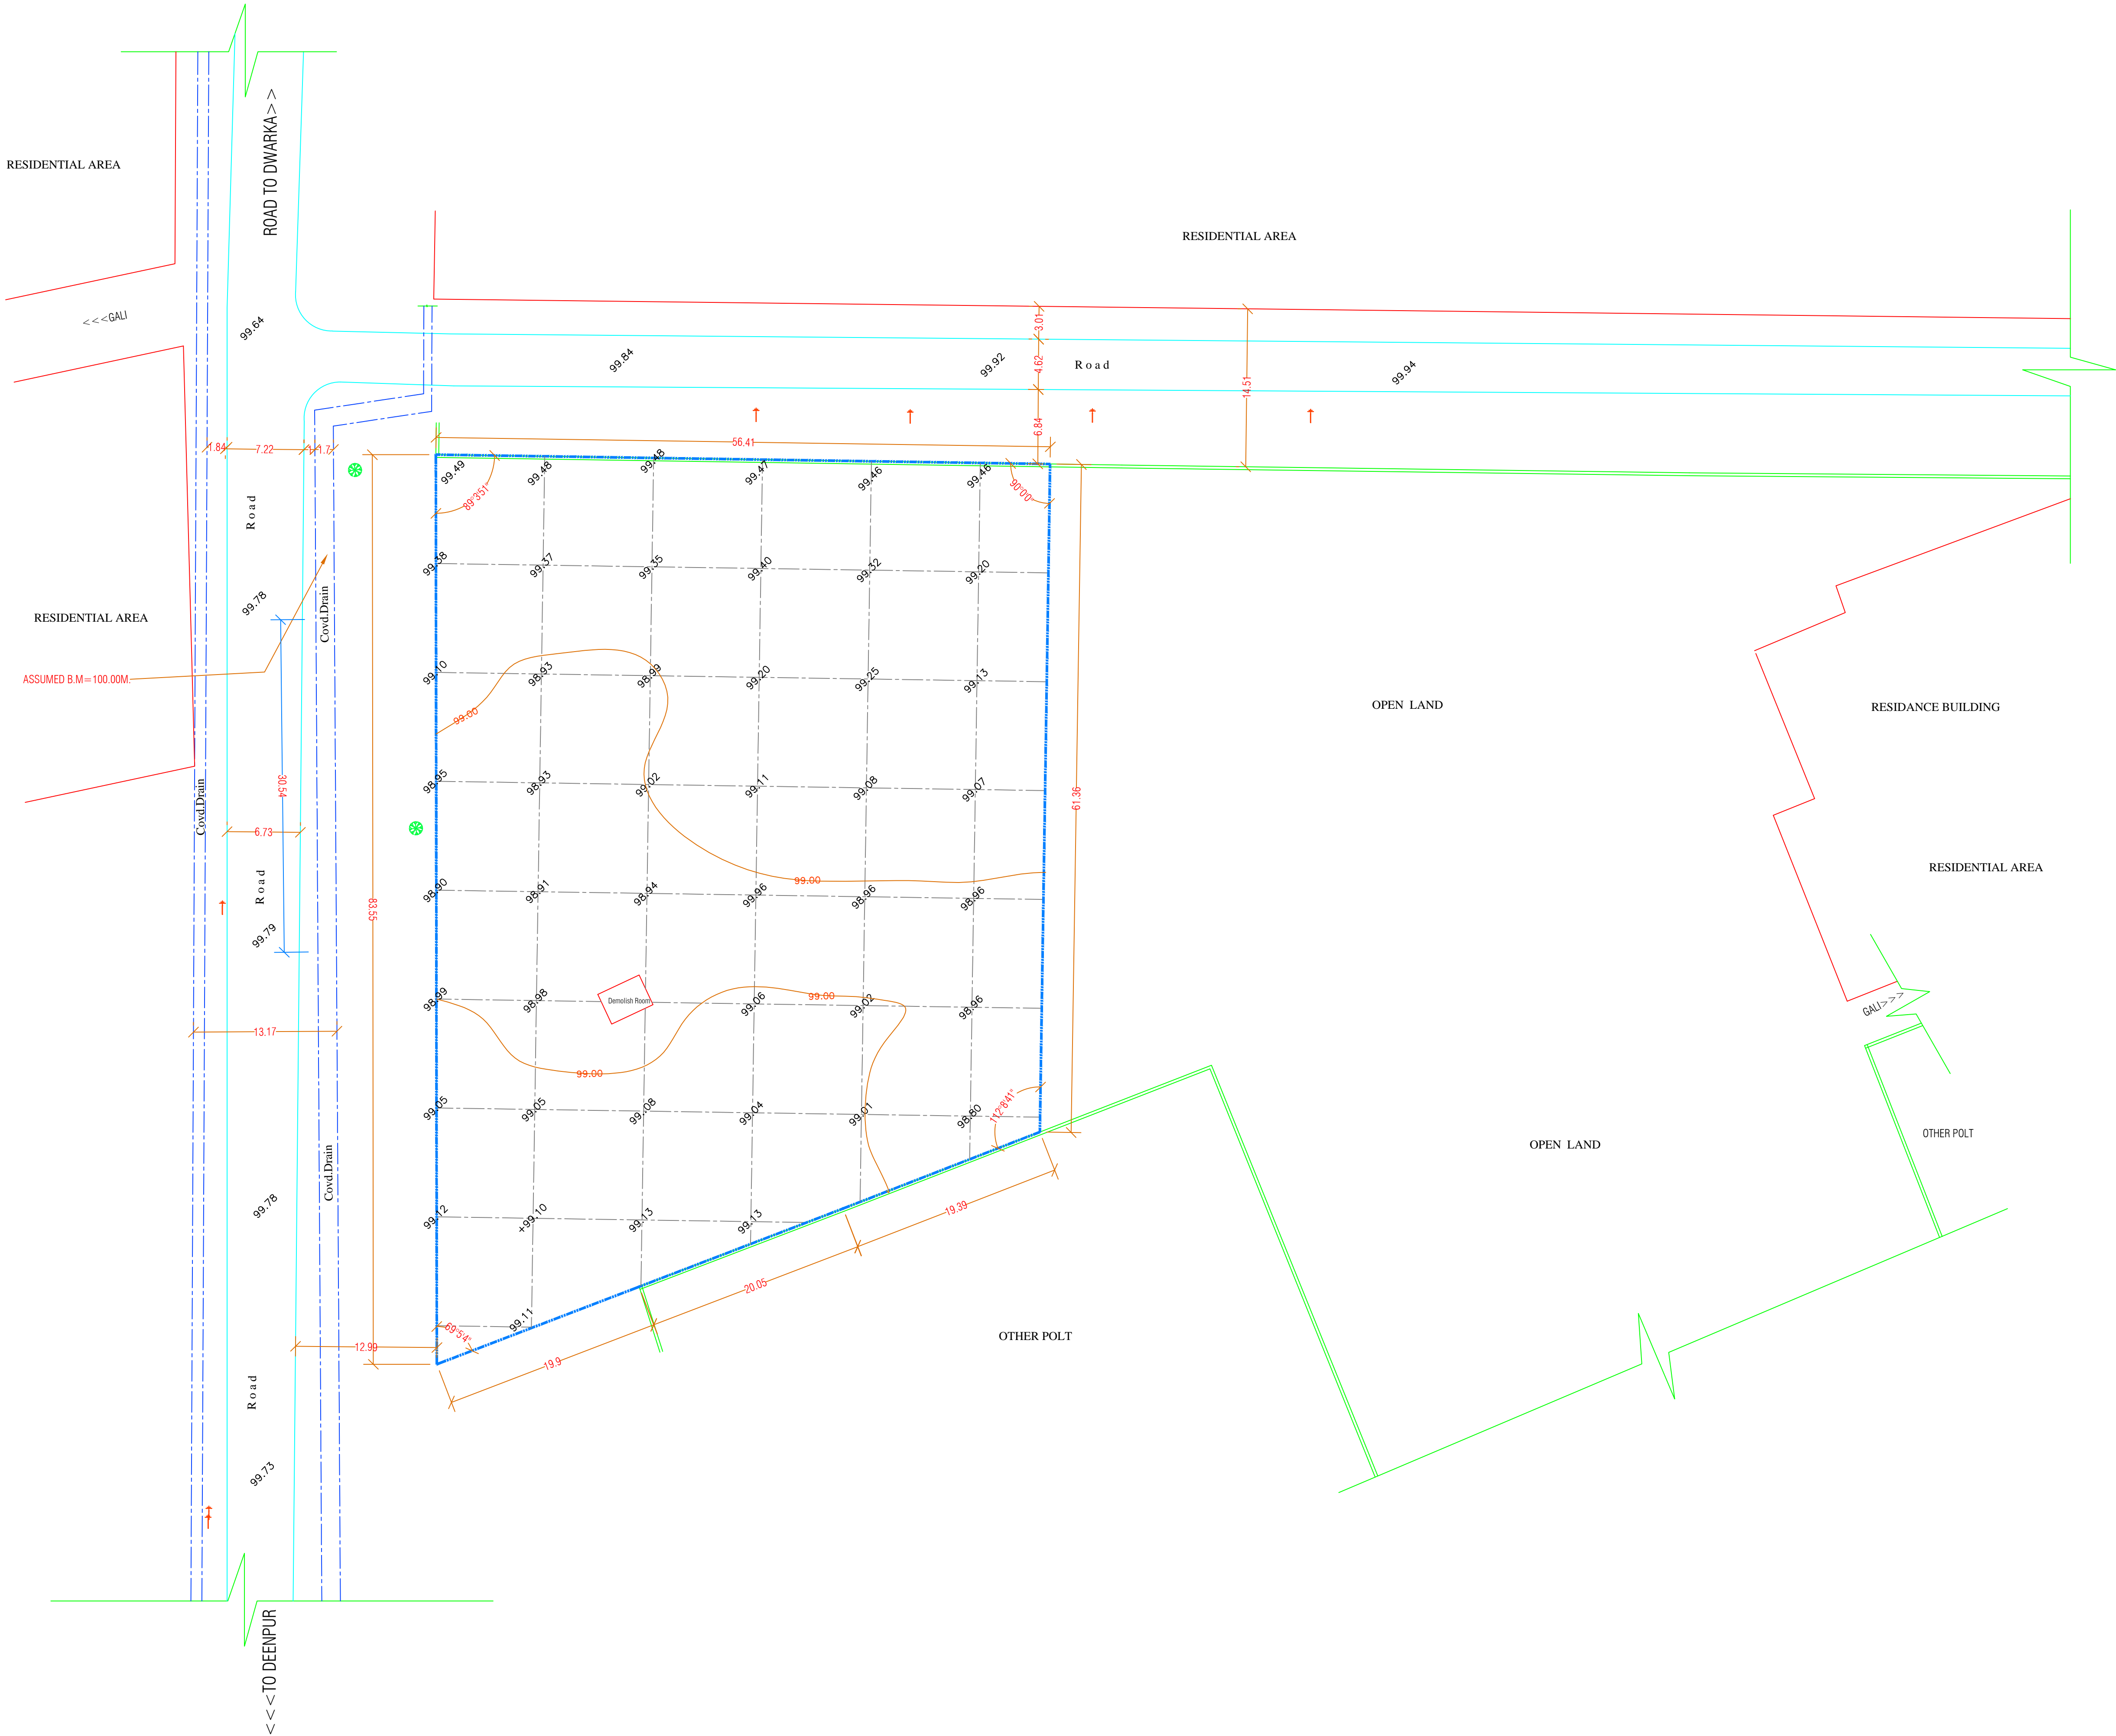

LEGEND

BOUNDARY WALL WITH GATE	
TREE	
ELECTRIC LINE	
HEIGHT	
PLOT LIMIT	
LAMP POST	
CONTOUR	
MANHOLE	

NOTE

- ALL DIMENSIONS AND HEIGHT ARE IN METRE.
- THE NORTH LINE INDICATED IS A MAGNETIC NORTH DIRECTION.
- ALL HEIGHTS ARE w.r.t. ASSUMED B.M 100.0m. i.e. ON DRAIN AS INDICATED IN THE DRAWING.

PLOT AREA

4046.8004 SQ.M OR 1.00 ACRE

03			
02			
01			
SL. NO.	DATE	AS PER	REMARKS

REVISED ON

PROJECT
PROPOSED PROJECT SITE
GOYLA DAIRY,NAJAFGARH, NEW DELHI

TITLE
TOPOGRAPHICAL & CONTOUR SURVEY PLAN

SURVEY CONSULTANTS
RAO ENGINEERING ENTERPRISES
Geotechnical Consultants & Land Surveyors
91-D-3, Street -I, East Moti Bagh, Old Rohlak Road, Delhi -110007
Ph : 23698806, 23691434, Fax:23691434
Mob.-9811108174, 9310502435
E-mail:- raoraengg@rediffmail.com

	SCALE 1 : 300	DRAWN BY AWADHESH Kr. SAH
	CHECKED BY G.R. RAO	DATE MAY/2019