

#### Volume – I

#### **Tender Notification for**

### RATE CONTRACT FOR THE SUPPLY OF 250 KVA OIL TYPE DISTRIBUTION TRANSFORMERS IN BRPL

CMC/BR/25-26/FK/PR/RJ/1260

**Due Date for Submission of Bids: 28.03.2025** 

BSES RAJDHANI POWER LTD (BRPL)

BSES Bhawan, Nehru Place, New Delhi-110019

Corporate Identification Number: U74899DL2001PLC111527

Telephone Number: +91 11 3009 9999 Fax Number: +91 11 2641 9833

Website: www.bsesdelhi.com



## Section – I

REQUEST FOR QUOTATION

Tender Notification: CMC/BR/25-26/FK/PR/RJ/1260

RATE CONTRACT FOR THE SUPPLY OF 250 KVA OIL TYPE DISTRIBUTION TRANSFORMERS IN BRPL



#### **INDEX**

a= a		Page No
	TION – I: REQUEST FOR QUOTATION	04
	TION – II: INSTRUCTIONS TO BIDDER	11
SEC	TION – III: GENERAL CONDITIONS OF CONTRACT	22-32
1.0	GENERAL INSTRUCTIONS	23
2.0	DEFINITION OF TERMS	23
3.0	CONTRACT DOCUMENTS & PRIORITY	24
4.0	SCOPE OF SUPPLY – GENERAL	24
5.0	QUALITY ASSURANCE AND INSPECTION	25
6.0	PACKING, PACKING LIST & MARKING	25
7.0	PRICE BASIS FOR SUPPLY OF MATERIALS	26
8.0	VARIATION IN TAXES, DUTIES & LEVIES	26
9.0	TAXES & DUTIES ON RAW MATERIALS & BOUGHT OUT	
	COMPONENTS	26
10.0	TERMS OF PAYMENT AND BILLING	27
11.0	PRICE VALIDITY	27
12.0	PERFORMANCE GUARANTEE	27
13.0	FORFEITURE	28
14.0	RELEASE	28
15.0	DEFECTS LIABILITY PERIOD	28
16.0	RETURN, REPLACEMENT OR SUBSTITUTION	28
17.0	EFFECTIVE DATE OF COMMENCEMENT OF CONTRACT	29
18.0	TIME – THE ESSENCE OF CONTRACT	29
19.0	THE LAWS AND JURISDICTION OF CONTRACT	29
20.0	EVENTS OF DEFAULT	29
21.0	CONSEQUENCES OF DEFAULT	29
22.0	PENALTY FOR DELAY	30
23.0	FORCE MAJEURE	30
24.0	TRANSFER AND SUB-LETTING	31
25.0	RECOVERIES	32
26.0	WAIVER	32
27.0	INDEMNIFICATION	32
SEC	TION – IV: QUANTITY AND DELIVERY REQUIREMENT	33
	TION – V: TECHNICAL SPECIFICATION OF	
	OIL TYPE DT	42



#### **SECTION – I: REQUEST FOR QUOTATION**

#### 1.0 Event Information

1.01 BRPL invites bids through online portal for supply of 250 kVA Oil Type DT from the manufacturers. The bidder must qualify the technical requirements as specified in clause 2.0 stated below. The tender shall be duly super scribed as — "RATE CONTRACT FOR THE SUPPLY OF 250 KVA OIL TYPE DISTRIBUTION TRANSFORMERS IN BRPL, TENDER NOTICE CMC/BR/25-26/FK/PR/RJ/1260 DUE FOR SUBMISSION ON DT. 28.03.2025".

Sl. No.	Item Description	Specification	Requirement Total Qty.	<b>Estimated Cost</b>
1	Rate Contract for the Supply of 250 kVA Oil Type Distribution Transformers in BRPL	SECTION V	164 Nos.	Rs. 11.74 Cr

Note: Quantity may vary to any extent of +/- 30% of above mentioned total quantity.

1.02 The schedule of specifications with detail terms & conditions can be obtained from address given below against demand draft/Pay Order of Rs.1180/- with GST-, drawn in favour of BSES RAJDHANI POWER LTD, payable at New Delhi. The sale of tender documents will be issued from 08.03.2025 onwards on all working days up to 28.03.2025. The tender documents can also be downloaded from the website www.bsesdelhi.com or https://srmprdportal.bsesdelhi.com/irj/portal

In case tender papers are downloaded from the above website, then the bidder has to submit a demand draft covering the cost of bid documents as stated above in a separate envelope with suitable superscription: Tender Fee & EMD and Tender Notice Ref: CMC/BR/25-26/FK/PR/RJ/1260", Due date of submission, Tender opening date. This envelope should be deliver to the following address (scanned copy of Tender Fee & EMD to be uploaded on e –procurement portal):

# HEAD OF THE DEPARTMENT, 1st FLOOR, 'C' BLOCK, CONTRACTS & MATERIALS DEPARTMENT, BSES RAJDHANI POWER LTD, BSES BHAWAN, NEHRU PLACE, NEW DELHI-110019

1.03 Offers will be received up to 1500 Hrs. on dt. 28.03.2025 as indicated earlier and will be opened at the address given below dt. 28.03.2025 at 1530 Hrs. in the presence of authorized representatives of the bidders. The schedule of specifications with detail terms & conditions are enclosed. It is the sole responsibility of the bidder to ensure that the bid documents reach this office on or before the due date.



- 1.04 BRPL reserves the right to accept/ reject any or all Tenders without assigning any reason thereof and alter the quantity of materials mentioned in the Tender documents at the time of placing purchase orders. Tender will be summarily rejected if:
  - i) Earnest Money Deposit (EMD) @ 1% (One percent) of the Tender value i.e. Rs. 11,74,000/- is not deposited in shape of Bank Draft in favour of BSES RAJDHANI POWER LTD, payable at New Delhi or Bank Guarantee executed on favour of BSES RAJDHANI POWER LTD.
  - ii) The offer does not contain "FOR, NEW DELHI price indicating break-up towards all taxes & duties".
  - iii) Complete Technical details are not enclosed.
  - iv) Tender is received after due time due to any reason.
- 1.05 BRPL reserves the right to reject any or all bids or cancel/ withdraw the invitation for bids without assigning any reason whatsoever and in such case no bidder/ intending bidder shall have any claim arising out of such action time of placing purchase orders.

#### 2.0 Qualification Criteria:-

The prospective bidder must qualify all of the following requirements to be eligible to participate in the bidding. Bidders who meet following requirements will be considered as successful bidder and management has a right to disqualify those bidders who do not meet these requirements.

- 1) The bidder should have own manufacturing facility in India for Distribution transformer of similar rating or higher since last 3 years. Manufacturing and factory incorporation certificate/undertaking are submitted by bidder. The details of manufacturing units, locations and works from where supply against this tender shall be proposed to be furnished.
- 2) The Bidder should have supplied at least 100 Nos. of transformers of similar rating or higher rating in last 5 years from the date of bid opening to any utilities/SEB's/PSU's/reputed company wherein the end user shall be Utility/SEB's/PSU's..i. Summary list of executed Purchase orders ii. Purchase order copies iii. Material delivery clearance certificate copy or delivery completion certificates or invoice copies.
- 3) Performance certificate for minimum 2 year satisfactory performance for 250 kVA or higher ratings supplied in last 7 years from the date of bid opening from at least two utilities/ SEB's/ PSU's/ reputed company wherein the end user shall be utilities/ SEB's/ PSU's.
  - In case of bidder has a previous association with BRPL/BYPL for similar product and service, the performance feedback for that bidder by BRPL/BYPL shall only



be considered irrespective of performance certificate issued by any third organization.- *Performance Certificate* 

- 4) The bidder should have servicing, repairing, testing & refurbishment facility in INDIA with necessary spares and testing equipments for providing prompt after sales service for DT. Relevant Details/certificates/Undertaking. Details of the setup available shall be brought out in the offer. The bidder shall submit undertaking along with the bid confirming the infrastructure details submitted.
- 5) The bidder should have plant installed capacity to supply of minimum 15-20 nos of distribution transformer of 250 kVA or higher capacity each per month. *Installed Capacity Certificate*.
- 6) The Bidder must possess valid ISO 9001:2015 certification and BIS License. *Valid copy of Certification*
- 7) Bidder should have Average Annual Sales Turnover of Rs 10 Crores or more in last three (3) Financial Years Balance Sheet /CA Certificate to be submit
- 8) The Bidder shall submit an undertaking "No Litigation" is pending with the BRPL or its Group/Associates Companies as on date of bid opening.- *Undertaking*
- 9) An undertaking (self-certificate) that the bidder has not been blacklisted/debarred by any central/state government institution including electricity utilities as on date of bid opening. *Undertaking*
- 10) The bidder must have valid PAN No., GST Registration Number, in addition to other statutory compliances. The bidder must submit the copy of registrations and submit an undertaking that the bidder shall comply all the statuary compliances as per the laws/rules etc. before the start of the work- Relevant Statutory Documents Copy/Undertaking
- 11) In case of new bidders (not enlisted in BSES), Factory Inspection & evaluation shall be carried out to ascertain bidders manufacturing capabilities and quality procedures. BRPL reserves the right to assess the capabilities /installed capacity

#### 3.0 Bidding and Award Process

NIT No.: CMC/BR/25-26/FK/PR/RJ/1260

Bidders are requested to submit their questions regarding the RFQ or the bidding process after review of this RFQ. BRPL response to the questions raised by various bidders will be distributed to all participating bidders through website.



#### a. Time schedule of the bidding process

The bidders on this RFQ package should complete the following within the dates specified as under:

S.No.	Steps	Activity description	Due date
1	Technical Queries	All Queries related to RFQ	On or before 14.03.2025 1500 Hrs.
2	Technical Offer	Documentary evidence in support of qualifying criteria. Technical Literature/ GTP/ Drawings/ Type test report, if any, etc., Testing facilities, any other relevant document, acceptance to commercial terms & conditions viz. delivery Schedule/ Period, Payment terms, PBG etc. Quality assurance plan, Deviation from the specification, list of plant & machinery and testing equipments Un priced items.	28.03.2025, 1500 Hrs
3	Commercial Offer	Prices for Transformer and Break up regarding basic price and taxes. Delivery commitment	28.03.2025, 1500 Hrs
4	Opening of technical bid	As per RFQ	28.03.2025, 1530 Hrs

#### b. Bid submission through E-Procurement Portal

BSES will carry out E-Procurement through its e-procurement portal (<a href="https://srmprdportal.bsesdelhi.com/irj/portal">https://srmprdportal.bsesdelhi.com/irj/portal</a>). Interested Non-registered bidders are requested to obtain the portal user name and password (if not available) for bid submission. For participating in e-Tenders of BRPL, please write a mail to: Mr. Satyam Singh, E-mail: satyam.singh@relianceada.com, with your details as per below:

- a) Existing Vendor Code with BRPL or its Group/Associates Companies (if available):
- b) Trade Name: .....
- c) Address of Principal Place of Business: .....
- d) Contact Person's Name: .....
- e) Contact Person's Designation: .....
- f) Contact Person's Mobile No.: .....
- g) Contact Person's email ID: .....
- h) Also, attach a valid copy of Power of Attorney in favour of mentioned Contact Person for being authorized to receive user ID and password on behalf of their organization.



The login ID details shall be sent through email to the email ID mentioned by you for the same.

Bids shall be submitted in 2 (Two) parts on the assigned folder of the e-procurement site. Please refer to the user manual available at https://srmprdportal.bsesdelhi.com/irj/portal

This is a two part bid process. Bidders are to upload the bids (a) Technical Bid (b) Price Bid on website.

- The Part-I (Technical Bid) Technical Bid should not contain any cost information whatsoever. In case of Bids where the qualification requirements, technical suitability and other requirements are found to be inadequate, Part-II "Financial Bid" will not be opened.
- The Part-II (Financial Bid) Qualified bidders will be intimated after technical evaluation of all the bids is completed. The date and time of same shall be intimated in due course to the qualified bidders. Notwithstanding anything stated above, the Purchaser reserves the right to assess bidder's capability to perform the contract, should the circumstances warrant such assessment in the overall interest of the purchaser. In this regard the decision of the purchaser is final.

Bids have to be mandatorily submitted only through the e-procurement portal of BSES Delhi. Bids submitted through any other form/ route shall not be admissible. However, documents that necessarily have to be submitted in originals like EMD or Tender Fee (in the form of BG as applicable) and any other documents mentioned in the tender documents have to be submitted at the BRPL office before the due date and time of submission. Please mention the NIT No ...... on sealed envelope of EMD and DD and submit the documents on following address (scanned copy of EMD and Tender Fee to be uploaded on e-procurement portal):

# HEAD OF THE DEPARTMENT, 1st FLOOR, 'C' BLOCK, CONTRACTS & MATERIALS DEPARTMENT, BSES RAJDHANI POWER LTD, BSES BHAWAN, NEHRU PLACE, NEW DELHI-110019.

#### 4.0 REVERSE AUCTION CLAUSE

NIT No.: CMC/BR/25-26/FK/PR/RJ/1260

Purchaser reserves the right to use the reverse auction as tool through SAP – SRM as an integral part of the entire tendering process. All techno commercially qualified bidders shall participate in the reverse auction. Notwithstanding anything stated above, the Purchaser reserves the right to assess the bidder's capability to perform the contract, should the circumstances warrant such assessment in the overall interest of the purchaser. In this regard the decision of the purchaser is final. Bidder is to submit their acceptance as per the format attached ANNEXURE-III.



Purchaser intends to award the business on a lowest bid basis, so suppliers are encouraged to bid competitively. The decision to place purchase order / letter of acceptance solely depends on purchaser on the cost competitiveness across multiple lots, quality, delivery and bidder's capacity, in addition to other factors that Purchaser may deem relevant.

The purchaser reserves all the rights to award the contract to one or more bidders so as to meet the delivery requirement or nullify the award decision without any reason.

BSES reserves the right to split the tender quantity amongst techno commercially qualified bidders on account of delivery requirement in tender, quantity under procurement etc.

Splitting of tender quantity amongst more than one bidder shall be governed by below mentioned guidelines:

- If the quantity is to be split among 2 bidders, it will be done in the ratio of 70:30 on L1 price.
- If the quantity is to be split among 3 bidders, it will be done in the ratio of 60:25:15 on L1 price.
- In case quantity needs to be distributed and order splitting is required, distribution of quantity shall be maximum among three (3) bidders.

In the event of your bid being selected by purchaser (and / or its affiliates) and your subsequent DEFAULT on your bid; you will be required to pay purchaser (and / or its affiliates) an amount equal to the difference in your bid and the next lowest bid on the quantity declared in RFQ.

In case any supplier is found unsatisfactory during the delivery process, the award will be cancelled and BRPL reserves the right to award other suppliers who are found fit.

Quantity Variation: The purchaser reserves the rights to vary the quantity by +/-30% of the tender quantity.

**Rate Contract:** The rate contract shall have a validity period of 12 months from the date of LOI / PO issued to the responsive, techno- commercially acceptable and evaluated to be lowest bidder.

**Repeat Order**: BRPL reserves the right to place repeat order at the same rates & terms and conditions as per this tender against additional requirement subject to mutual agreement between BRPL & supplier.

#### **6.0** Market Integrity:

We have a fair and competitive marketplace. The rules for bidders are outlined in the Terms & Conditions. Bidders must agree to these rules prior to participating. In



addition to other remedies available, we reserves the right to exclude a bidder from participating in future markets due to the bidder's violation of any of the rules or obligations contained in the Terms & Condition. Bidders who violate the marketplace rules or engage in behavior that disrupts the fair execution of the marketplace restricts a bidder to length of time, depending upon the seriousness of the violation. Examples of violations include, but are not limited to:

- Failure to honor prices submitted to the marketplace.
- Breach of the terms of the published in Request For Quotation.

#### 7.0 Supplier Confidentiality

All information contained in this RFQ is confidential and may not be disclosed, published or advertised in any manner without written authorization from BRPL. This includes all bidding information submitted.

All RFQ documents remain the property of BRPL and all suppliers are required to return these documents to BRPL upon request.


Suppliers who do not honor these confidentiality provisions will be excluded from participating in future bidding events.

#### 8.0 Contact Information

All communication as regards this RFQ shall be made (i) in English, (ii) in writing and (iii) sent by mail, facsimile to:

	Technical	Commercial
Contact Name	Mr. Amit Tomar	Ms Rachna Jain
	Copy to Mr. Gopal Nariya	Copy to Mr. Pankaj Goyal & Mr.
		Satyam Singh
Address	BSES RAJDHANI POWER LTD,	C&M Deptt. 1st floor, D- Block,
	2nd Floor, B Block, Nehru Place, New	BSES Rajhdhani Power Limited,
	Delhi – 110019	BSES Bhawan, Nehru Place,
		New Delhi -110019
Email-ID	amit.as.tomar@relianceada.com	rachna.jain@relianceada.com
	gopal.nariya@relianceada.com	pankaj.goyal@relianceada.com
		satyam.singh@relianceada.com



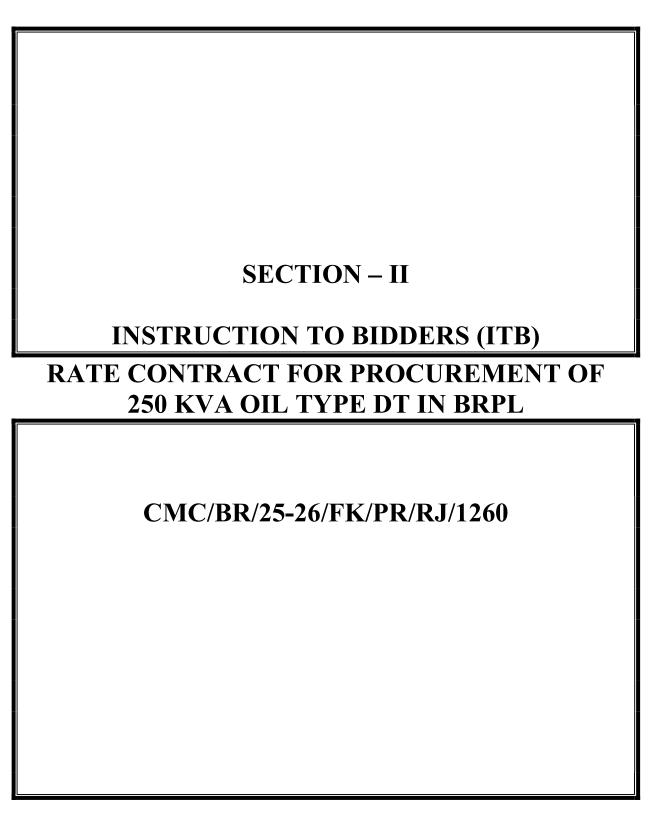



1.00 BSES Rajdhani power Ltd, hereinafter referred to as the Purchaser are desirous of implementing the various Systems Improvement/Repair & Maintenance works at their respective licensed area in Delhi. The Purchaser has now floated this tender for procurement of Oil type Distribution Transformers as notified earlier in this bid document.

#### 2.00 SCOPE OF WORK

The scope shall include Design, Manufacture, Testing at works conforming to the Technical Specifications enclosed along with Packing, Forwarding, Freight and Unloading and proper stacking at Purchaser's stores.

#### 3.00 DISCLAIMER

- 3.01 This Document includes statements, which reflect various assumptions, which may or may not be correct. Each Bidder/ Bidding Consortium should conduct its own estimation and analysis and should check the accuracy, reliability and completeness of the information in this Document and obtain independent advice from appropriate sources in their own interest.
- 3.02 Neither Purchaser nor its employees will have any liability whatsoever to any Bidder or any other person under the law or contract, the principles of restitution or unjust enrichment or otherwise for any loss, expense or damage whatsoever which may arise from or be incurred or suffered in connection with anything contained in this Document, any matter deemed to form part of this Document, provision of Services and any other information supplied by or on behalf of Purchaser or its employees, or otherwise a rising in any way from the selection process for the Supply.
- 3.03 Though adequate care has been taken while issuing the Bid document, the Bidder should satisfy itself that Documents are complete in all respects. Intimation of any discrepancy shall be given to this office immediately.
- 3.04 This Document and the information contained herein are Strictly Confidential and are for the use of only the person(s) to whom it is issued. It may not be copied or distributed by the recipient to third parties (other than in confidence to the recipient's professional advisors).

#### 4.00 COST OF BIDDING

The Bidder shall bear all cost associated with the preparation and submission of its Bid and Purchaser will in no case be responsible or liable for those costs.

#### B BIDDING DOCUMENT

#### 5.00 BIDDING DOCUMENTS



5.01 The Scope of Work, Bidding Procedures and Contract Terms are described in the Bidding Documents. In addition to the covering letter accompanying Bidding Documents, the Bidding Documents include:

#### Volume -I

a)	Request for Quotation (RFQ)	- Section – I
b)	Instructions to Bidders (ITB)	- Section – II
c)	General Conditions of Contract	- Section - III
d)	Quantity and delivery requirement	- Section –IV
e)	Technical Specifications (TS)	- Section –V

#### Volume – II

a)	Bid Form	- Annexure – I
b)	Bid Format	- Annexure – II
c)	Price Schedule	- Annexure – III
d)	Commercial Terms & Conditions	- Annexure - IV
e)	No Deviation Sheet	- Annexure - V
f)	Qualification Criterion	- Clause 2.0

5.02 The Bidder is expected to examine the Bidding Documents, including all Instructions, Forms, Terms and specifications. Failure to furnish all information required by the Bidding documents or submission of a Bid not substantially responsive to the Bidding Documents in every respect will may result in the rejection of the Bid.

#### 6.00 AMENDMENT OF BIDDING DOCUMENTS

- 6.01 At any time prior to the deadline for submission of Bids, the Purchaser may for any reasons, whether at its own initiative or in response to a clarification requested by a prospective Bidder, modify the Bidding Documents by Amendment.
- 6.02 The Amendment shall be part of the Bidding Documents, pursuant to Clause 5.01, and it will be notified in writing by Fax/e-mail to all the Bidders who have received the Bidding Documents and confirmed their participation to Bid, and will be binding on them.
- 6.03 In order to afford prospective Bidders reasonable time in which to take the Amendment into account in preparing their Bids, the Purchaser may, at its discretion, extend the deadline for the submission of Bids.

#### C PREPARATION OF BIDS

#### 7.00 LANGUAGE OF BID

The Bid prepared by the Bidder, and all correspondence and documents relating to the Bid exchanged by the Bidder and the Purchaser, shall be written in the English Language. Any printed literature furnished by the Bidder may be written in another Language, provided that this literature is accompanied by an English translation, in



which case, for purposes of interpretation of the Bid, the English translation shall govern.

#### 8.00 DOCUMENTS COMPRISING THE BID

The Bid prepared and submitted by the Bidder shall comprise the following components:

- a) Bid Form ,Price & other Schedules (STRICTLY AS PER FORMAT)and Technical Data Sheets completed in accordance with Clause 9.0, 10.0, 11.0 and Technical Specification;
- b) All the Bids must be accompanied with the required EMD as mentioned in the Section-I against each tender.
- c) Power of Attorney or Authorization letter indicating that the person(s) signing the Bid have the authority to sign the Bid and thus that the Bid is binding upon the Bidder during the full period of its validity, in accordance with clause 12.0.

#### 9.00 BID FORM

9.01 The Bidder shall complete an "Original" and another one "Copy" of the Bid Form and the appropriate Price & Other Schedules and Technical Data Sheets.

#### 9.02 **EMD**

Pursuant to Clause 8.0(b) above, the bidder shall furnish, as part of its bid, a EMD amounting to 1% of the total bid value (FOR Destination) i.e. **Rs. 11,74,000**/-. The EMD is required to protect the Purchaser against the risk of Bidder's conduct which would warrant the security's forfeiture.

The EMD shall be denominated in the currency of the bid, and shall be in the following form:

- a) A bank guarantee issued by any scheduled bank strictly as per the form at enclosed and shall be valid for a period of thirty (30) days beyond the validity of the bid.
- b) Bank Draft in favour of BSES RAJDHANI POWER LTD, payable at New Delhi.

Unsuccessful bidders' EMD will be discharged or returned as promptly as possible as but not later than thirty (30) days after the expiration of the period of bid validity.

The successful bidder's EMD will be discharged upon furnishing the performance security. The EMD may be forfeited:

- a) If the Bidder:
  - i) Withdraws its bid during the period of bid validity specified by the Bidder in the Bid Form; or
- b) in the case of a successful Bidder, if the Bidder fails:



- i) to sign the Contract, or
- ii) to furnish the required performance security.

#### 10.00 BID PRICES

- 10.01 Bidders shall quote for the entire Scope of Supply with a break-up of prices for individual items. The total Bid Price shall also cover all the Supplier's obligations mentioned in or reasonably to be inferred from the Bidding Documents in respect of Design, Supply, Transportation to site, all in accordance with the requirement of Bidding Documents the Bidder shall complete the appropriate Price Schedules included herein, stating the Unit Price for each item & total Price.
- 10.02 The prices offered shall be inclusive of all costs as well as Duties, Taxes and Levies paid or payable during execution of the supply work, breakup of price constituents, should be there. Prices quoted by the Bidder shall be—"Variable "and not subject to price adjustment during the performance of the Contract as per Price Variation (PV) Formulae subject to ceiling of (+) 20%. However there will be no ceiling on Minus (-) side
- 10.03 The initial and final date for application of PV will be as per Circular of IEEMA on the 1st day of the month prior to month of due date of bid submission and on the 1st day of the month prior to month of date of material offered for inspection. The bidder shall submit supporting IEEMA Circular(s) along with his bid
- 10.04 Price Variation Formula

 $P=P_0/100 * (7+41*C/C_0+23*ES/ES_0+10*IS/IS_0+5*IM/IM_0+8*TO/TO_0+6*W/W_0)$ 

P = Ex-works Price payable as adjusted in accordance with above formula

 $P_0 = Ex-works Price as per RC/PO$ .

C = Price of CC copper rods. This price is as applicable for the month, ONE month prior to the date of delivery.

ES = Price of CRGO Electrical Steel Lamination. This price is as applicable for the month, ONE month prior to the date of delivery.

IS = Price of HR Coil of 3.15 mm thickness. This price is as applicable for the month, ONE month prior to the date of delivery.

IM = Price of Insulating Materials. This price is as applicable for the month, ONE month prior to the date of delivery.

TO = Price of Transformer Oil. This price is as applicable for the month, ONE month prior to the date of delivery.

W = All India average consumer price index number for industrial workers, as published by the Labour Bureau, Ministry of Labour, Govt. of India (Base: 2016 = 100). This index number is as applicable for the month, THREE months prior to the date of delivery.

 $C_0$  = Price of CC copper rods. This price is as applicable for the month, ONE month prior to the due date of tender.



 $ES_0$  = Price of CRGO Electrical Steel Lamination. This price is as applicable for the month, ONE month prior to the due date of tender.

 $IS_0$  = Price of HR Coil of 3.15 mm thickness. This price is as applicable for the month, ONE month prior to the due date of tender.

IM<sub>0</sub>= Price of Insulating Materials. This price is as applicable for the month, ONE month prior to the due date of tender.

 $TO_0$  = Price of Transformer Oil. This price is as applicable for the month, ONE month prior to the due date of tender.

 $W_0$  = All India average consumer price index number for industrial workers, as published by the Labour Bureau, Ministry of Labour, Govt. of India (Base: 2016 = 100). This index number is as applicable for the month, THREE months prior to the due date of tender.

The above prices and indices are as published by IEEMA prevailing as on the first working day of the calendar month, i.e. one month prior to the date of tender submission e.g. if tender is submitted in May 2022, the applicable prices should be those prevailing as on 1st April, 2022.

If the date of delivery in terms of clause given below falls in November 2022, the applicable prices of raw material should be as published by IEEMA prevailing as on 1st October, 2022.

#### Note:

- a) All prices of raw materials are exclusive of GST amount and exclusive of any other Central, State or Local Taxes etc.
- b) Due Date of Tender is the original due date of tender submission. If due date of tender (bid submission) is extended due to any reason, the base date (original due date) will remain unchanged for the calculation of PV clause.
- c) The date of delivery for PV calculation shall be the date on which the equipment/material is notified as being ready for inspection/dispatch or the contracted delivery date whichever is earlier whenever supplies are effected within contractual delivery period. In case the supplies are effected after the original contractual delivery period, the date of delivery for P.V. purpose would be the one out of original or extended date on which price variation is lower.

Bidder shall submit detailed calculation of revised rate and amount as per the Price Variation Formula along with relevant IEEMA circulars. After approval/clearance from Buyer of revised rates, Invoicing shall be done by the supplier

#### 11.00 BID CURRENCIES

Prices shall be quoted in **Indian Rupees (INR) only**.

#### 12.00 PERIOD OF VALIDITY OF BIDS

- 12.01 Bids shall remain valid for **120 days** post bid date.
- 12.02 Notwithstanding Clause 12.01 above, the Purchaser may solicit the Bidder's consent to an extension of the Period of Bid Validity. The request and the responses thereto shall be made in writing by Fax/e-mail.



Bidders shall submit Bids, which comply with the Bidding Documents. Alternative Bids will not be considered. The attention of Bidders is drawn to the provisions of Clause 22.03 & 22.04 regarding the rejection of Bids, which are not substantially responsive to the requirements of the Bidding Documents.

#### 14.00 FORMAT AND SIGNING OF BID

- 14.01 The original Bid Form and accompanying documents (as specified in Clause9.0), clearly marked "Original Bid", plus one copy must be received by the Purchaser at the date, time and place specified pursuant to Clauses15.0 and16.0. In the event of any discrepancy between the original and the copies, the original shall govern.
- 14.02 The original and copy of the Bid shall be typed or written in indelible ink and shall be signed by the Bidder or a person or persons duly authorized to sign on behalf of the Bidder. Such authorization shall be indicated by written Power-of-Attorney accompanying the Bid.
- 14.03 The Bid shall contain no interlineations, erasures or overwriting except as necessary to correct errors made by the Bidder, in which case such corrections shall be initialed by the person or persons signing the Bid.

#### D SUBMISSION OF BIDS

#### 15.0 SEALING AND MARKING OF BIDS

- 15.01 Bid submission: All the Bid Documents shall be uploaded on website before the closing time for submission of the bid.
- 15.02 The EMD and tender fee shall be enclosed in a sealed envelope and the said envelope shall be superscribed with Tender Fee & EMD and "Tender Notice no., Due date of submission, Tender opening date".
- 15.03 The Bidder has the option of sending the Bids in person. Bids submitted by Telex/ Telegram/ Fax will not be accepted. No request from any Bidder to the Purchaser to collect the proposals from Airlines/Cargo Agents etc shall be entertained by the Purchaser.

#### 16.0 DEADLINE FOR SUBMISSION OF BIDS

- 16.01 The original Bid, together with the required copies, must be received by the Purchaser at the address specified not later than **1500 HRS on 28.03.2025**.
- 16.02 The Purchaser may, at its discretion, extend the deadline for the submission of Bids by amending the Bidding Documents in accordance with Clause 9.0, in which case all



rights and obligations of the Purchaser and Bidders previously subject to the deadline will thereafter be subject to the deadline as extended.

#### 17.0 ONE BID PER BIDDER

Each Bidder shall submit only one Bid. A Bidder who submits or participates in more than one Bid will cause all those Bids to be rejected.

#### 18.00 LATE BIDS

Any Bid received by the Purchaser after the deadline for submission of Bids prescribed by the Purchaser, pursuant to Clause 16.0, will be declared "Late" and rejected and returned unopened to the Bidder.

#### 19.00 MODIFICATIONS AND WITHDRAWAL OF BIDS

19.01 The Bidder is not allowed to modify or withdraw its Bid after the Bid's submission.

#### E. EVALUATION OF BID

#### 20.00 PROCESS TO BE CONFIDENTIAL

Information relating to the examination, clarification, evaluation and comparison of Bids and recommendations for the award of a contract shall not be disclosed to Bidders or any other persons not officially concerned with such process. Any effort by a Bidder to influence the Purchaser's processing of Bids or award decisions may result in the rejection of the Bidder's Bid.

#### 21.00 CLARIFICATION OF BIDS

NIT No.: CMC/BR/25-26/FK/PR/RJ/1260

To assist in the examination, evaluation and comparison of Bids, the Purchaser may, at its discretion, ask the bidder for a clarification of its Bid. All responses to requests for clarification shall be in writing and no change in the price or substance of the Bid shall be sought, offered or permitted.

#### 22.00 PRELIMINARY EXAMINATION OF BIDS / RESPONSIVENESS

- 22.01 Purchaser will examine the Bids to determine whether they are complete, whether any computational errors have been made, whether required sureties have been furnished, whether the documents have been properly signed, and whether the Bids are generally in order.
- 22.02 Arithmetical errors will be rectified on the following basis. If there is a discrepancy between the unit price and the total price per item that is obtained by multiplying the unit price and quantity, the unit price shall prevail and the total price per item will be corrected. If there is a discrepancy between the Total Amount and the sum of the total



price per item, the sum of the total price per item shall prevail and the Total Amount will be corrected.

- 22.03 Prior to the detailed evaluation, Purchaser will determine the substantial responsiveness of each Bid to the Bidding Documents including production capability and acceptable quality of the Goods offered. A substantially responsive Bid is one, which conforms to all the terms and conditions of the Bidding Documents without material deviation.
- 22.04 Bid determined as not substantially responsive will be rejected by the Purchaser and/or the Purchaser and may not subsequently be made responsive by the Bidder by correction of the non -conformity.

#### 23.0 EVALUATION AND COMPARISON OF BIDS

- 23.01 The evaluation of Bids shall be done based on the delivered cost competitiveness basis.
- 23.02 The evaluation of the Bids shall be a stage-wise procedure. The following stages are identified for evaluation purposes: In the first stage, the Bids would be subjected to a responsiveness check. The Technical Proposals and the Conditional ties of the Bidders would be evaluated. Subsequently, the Financial Proposals along with supplementary Financial Proposals, if any,of Bidders with Techno-commercially Acceptable Bids shall be considered for final evaluation.
- 23.03 The Purchaser's evaluation of a Bid will take into account, in addition to the Bid price, the following factors, in the manner and to the extent indicated in this Clause:
- (a) Supply Schedule
- (b) Deviations from Bidding Documents
  - Bidders shall base their Bid price on the terms and conditions specified in the Bidding Documents. The cost of all quantifiable deviations and omissions from the specification, terms and conditions specified in Bidding Documents shall be evaluated. The Purchaser will make its own assessment of the cost of any deviation for the purpose of ensuring fair comparison of Bids.
- 23.04 Any adjustment in price, which results from the above procedure, shall be added for the purposes of comparative evaluation only to arrive at an "Evaluated Bid Price". Bid Prices quoted by Bidders shall remain unaltered.

#### F. AWARD OF CONTRACT

NIT No.: CMC/BR/25-26/FK/PR/RJ/1260

#### 24.0 CONTACTING THE PURCHASER

24.01 From the time of Bid submission to the time of contract award, if any Bidder wishes to contact the Purchaser on any matter related to the Bid, it should do so in writing.



24.02 Any effort by a Bidder to influence the Purchaser and/or in the Purchaser's decisions in respect of Bid evaluation, Bid comparison or Contract Award, will result in the rejection of the Bidder's Bid.

## 25.0 THE PURCHASER 'S RIGHT TO ACCEPT ANY BID AND TO REJECT ANY OR ALL BIDS

The Purchaser reserves the right to accept or reject any Bid and to annul the Bidding process and reject all Bids at anytime prior toward of Contract, without thereby incurring any liability to the affected Bidder or Bidders or any obligation to inform the affected Bidder or Bidders of the grounds for the Purchaser's action.

#### 26.0 AWARD OF CONTRACT

The Purchaser will award the Contract to the successful Bidder whose Bid has been Determined to be the lowest-evaluated responsive Bid, provided further that the Bidder has been determined to be qualified to satisfactorily perform the Contract. Purchaser reserves the right to award order other bidders in the tender, provided it is required for progress of project & provided he agrees to come to the lowest rate.

#### 27.0 THE PURCHASER'S RIGHT TO VARY QUANTITIES

The Purchaser reserves the right to vary the quantity i.e. increase or decrease the numbers/quantities without any change in terms and conditions during the execution of the Order.

#### 28.0 LETTER OF INTENT/ NOTIFICATION OF AWARD

The letter of intent/ Notification of Award shall be issued to the successful Bidder whose bids have been considered responsive, techno-commercially acceptable and evaluated to be the lowest (L1). The successful Bidder shall be required to furnish a letter of acceptance within 7 days of issue of the letter of intent/Notification of Award by Purchaser.

#### 29.0 PERFORMANCE BANK GUARANTEE

Bidder shall initially submit the PBG within 28 days of placement of RC for 1% of RC Value (including GST) valid till RC validity period plus three month claim period. If there is extension in RC validity date, the BG shall be extended accordingly. Upon submission of the performance security, the EMD shall be released.


Thereafter bidder shall submit PBG on Purchase Order (PO) basis for 10% of the PO value (including GST). The Performance Bond shall be valid for a period of twenty four months (24) from the date of the commissioning or thirty months (30) from the date of receipt of material (last consignment of PO) at site/stores whichever is earlier plus 3 months towards claim period.

#### 30.00 CORRUPT OR FRADULENT PRACTICES



- 30.01 The Purchaser requires that the Bidders observe the highest standard of ethics during the procurement and execution of the Project. In pursuance of this policy, the Purchaser:
- (a) Defines, for the purposes of this provision, the terms set forth below as follows:
  - i) "Corrupt practice" means behavior on the part of officials in the public or private sectors by which they improperly and unlawfully enrich themselves and/or those close to them ,or induce others to do so, by misusing the position in which they are placed, and it includes the offering, giving, receiving, or soliciting of anything of value to influence the action of any such official in the procurement process or in contract execution; and
  - ii) "Fraudulent practice" means a misrepresentation of facts in order to influence a procurement process or the execution of a contract to the detriment of the Purchaser, and includes collusive practice among Bidders (prior to or after Bid submission) designed to establish Bid prices at artificial non-competitive levels and to deprive the Purchaser of the benefits of free and open competition.
- (b) Will reject a proposal forward if it determines that the Bidder recommended for award has engaged in corrupt or fraudulent practices in competing for the contract in question;
- (c) Will declare a firm ineligible, either indefinitely or for a stated period of time, to be awarded a contract if it at any time determines that the firm has engaged in corrupt or fraudulent practices in competing for, or in executing, a contract.
- 30.02 Furthermore, Bidders shall be aware of the provision stated in the General Conditions of Contract.



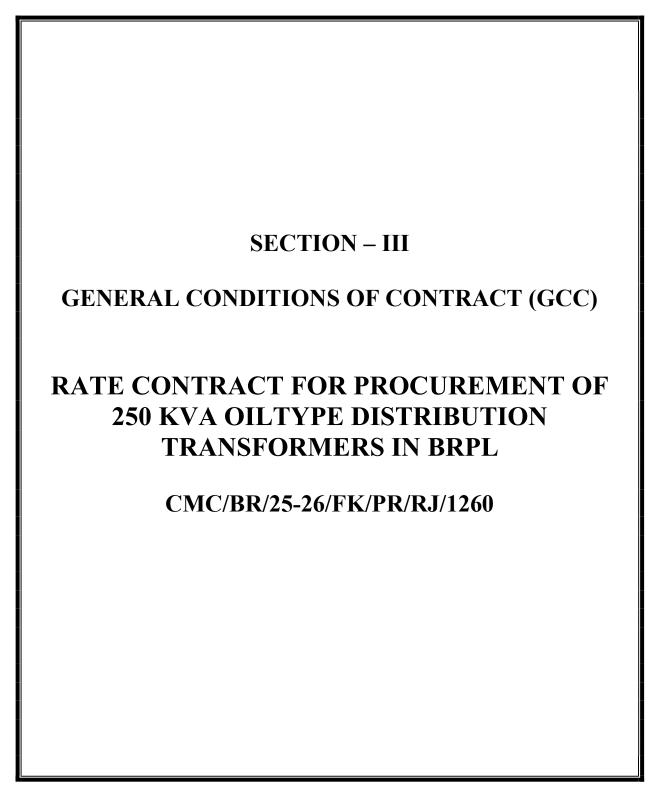



#### GENERAL TERMS AND CONDITIONS

#### 1.0 General Instructions

- 1.01 All the Bids shall be prepared and submitted in accordance with these instructions.
- 1.02 Bidder shall bear all costs associated with the preparation and delivery of its Bid, and the Purchaser will in no case shall be responsible or liable for these costs.
- 1.03 The Bid should be submitted by the Bidder in whose name the bid document has been issued and under no circumstances it shall be transferred/ sold to the other party.
- 1.04 The Purchaser reserves the right to request for any additional information and also reserves the right to reject the proposal of any Bidder, if in the opinion of the Purchaser, the data in support of RFQ requirement is incomplete.
- 1.05 The Bidder is expected to examine all instructions, forms, terms & conditions and specifications in the Bid Documents. Failure to furnish all information required in the Bid Documents or submission of a Bid not substantially responsive to the Bid Documents in every respect may result in rejection of the Bid. However, the Purchaser's decision in regard to the responsiveness and rejection of bids shall be final and binding without any obligation, financial or otherwise, on the Purchaser.

#### 2.0 Definition of Terms

- 2.01 "Purchaser" shall mean BRPL Limited, on whose behalf this bid enquiry is issued by its authorized representative / officers.
- 2.02 "Bidder" shall mean the firm who quotes against this bid enquiry issued by the Purchaser. "Supplier" or "Supplier" shall mean the successful Bidder and/or Bidders whose bid has been accepted by the Purchaser and on whom the "Letter of Acceptance" is placed by the Purchaser and shall include his heirs, legal representatives, successors and permitted assigns wherever the context so admits.
- 2.03 "Supply" shall mean the Scope of Contract as described.
- 2.04 "Specification" shall mean collectively all the terms and stipulations contained in those portions of this bid document known as RFQ, Commercial Terms & Condition, Instructions to Bidders, Technical Specifications and the Amendments, Revisions, Deletions or Additions, as may be made by the Purchaser from time to time.
- 2.05 "Letter of Acceptance" shall mean the official notice issued by the Purchaser notifying the Supplier that his proposal has been accepted and it shall include amendments thereto, if any, issued by the Purchaser. The "Letter of Acceptance" issued by the Purchaser shall be binding on the "Supplier" The date of Letter of Acceptance shall be taken as the effective date of the commencement of contract.



- 2.06 "Month" shall mean the calendar month and "Day" shall mean the calendar day.
- 2.07 "Codes and Standards" shall mean all the applicable codes and standards as indicated in the Specification.
- 2.08 "Offer Sheet" shall mean Bidder's firm offer submitted to BRPL in accordance with the specification.
- 2.09 "Contract" shall mean the "Letter of Acceptance" issued by the Purchaser.
- 2.10 "Contract Price" shall mean the price referred to in the "Letter of Acceptance".
- 2.11 "Contract Period" shall mean the period during which the "Contract" shall be executed as agreed between the Supplier and the Purchaser in the Contract inclusive of extended contract period for reason beyond the control of the Supplier and/or Purchaser due to force majeure.
- 2.12 "Acceptance" shall mean and deemed to include one or more of the following as will be stipulated in the specification:
- a) The written acceptance of material by the inspector at suppliers works to ship the materials.
- b) Acceptance of material at Purchaser site stores after its receipt and due inspection/testing and release of material acceptance voucher.
- c) Where the scope of the contract includes supply, acceptance shall mean issue of necessary equipment / material takeover receipt after installation & commissioning and final acceptance.

#### 3.0 Contract Documents & Priority

- 3.01 Contract Documents: The terms and conditions of the contract shall consist solely of these RFQ conditions and the offer sheet.
- 3.02 Priority: Should there be any discrepancy between any term hereof and any term of the Offer Sheet, the terms of these RFQ shall prevail.

#### 4.0 Scope of Supply - General

- 4.01 The "Scope of Supply" shall be on the basis of Bidder's responsibility, completely covering the obligations, responsibility and supplies provided in this Bid enquiry whether implicit or explicit.
- 4.02 Bidder shall have to quote for the Bill of quantities as listed in Section IV of this RFQ.



- 4.03 Quantity variation and additional requirement if any shall be communicated to successful bidder during project execution.
- 4.04 All relevant drawings, data and instruction manuals.

#### 5.0 Quality Assurance and Inspection

- 5.01 Immediately on award of contract, the bidder shall prepare detailed quality assurance plan / test procedure identifying the various stages of manufacture, quality checks performed at each stage, raw material inspection and the Customer hold points. The document shall also furnish details of method of checking, inspection and acceptance standards / values and get the approval of Purchaser before proceeding with manufacturing. However, Purchaser shall have right to review the inspection reports, quality checks and results of suppliers in house inspection department which are not Customer hold points and the supplier shall comply with the remarks made by purchaser or his representative on such reviews with regards to further testing, rectification or rejection, etc.
- 5.02 Witness and Hold points are critical steps in manufacturing, inspection and testing where the supplier is obliged to notify the Purchaser in advance so that it may be witnessed by the Purchaser. Final inspection is a mandatory hold point. The supplier needs to proceed with the work past a hold point only after clearance by purchaser or a witness waiver letter from BRPL.
- 5.03 The performance of waiver of QA activity by Purchaser at any stage of manufacturing does not relieve the supplier of any obligation to perform in accordance with and meet all the requirements of the procurement documents and also all the codes & reference documents mentioned in the procurement document nor shall it preclude subsequent rejection by the purchaser.
- 5.04 On completion of manufacturing the items can be dispatched only after issue of shipping release by the Purchaser.
- 5.05 All testing and inspection shall be done without any extra cost.
- 5.06 Purchaser reserve the right to send any material out of the supply to any recognized laboratory for testing and the cost of testing shall be borne by the Purchaser. In case the material is found not in order with the technical requirement / specification, the charges along with any other penalty which may be levied is to be borne by the bidder. To avoid any complaint the supplier is advised to send his representative to the stores to see that the material sent for testing is being sealed in the presence of bidders representative.
- 5.07 Bidder has to sign quality agreement before supply of the material.

#### 6.0 Packing, Packing List & Marking



- 6.01 Packing: Supplier shall pack or shall cause to be packed all Commodities in boxes and containers and otherwise in such a manner as shall be reasonably suitable for shipment by road or rail to BRPL without undue risk of damage in transit.
- 6.02 Packing List: The contents of each package shall be itemized on a detailed list showing the exact weight and the extreme outside dimensions (length, width and eight) of each container or box. One copy of the packing list shall be enclosed in each package delivered. There shall also be enclosed in one package a master packing list identifying each individual package, which is part of the shipment. On any packaging where it is not feasible to place the packing list inside the container, all pertinent information shall be stenciled on the outside and will thus constitute a packing list.

#### 7.0 Prices basis for supply of materials

Bidders require quoting their prices on Landed Cost Basis and separate price for each item.

For Supply to BRPL Delhi the price shall be inclusive of packing, forwarding, GST and freights. The above supply prices shall also include unloading at site stores. Transit and storage insurance will be arranged by BRPL; however bidder to furnish required details in advance for arranging the same by BRPL.

#### 8.0 Variation in taxes, duties & levies:

NIT No.: CMC/BR/25-26/FK/PR/RJ/1260

- 8.01 The total order value shall be adjusted on account of any variations in Statutory Levies imposed by Competent Authorities by way of fresh notification(s) within the stipulated delivery period only. However, in case of reduction in taxes, duties and levies, the benefits of the same shall be passed on to BUYER.
- 8.02 No other Taxes, Duties & Levies other than those specified above will be payable by BUYER except in case of new Levies, Taxes & Duties imposed by the Competent Authorities by way of fresh notification(s) subsequent to the issue of PURCHASE ORDER but within the stipulated delivery period.
- 8.03 Notwithstanding what is stated above, changes in Taxes, Duties & Levies shall apply only to that portion of PURCHASE ORDER not executed on the date of notification by Competent Authority. Further, changes in Taxes, Duties & Levies after due date of Delivery shall not affect PURCHASE ORDER Terms and Value.
- 8.04 PURCHASE ORDER value shall not be subject to any variation on account of variation in Exchange rate(s).

#### 9.0 Taxes & Duties on raw materials & bought out components:

9.01 Taxes & Duties on raw materials & bought out components are included in Order Value and are not subject to any escalation or variation for any reason whatsoever.



9.02 Taxes & Duties on raw materials & bought out components procured indigenously are included in Order Value and are not subject to any escalation or variation for any reason whatsoever.

#### 10.0 Terms of payment and billing

- 10.01 For Supply of Equipments:
- 100% payment shall be made within 45 days from the date of receipt of material at store/ site against submission of 10 % performance bank guarantee. (Refer 10.01)
- 10.02 Bidder to submit the following documents against dispatch of each consignment:
- i) Consignee copy of LR
- ii) Supplier detailed invoice showing commodity description, quantity, unit price, total price and basis of delivery.
- iii) Original certificate issued by BRPL confirming receipt of material at site and acceptance of the same.
- iv) Dispatch clearance / inspection report in original issued by the inspection authority
- v) Packing List.
- vi) Test Reports
- vii) Guarantee Certificate.
- viii) Insurance policy to be obtained by supplier

#### 11.0 Price Validity

11.01 All bids submitted shall remain valid, firm and subject to unconditional acceptance by BRPL Delhi for 120 days post bid-date. For awarded suppliers, the prices shall remain valid and firm till contract completion.

#### 12.0 Performance Guarantee

12.01 Bidder shall initially submit the PBG with in 28 days of placement of RC for 1% of RC Value (including GST) valid till RC validity period plus three month claim period. If there is extension in RC validity date, the BG shall be extended accordingly.

Upon submission of the performance security, the EMD shall be released..

Thereafter bidder shall submit PBG on Purchase Order (PO) basis for 10% of the PO value (including GST). The Performance Bond shall be valid for a period of twenty four months (24) from the date of the commissioning or thirty months (30) from the date of receipt of material (last consignment of PO) at site/stores whichever is earlier plus 3 months towards claim period.



Depositing pay order /demand draft of the relevant amount directly with BRPL at the address listed above or as otherwise specified by BRPL, either of which shall constitute the Performance Bond hereunder; or

Bank guarantee from any nationalized bank in favour of BSES RAJDHANI POWER LTD (BRPL). The performance Bank guarantee shall be in the format as specified by BRPL.

#### 13.0 Forfeiture

- 13.01 Each Performance Bond established under Clause 10.0 shall contain a statement that it shall be automatically and unconditionally forfeited without recourse and payable against the presentation by BRPL of this Performance Bond to the ICICI Bank at Mumbai, or to the relevant company/ correspondent bank referred to above, as the case may be, together with a simple statement that supplier has failed to comply with any term or condition set forth in the Contract.
- 13.02 Each Performance Bond established under will be automatically and unconditionally forfeited without recourse if BRPL in its sole discretion determines that supplier has failed to comply with any term or condition set forth in the contract.

#### 14.0 Release

All Performance Bonds will be released without interest within seven (7) days from the last date up to which the Performance Bond has to be kept valid (as defined in Clause 10.0) except for the case set forth in Clause 21.0.

#### 15.0 Defects Liability Period

15.01 The bidder to Guarantee the materials / items supplied against any defect of failure, which arise due to faulty materials, workmanship or design for the entire defects liability period. The Defect liability period shall be 60 months from the date of commissioning or 66 months from the date of delivery whichever is earlier. If during the defects liability period any materials / items are found to be defective, these shall be replaced or rectified by the bidder at his own cost within 30 days from the date of receipt of intimation

#### 16.0 Return, Replacement or Substitution.

NIT No.: CMC/BR/25-26/FK/PR/RJ/1260

BRPL shall give Supplier notice of any defective Commodity promptly after becoming aware thereof. BRPL may in its discretion elect to return defective Commodities to Supplier for replacement, free of charge to BRPL, or may reject such Commodities and purchase the same or similar Commodities from any third party. In the latter case BRPL shall furnish proof to Supplier of the cost of such substitute purchase. In either case, all costs of any replacement, substitution, shipping, labour and other related expenses incurred in connection with the return and replacement or for the substitute purchase of a Commodity hereunder should be for the account of Supplier. BRPL may set off such costs against any amounts payable by BRPL to Supplier. Supplier shall reimburse BRPL for the amount, if any, by which the price of a substitute Commodity exceeds the price for such Commodity as quoted in the Bid.



#### 17.0 Effective Date of Commencement of Contract:

17.01 The date of the issue of the Letter of Acceptance shall be treated as the effective date of the commencement of Contract.

#### 18.0 Time – The Essence of Contract

18.01 The time and the date of completion of the "Supply" as stipulated in the Letter Of Acceptance / Purchase order issued to the Supplier shall be deemed to be the essence of the "Contract". The Supply has to be completed not later than the aforesaid Schedule and date of completion of supply.

#### 19.0 The Laws and Jurisdiction of Contract:

- 19.01 The laws applicable to this Contract shall be the Laws in force in India.
- 19.02 All disputes arising in connection with the present Contract shall be settled amicably by mutual consultation failing which shall be finally settled as per the rules of Arbitration and Conciliation Act, 1996 at the discretion of Purchaser. The venue of arbitration shall be at Mumbai in India

#### 20.0 Events of Default

- 20.01 Events of Default. Each of the following events or occurrences shall constitute an event of default ("Event of Default") under the Contract:
- a) Supplier fails or refuses to pay any amounts due under the Contract;
- b) Supplier fails or refuses to deliver Commodities conforming to this RFQ/ specifications, or fails to deliver Commodities within the period specified in P.O. or any extension thereof
- c) Supplier becomes insolvent or unable to pay its debts when due, or commits any act of bankruptcy, such as filing any petition in any bankruptcy, winding-up or reorganization proceeding, or acknowledges in writing its insolvency or inability to pay its debts; or the Supplier's creditors file any petition relating to bankruptcy of Supplier;
- d) Supplier otherwise fails or refuses to perform or observe any term or condition of the Contract and such failure is not remediable or, if remediable, continues for a period of 30 days after receipt by the Supplier of notice of such failure from BRPL.

#### 21.0 Consequences of Default.

- a) If an Event of Default shall occur and be continuing, BRPL may forthwith terminate the Contract by written notice.
- b) In the event of an Event of Default, BRPL may, without prejudice to any other right granted to it by law, or the Contract, take any or all of the following actions;



- i) present for payment to the relevant bank the Performance Bond;
- ii) purchase the same or similar Commodities from any third party; and/or
- iii) recover any losses and/or additional expenses BRPL may incur as a result of Supplier's default.

#### 22.0 Penalty for Delay

- 22.01 If supply of items / equipments is delayed beyond the supply schedule as stipulated in purchase order then the Supplier shall be liable to pay to the Purchaser as penalty for delay, a sum of 1% (one percent) of the contract price for every week delay or part thereof for undelivered quantities.
- 22.02 The total amount of penalty for delay under the contract will be subject to a maximum of ten percent (10%) of the contract price for undelivered quantities.
- 22.03 The Purchaser may, without prejudice to any method of recovery, deduct the amount for such damages from any amount due or which may become due to the Supplier or from the Performance Bond or file a claim against the supplier.

#### 23.0 Force Majeure

#### 23.01 General

An "Event of Force Majeure" shall mean any event or circumstance not within the reasonable control directly or indirectly, of the Party affected, but only if and to the extent that:

- Such event or circumstance materially and adversely affects the ability of the affected Party to perform its obligations under this Contract, and the affected Party has taken all reasonable precautions, due care and reasonable alternative measures in order to prevent or avoid the effect of such event on the affected party's ability to perform its obligations under this Contract and to mitigate the consequences thereof.
- ii) For the avoidance of doubt, if such event or circumstance would not have materially and adversely affected the performance of the affected party had such affected party followed good industry practice, such event or circumstance shall not constitute force majeure.
- iii) Such vent is not the direct or indirect result of the failure of such Party to perform any of its obligations under this Contract.
- iv) Such Party has given the other Party prompt notice describing such events, the effect thereof and the actions being taken in order to comply with above clause.
- 23.02 Specific Events of Force Majeure subject to the provisions of above clause, Events of Force Majeure shall include only the following to the extent that they or their consequences satisfy the above requirements:
- 23.03 Mitigation of Events of Force Majeure Each Party shall:



- i) Make all reasonable efforts to prevent and reduce to a minimum and mitigate the effect of any delay occasioned by an Event of Force Majeure including recourse to alternate methods of satisfying its obligations under the Contract;
- ii) Use its best efforts to ensure resumption of normal performance after the termination of any Event of Force Majeure and shall perform its obligations to the maximum extent practicable as agreed between the Parties; and
- iii) Keep the other Party informed at regular intervals of the circumstances concerning the event of Force Majeure, with best estimates as to its likely continuation and what measures or contingency planning it is taking to mitigate and or terminate the Event of Force Majeure.
- 23.04 Burden of Proof In the event that the Parties are unable in good faith to agree that a Force Majeure event has occurred to an affected party, the parties shall resolve their dispute in accordance with the provisions of this Agreement. The burden of proof as to whether or not a force majeure event has occurred shall be upon the party claiming that the force majeure event has occurred and that it is the affected party.
- 23.05 Termination for Certain Events of Force Majeure. If any obligation of any Party under the Contract is or is reasonably expected to be delayed or prevented by a Force Majeure event for a continuous period of more than 3 months, the Parties shall promptly discuss in good faith how to proceed with a view to reaching a solution on mutually agreed basis. If a solution on mutually agreed basis cannot be arrived at within a period of 30 days after the expiry of the period of three months, the Contract shall be terminated after the said period of 30 days and neither Party shall be liable to the other for any consequences arising on account of such termination.
- 23.06 Limitation of Force Majeure event. The Supplier shall not be relieved of any obligation under the Contract solely because cost of performance is increased, whether as a consequence of adverse economic consequences or otherwise.
- 23.07 Extension of Contract Period due to Force Majeure event The Contract period may be extended by mutual agreement of Parties by way of an adjustment on account of any period during which an obligation of either Party is suspended due to a Force Majeure event.
- 23.08 Effect of Events of Force Majeure. Except as otherwise provided herein or may further be agreed between the Parties, either Party shall be excused from performance and neither Party shall be construed to be in default in respect of any obligations hereunder, for so long as failure to perform such obligations shall be due to and event of Force Majeure."

#### 24.0 Transfer And Sub-Letting

NIT No.: CMC/BR/25-26/FK/PR/RJ/1260

24.01 The Supplier shall not sublet, transfer, assign or otherwise part with the Contract or any part thereof, either directly or indirectly, without prior written permission of the Purchaser.



#### 25.0 Recoveries

25.01 Whenever under this contract any money is recoverable from and payable by the bidder, the purchaser shall be entitled to recover such sum by appropriating in part or in whole by detecting any sum due to which any time thereafter may become due from the supplier in this or any other contract. Should the sum be not sufficient to cover the full amount recoverable the bidder shall pay to the purchaser on demand the remaining balance.

#### 26.0 Waiver

26.01 Failure to enforce any condition herein contained shall not operate as a waiver of the condition itself or any subsequent breach thereof.

#### 27.0 Indemnification

NIT No.: CMC/BR/25-26/FK/PR/RJ/1260

27.01 Notwithstanding contrary to anything contained in this RFQ, Supplier shall at his costs and risks make good any loss or damage to the property of the Purchaser and/or the other Supplier engaged by the Purchaser and/or the employees of the Purchaser and/or employees of the other Supplier engaged by the Purchaser whatsoever arising out of the negligence of the Supplier while performing the obligations under this contract.



### SECTION – IV: QUANTITY AND DELIVERY REQUIREMENT

Sl.	Item Description	Specification	Requirement	Delivery	
No.				Schedule	Location
	Bl	RPL,DELHI			
1	Rate Contract for Procurement of 250 KVa Oil Type DT	SECTION V	164 Nos.	In lots within 2 months from the date	Stores BRPL Delhi
	TOTA:	L		of drawing approval	Delili



#### **BID FORM**

#### Supply of 250 kVA Oil Type DT

To

Head of the Department Contracts & Materials BSES Rajdhani Power Ltd BSES Bhawan, Nehru Place New Delhi– 110019 Sir.

We understand that BRPL is desirous of procuring "250 kVA Oil Type DT" in its licensed distribution network area in Delhi. Having examined the Bidding Documents for the above named works, we the undersigned, offer to deliver the goods in full conformity with the Drawings, Conditions of Contract and specifications for the sum of <u>AS PER PRICE BID ENCLOSED</u> or such other sums as may be determined in accordance with the terms and conditions of the contract .The above amounts are in accordance with the Price Schedules attached herewith and are made part of this bid.

If our Bid is accepted, we undertake to deliver the entire goods as per delivery schedule given by you from the date of award of purchase order/letter of intent.

If our Bid is accepted, we will furnish a performance bank guarantee for an amount of 10% (Ten) percent of the total contract value for due performance of the Contract in accordance with the General Conditions of Contract.

We agree to abide by this Bid for a period of 120 days from the date fixed for bid opening under clause 9.0 of GCC, and it shall remain binding upon us and may be accepted at any time before the expiration of that period.

We declare that we have studied the provision of Indian Income Tax Law and other Indian Laws for supply of equipments/materials and the prices have been quoted accordingly.

Unless and until Letter of Intent is issued, this Bid, together with your written acceptance thereof, shall constitute a binding contract between us.

We understand that you are not bound to accept the lowest, or any bid you may receive.

There is provision for Resolution of Disputes under this Contract, in accordance with the Laws and Jurisdiction of Contract, Clause 19 of GCC.

Dated this	day of		20	
		In	the	capacity
of				
duly at	thorized to sign for and on	behalf of (IN B)	LOCK CAPITAL	S)



#### **Annexure -II**

FORMAT FOR EMD BANK GUARANTEE
(To be issued in a Non Judicial Stamp Paper of Rs.50/-purchased in the name of the bank) Whereas [name of the Bidder] (hereinafter called the "Bidder") has submitted its bid dated [date of submission of bid] for the supply of [name and/or description of the goods] (hereafter called "the Bid"). KNOW ALL PEOPLE by these presents that WE [name of bank]at[Branch Name and address],having our registered office at[address of the registered office of the bank](herein after called —"the Bank"),are bound unto BSES Rajdhani Power Ltd., with its Corporate Office at BSES Bhawan Nehru Place, New Delhi -110019, (herein after called —the "Purchaser") in the sum of for which payment well and truly to be made to the said Purchaser, the Bank binds itself, its successors, and assigns by these presents. Sealed with the Common Seal of the said Bank this day of 20
THE CONDITIONS of this obligation are:
If the Bidder withdraws its Bid during the period of bid validity specified by the Bidder on the Bid Form; or
If the Bidder, having been notified of the acceptance of its Bid by the Purchaser during the period of bid validity:
fails or refuses to execute the Contract Form ,if required; or fails or refuses to furnish the performance security, In accordance with the Instructions to Bidders/GENERAL CONDITIONS.;
We undertake to pay to the Purchaser up to the above amount upon receipt of its first written demand, without the Purchaser having to substantiate its demand, provided that is its demand the purchaser will note that amount claimed by it is due to it, owing to the occurrence of one or both of the two conditions, specifying the occurred condition or conditions.
This guarantee will remain in force up to and including thirty (30) days after the period of bid validity, and any demand in respect thereof should reach the Bank not later than the above date.
(Signature of the bank)
Signature of the witness



#### **Annexure-III**

#### **PRICE FORMAT**

ENQUIRY NO & DATE: NIT: CMC/BR/25-26/FK/PR/RJ/1260

#### PRICE SCHEDULE

ITEM	QTY	UO	EX-	CGS	CGST	SGS	SGST	IGS	IGST	FREIG	LAND	TOTA
DESCRIPTIO	AS	M	WOR	T	AMOU	T	AMOU	T	AMOU	HT	ED	L
N	PER		KS	(%)	NT	(%)	NT	(%)	NT		RATE/	LAND
	RFQ		RATE								UNIT	ED
			/									COST
			UNIT									(INR)
250 kVa Oil	164	Nos										
Type DT		•										

#### Note:

- 1. Prices shall be Firm
- 2. The prices received without break up of ex works, Freight, GST are liable for rejection
- 3. Please indicate the exact percentage of taxes in figures and words.
- 4. If there is a discrepancy between the unit price and the total price THE UNIT PRICE shall prevail.
- 5. Bidders are requested to attach the covering letter head alongwith the price bid indicating reference no and date.

Bidders seal & signature



## Annexure - IV

Enquiry No. : CMC/BR/25-26/FK/PR/RJ/1260

## **COMMERCIAL TERMS AND CONDITIONS**

S/NO	ITEM	AS PER BRPL	CONFIRMATION
	DESCIPTION		OF BIDDER
1	Validity of prices	120 days from date of offer	
2	Price basis	Price Variation, FOR Delhi store basis, Prices shall be inclusive of all taxes & duties, freight upto Delhi stores. Unloading at stores be in vendor's scope Transit insurance in BRPL scope	
3	Payment Terms	100% payment within 45 days after receipt of material at stores	
4	Delivery schedule	Rate Contract for One Year, however delivery shall be start in segregated manner within 2 months from date of drawing approval	
5	Defect Liability Period	The bidder to Guarantee the materials / items supplied against any defect of failure, which arise due to faulty materials, workmanship or design for the entire defects liability period. The Defect liability period shall be 60 months from the date of commissioning or 66 months from the date of delivery whichever is earlier. If during the defects liability period any materials / items are found to be defective, these shall be replaced or rectified by the bidder at his own cost within 30 days from the date of receipt of intimation.	
6	Penalty for delay	1% per week of delay of undelivered units or part thereof subject to maximum of 10% of total PO value of undelivered units	
7	Performance Bank Guarantee	Bidder shall initially submit the PBG within 28 days of placement of RC for 1% of RC Value (including GST) valid till RC validity period plus three month claim period. If there is extension in RC validity date, the BG shall be extended accordingly .Upon submission of the performance security, the	



RAJDH	RAJDHANI POWER LIMITED		
		EMD shall be released.	
		Thereafter bidder shall submit PBG on	
		Purchase Order (PO) basis for 10% of the	
		PO value (including GST). The Performance	
		Bond shall be valid for a period of twenty	
		four months (24) from the date of the	
		commissioning or thirty months (30) from	
		the date of receipt of material (last	
		consignment of PO) at site/stores whichever	
		is earlier plus 3 months towards claim	
		period.	



## ANNEXURE - V

ENQUIRY NO: CMC/BR/25-26/FK/PR/RJ/1260

## **NO DEVIATION SHEET**

SL NO	SL	NO	OF	TECHNICAL	DEVIATION, IF ANY
	SPEC	IFICATIO	N		

## **SIGNATURE & SEAL OF BIDDER**

## **NAME OF BIDDER**



## **CHECK LIST**

Sl No	Item Description	YES/NO
1	INDEX	YES/NO
2	COVERING LETTER	YES/NO
3	BID FORM (UNPRICED) DULY SIGNED	YES/NO
4	BILL OF MATERIAL (UNPRICED)	YES/NO
5	TECHNICAL BID	YES/NO
6	ACCEPTANCE TO COMMERCILAL TERMS & CONDITIONS	YES/NO
7	FINANCIAL BIDS (IN SEALED ENVELOPE)	YES/NO
8	EMD IN PRESCRIBED FORMAT	YES/NO
9	DEMANT DRAFT OF RS 1180/- DRAWN IN FAVOUR OF	BSES RAJDHANI POWER LTD
10	POWER OF ATTORNEY/ AUTHORISATION LETTER FOR SIGNING THE BID	YES/NO



#### FORM FOR PARTICIPATION IN REVERSE AUCTION EVENT

(To be signed & stamped by the bidder along-with bid)

BSES Rajdhani Power Ltd (BRPL) intends to use reverse auction through SAP-SRM tool as an integral part of entire tendering process. All bidders who are techno-commercially qualified on the basis of tender requirements shall participate in the reverse auction.

The following terms and conditions are deemed as accepted by the bidder on participation in the bid:-

- 1. In case of bidding through Internet medium, bidders are advised to ensure availability of all associated infrastructure as required to participate in the reverse auction event. Inability to bid due to telephone glitch, internet response issues, software & hardware hangs/failures, power failures or any other reason shall not be the responsibility of BRPL.
- 2. In case bidder fails to participate in the reverse auction event due to any reason whatsoever, it shall be presumed that the bidder has no further discounts to offer and the initial bid submitted by them as a part of tender shall be considered as bidder's Final .No Regret offer.Any off-line price bids received from a bidder in lieu of non-participation in the reverse auction event shall be rejected by BRPL.
- 3. The bidder is advised to understand the auto bid process t safeguard themselves against any possibility of non-participation in the reverse auction event.
- 4. The bidder shall be prepared with competitive price quotes during the day of reverse auction event.
- 5. The prices quoted by bidder in reverse auction event shall be on FOR Landed cost BRPL Store/site basis inclusive of all relevant taxes, duties, levies, transportation charges etc.
- 6. The prices submitted by the bidder during reverse auction event shall be binding on the bidder.
- 7. The bidder agrees to non-disclosure of trade information regarding bid details e.g.purchase, identity, bid process/technology, bid documentation etc.
- 8. BRPL will make every effort to make the bid process transparent. However award decision of BRPL will be final and binding on the bidder.
- 9. The prices submitted during reverse auction event shall be binding on the bidder.
- 10. No request for Time extension of the reverse auction event shall be considered by BRPL.

#### Seal & Signature of Bidder



# SECTION – V TECHNICAL SPECIFICATIONS (TS)

## 250 KVA OIL TYPE DT IN BRPL

CMC/BR/25-26/FK/PR/RJ/1260


The detailed technical specifications of 250 kVA Oil Type DT



Technical Specification of Conventional Oil filled Distribution Transformer

Specification no - BSES-TS-12-TRDU-R1

Rev:		51
Date:		07/12/2022
Dranavad hu	Vani Sood / Pronab Bairagi	Jourses
Prepared by	Jeena Borana	Levis
	Srinivas Gopu	troj .
Reviewed by	Amit Tomar	listed
Approved by	Gaurav Sharma	Coarlan
Approved by	Gopal Nariya	15/2





# TECHNICAL SPECIFICATION OF CONVENTIONAL OIL FILLED DISTRIBUTION TRANSFORMER

## **INDEX**


Reco	rd of R	evision	3
1.0	Scop	e of Supply	4
2.0	Code	s & standards	4
3.0	Major	Design Criteria & Parameters of the Transformer	5
4.0	Cons	truction & Design	10
5.0	Fitting	gs and Accessories on Transformer	24
6.0	Appro	oved make of components	28
7.0	Quali	ty assurance	29
8.0	Progr	ess Reporting	30
9.0	Inspe	ction & testing	31
10.0	Packi	ng , Shipping, Handling and Storage	37
11.0	Devia	itions	38
12.0	Draw	ings& Data Submission Matrix	38
Anne	xure	A Scope of supply	41
Anne	xure	B Service Conditions	42
Anne	xure	C Technical Particulars of transformer oil	43
Anne	xure	D Manufacturing Quality Assurance Plan	45
Sche	dule	A Guaranteed Technical Particulars (Data by Seller)	70
Sche	dule	B Guaranteed Technical Particulars of Transformer Oil	80
Sche	dule	C Recommended Spares (Data by Seller)	82



# TECHNICAL SPECIFICATION OF CONVENTIONAL OIL FILLED DISTRIBUTION TRANSFORMER

## **Record of Revision**

SI No.	Revision	Item/Clause No.	Nature of change	Approved by
	No			
1	R1	3.23, 3.24.3,	Transformer rating added	GN/GS
		3.25.7, 3.26.7,		
		3.30, 3.35,		
		4.2.8.6,4.2.10.7		
2	R1	3.29	Material of HV busbar revised	GN/GS
3	R1	3.31	Material of LV busbar revised	GN/GS
4	R1	4.2.8.2	Rating of additional neutral bushing added	GN/GS
5	R1	5.21	Buckholz relay for 1000 KVA added	GN/GS





# TECHNICAL SPECIFICATION OF CONVENTIONAL OIL FILLED DISTRIBUTION TRANSFORMER


#### 1.0 Scope of Supply

For scope of supply, refer annexure – A.

#### 2.0 Codes & standards

- a) Materials, equipment and methods used in the manufacture of Transformer shall conform to the latest edition of below mentioned standards.
- b) Vendor shall possess valid BIS Certification.

IS 1180	Outdoor type oil immersed distribution transformer upto and
	including 2.5MVA,33kV
IS 2026	Power Transformers
IS 2026-4	Terminal Marking, tappings and Connections for Power
	Transformers.
IS:3347	Dimensions for Porcelain Transformer bushing
IS:3637	Gas operated relays
IS:3639	Fitting & Accessories for power transformers
IS:4201	Application guide for CT's
IS:8478	Application guide for On-load tap changer
IS:10028	Code of practice for selection, installation & maintenance of
	transformers
IS 5561	Electrical Power Connectors
IS 5	Colors for ready mix paints
IS:335	Insulating oil
IS 6272	Industrial cooling fans
IS 12615	Three phase induction motors
IS/IEC 60034	Rotating Electrical Machines. (e.g. For Cooler Fan Motors.)
IS/IEC 60071	Co-ordination of Insulation.
IS 16227/IEC 61869	Current Transformers.
IS 8468/ IEC 60214	On Load Tap Changers
IS2026-7/IEC 60076-7	Loading Guide for Oil-Immersed Power Transformers.
IS 2026-8 /IEC 60076-8	Application Guide for Power Transformers.
IS 2026-10/IEC 60076-10	Determination of Transformer Sound Levels.
IS/IEC 60529	Degrees of Protection Provided by Enclosures (IP Code).





# TECHNICAL SPECIFICATION OF CONVENTIONAL OIL FILLED DISTRIBUTION TRANSFORMER

IS/IEC 60947	Low-Voltage Switchgear and Control gear.
IS/IEC 60137	Bushing for alternating voltage above 1000V
IS:1271/IEC 60085	Thermal evaluation and classification of electrical insulation
IEC 60076	Power transformers.
IEC 60156	Method for Determination of the Electric Strength for Insulating
	Oils.
IEC 60296	Specification for Unused Mineral Insulating Oils for
	Transformers and Switchgear.
IEC 60445	Basic& Safety principles for man-machine interface, marking and identification, Identification of Equipment Terminals and conductor terminals
BS 148	Determination of Transformer and Reactor Sound Levels.
BS 223	Application Guide for Power Transformers.
BS 2562	Terminal and Tapping Markings for Power Transformers.
	Indian Electricity Rules
	Indian Electricity Act
	CBIP manual

In the event of direct conflict between various order documents, the precedence of authority of documents shall be as follows -

- i. Guaranteed Technical Particulars (GTP)
- ii. This Specification
- iii Indian Standards / IEC standards
- iv Approved Vendor Drawings
- iv. Other documents

## 3.0 Major Design Criteria & Parameters of the Transformer

Sr No	Description	Data by purchaser
3.1	Voltage variation on supply side	+ / - 10 %
3.2	Frequency variation on supply side	+/ - 5 %
3.3	Transient condition	- 20 % or + 10 % combined variation of
		voltage and frequency
3.4	Service Condition	Refer Annexure B
3.5	Insulation level	Class A



3.6	Location of equipment	Generally Outdoor but may be located
		indoor also with poor ventilation
3.7	Reference design ambient	50 deg C
	temperature	
3.8	Туре	Oil immersed, core type, step down
3.9	Type of cooling	ONAN
3.10	Reference standard	IS 2026/IS 1180
3.11	No. of phases	3
3.12	No. of windings per phase	2
3.13	Rated frequency ( Hz )	50 Hz
3.14	Highest system voltage HV side	12 kV
3.15	Highest system voltage LV side	460 volt
3.16	Lightning Impulse withstand voltage	
	, kV peak	
3.16.1	For nominal system voltage of 11 kV	75
3.17	Power Frequency Withstand Voltage	
	kV rms	
3.17.1	For nominal system voltage of 11 kV	28
3.17.2	For nominal system voltage of 415 V	3
3.18	Clearances Phase to Phase , mm	
3.18.1	For nominal system voltage of 11 kV	180
3.18.2	For nominal system voltage of 415 V	25
3.19	Clearances Phase to Earth , mm	
3.19.1	For nominal system voltage of 11 kV	120
3.19.2	For nominal system voltage of 415 V	25
3.20	System Fault Level , HV side	350 MVA
3.21	System Fault Level , LV side	35 MVA
3.22	System earthing	
3.22.1	HV	Solidly earthed
3.22.2	LV	Solidly earthed
3.23	Ratings	250/400/630/1000/1600/2000/2500 <sup>(R1)</sup>
		kVA



3.24	Percentage Impedance at 75 deg C	
3.24.1	250/400/630 kVA	4.5 % with IS tolerance
3.24.2	1000 kVA	5.0 % with IS tolerance
3.24.3	1600/2000/2500 <sup>(R1)</sup> kVA	6.25% with IS tolerance
3.25	Max Total losses(No Load+ Load	
	Losses at 75°C) at 50% of the rated	
	load , kW	
3.25.1	250 kVA	0.98
3.25.2	400 kVA	1.225
3.25.3	630 kVA	1.86
3.25.4	1000 kVA	2.79
3.25.5	1600 kVA	4.2
3.25.6	2000 kVA	5.05
3.25.7	2500 kVA	6.15 <sup>(R1)</sup>
3.26	Max Total losses(No Load+ Load	
	Losses at 75°C) at 100% of the	
	rated load , kW	
3.26.1	250 kVA	2.93
3.26.2	400 kVA	3.45
3.26.3	630 kVA	5.3
3.26.4	1000 kVA	7.7
3.26.5	1600 kVA	11.8
3.26.6	2000 kVA	15
3.26.7	2500 kVA	18.5 <sup>(R1)</sup>
3.27	Phase CT Ratio , Amp	
3.27.1	250 kVA	400/5
3.27.2	400 kVA	600/5
3.27.3	630 kVA	1000/5
3.27.4	1000 kVA	1500/5
3.27.5	1600 kVA	2500/5
3.27.6	2000 kVA	3000/5
3.27.7	2500 kVA	4000/5 <sup>(R1)</sup>



3.28	HV cable size for all sizes /	11 kV (E) grade , A2XCEWY 3C x 150
	Conductor size	sqmm
3.29	Busbar size on HV side for cable	50x10-Tinned copper
	termination, mm x mm	
3.30	LV cable size, 650 /1100 V grade,	Cable
	A2XY cable single core 630 sqmm	
	unarmoured (approx cable dia 40	
	mm)/ A2XY Cable single core	
	1000sqmm(Approx dia. 48mm)	
3.30.1	250 kVA	1 runs per phase + 1 runs in Neutral-
		single core 630 sqmm cable
3.30.2	400 kVA	2 runs per phase + 2 runs in Neutral-
		single core 630 sqmm cable
3.30.3	630 kVA	3 runs per phase + 3 runs in Neutral-
		single core 630 sqmm cable
3.30.4	1000 kVA	4 runs per phase + 4 runs in Neutral-
		single core 630 sqmm cable
3.30.5	1600 KVA	3 runs per phase + 3 runs in Neutral-
		single core 1000 sqmm cable
3.30.6	2000 kVA	4 runs per phase + 4 runs in Neutral-
		single core 1000 sqmm cable
3.30.7	2500 kVA <sup>(R1)</sup>	5 runs per phase + 5 runs in Neutral-
		single core 1000 sqmm cable
3.31	Busbar size on LV side for cable	
	termination, mm x mm	
3.31.1	250/400/630 kVA <sup>(R1)</sup>	
3.31.1.1	Phase	100 x 12-Alumium
3.31.1.2	Neutral	100 x 12-Alumium
3.31.2	1000kVA	
3.31.2.1	Phase	
		2 runs 100 x 12-Aluminium
3.31.2.2	Neutral	
		2 runs 100 x 12-Aluminium



3.31.3	1600kVA	
3.31.3.1	Phase	
		2 runs 160 x 12-Aluminium
3.31.3.2	Neutral	
		2 runs 160 x 12-Aluminium
3.31.4	2000kVA	
3.31.4.1	Phase	2 runs 160 x 12-Aluminium
3.31.4.2	Neutral	2 runs 160 x 12-Aluminium
3.31.5	2500kVA <sup>(R1)</sup>	
3.31.5.1	Phase	2 runs 160 x 15-Aluminium
3.31.5.2	Neutral	2 runs 160 x 15-Aluminium
3.32	Maximum Overall Dimension	
	Acceptable ( length x width x height),	
	mm x mm x mm	
3.32.1	250 KVA	1500 x1300x 1700
3.32.2	400 kVA	1500X1500X2000
3.32.3	630 kVA	1700X1700X2200
3.32.4	1000 kVA	1900X1900X2500
3.32.5	1600 kVA	2300X2000X2600
3.32.6	2000 kVA	2500X2000X2600
3.32.7	2500 kVA <sup>(R1)</sup>	2800X2300X2700
	Short Circuit withstand Capacity of	
3.33	the transformer	
3.33.1	Three phase dead short circuit at	For 3 secs.
	secondary terminal with rated	
	voltage maintained on the other side	
3.33.2	Single phase short circuit at	For 3 secs.
	secondary terminal with rated	
	voltage maintained on other side	
3.34	Overload Capability	As per IS 2026/IEC 60905



# TECHNICAL SPECIFICATION OF CONVENTIONAL OIL FILLED DISTRIBUTION TRANSFORMER

Noise Level (R1)	400/630/1000/1600/2000/2500 KVA-
	56/57/58/60/61/62 Db respectively
Radio Influence Voltage	Maximum 250 microvolt
Harmonic suppression	Transformer to be designed for
	suppression of 3rd, 5th, 7th harmonic
	voltages and high frequency
	disturbances.
Partial Discharge	Transformer to be free from partial
	discharge upto 120 % of rated voltage
	as the voltage is reduced from 150 %
	of rated voltage i.e. there shall be no
	significant rise above background level
Tappings	Off Circuit taps on HV winding , +10%
	to - 10% in steps of 2.5 % , change of
	taps by externally operated switch
Rotary tap switch operating voltage	11 kV
Rotary tap switch current rating,	
Amp.	
250 KVA	20 Amps
400 kVA	60 Amp
630 / 1000 kVA	100 Amp
1600/2000 kVA	150 Amp
2500 kVA <sup>(R1)</sup>	200 Amp
	Radio Influence Voltage Harmonic suppression  Partial Discharge  Tappings  Rotary tap switch operating voltage Rotary tap switch current rating, Amp.  250 KVA  400 kVA  630 / 1000 kVA  1600/2000 kVA

## 4.0 Construction & Design

4.1	Туре	Double Copper wound, three phase, oil
		immersed, with ONAN cooling, with off
		circuit tap changer
4.2	Major Parts	
4.2.1	Tank	
4.2.1.1	Туре	Non sealed type with conservator as



		per manufacturer's standard.
4.2.1.2	Material of Construction	Robust mild steel plate without pitting
		and low carbon content
4.2.1.3	Plate Thickness	Adequate for meeting the requirements
		of pressure and vacuum type tests as
		per IS
4.2.1.4	Welding features	i) All seams and joints shall be
		double welded
		ii) All welding shall be stress relieved
		for sheet thickness greater than
		35 mm
		iii) All pipes, radiators, stiffeners,
		welded to the tank shall be welded
		externally
4.2.1.5	Tank features	i) Adequate space at bottom for
		collection of sediments
		ii) Stiffeners provided for rigidity and
		designed to prevent accumulation
		of water
		iii) No internal pockets in which gas/air
		can accumulate
		iv) No external pocket in which water
		can lodge
		v) Tank bottom with welded skid base
		vi) Tank cover sloped to prevent
		retention of rain water
		vii) Minimum disconnection of pipe
		work and accessories for cover
		lifting
		viii)Tanks shall be of a strength to
		prevent permanent deformation
		during lifting , jacking,
		transportation with oil filled.
		ix) Tank to be designed for oil filling



		under vacuum
		x) Tank cover fitted with lifting lug
		xi) Tank cover bent at all the ends
		xii) Minimum disconnection of pipe
		work and accessories for cover
		lifting
4.2.1.6	Flanged type adequately sized	i) HV line bushing
	inspection cover rectangular in shape	ii) LV line bushing
	required for	iii) LV neutral bushing
		iv) Core / Winding
4.2.1.7	Fittings and accessories on main tank	See under fittings and accessories.
4.2.2	Conservator for the main tank	coo and manigo and accessines.
4.2.2.1	Capacity	Adequate between highest and lowest
1.2.2.1	Capacity	visible levels to meet the requirement
		of expansion of oil volume in the
		transformer and cooling equipment
		from minimum ambient temperature to
		maximum operating temperatures.
4.2.2.2	Conservator oil preservation system	Conventional
4.2.2.3	Conservator features	i) Conservator shall be bolted into
4.2.2.3	Conservator reatures	position so that it can be removed
		for cleaning / other maintenance
		purposes  ii) Main pine from tank shall project
		ii) Main pipe from tank shall project
		about 20 mm above conservator
		bottom for creating a sump for
		collection of impurities
		iii) Conservator minimum oil level
		corresponding to minimum
		temperature shall be well above
		the sump level.
		iv) Conservator to main tank piping
		shall be supported at minimum two
		points.



4.2.2.4	Fittings and accessories on main tank	i) Prismatic oil gauge with
	conservator	MINIMUM, NORMAL and
		MAXIMUM marking
		ii) End Cover
		iii) Oil Filling Hole with cap
		iv) Silica Gel Dehydrating Breather
		with oil seal and dust filter with
		clear acrylic single piece clearly
		transparent cover resistant to UV
		rays(1kg). Breather shall be of
		Flanged type in circular shape with
		4 no.holes of ½ inches with
		hardware of M10 bolts. Silica gel
		shall be of round ball type of
		2.5mm dia.
		v) Drain Plug
		vi) Air release plug as required
		vii) Pressure/ Vacuum gauge
		viii) Magnetic Oil Gauge with LOW
		LEVEL ALARM
4.2.3	Radiators	Detachable type
4.2.3.1	Thickness	Minimum 1.2 mm
4.2.4.2	Features	With lifting lugs, air release plug,
4.2.5	Core	
4.2.5.1	Material	High grade , non ageing, low loss, high
		permeability, grain oriented, cold rolled
		silicon steel lamination. Core shall be
		low loss of 1Watt/kG (max)
4.2.5.2	Grade	Premium Grade minimum M3 or better
4.2.5.3	Lamination thickness	0.23 mm Max.
4.2.5.4	Design Flux Density at rated	As per Manufacturer design.
	conditions at principal tap	
4.2.5.5	Maximum Flux Density at 12.5 % over	1.9 T



	excitation / over fluxing	
4.2.5.6	Core Design Features	i) Core shall be in the form of step
		and stack in three limb format.
		Note: Wound core shall not be acceptable
		ii) Magnetic circuit designed to avoid
		short circuit paths within core or to
		the earthed clamping structures
		iii) Magnetic circuit shall not produce
		flux components at right angles to
		the plane of lamination to avoid
		local heating
		iv) Least possible air gap and rigid
		clamping for minimum core loss
		and noise generation
		v) Adequately braced to withstand
		bolted faults on secondary
		terminals without mechanical
		damage and damage/
		displacement during transportation
		and positioning.
		vi) Percentage harmonic potential with
		the maximum flux density under
		any condition limited to avoid
		capacitor overloading in the system
		vii) All steel sections used for
		supporting the core shall be
		thoroughly sand blasted after
		cutting , drilling, welding
		viii) Provision of lifting lugs for core coil
		assembly
		ix) Supporting framework designed not
		to obstruct complete drainage of oil
		from transformer



4.2.6	Winding	
4.2.6.1	Material	Electrolytic Copper
4.2.6.2	Maximum Current Density allowed	3 Amp per sq mm at all taps.
4.2.6.3	Winding Insulating material	Class A , non catalytic, inert to
		transformer oil, free from compounds
		liable to ooze out, shrink or collapse.
4.2.6.4	Winding Insulation	Uniform
4.2.6.5	Design features	i) Type of winding
		a. LV: Sprial/Helical
		b. HV: Crossover/Disc
		Note: Foil winding shall not be
		acceptable
		ii) Stacks of winding to receive
		adequate shrinkage treatment
		iii) Connections braced to withstand
		shock during transport, switching,
		short circuit, or other transients.
		iv) Minimum out of balance force in
		the transformer winding at all
		voltage ratios.
		v) Conductor width on edge
		exceeding six times its thickness
		vi) Transposed at sufficient intervals.
		vii) Coil assembly shall be suitably
		supported between adjacent
		sections by insulating spacers +
		barriers
		viii) Winding leads rigidly supported ,
		using guide tubes if practicable
		ix) Winding structure and major
		insulation not to obstruct free flow
		of oil through ducts
		x) Provision of taps as per clause
		3.39



4.2.7	Transformer Oil	
4.2.7.1	Туре	Should be in accordance with
		specification as per Annex C of this
		document
4.2.8	Bushings and Terminations	
4.2.8.1	Type of HV side bushing	HV bushing should be top mounted.
		Outdoor, Pocelain, rated voltage and
		creepage as per 31mm/kV with voltage
		class of 12kV respectively
4.2.8.2	Type of LV side bushing	LV bushing should be top mounted.
		Outdoor, Porcelain, rated voltage and
		creepage as per 31mm/kV with voltage
		class of 1.1 kV respectively
		Additional neutral bushing of porcelain
		outside on top of LT cable box with
		brass palm connector (as per IS 3347)
		shall be provided. The rating of
		additional neutral bushing should be same as phase bushing (R1).
		Connection between the main neutral
		and additional neutral shall be
		provided. For extra neutral bushing,
		protection box shall be provided in
		order to prevent ingress of water.
4.2.8.2.1	Essential provision for LV side line	It shall be complete with brass palm
	bushing	with aluminium busbar of size shall be
		as per clause 3.31.
		Bimetallic strip to be provided
4.2.8.2.2	Essential provision for LV side neutral	In case of neutral bushing the stem
	bushing	and busbar shall be integral without
		bolted, threaded, brazed joints. Busbar
		size shall be as per clause 3.31
4.2.8.3	Arcing Horns	Not required
4.2.8.4	Support insulators inside HV cable box	Epoxy resin cast, rated voltage 12 kV
	1	



	if provided	
4.2.8.5	Termination on HV side bushing	By bimetallic terminal connectors
		suitable for ACSR/AAAC conductor /
		Cable connection through cable box
		with disconnecting link suitable for
		11kV(E) grade,A2XFY 3Cx 150sqmm
4.2.8.6	Termination of LV side bushing	By bimetallic terminal connectors
		suitable for LV Cable size of
		650/1100VGrade, A2XY Cable single
		core 630sqmm (Approx dia 40mm) /
		A2XY Cable single core 1000sqmm
		(Approx dia. 48mm) for
		1600/2000/2500 <sup>(R1)</sup> KVA.
4.2.8.7	Minimum creepage distance of all	31mm/KV
	bushings and support insulators.	
4.2.8.8	Protected creepage distance	At least 50 % of total creepage
		distance
4.2.8.9	Continuous Current rating	Minimum 20 % higher than the current
		corresponding to the minimum tap of
		the transformer
4.2.8.10	Rated thermal short time current	25 times the rated current for 2 sec
4.2.8.11	Atmospheric protection for clamp and	Hot dip galvanizing as per IS 2633
	fitting of iron and steel	
4.2.8.12	Bushing terminal lugs in oil and air	
		Brass palm connector for HV & LV side
		(as per IS: 3347)
4.2.8.13	Sealing washers /Gasket ring	Nitrile cork rubber(RC70C)/ Expanded
		TEFLON(PTFE) as applicable.
4.2.9	HV & LV cable box	Required
4.2.9.1	Material of Construction	Sheet Steel min. 2.5 mm thick
4.2.9.2	Cable entry	At bottom through detachable gland
		plate with cable clamps of non
		magnetic material



4.2.9.3	Cable size for HV	11 kV (E) grade , A2XFY 3C x 150
		sqmm
4.2.9.4	Cable size for LV	LV cable size, 650 /1100 V grade,
		A2XY cable single core 630 sqmm
		unarmoured (approx cable dia 40 mm)
		/ A2XY Cable single core 1000sqmm
		(Approx dia. 48mm) for
		1600/2000/2500 <sup>(R1)</sup> KVA.
4.2.9.5	Cable size for LV Neutral	LV cable size, 650 /1100 V grade,
		A2XY cable single core 630 sqmm
		unarmoured (approx cable dia 40 mm)
		/ A2XY Cable single core 1000sqmm
		(Approx dia. 48mm) for
		1600/2000/2500 <sup>(R1)</sup> KVA.
4.2.9.6	Detachable Gland Plate material for	i) MS for HV cable box
	HV, LV, LV Neutral box	ii) Al for LV cable box.
4.2.9.7	Gland plate thickness for HV, LV, LV	i) 3 mm for HV side cable box
	Neutral box	ii) 5 mm for LV cable box.
4.2.9.8	Cable gland for HV cables	Nickel plated brass double
4.2.9.9	Cable lug for HV, LV, LV Neutral	i) Double hole Aluminium lugs for LV &
	cables	Neutral side ii) Single hole Aluminum lugs for HV
		side
4.2.9.10	Essential parts	i) Flange type removable front cover
		with handles min two nos.
		ii) Aluminium for LV with bimetallic
		strips and tinned copper for HV
		Busbar of adequate size for
		Purchaser's cable termination with
		busbar supports
		iii) Earthing boss for the cable box
		iv) Earthing link for the gasketted joints
		at two point for each joint
		v) Earthing provision for cable
		Armour/ Screen



:
tion and
dle
d vertical joint
/ side
all three
ore glass
main tank by
ossible by
unting plate
without
able for
) I



		mm depth.
4.2.10.8.2	Fixing of instrument / meters within	On slotted channel 40 x 12 mm size,
	box	channel fixed on vertical slotted angle
		40 x 40 mm size at two ends
4.2.10.8.3	No of horizontal channels to be provided	Four
4.2.10.8.4	Fixing of terminals within the box	On horizontal slotted channel with the
		help of C channel available with the
		terminals
4.2.10.8.5	Location	On tank wall
4.2.10.8.6	Box door design	Openable from outside with antitheft
		hinge, padlock facility, door fixed by
		stainless steel allen screw M6 size ,
		door shall have canopy for rain
		protection
4.2.10.8.7	Terminal strip	Nylon 66 material, minimum 4 sq mm,
		screw type for control wiring and
		potential circuit.
4.2.10.8.8	Cables and wires	PVC insulated, extruded PVC inner
		sheathed, armoured, extruded PVC
		outer sheathed 1100 V grade control
		cable as per latest edition of IS 1554
		part 1 minimum 2.5 sq mm for signals
		and 4 sq mm for CT with multi strand
		copper conductor
4.2.10.8.9	Cable Glands	Nickel plated brass double
		compression weatherproof cable
		gland
4.2.10.8.10	Lugs on wires	Tinned copper pre insulated Pin, Ring,
		Fork type as applicable
4.2.10.8.11	Potential signal in CT box	i) Tapped from main LV busbar
		ii) Neutral Link and Fuse to be
		provided by bidder for PT
4.2.10.8.12	Essential provision	Wiring diagram to be fixed on the back



		of door along with CT spec. on
		Aluminum engraved plate fixed by rivet.
4.2.11	Off Circuit tap Switch	
4.2.11.1	Range /Step	Off circuit taps on HV winding, +10% to
		-10% in steps of 2.5%, change of taps
		by externally operated switch.
4.2.11.2	Туре	Rotary type, 3 pole gang operated,
		draw out type
4.2.11.3	Operating Voltage	11kV
4.2.11.4	Rated Current for tap Switch	i) 400 kVA - 60 Amps
		ii) 630/1000 kVA - 100 Amps
		iii) 1600/2000kVA-150 Amps
		iv) 2500kVA- 200 Amps
4.2.11.5	Operating Handle	External at suitable height to be
		operated from ground level.
4.2.11.6	Essential provision	Tap position indicator, direction
		changing facility, locking arrangement,
		and caution plate metallic fixed by
		rivet.
4.2.12	Pressure Relief Device	
4.2.12.1	Туре	Pressure Relief Valve (PRV)
4.2.12.2	Auxiliary contacts	2 NO
4.2.13	Winding and Oil Temperature	Required
	scanner	
4.2.13.1	PT 100 sensor	For measurement of Oil temperature
		LV winding temperature.
4.2.13.2	No of potential free trip contacts	2 NO
4.2.13.3	No of potential free alarm contacts	2 NO
4.2.13.4	Auxiliary Supply	240 AC, Single phase, 50Hz. Tapped
		from LV side busbar through a MCB
		located inside box.



4.2.13.5	Communication port	RS 485 port for interfacing with FRTU
		on Modbus protocol.
		Battery/Super capacitor for data
		transmission to SCADA in the event of
		Auxiliary supply fail
4.2.13.5	Fixing of instrument	On side wall of tank
4.2.14	Auxiliary Relay (hand reset type)	Required to identify the type of
		fault/indication.
4.2.14.1	Quantity	4 no's Separate auxiliary relay to be
		provided for PRV, MOG,WTI/OTI,
		Buchholz relay.
4.2.14.2	Potential free contacts	2 NO
4.2.14.3	Auxiliary supply	240V AC
4.3	Hardware	
4.3.1	External	Hot dip galvanized bolts
4.3.2	Internal	Cadmium plated except special
		hardware for frame parts and core
		assembly as per manufacturer's design
4.4	Gasket	
4.4.1	For Transformer , surfaces interfacing	Nitrile cork rubber RC70C grade
	with oil like inspection cover etc.	
4.4.2	For Cable boxes, Marshalling box, etc.	Neoprene rubber based/ cork nitrile
4.5	Valves	
4.5.1	Material of construction	Brass / gun metal
4.5.2	Туре	Both end flanged gate valve / butterfly
		valve depending on application
4.5.3	Size	As per manufacturer's standard
4.5.4	Essential provision	Position indicator, locking rod,
		padlocking facility, valve guard, cover
		plate.
4.6	Cable routing on Transformer	Control cables for accessories on
		transformer tank shall be routed
		through perforated GI trays



4.6.1	Control cable specification	PVC insulated, extruded PVC inner
		sheathed, armoured, extruded PVC
		outer sheathed 1100 V grade control
		cable as per latest edition of IS 1554
		part 1 minimum 2.5 sq mm for signals
		and 4 sq mm for CT with multi strand
		copper conductor
4.6.2	Specification of wires to be used	PVC insulated multi-strand flexible
	inside marshalling box.	copper wires of minimum 2.5 sq mm
		size, 1100 V grade as per latest edition
		of relevant IS
4.7	Terminal Blocks to be used by the	Nylon 66 material, minimum 4 sq mm,
	vendor	Stud type screw driver operated type
		for control wiring and potential circuit.
4.7.1	Essential provision for CT terminals	Sliding link type disconnecting terminal
		block Stud type screwdriver operated
		with facility for CT terminal shorting
		material of housing melamine/ Nylon66
4.8	Cable glands to be used by the vendor	Nickel plated brass double
		compression weatherproof cable
		gland
4.9	Cable lugs to be used by the vendor	
4.9.1	For power cables	Long barrel medium duty Aluminium lug
	· ·	with knurling on inside surface.
4.9.2	For Control Cable	Tinned copper pre insulated Pin, Ring,
		Fork type as applicable
4.10	Painting of transformer, Radiator,	
	marshalling box for CT, cable boxes	
	etc.	
4.10.1	Surface preparation	By 7 tank pretreatment process or shot
		blasting method
4.10.2	Finish on internal surfaces of the	Bright Yellow heat resistant and oil
	transformer	resistant paint two coats. Paint shall



# TECHNICAL SPECIFICATION OF CONVENTIONAL OIL FILLED DISTRIBUTION TRANSFORMER

		neither react nor dissolve in hot
		transformer insulating oil.
4.10.3	Finish on inner surface of the CT	White Polyurethane paint anti
	terminal box, HV/LV/LVN cable box	condensation type two coats ,
		minimum dry film thickness 80 microns
4.10.4	Finish on outer surface of the	Battle ship Grey shade 632
	transformer, radiator, CT terminal box,	Polyurethane paint two coats,
	HV/LV/LVN cable box	minimum dry film thickness 80 microns
4.10.5	Frame parts	Battle ship grey shade 632 IS 5, 80
		micron minimum insulating oil resistant
		paint. Paint shall neither react nor
		dissolve in hot transformer insulating
		oil.

## 5.0 Fittings and Accessories on Transformer

5.1	Rating and Diagram Plate	Required
5.1.1	Material	Anodized aluminum 16SWG
5.1.2	Background	SATIN SILVER
5.1.3	Letters, diagram & border	Black
5.1.4	Process	Etching
5.1.5	Rating and Diagram Plate details	Following details shall be provided on
		rating and diagram plate as a minimum
		i) type/kind of transformer with
		winding material
		ii) standard to which it is manufactured
		iii) manufacturer's name;
		iv) transformer serial number;
		v) month and year of manufacture
		vi) rated frequency in Hz
		vii) rated voltages in kV
		viii) number of phases
		ix) rated power in kVA
		x) type of cooling (ONAN)
		xi) rated currents in A



xii) vector group connection symbol
xiii) 1.2/50µs wave impulse voltage
withstand level in kV
xiv) power frequency withstand voltage
in kV
xv) impedance voltage at rated current
and frequency in percentage at
principal, minimum and maximum
tap
xvi) Max. Total losses at 50 % rated
load
xvii) Max. Total losses at 100 % rated
load
xviii) Load loss at 50% & 100% rated
load
xix) No-load loss at rated voltage and
frequency
xx) Energy efficiency level.
xxi) continuous ambient temperature
at which ratings apply in deg C
xxii) top oil and winding temperature
rise at rated load in deg C;
xxiii) winding connection diagram with
taps and table of tapping voltage,
current and power
xxiv) transport weight of transformer
xxv) weight of core and windings
xxvi) Weight of core
xxvii) Weight of winding
xxviii)total weight
xxix) volume of oil
xxx) weight of oil
xxxi) name of the purchaser
xxxii) PO no and date



		xxxiii)Guarantee period
5.2	Terminal marking Plate for Bushing,	Required
	anodized aluminium black lettering	
	on satin silver background both	
	inside cable boxes near termination	
	and on cable box cover (all fixed by	
	rivet)	
5.3	Company Monogram Plate fixed by	Required
	rivet	
5.4	Lifting Lug to lift complete	Required
	transformer with oil	
5.5	Lifting lug for top cover	Required
5.6	Lashing Lug	Required
5.7	Jacking Pad with Haulage hole to	Required
	raise or lower complete transformer	
	with oil	
5.8	Detachable Bidirectional flat roller	Required
	Assembly	
5.8.1	Roller center to center distance	Minimum 900 mm on the side of HV
		and LV cable box
		Maximum 800 mm on the other side
		(perpendicular to HV, LV cable box).
5.8.2	Essential provision	Roller dia 150 mm min., roller to be
		fixed in such a way so that the
		lowermost part of the skid is above
		ground by at least 100 mm when the
		transformer is installed on roller.
5.9	Pockets for ordinary thermometer	Required
	on tank cover with metallic	
	identification plate fixed by rivet.	
5.10	Drain valve (gate valve) for the	Required
	main tank with cork above ground	
	by 150mm minimum with	
	padlocking and valve guard with	
	•	Dago 26 of 92



joints , in cable boxes, Conservator  Earthing bridge by copper strip jumpers on all gasket joints at at least two points for electrical continuity  5.16 Skid base welded type with haulage hole  5.17 Core , Frame to tank Earthing Required  5.18 Danger plate made of Anodized aluminum with white letters on red background on Transformer, cable boxes (all fixed by rivet)  5.19 Caution plate for Off Circuit tap changer fixed by rivet.  5.20 MOG with auxiliary contact wired upto Terminal Box  A Scope of supply  Required  Required  Required  Required		metallic identification plate fixed by	
padlocking and valve guard with metallic identification plate fixed by rivet.  5.12 Air Release Plug on tank cover with metallic identification plate fixed by rivet.  5.13 Earthing pad on tank for transformer earthing complete with non ferrous nut., bolt, washers, spring washers etc. with metallic identification plate fixed by rivet  5.14 Rainhood for vertical gasketted joints, in cable boxes, Conservator  5.15 Earthing bridge by copper strip jumpers on all gasket joints at at least two points for electrical continuity  5.16 Skid base welded type with haulage hole  5.17 Core, Frame to tank Earthing Required  5.18 Danger plate made of Anodized aluminum with white letters on red background on Transformer, cable boxes (all fixed by rivet)  5.19 Caution plate for Off Circuit tap changer fixed by rivet.  5.20 MOG with auxiliary contact wired upto Terminal Box		rivet.	
metallic identification plate fixed by rivet.  5.12 Air Release Plug on tank cover with metallic identification plate fixed by rivet.  5.13 Earthing pad on tank for transformer earthing complete with non ferrous nut., bolt, washers, spring washers etc. with metallic identification plate fixed by rivet  5.14 Rainhood for vertical gasketted joints, in cable boxes, Conservator  5.15 Earthing bridge by copper strip jumpers on all gasket joints at at least two points for electrical continuity  5.16 Skid base welded type with haulage hole  5.17 Core, Frame to tank Earthing Required  5.18 Danger plate made of Anodized aluminum with white letters on red background on Transformer, cable boxes (all fixed by rivet)  5.19 Caution plate for Off Circuit tap changer fixed by rivet.  5.20 MCG with auxiliary contact wired upto Terminal Box	5.11	Filter valve (gate valve) at top with	Required
rivet.  5.12 Air Release Plug on tank cover with metallic identification plate fixed by rivet.  5.13 Earthing pad on tank for transformer earthing complete with non ferrous nut., bolt, washers, spring washers etc. with metallic identification plate fixed by rivet  5.14 Rainhood for vertical gasketted joints, in cable boxes, Conservator  5.15 Earthing bridge by copper strip jumpers on all gasket joints at at least two points for electrical continuity  5.16 Skid base welded type with haulage hole  5.17 Core, Frame to tank Earthing Required  5.18 Danger plate made of Anodized aluminum with white letters on red background on Transformer, cable boxes (all fixed by rivet)  5.19 Caution plate for Off Circuit tap changer fixed by rivet.  5.20 MOG with auxiliary contact wired upto Terminal Box		padlocking and valve guard with	
Air Release Plug on tank cover with metallic identification plate fixed by rivet.  5.13 Earthing pad on tank for transformer earthing complete with non ferrous nut ., bolt, washers, spring washers etc. with metallic identification plate fixed by rivet  5.14 Rainhood for vertical gasketted joints , in cable boxes, Conservator A Scope of supply  5.15 Earthing bridge by copper strip jumpers on all gasket joints at at least two points for electrical continuity  5.16 Skid base welded type with haulage hole  5.17 Core , Frame to tank Earthing Required  5.18 Danger plate made of Anodized aluminum with white letters on red background on Transformer, cable boxes (all fixed by rivet)  5.19 Caution plate for Off Circuit tap changer fixed by rivet.  5.20 MOG with auxiliary contact wired upto Terminal Box		metallic identification plate fixed by	
metallic identification plate fixed by rivet.  5.13 Earthing pad on tank for transformer earthing complete with non ferrous nut ., bolt, washers, spring washers etc. with metallic identification plate fixed by rivet  5.14 Rainhood for vertical gasketted joints, in cable boxes, Conservator  5.15 Earthing bridge by copper strip jumpers on all gasket joints at at least two points for electrical continuity  5.16 Skid base welded type with haulage hole  5.17 Core, Frame to tank Earthing Required  5.18 Danger plate made of Anodized aluminum with white letters on red background on Transformer, cable boxes (all fixed by rivet)  5.19 Caution plate for Off Circuit tap changer fixed by rivet.  5.20 MOG with auxiliary contact wired upto Terminal Box		rivet.	
rivet.  5.13 Earthing pad on tank for transformer earthing complete with non ferrous nut ., bolt, washers, spring washers etc. with metallic identification plate fixed by rivet  5.14 Rainhood for vertical gasketted joints , in cable boxes, Conservator A Scope of supply  5.15 Earthing bridge by copper strip jumpers on all gasket joints at at least two points for electrical continuity  5.16 Skid base welded type with haulage hole  5.17 Core , Frame to tank Earthing Required  5.18 Danger plate made of Anodized aluminum with white letters on red background on Transformer, cable boxes (all fixed by rivet)  5.19 Caution plate for Off Circuit tap changer fixed by rivet.  5.20 MOG with auxiliary contact wired upto Terminal Box	5.12	Air Release Plug on tank cover with	Required
Earthing pad on tank for transformer earthing complete with non ferrous nut ., bolt, washers, spring washers etc. with metallic identification plate fixed by rivet  5.14 Rainhood for vertical gasketted joints, in cable boxes, Conservator A Scope of supply  5.15 Earthing bridge by copper strip jumpers on all gasket joints at at least two points for electrical continuity  5.16 Skid base welded type with haulage hole  5.17 Core, Frame to tank Earthing Required  5.18 Danger plate made of Anodized aluminum with white letters on red background on Transformer, cable boxes (all fixed by rivet)  5.19 Caution plate for Off Circuit tap changer fixed by rivet.  5.20 MOG with auxiliary contact wired upto Terminal Box		metallic identification plate fixed by	
transformer earthing complete with non ferrous nut ., bolt, washers, spring washers etc. with metallic identification plate fixed by rivet  5.14 Rainhood for vertical gasketted joints, in cable boxes, Conservator  5.15 Earthing bridge by copper strip jumpers on all gasket joints at at least two points for electrical continuity  5.16 Skid base welded type with haulage hole  5.17 Core, Frame to tank Earthing Required  5.18 Danger plate made of Anodized aluminum with white letters on red background on Transformer, cable boxes (all fixed by rivet)  5.19 Caution plate for Off Circuit tap changer fixed by rivet.  5.20 MOG with auxiliary contact wired upto Terminal Box		rivet.	
non ferrous nut ., bolt, washers, spring washers etc. with metallic identification plate fixed by rivet  5.14 Rainhood for vertical gasketted joints, in cable boxes, Conservator  5.15 Earthing bridge by copper strip jumpers on all gasket joints at at least two points for electrical continuity  5.16 Skid base welded type with haulage hole  5.17 Core, Frame to tank Earthing Required  5.18 Danger plate made of Anodized aluminum with white letters on red background on Transformer, cable boxes (all fixed by rivet)  5.19 Caution plate for Off Circuit tap changer fixed by rivet.  5.20 MOG with auxiliary contact wired upto Terminal Box	5.13	Earthing pad on tank for	Required
spring washers etc. with metallic identification plate fixed by rivet  5.14 Rainhood for vertical gasketted joints, in cable boxes, Conservator A Scope of supply  5.15 Earthing bridge by copper strip jumpers on all gasket joints at at least two points for electrical continuity  5.16 Skid base welded type with haulage hole  5.17 Core, Frame to tank Earthing Required  5.18 Danger plate made of Anodized aluminum with white letters on red background on Transformer, cable boxes (all fixed by rivet)  5.19 Caution plate for Off Circuit tap changer fixed by rivet.  5.20 MOG with auxiliary contact wired upto Terminal Box		transformer earthing complete with	
identification plate fixed by rivet  5.14 Rainhood for vertical gasketted joints, in cable boxes, Conservator A Scope of supply  5.15 Earthing bridge by copper strip jumpers on all gasket joints at at least two points for electrical continuity  5.16 Skid base welded type with haulage hole  5.17 Core, Frame to tank Earthing Required  5.18 Danger plate made of Anodized aluminum with white letters on red background on Transformer, cable boxes (all fixed by rivet)  5.19 Caution plate for Off Circuit tap changer fixed by rivet.  5.20 MOG with auxiliary contact wired upto Terminal Box		non ferrous nut ., bolt, washers,	
5.14 Rainhood for vertical gasketted joints, in cable boxes, Conservator A Scope of supply  5.15 Earthing bridge by copper strip jumpers on all gasket joints at at least two points for electrical continuity  5.16 Skid base welded type with haulage hole  5.17 Core, Frame to tank Earthing Required  5.18 Danger plate made of Anodized aluminum with white letters on red background on Transformer, cable boxes (all fixed by rivet)  5.19 Caution plate for Off Circuit tap changer fixed by rivet.  5.20 MOG with auxiliary contact wired upto Terminal Box		spring washers etc. with metallic	
joints , in cable boxes, Conservator  Earthing bridge by copper strip jumpers on all gasket joints at at least two points for electrical continuity  5.16 Skid base welded type with haulage hole  5.17 Core , Frame to tank Earthing Required  5.18 Danger plate made of Anodized aluminum with white letters on red background on Transformer, cable boxes (all fixed by rivet)  5.19 Caution plate for Off Circuit tap changer fixed by rivet.  5.20 MOG with auxiliary contact wired upto Terminal Box  A Scope of supply  Required  Required  Required  Required		identification plate fixed by rivet	
5.15 Earthing bridge by copper strip jumpers on all gasket joints at at least two points for electrical continuity  5.16 Skid base welded type with haulage hole  5.17 Core , Frame to tank Earthing Required  5.18 Danger plate made of Anodized aluminum with white letters on red background on Transformer, cable boxes (all fixed by rivet)  5.19 Caution plate for Off Circuit tap changer fixed by rivet.  5.20 MOG with auxiliary contact wired upto Terminal Box	5.14	Rainhood for vertical gasketted	Required Not required as per Annexure
jumpers on all gasket joints at at least two points for electrical continuity  5.16 Skid base welded type with haulage hole  5.17 Core, Frame to tank Earthing Required  5.18 Danger plate made of Anodized aluminum with white letters on red background on Transformer, cable boxes (all fixed by rivet)  5.19 Caution plate for Off Circuit tap changer fixed by rivet.  5.20 MOG with auxiliary contact wired upto Terminal Box		joints , in cable boxes, Conservator	,
least two points for electrical continuity  5.16 Skid base welded type with haulage hole  5.17 Core , Frame to tank Earthing Required  5.18 Danger plate made of Anodized aluminum with white letters on red background on Transformer, cable boxes (all fixed by rivet)  5.19 Caution plate for Off Circuit tap changer fixed by rivet.  5.20 MOG with auxiliary contact wired upto Terminal Box	5.15		Required
continuity  5.16 Skid base welded type with haulage hole  5.17 Core , Frame to tank Earthing Required  5.18 Danger plate made of Anodized aluminum with white letters on red background on Transformer, cable boxes (all fixed by rivet)  5.19 Caution plate for Off Circuit tap changer fixed by rivet.  5.20 MOG with auxiliary contact wired upto Terminal Box		jumpers on all gasket joints at at	
5.16 Skid base welded type with haulage hole  5.17 Core, Frame to tank Earthing Required  5.18 Danger plate made of Anodized aluminum with white letters on red background on Transformer, cable boxes (all fixed by rivet)  5.19 Caution plate for Off Circuit tap changer fixed by rivet.  5.20 MOG with auxiliary contact wired upto Terminal Box		·	
hole  5.17 Core , Frame to tank Earthing Required  5.18 Danger plate made of Anodized aluminum with white letters on red background on Transformer, cable boxes (all fixed by rivet)  5.19 Caution plate for Off Circuit tap changer fixed by rivet.  5.20 MOG with auxiliary contact wired upto Terminal Box		•	
5.17 Core , Frame to tank Earthing Required  5.18 Danger plate made of Anodized aluminum with white letters on red background on Transformer, cable boxes (all fixed by rivet)  5.19 Caution plate for Off Circuit tap changer fixed by rivet.  5.20 MOG with auxiliary contact wired upto Terminal Box	5.16		Required
5.18 Danger plate made of Anodized aluminum with white letters on red background on Transformer, cable boxes (all fixed by rivet)  5.19 Caution plate for Off Circuit tap changer fixed by rivet.  5.20 MOG with auxiliary contact wired upto Terminal Box			
aluminum with white letters on red background on Transformer, cable boxes (all fixed by rivet)  5.19 Caution plate for Off Circuit tap changer fixed by rivet.  5.20 MOG with auxiliary contact wired upto Terminal Box			·
background on Transformer, cable boxes (all fixed by rivet)  5.19 Caution plate for Off Circuit tap changer fixed by rivet.  5.20 MOG with auxiliary contact wired upto Terminal Box	5.18		Required
boxes (all fixed by rivet)  5.19 Caution plate for Off Circuit tap Required changer fixed by rivet.  5.20 MOG with auxiliary contact wired upto Terminal Box			
5.19 Caution plate for Off Circuit tap changer fixed by rivet.  5.20 MOG with auxiliary contact wired upto Terminal Box		background on Transformer, cable	
changer fixed by rivet.  5.20 MOG with auxiliary contact wired Required upto Terminal Box		, ,	
5.20 MOG with auxiliary contact wired Required upto Terminal Box	5.19	Caution plate for Off Circuit tap	Required
upto Terminal Box		changer fixed by rivet.	
·	5.20	MOG with auxiliary contact wired	Required
		upto Terminal Box	
	5.21	Buchholz relay for transformer	Required
1000kVA <sup>(R1)</sup> and above		1000kVA <sup>(R1)</sup> and above	
5.22 Pressure relief valve Required	5.22	Pressure relief valve	Required



# TECHNICAL SPECIFICATION OF CONVENTIONAL OIL FILLED DISTRIBUTION TRANSFORMER

5.23	WTI & OTI Temperature Scanner	Required
5.24	Auxiliary relays (4 no's)	Required
5.25	LT cable support-By aluminium clamp fixed on the on MS bracket of size 50x 10 supported from the tank wall shall be provided.	Required
5.26	HT cable support-By GI clamp fixed on the on MS bracket of size 50x 10 supported from the tank wall shall be provided.	Required

## 6.0 Approved make of components

6.1	СТ	Pragati / ECS /
		Kappa/Mehru/Continental/Nortex
6.2	Bushings	Baroda Bushing/Jaipur glass/CJI
6.3	Tap Changer	Alwaye /Paragon
6.4	MOG	Sukrut/Atvus
6.5	Valves	Newman/ATAM
6.6	CRGO	Nippon/JFE/Posco/Thyson kkurup
6.7	Copper	Birla copper/Sterlite
6.8	Pre compressed Pressboard	Raman Board, Mysore/ Senapathy
		Whiteley
6.9	Laminated Wood	Permalli Wallance / Rochling Engineers
6.10	Oil	Apar/Savita/Raj Petro/Gandhaar
6.11	Steel	TATA/Jindal/SAIL
6.12	Lugs/Glands	Jainson/Dowells/Comet
6.13	Radiators	CTR/Hi-Tech Radiators /Tarang
		Engineers
6.14	WTI/OTI	Precimeasure/ Pecon
6.15	Buchholz Relay	Sukrut/Atvus
6.16	Auxiliary Relay	GE/Alstrom
6.17.	Aluminium	Hindalco, Nalco, Sterlite, Birla



# TECHNICAL SPECIFICATION OF CONVENTIONAL OIL FILLED DISTRIBUTION TRANSFORMER

Note – Any other make of component offered by the bidder maybe reviewed & approved by purchaser

## 7.0 Quality assurance

7.1	Quality Assurance program	To be submitted before contract award.
		Program shall contain following
		<ul> <li>i) The structure of the organization</li> <li>ii) The duties and responsibilities assigned to staff ensuring quality of work.</li> <li>iii) The bidder should have qualified technical &amp; dedicated QA</li> </ul>
		personnel at various stages of manufacture & testing.  iv) Factory inspection of bidder may be carried out to ascertain the quality system and process in
		place at manufacturing facility. The same is applicable to bidders not approved with BSES.  v) The system for purchasing, taking delivery and verification of materials vi) The system for ensuring quality of
		workmanship vii) The system for control of
		documentation viii) The system for the retention of records
		<ul> <li>ix) The arrangements for the Supplier's internal auditing</li> <li>x) A list of the administration and work procedures required to achieve and verify Contract's quality requirements. These procedures shall be made readily available to</li> </ul>
		the Purchaser for inspection on request
7.2	Quality Plan	To be submitted by the successful
		bidder for approval. Plan shall contain
		following as a minimum  i) An outline of the proposed work and programm sequence



# TECHNICAL SPECIFICATION OF CONVENTIONAL OIL FILLED DISTRIBUTION TRANSFORMER

		ii) The structure of the Supplier's
		organisation for the contract
		iii) The duties and responsibilities
		assigned to staff ensuring quality of
		work for the contract
		iv) Inspection Hold and notification
		points mutually agreed.
		v) Submission of engineering
		documents required by the
		specification
		vi) The inspection of materials and
		components on receipt
		vii) Reference to the Supplier's work
		procedures appropriate to each
		activity
		viii) Inspection during fabrication/ construction
		ix) Final inspection and test
		x) Successful bidder shall include
		submittal of Mills invoice, Bill of
		lading, Mill's test certificate for
		grade, physical tests, dimension,
		specific watt loss per kG for the
		core material to the purchaser for
		verification in the quality plan
		suitably
7.3	Manufacturing Quality Assurance Plan	Refer Annexure D
1		

## 8.0 Progress Reporting

8.1	Outline Document	To be submitted for purchaser approval
		for outline of production, inspection,
		testing, packing, dispatch,
		documentation programme
8.2	Detailed Progress report	To be submitted to Purchaser once a month containing i) Progress on material procurement ii) Progress on fabrication iii) Progress on assembly iv) Progress on internal stage inspection v) Reason for any delay in total programme vi) Details of test failures if any in manufacturing stages vii) Progress on final box up



# TECHNICAL SPECIFICATION OF CONVENTIONAL OIL FILLED DISTRIBUTION TRANSFORMER

viii) Constraints
ix) Forward path

### 9.0 Inspection & testing

9.1.1	Tank and Conservator	<ul> <li>i) Check correct dimensions between wheels demonstrate turning of wheels through 90 deg and further dimensional check.</li> <li>ii) Check for physical properties of materials for lifting lugs, jacking pads etc. All load bearing welds, including lifting lug welds shall be subjected to</li> <li>iii) required load tests.</li> <li>iv) Leakage test of the conservator.</li> <li>v) Certification of all test results.</li> <li>vi) Oil leakage test .</li> <li>vii) Vacuum and Pressure test on tank as type test as per IS</li> </ul>			
9.1.2	Core	7			
9.1.2.1	Mother Core coil	Verification & inspection of the mother coil at port & putting stamp & seal may be inspected by BSES.			
9.1.2.2	Core sample type testing	Reconciliation of mother coil by checking stamp & seal at factory before slitting. One sample of CRGO to be sealed for testing at ERDA/CPRI. Following Tests shall be conducted on the sample per P.O.  i) Specific core loss measurement ii) Magnetic polarization iii) Magnetic permeability iv) Specific core loss measurement after accelerated ageing test v) Surface insulation resistivity vi) Electrical resistivity measurement vii) Stacking factor viii) Ductility(Bend test) ix) Lamination thickness x) Magnetization characteristics (B-H curve)			
9.1.2.3	Core cutting	Bidder should have in house core cutting			



		facility for proper monitoring & control on			
		quality. In case it is done outside cutting			
		shall be done in presence of BSES.			
9.1.2.4	Core physical verification	i) Check on the quality of varnish if			
		used on the stampings.			
		a) Measurement of thickness and			
		hardness of varnish on stampings.			
		b) Solvent resistance test to check that			
		varnish does not react in hot oil.			
		c) Check over all quality of varnish by			
		sampling to ensure uniform hipping			
		colour, no bare spots. No ever burnt			
		varnish layer and no bubbles on			
		varnished surface.			
		ii) Check on the amount of burns.			
		iii) Bow check on stampings.			
		iv) Check for the overlapping of			
		stampings. Corners of the sheet are			
		· -			
		to be apart.			
		v) Visual and dimensional check during			
		assembly stage.			
		vi) Check on complete core for measurements of iron-loss and check			
		for any hot spot by exciting the core			
		so as to induce the designed value of			
		flux density in the core.			
		vii) Check for inter laminar insulation			
		between core sectors before and			
		after pressing.			
		viii) Visual and dimensional checks for			
		straightness and roundness of core,			
		thickness of limbs and suitability of			
		clamps.			
		ix) High voltage test (2 KV for one			
		minute) between core and clamps.			
9.1.2.5	Documents verification	Certification of all test results.			
9.1.2.3	Documents vermeation	Following documents to be submitted during the stage inspection			
		i) Invoice of supplier			
		ii) Mills test certificates			
		iii) Packing list			
		iv) Bill of lading			
		v) Bill of entry certificates by customs			
9.1.3	Insulating Materials	i) Sample check for physical properties of			
		materials.			
	1				



		ii) Check for dielectric strength.
		iii) Visual and dimensional checks.
		iv) Check for the reaction of hot oil on
		insulating materials.
		v) Certification of all test results.
9.1.4	Windings	<ul> <li>i) Sample check on winding conductor for mechanical properties and electrical conductivity.</li> <li>ii) Visual and dimensional check on conductor for scratches, dept. mark etc.</li> <li>iii) Sample check on insulating paper for PE value, Bursting strength, Electric strength.</li> <li>iv) Check for the reaction of hot oil on insulating paper.</li> <li>v) Check for the bending of the insulating paper on conductor.</li> <li>vi) Check and ensure that physical condition of all materials taken for winding is satisfactory and free of dust.</li> <li>vii) Check for absence of short circuit between parallel strands.</li> </ul>
		viii) Check for Brazed joints wherever applicable.  ix) Measurement of voltage ratio to be carried out when core/ yoke is completely restocked and all connections are ready.  x) Certification of all test results.
9.1.4.1	Checks before drying process	
₩. I.4. I	Checks before drying process	<ul> <li>i) Check conditions of insulation on the conductor and between the windings.</li> <li>ii) Check insulation distance between high voltage connection distance between high voltage connection cables and earthed and other live parts.</li> <li>iii) Check insulation distance between low voltage connection and earthed and other parts.</li> <li>iv) Insulation test of core earthing.</li> <li>v) Check for proper cleanliness</li> <li>vi) Check tightness of coils i.e. no free</li> </ul>



		movement.		
		vii) Certification of all test results.		
9.1.4.2	Checks during drying process	<ul> <li>i) Measurement and recording of temperature and drying time during vacuum treatment.</li> <li>ii) Check for completeness of drying.</li> <li>iii) Certification of all test results.</li> </ul>		
9.1.5	Oil sample testing	One sample of oil drawn from every lot of transformer offered for inspection should be tested at CPRI/ERDA lab for tests as listed under Table-1 of IS:1866 (2000). The cost of this testing should be included within the cost of transformer.		
9.1.6	Test on fittings and accessories	As per manufacturer's standard		
9.2	Routine tests	The sequence of routine testing shall be as follows  i) Visual and dimension check for completely assembled transformer  ii) Measurements of voltage ratio  iii) Measurements of winding resistance at principal tap and two extreme taps.  iv) Vector Group and polarity test  v) Measurements of insulation resistance*  vi) Separate sources voltage withstand test.  vii) Measurement of iron losses and exciting current at rated frequency and 90%, 100% and 110% rated voltage.  viii) Induced voltage withstand test.  ix) Load losses measurement at 50 % & 100 % of load.  x) Impedance measurement of principal tap (HV and LV) of the transformer.  xi) Routine test of tanks  xii) Induced voltage withstand test (to be repeated if type tests are conducted).  xiii) Measurement of Iron loss (to be repeated if type test are conducted).  xiv) Measurement of capacitance and Tan Delta for transformer winding and Tan Delta for transformer oil (for		



	T	11.6
		all transformers).  xv) Ratio of CT  xvi) Oil leakage test on completely assembled transformer  xvii) Magnetic balance test  xviii)Power frequency voltage withstand test on all auxiliary circuits  xix) Certification of all test results.  xx) Temperature Rise Test #
		Note: a) *Insulation resistance measurement shall be carried out at 5kV for HV and 1kV for LV. Value of IR should not be less than 1000 Mohms. Polarization Index (PI = IR <sub>10min</sub> /IR <sub>1min</sub> ) should not be less than 1.5 (If one minute IR value is above 5000 Mohms and it is not be possible to obtain an accurate 10 minutes reading, in such cases polarization index can be disregarded as a measure of winding condition.)
		b) #Temperature rise test may be necessary to be carried one unit/lot. Purchaser's engineer, will at its discretion, select transformer for temp. rise test from any lot offered for inspection at manufacturer's works and witness the same for comparison with ERDA/CPRI type test results c) BSES may appoint recognized testing authority like CPRI /ERDA lab with their instruments & engineer's team and measure no load loss, load loss and percentage impedance of the transformer at supplier's works at our own cost. Bidder shall agree and give them full co-operation during their stay & testing at shop floor. The losses & impedance values so obtained will be considered as final.
9.3	Acceptance test at NABL lab	Bidder should have in-house NABL accredited testing facility. In case of unavailability of same, one Transformer of each rating shall be randomly selected and sealed by BSES representative for complete acceptance
	1	1 1 -



		test as per IS 1180 ( including temperature
		test) at third party NABL Lab. Tests shall
		be conducted once per Rate contract.
9.4	Type Tests	On one transformer of each rating and
0.1	1,750 1,0000	type at CPRI/ERDA.
		i) Impulse withstand test on all three
		HV limbs of the transformers for
		chopped wave as per standard
		ii) Temperature rise test as per IS
		iii) Dissolved gas analysis before and
		after Temperature Rise Test
		iv) Pressure and Vacuum test on tank
		1.7
		Note – Purchaser may choose to carry out
		short circuit, impulse & temperature rise
		test on one unit from a lot offered from
		inspection at CPRI/ERDA
9.5	Special Tests	On one transformer of each rating and
		type
		i) Dynamic & Thermal (3 sec) Short
		Circuit Test as per IS 2026
		ii) Measure of zero seq. impedance (Cl.
		16.10 IS 2026 Part I).
		iii) Measurement of acoustic noise level
		(Cl. 16.12 of IS 2026 Part I).
		iv) Measurement of harmonic level on no
		load current.
		v) Paint adhesion test.
		vi) High voltage withstand test shall be
		performed on the auxiliary equipment and wiring after complete assembly.
		Cost of such tests, if extra, shall be
		quoted separately by the Bidder.
9.6	Notification to bidders	In case bidder had conducted type &
3.0	Transaction to bladelo	special tests from CPRI/ERDA on BSES
		design and there is no design change in
		the transformer less than 10 years from
		the date of the bid opening, then bidder
		need not to conduct the type test from
		CPRI/ERDA lab.
		The bidder shall submit the under taking
		that there is no change in design with
		The state of the s
[		respect to type tested design.



# TECHNICAL SPECIFICATION OF CONVENTIONAL OIL FILLED DISTRIBUTION TRANSFORMER

		quality. In case the product offered is never type & special tested the same (as per above clause 9.4.& 9.5), is to be conducted by bidder at his own cost at CPRI/ERDA		
9.7	Customer Hold Point	<ul> <li>i) GTP &amp; Drawings approval</li> <li>ii) Core Inspection(See Cl No 9.1.2)         Sample to be tested at CPRI/ERDA for each lot.     </li> <li>iii) Tank Pressure &amp; vacuum Test</li> <li>iv) Core &amp; Coil Stage inspection of each lot to be offered for final testing.</li> </ul>		

### 10.0 Packing , Shipping, Handling and Storage

10.1	Packing				
10.1.1	Packing protection	Against corrosion, dampness, heavy			
		rains, breakage and vibration			
10.1.2	Packing for accessories and spares	Robust wooden non returnable packing			
		case with all the above protection			
10.1.3	Packing details	On each packing case details required			
		as follows			
		i) Individual serial number;			
		ii) Purchaser's name;			
		iii) PO number;			
		iv) Destination;			
		v) Supplier's name; vi) Name and address of supplier's agent vii) Description and quantity viii) Manufacturer's name ix) Country of origin			
		x) Case measurements			
		xi) Gross and net weights in			
		kilograms			
		xii) All necessary slinging and stacking			
		instructions.			
10.2	Shipping	i) The bidder shall ascertain at an			
		early date and definitely before the			
		commencementof manufacture, any			
		transport limitations such as weights,			
		dimensions, road culverts, overhead			
		lines, free access etc. from the			



### TECHNICAL SPECIFICATION OF CONVENTIONAL OIL FILLED DISTRIBUTION TRANSFORMER

		manufacturing plant to the project site; and furnish to the Purchaser confirmation that the proposed packages can be safely transported, as normal or oversize packages, upto the plant site.  ii) Any modifications required in the infrastructure and cost thereof in this connection shall be brought to the notice of the Purchaser
10.3	Handling and Storage	As per manufacturer's instruction


#### 11.0 Deviations

Deviations from this Specification shall be stated in writing with the tender by reference to the Specification clause/GTP/Drawing and a description of the alternative offer. In absence of such a statement, requirements of the Specification shall be met without exception.

#### 12.0 Drawings& Data Submission Matrix

Drawing submission shall be as per the matrix given below. All documents/ drawing shall be provided on A3/A4 sheet in box file with separators for each section. PDF shall also be provided of all documents via USB. Deviation sheet and GTP shall be provided in excel sheet.Language of the documents shall be English only. Deficient/ improper document/ drawing submission may liable for rejection.

	Documents to be submitted	With the bid	After Award	
S.no			For Approval	Prior to dispatch
1	Copy of specification along with company seal & signature on each page.	✓	✓	
2	Guaranteed technical particulars	<b>✓</b>	✓	
3	Outline dimension drawing for each major component, general arrangement drawing showing component layout an general schematic diagrams.	<b>√</b>	<b>✓</b>	
4	Type test certificates, where available, and sample routine test reports	✓	<b>✓</b>	
5	Detailed reference list of customers already using equipment offered during the last 5 years with particular emphasis on units of similar design and rating	✓		






	1		After Award	
S.no	Documents to be submitted	With the bid	For	Prior to
6	Details of manufacturers quality assurance standard and programme and ISO 9000 series or equivalent national certification.	<b>✓</b>	Approval	dispatch
7	Deviations from this specification. Only deviations approved in writing before award of contract shall be accepted.	<b>√</b>		
8	Recommended spare parts and consumable items for the five years of operation with prices and spare parts catalogue with price list for future requirements.	<b>√</b>		
9	Transport / shipping dimension and weights, space required for handling parts for maintenance	✓		
10	Write up on oil preservation system.		✓	✓
11	Quality assurance program.	<b>√</b>	<b>√</b>	
12	Programme for production and testing		✓	
13	General description of the equipment and all components, including brochures		✓	
14	Detailed dimension drawing for all components ,general arrangement drawing showing detailed component layout and detailed schematic and wiring drawings for all components like marshalling box and OTI/WTI scanner, PRV, Buchhloz relay. Auxiliary relays		<b>✓</b>	
15	Calculations to substantiate choice of electrical, structural, mechanical component size, ratings		✓	
16	Detailed loading drawing to enable the purchaser to design and construct foundations for the transformer.		<b>√</b>	
17	Transport /shipping dimension with weights ,wheel base details, untanking height etc.		✓	
18	Terminal arrangements and cable box details		<b>√</b>	
19	Flow diagram of cooling system showing no. of cooling banks		✓	
20	Drawings of major components like		✓	



			Afte	r Award
S.no	Documents to be submitted	With the bid	For Approval	Prior to dispatch
	bushing,CT, OTI/WTI Scanner, PRV, Buchholz relay, Auxiliary relays, Valves, radiators etc			
21	Lists of makes of all fittings and accessories		✓	
22	Statement drawing attention to all exposed points in the equipment at which contact with or in close proximity to other metals and stating clearly what protection is employed to prevent corrosion at each point		<b>✓</b>	
23	Detailed installation and commissioning instructions			✓
24	Inspection and test reports carried out in manufacturers works			✓
25	Test certificates of all bought out items. and catalogues			<b>✓</b>
26	Operation and maintenance instructions as well as trouble shooting charts.			✓





### Annexure A Scope of supply

### 1.0 The scope of supply shall include following

1.1 Design, manufacture, assembly, testing at stages of manufacture as per Cl. 9 of this specification, final testing at manufacturer works on completely assembled transformer before dispatch, packing, transportation, delivery and submission of all documentation for the Power transformer with all accessories as below

Sr. No	Description	Scope of
		Supply
1.1.1	Fully assembled transformer with all major parts like conservator,	YES
	Radiators, CT box, Fittings and accessories as per Clause 5.0 of	
	this specification	
1.1.2	Off circuit tap changer as per this specification	YES
1.1.3	HV, LV, cable boxes	YES
1.1.4	Support steel material for support of cable boxes from ground	YES
1.1.5	Foundation Bolts for complete transformer	YES
1.1.6	Support structure to support of cable from the transformer tank	YES
1.1.7	Nickel Plated brass double compression glands for HV and LV,	YES
	LVN cables (in case of termination by cable)	
1.1.8	Long barrel medium duty Aluminium lugs for power cables (in	YES
	case of termination by cable)	
1.1.9	Nickel Plated brass double compression glands and tinned copper	YES
	lugs for control cable termination in CT box for vendor's cables	
1.1.10	Cables and wires for transformer accessories and internal wiring of	YES
	CT box	
1.1.11	Touch up paint, minimum 2 litres	YES



# TECHNICAL SPECIFICATION OF CONVENTIONAL OIL FILLED DISTRIBUTION TRANSFORMER

1.1.12	Extra Transformer oil 10 % in non returnable drums	YES
1.1.13	One spare complete set of gaskets	YES
1.1.14	Routine testing as per Cl. 9.2 & 9.3 of this specification	YES
1.1.15	Type testing as per Cl. 9.4 of this specification	YES
1.1.16	Special testing as per Cl. 9.5 of this specification	YES
1.1.17	Submission of Documentation as detailed below	YES

### Annexure B Service Conditions

1.0.0	Delhi Atmospheric conditions	
a)	Average grade atmosphere :	Heavily polluted, dry
	Maximum altitude above sea	1000 M
	level	
b)	Ambient Air temperature	Highest 50 deg C, Average 40 deg C
	Design ambient temperature	50 deg C
c)	Relative Humidity	90 % Max
d)	Seismic Zone	4
e)	Rainfall	750 mm concentrated in four months



#### Annexure C Technical Particulars of transformer oil

Transformer oil shall be new and conform to the following requirements:

#### 1.0 Codes & standards

Latest revision of following codes & standards with all amendments –

		Standard no	Title
	1.1	IS 335	New insulating oils
ĺ	1.2	IS 1783	Drums for oils

#### 2.0 Properties

The insulating material shall have following features

Sr No	Item description	Specification requirement							
2.1	Function								
2.1.1	Viscosity								
2.1.1.1	Viscosity at 40°C	15 mm <sup>2</sup> /s, Max							
2.1.1.2	Viscosity at 0°C	1800 mm <sup>2</sup> /s, Max							
2.1.2	Pour Point	- 10 <sup>o</sup> C, Max							
2.1.3	Water content	30 mg/Kg, Max							
2.1.4	Breakdown voltage								
2.1.4.1	New unfiltered oil	30 kV, Min							
2.1.4.2	After filtration	70 kV, Min							
2.1.5	Density at 20 <sup>o</sup> C	0.895 g/ml, Max							
2.1.6	Dielectric dissipation factor at 90°C	0.005, Max							
2.1.7	Particle Content	Manufacturer to specify the data							
2.2	Refining/Stability								
2.2.1	Appearance of oil	Clear, free from sediment and suspended matter							
2.2.2	Acidity	0.01 mg KOH/g, Max							
2.2.3	Interfacial tension at 27°C	0.04 N/m, Min							
2.2.4	Total sulphur content	Manufacturer to specify the data							
2.2.5	Corrosive sulfur	Not-corrosive							
2.2.6	Potentially Corrosive sulfur	Not-corrosive							
2.2.7	DBDS	Not detectable (<5 mg/kg)							
2.2.8	Inhibitor	Not detectable (<0.01%)							
2.2.9	Metal Passivator	Not detectable (<5 mg/kg)							
2.2.10	Other additives	Manufacturer to specify the data							
2.2.11	2-furfural and related Compounds content	Not detectable (<0.05 mg/kg) for each individual compound							
2.3	Performance								
2.3.1	Oxidation stability, test duration 164 h								
2.3.1.1	Total acidity	1.2 mg KOH/g, Max							
2.3.1.2	Sludge	0.8%, Max							
2.3.1.3	DDF at 90°C	0.5, Max							



Sr No	Item description	Specification requirement
2.3.2	Gassing Tendency	Manufacturer to specify the data
2.3.3	ECT	Manufacturer to specify the data
2.4	Health,safety and Environment	
2.4.1	Flash point	135 <sup>o</sup> C, Min
2.4.2	PCA content Max	3%, Max
2.4.3	PCB content	Not detectable (<2 mg/Kg)





### Annexure D Manufacturing Quality Assurance Plan

SL NO	CHARACTRISTICS	CLASS TYPE OF CHECK	· · · · · · · · · · · · · · · · · · ·	QUANTUM		ACCEPTANC	FORMAT OF	AGENCY			REMARKS
			CHECK	ECK OF CHECK	DOCUMENT	E NORMS	RECORD	S	М	0	
1	2	3	4	5	6	7	8		9		10
Α	RAW Material										
1	Winding Conductor (PICC)										
1.1	Bare Dimensions & Finish of Conductor	Major	Measurement	1 sample per size per lot	IEC 13730 Part 27,IEC 60317,IS 7404,IS 6160,IS 613	IEC 13730 Part 27,IEC 60317,IS 7404,IS 6160,IS 613	Supplier's TC	Р	V	R	
1.2	Increase in dimensions due to Paper covering	Major	Measurement	-DO-	-DO-	-DO-	-DO-	Р	V	R	
1.3	Resistivity @ 20°C	Major	Electrical	-DO-	-DO-	-DO-	-DO-	Р	V	R	
1.4	No of Layers	Critical	Measurement	-DO-	-DO-	-DO-	-DO-	Р	V	R	
1.5	Conductor Tensile strength	Critical	Mechanical	-DO-	-DO-	-DO-	-DO-	Р	V	R	
1.6	Conductor Elongation	Critical	Mechanical	-DO-	-DO-	-DO-	-DO-	Р	V	R	
1.7	% Overlap of Paper	Critical	Mechanical	-DO-	-DO-	-DO-	-DO-	Р	V	R	





SL NO	CHARACTRISTICS	CLASS	TYPE OF	QUANTUM	REFERENCE	ACCEPTANC E NORMS	FORMAT OF	AGENCY			REMARKS
			CHECK	OF CHECK	DOCUMENT		RECORD	S	M	0	
1	2	3	4	5	6		8		9		10
1.8	Corner Radius	Critical	Mechanical	-DO-	-DO-	-DO-	-DO-	Р	V	R	
1.9	Kraft Paper Insulation										
1.9.1	Thickness	Major	Measurement	1 sample per size per lot	IEC:60554, IS:9335	IEC:60554, IS:9335	Supplier's TC	Р	V	R	
1.9.2	Apparent Density	Major	Chemical	-DO-	-DO-	-DO-	-DO-	Р	V	R	
1.9.3	Air Permeability	Major	Chemical	-DO-	-DO-	-DO-	-DO-	Р	V	R	
1.9.4	Tensile Index (Longitudinal and Transverse)	Major	Mechanical	-DO-	-DO-	-DO-	-DO-	Р	V	R	
1.9.5	Electrical Strength in Air	Major	Electrical	-DO-	-DO-	-DO-	-DO-	Р	V	R	
1.9.6	Ash Content	Major	Chemical	-DO-	-DO-	-DO-	-DO-	Р	V	R	
1.9.7	pH of 5% Aqueous Extract	Major	Chemical	-DO-	-DO-	-DO-	-DO-	Р	V	R	
1.9.8	Conductivity of 5% Aqueous Extract	Critical	Chemical	-DO-	-DO-	-DO-	-DO-	Р	V	R	
1.9.9	Moisture Content	Major	Chemical	-DO-	-DO-	-DO-	-DO-	Р	V	R	
1.9.10	Heat Stability	Major	Chemical	-DO-	-DO-	-DO-	-DO-	Р	V	R	
1.9.11	Degree of Polymerization	Major	Chemical	-DO-	-DO-	-DO-	-DO-	Р	٧	R	





SL NO	CHARACTRISTICS	CLASS	TYPE OF	QUANTUM	REFERENCE	ACCEPTANC	FORMAT OF	AGENCY			REMARKS
			CHECK OF CHECK	OF CHECK	DOCUMENT	E NORMS	RECORD	S	М	0	
1	2	3	4	5	6	7	8		9		10
1.9.12	Elongation (MD & CMD)	Major	Mechanical	-DO-	-DO-	-DO-	-DO-	Р	V	R	
1.9.13	Tear index	Major	Mechanical	-DO-	-DO-	-DO-	-DO-	Р	V	R	
2.0	CRGO Laminations (Watt absorption)										
2.1	Specific Core Loss	Major	Electrical	Random	IEC 60404, IS 3024, IS 649	IEC 60404, IS 3024, IS 649	Supplier's TC	Р	V	R	
2.2	Surface Insulation resistance	Major	Electrical	-DO-	-DO-	-DO-	-DO-	Р	V	R	
2.3	Ageing Test	Major	Measurement	-DO-	-DO-	-DO-	-DO-	Р	٧	R	
2.4	Stacking Factor	Major	Measurement	-DO-	-DO-	-DO-	-DO-	Р	V	R	
2.5	Waviness	Major	Measurement	-DO-	-DO-	-DO-	-DO-	Р	V	R	
2.6	Edge Burr	Major	Visual	-DO-	-DO-	-DO-	-DO-	Р	V	R	
2.7	Sample testing for Checking Specific Core loss, accelerated ageing test, Surface insulation resistivity, AC permeability and magnetization, stacking	Major	Electrical	100%	-DO-	-DO-			Р	W	Sample will be randomly selected by BSES & will be send for testing at CPRI/ERDA





SL NO	CHARACTRISTICS	CLASS	TYPE OF CHECK	QUANTUM	REFERENCE	ACCEPTANC E NORMS	FORMAT OF RECORD	AGENCY			REMARKS
				OF CHECK	DOCUMENT			S	М	0	
1	2	3	4	5	6	7	8		9		10
	factor, Ductility										lab.
3.12	Core Cutting	Major	Visual	Random	-DO-	-DO-	-DO-	Р	W	W	
3.0	Un-impregnated Laminated Wood										
3.1	Thickness	Major	Visual	1 sample size / LOT	IS 3513/IEC 61061	IS 3513/IEC 61061	Supplier's TC	Р	V	R	
3.2	Density	Major	Chemical	-DO-	-DO-	-DO-	-DO-	Р	V	R	
3.3	Moisture Content	Major	Chemical	-DO-	-DO-	-DO-	-DO-	Р	V	R	
3.4	Oil Absorption	Major	Chemical	-DO-	-DO-	-DO-	-DO-	Р	٧	R	
3.5	Cross breaking strength	Major	Mechanical	-DO-	-DO-	-DO-	-DO-	Р	٧	R	
3.6	Compressive Strength	Major	Mechanical	-DO-	-DO-	-DO-	-DO-	Р	٧	R	
3.7	Electric Strength in Oil	Major	Electrical	-DO-	-DO-	-DO-	-DO-	Р	٧	R	
3.8	Shrinkage in oil	Major	Mechanical	-DO-	-DO-	-DO-	-DO-	Р	٧	R	
3.9	Tensile Strength,compressive strength	Major	Mechanical	-DO-	-DO-	-DO-	-DO-	Р	٧	R	
4.0	Press Boards (Pre- compressed)										





SL NO	CHARACTRISTICS	CLASS	TYPE OF	QUANTUM OF CHECK	REFERENCE	ACCEPTANC E NORMS	FORMAT OF	A	AGENCY		REMARKS
			CHECK		DOCUMENT		RECORD	S	М	0	
1	2	3	4	5	6	7	8		9		10
4.1	Thickness	Major	Measurement	1 sample/Size/LO T	IEC:60641, IS:1576	IEC:60641, IS:1576	Supplier's TC	Р	V	R	
4.2	Tensile Strength (MD & CMD)	Major	Mechanical	-DO-	-DO-	-DO-	-DO-	Р	V	R	
4.3	Shrinkage in Air (MD & CMD)	Major	Mechanical	-DO-	-DO-	-DO-	-DO-	Р	V	R	
4.4	Moisture Content	Major	Chemical	-DO-	-DO-	-DO-	-DO-	Р	V	R	
4.5	Oil Absorption	Major	Chemical	-DO-	-DO-	-DO-	-DO-	Р	V	R	
4.6	Electrical Strength in Oil and air	Major	Electrical	-DO-	-DO-	-DO-	-DO-	Р	V	R	
4.7	pH of 5% aqueous extract	Major	Chemical	-DO-	-DO-	-DO-	-DO-	Р	V	R	
4.8	Conductivity of 5% aqueous extract	Major	Chemical	-DO-	-DO-	-DO-	-DO-	Р	V	R	
4.9	Compressibility	Major	Mechanical	-DO-	-DO-	-DO-	-DO-	Р	V	R	
4.10	Ash Content	Major	Chemical	-DO-	-DO-	-DO-	-DO-	Р	V	R	
4.11	Apparent density	Major	Chemical	-DO-	-DO-	-DO-	-DO-	Р	V	R	
4.12	Elongation (MD & CMD)	Major	Mechanical	-DO-	-DO-	-DO-	-DO-	Р	V	R	
5.0	Tank and its										





SL NO	CHARACTRISTICS	CLASS	TYPE OF	QUANTUM	REFERENCE	ACCEPTANC	FORMAT	-	GEN	CY	REMARKS
			CHECK	OF CHECK	DOCUMENT	E NORMS	RECORD	S	М	0	
1	2	3	4	5	6	7	8		9	1	10
	accessories										
5.1	Structural steel										
5.1.1	Thickness	Major	Measurement	Random	IS 2062/ IS:1576	IS 2062/ IS:1576	Suppliers TC	Р	٧	R	
5.1.2	Yield Strength	Major	Mechanical	-DO-	-DO-	-DO-	-DO-	Р	٧	R	
5.1.3	Tensile Strength	Major	Mechanical	-DO-	-DO-	-DO-	-DO-	Р	٧	R	
5.1.4	Elongation	Major	Mechanical	-DO-	-DO-	-DO-	-DO-	Р	٧	R	
5.1.5	Bend test	Major	Mechanical	-DO-	-DO-	-DO-	-DO-	Р	٧	R	
5.1.6	Chemical composition	Major	Chemical	-DO-	-DO-	-DO-	-DO-	P	V	R	
5.2	Manufacturing of Tank and accessories										
5.2.1	Dimension check	Major	Measurement	100%	MFR. Spec/ DRG/BSES approved document	MFR. Spec/ DRG/ BSES approved document	MFR. Fabrication report	Р	W	R	
5.2.2	Joint preparation	Major	Measurement	100%	-DO-	-DO-	-DO-	Р	٧	R	
5.2.3	Assembly and alignment	Major	Visual and measurement	100%	MFR. Spec/ DRG	MFR. Spec/ DRG	MFR. Fabrication report	Р	V	R	





SL NO	CHARACTRISTICS	CLASS	TYPE OF	QUANTUM	REFERENCE	ACCEPTANC	FORMAT OF	4	AGEN	ICY	REMARKS
			CHECK	OF CHECK	DOCUMENT	E NORMS	RECORD	S	М	0	
1	2	3	4	5	6	7	8		9		10
5.2.4	DP Test on Welds on Load bearing members eg. Jack Pads	Major	DP Test	100%	-DO-	-DO-	-DO-	Р	W	R	
5.2.5	Pressure test	Major	Mechanical	On One unit	CBIP	CBIP	Test Report		Р	W	STAGE INSPECTIO N
5.2.6	Vacuum test	Major	Mechanical	On One unit	CBIP	CBIP	Test Report		Р	W	STAGE INSPECTIO N
5.2.7	Leakage test										
5.2.7.1	Main Unit	Major	Mechanical	100%	MFR. STD	MFR. STD	Test report	Р	W	R	
5.2.7.2	Conservator	Major	Mechanical	100%	MFR. STD	MFR. STD	Test report	Р	W	R	
5.2.7.3	Pipes	Major	Mechanical	100%	MFR. STD	MFR. STD	Test report	Р	W	R	
5.2.8	Surface preparation	Major	Visual	100%	MFR. STD	MFR. STD	MFR. Fabrication report	Р	٧	R	
5.2.9	Final Paint Coat (including Primer), Thickness & Shade	Major	Measurement	100%	MFR. STD	MFR. STD	Test report	Р	V	R	
5.2.10	Paint Peel off test	Major	Visual	100%	MFR. STD	MFR. STD	Test report		Р	R	





SL NO	CHARACTRISTICS	CLASS	TYPE OF	QUANTUM	REFERENCE	ACCEPTANC	FORMAT OF		AGEN	ICY	REMARKS
			CHECK	OF CHECK	DOCUMENT	E NORMS	RECORD	S	М	0	
1	2	3	4	5	6	7	8		9	1	10
6.0	Bushing/Insulators										
6.1	Make and rating	Critical	Visual	100%	IS 8603/IS 2099/App.Drg.	IS 8603/IS 2099/App.Drg.	Supplier's TC	Р	V	R	
6.2	Visual inspection for surface smoothness, any damage, etc.	Critical	Visual	100%	-DO-	-DO-	-DO-	Р	V	R	
6.3	Important dimension including Creepage distance	Major	Measurement	One sample /size / lot	-DO-	-DO-	-DO-	Р	V	R/W	
6.4	Dry Power Frequency voltage withstabd test	Major	Electrical	100%	-DO-	-DO-	-DO-	Р	V	R	
6.5	Air pressure test in water	Major	Electrical	100%	-DO-	-DO-	-DO-	Р	V	R	
6.6	Electro -Tinning	Major	Electrical	100%	-DO-	-DO-	-DO-	Р	V	R	
6.7	All routine electrical tests	Major	Electrical	-do-	-do-	-do-	-do-	P	V	R	
7.0	Magnetic Oil Gauge										
7.1	Make and dimensions	Major	Physical	100%	App.Drg./ Supplier Catalogue	App.Drg./ Supplier Catalogue	Supplier's TC	Р	V	R	
7.2	Test for level (eg at 30°	Major	Mechanical	100%	-DO-	-DO-	-DO-	Р	V	R	





SL NO	CHARACTRISTICS	CLASS	TYPE OF	QUANTUM	REFERENCE	ACCEPTANC	FORMAT OF	-	AGEN	ICY	REMARKS
			CHECK	OF CHECK	DOCUMENT	E NORMS	RECORD	S	М	0	
1	2	3	4	5	6	7	8		9		10
	Max)										
7.3	Switch contact test	Major	Electrical	100%	-DO-	-DO-	-DO-	Р	V	R	
7.4	Leakage test	Major	Mechanical	100%	-DO-	-DO-	-DO-	Р	V	R	
7.5	Switch operating and setting	Major	Electrical	100%	-DO-	-DO-	-DO-	Р	V	R	
7.6	Di-electric test at 2 KV AC between live terminal and body	Major	Electrical	100%	-DO-	-DO-	-DO-	Р	V	R	
8.	Buchholz relay										
8.1	Make and type	Critical	Visual	100%	App.Drg./ Supplier Catalogue /IS 3637	App.Drg./ Supplier Catalogue /IS 3637	Supplier's TC	Р	V	R	
8.2	Bore size	Major	Measurement	One/size	-DO-	-DO-	-DO-	Р	V	R	
8.3	Porosity and element test	Major	Critical	100%	-DO-	-DO-	-DO-	Р	V	R	
8.4	Gas volume and surge test	Major	Mechanical	One/Size	-DO-	-DO-	-DO-	Р	V	R	
8.5	HV test at 2 KV AC & IR test	Major	Electrical	100%	-DO-	-DO-	-DO-	Р	V	R	





SL NO	CHARACTRISTICS	CLASS	TYPE OF	QUANTUM	REFERENCE	ACCEPTANC	FORMAT OF	-	AGEN	CY	REMARKS
			CHECK	OF CHECK	DOCUMENT	E NORMS	RECORD	S	M	0	
1	2	3	4	5	6	7	8		9		10
8.6	Continuity for alarm/Trip	Major	Electrical	100%	-DO-	-DO-	-DO-	Р	V	R	
9.0	Radiator										
9.1	Dimension, number of sections	Major	Measurement	100%	MFR. DRG	VTD DRG	Supplier's TC	Р	٧	R	
9.2	Leakage Test with Air	Major	Visual	100%	As per CBIP	As per CBIP	Supplier's TC	Р	٧	R	
9.3	Paint shade	Major	Visual & Measurement	Random	MFR. Specs /Drg	MFR. Specs /Drg	Supplier's TC	Р	V	R	
9.4	Surface Preparation	Major	Measurement	100%	SA 2.5 of ISO 8503/2	SA 2.5 of ISO 8503/2	Supplier's TC	Р	٧	R	
10	Off Circuit Tap Changer										
10.1	Make, Rating and model	Major	Visual	100%	MFR. Spec/ IS 8468 /IEC 214- 1989	MFR. Spec/ IS 8468 /IEC 214-1989	Supplier's TC	Р	V	R	
10.2	Contact Resistance test	Major	Visual	100%	Supplier's STD	Supplier's STD	Supplier's TC	Р	V	R	
10.3	Electrical Routine test	Major	Electrical	100%	IS 8468/ IEC 214	IS 8468/ IEC 214	Supplier's TC	Р	V	R	
10.4	Mechanical test on diverter switch including	Major	Mechanical	100%	-DO-	-DO-	-DO-	Р	V	R	





SL NO	CHARACTRISTICS	CLASS	TYPE OF	QUANTUM	REFERENCE	ACCEPTANC	FORMAT OF		AGEN	ICY	REMARKS
			CHECK	OF CHECK	DOCUMENT	E NORMS	RECORD	S	M	0	
1	2	3	4	5	6	7	8		9		10
	pressure test										
10.5	HV test for Auxiliary circuit	Major	Electrical	100%	-DO-	-DO-	-DO-	Р	V	R	
10.6	Mechanical test on Tap selector switch with motor drive	Major	Mechanical	100%	-DO-	-DO-	-DO-	Р	V	R	
10.7	Pressure test for Oil Compartment	Major	Mechanical test	100%	-DO-	-DO-	-DO-	Р	V	R	
11.0	Transformer Oil	Major	Testing	One Sample from each lot	Annexure D of BSES spec.	Annexure D of BSES spec.	STC	Р	V	R	One sample of oil shall be drawn from each lot of Transforme r offered for final inspection by BSES representati ve and same shall be tested at CPRI/ERDA





SL NO	CHARACTRISTICS	CLASS	TYPE OF	QUANTUM	REFERENCE	ACCEPTANC	FORMAT OF	4	GEN	ICY	REMARKS
			CHECK	OF CHECK	DOCUMENT	E NORMS	RECORD	S	М	0	
1	2	3	4	5	6	7	8		9		10
											lab as per relevant std.
12.0	OTI / WTI Scanner										
12.1	Make and Model	Critical	Visual	100%	MFR. STD/App. Drg.	MFR. STD/App. Drg.	Suppliers TC	Р	Р	R	
12.2	Calibration	Major	Electrical	100%	-DO-	-DO-	-DO-	Р	Р	R	
12.3	Check for alarm & trip signal operation against set value	Major	Electrical	100%	-DO-	-DO-	-DO-	Р	Р	R	
12.4	HV test	Major	Electrical	100%	-DO-	-DO-	-DO-	Р	٧	R	
12.5	Switch Setting	Major	Mechanical	100%	-DO-	-DO-	-DO-	Р	Р	R	
13.0	Bushing Metal parts										
13.1	Dimension Checks	Major	Mechanical	100%	MFR. STD /IS 3347	MFR. STD /IS 3347	Supplier's TC	Р	V	R	
13.2	Surface Finish	Major	Visual	100%	-DO-	-DO-	-DO-	Р	٧	R	
14.0	Current Transformers										
14.1	Dimensions, make	Major	Measurement	100%	MFR. STD /App. DRG. / IS 2705	MFR. STD /App. DRG. / IS 2705	Supplier's TC	Р	Р	R	





SL NO	CHARACTRISTICS	CLASS	TYPE OF	QUANTUM	REFERENCE	ACCEPTANC	FORMAT OF		AGEN	ICY	REMARKS
			CHECK	OF CHECK	DOCUMENT	E NORMS	RECORD	S	М	0	
1	2	3	4	5	6	7	8		9		10
14.2	Rating and terminal marking	Major	Physical	100%	MFR. APPD. DRG	MFR. APPD. DRG	Supplier's TC	Р	Р	R	
14.3	Measurement of ratio and phase angle error	Major	Electrical	100%	IS 2705	IS 2705	Supplier's TC	Р	٧	R	
14.4	High Voltage test	Major	Electrical	100%	-DO-	-DO-	-DO-	Р	٧	R	
14.5	Inter-Turn insulation test	Major	Electrical	100%	-DO-	-DO-	-DO-	Р	V	R	
14.6	Polarity	Major	Electrical	100%	-DO-	-DO-	-DO-	Р	V	R	
14.7	Knee point voltage	Major	Electrical	-do-	-do-	-do-	-do-	Р	٧	R	Only for Class-PS NCT
14.8	Excitation current	Major	Electrical	-do-	-do-	-do-	-do-	Р	V	R	Only for Class-PS NCT
14.9	Secondary winding resistance	Major	Electrical	-do-	-do-	-do-	-do-	Р	٧	R	Only for Class-PS NCT
15.0	Valves/ Butterfly valves										
15.1	Make & operation	Critical	Visual	100%	APP.drg./MFR. STD/IS 778	APP.drg./MFR . STD/IS 778	Supplier's TC	Р	Р	R	
15.2	Leakage test for body	Major	Mechanical	100%	-DO-	-DO-	-DO-	Р	Р	R	





SL NO	CHARACTRISTICS	CLASS	TYPE OF	QUANTUM	REFERENCE	ACCEPTANC	FORMAT OF	-	GEN	ICY	REMARKS
			CHECK	OF CHECK	DOCUMENT	E NORMS	RECORD	S	М	0	
1	2	3	4	5	6	7	8		9		10
15.3	Leakage test for top spindle	Major	Mechanical	100%	-DO-	-DO-	-DO-	Р	Р	R	
15.4	Mounting dimensions	Major	Measurement	100%	-DO-	-DO-	-DO-	Р	Р	R	
15.5	Material of Body & Seat	Major	Chemical & measurement	1 sample per lot	-DO-	-DO-	-DO-	Р	٧	R	
16.0	Pressure relief Valve/Device										
16.1	Make	Critical	Visual	100%	MFR. STD/ App. Drg.	MFR. STD/ App. Drg.	-DO-	Р	Р	R	
16.2	Operating pressure	Major	Mechanical	100%	-DO-	-DO-	-DO-	Р	Р	R	
16.3	Switch Contact test	Major	Electrical	100%	-DO-	-DO-	-DO-	Р	Р	R	
16.4	Mounting dimensions	Major	Measurement	100%	-DO-	-DO-	-DO-	Р	٧	R	
16.5	HV test between body & terminal	Major	Electrical	100%	-DO-	-DO-	-DO-	Р	٧	R	
17.0	Gasket										
17.1	Appearance & Finish	Major	Mechanical	1 sample per size per lot	IS 4253-II, 1980/IS 3400	IS 4253-II, 1980/IS 3400	Supplier's TC	Р	٧	R	
17.2	Hardness, IRHD	Major	Mechanical	-DO-	-DO-	-DO-	-DO-	Р	V	R	
17.3	Tensile Strength	Major	Mechanical	-DO-	-DO-	-DO-	-DO-	Р	V	R	





SL NO	CHARACTRISTICS	CLASS	TYPE OF	QUANTUM	REFERENCE	ACCEPTANC	FORMAT OF		AGEN	CY	REMARKS
			CHECK	OF CHECK	DOCUMENT	E NORMS	RECORD	S	М	0	
1	2	3	4	5	6	7	8		9	1	10
17.4	Compressibility	Major	Mechanical	-DO-	-DO-	-DO-	-DO-	Р	V	R	
17.5	Compression set	Major	Mechanical	-DO-	-DO-	-DO-	-DO-	Р	V	R	
17.6	Flexibility	Major	Mechanical	-DO-	-DO-	-DO-	-DO-	Р	V	R	
18.0	Silica gel Breather with oil seal										
18.1	Type / model/weight	Major	Visual	100%	MFR. STD /DRG	MFR. STD /DRG	Supplier's TC	Р	V	R	
18.2	Color of Gel	Major	Visual	100%	-DO-	-DO-	-DO-	Р	V	R	
19	Control cubicle/CT terminal Box										
19.1	Dimensions	Major	Measure ment	100%	BSES Approved document	BSES Approved document	Supplier's TC	Р	V	R	
19.2	Hi-voltage test at 2kV RMS for one minute	Major	Electrical	-DO-	-DO-	-DO-	-DO-	Р	V	R	
19.3	Insulation resistance at 5000 V DC	Major	Electrical	-DO-	-DO-	-DO-	-DO-	Р	V	R	
19.4	Verification of component & Fittings	Major	Visual	-DO-	-DO-	-DO-	-DO-	Р	V	R	





SL NO	CHARACTRISTICS	CLASS	TYPE OF	QUANTUM	REFERENCE	ACCEPTANC	FORMAT OF	4	AGEN	ICY	REMARKS
			CHECK	OF CHECK	DOCUMENT	E NORMS	RECORD	S	М	0	
1	2	3	4	5	6	7	8		9		10
19.5	Wiring check	Major	Visual	-DO-	-DO-	-DO-	-DO-	Р	V	R	
19.6	Welding, grinding, chipping	Major	Visual	DO-	-DO-	-DO-	-DO-	Р	V	R	
19.7	Paint	Major	Visual	-DO-	-DO-	-DO-	-DO-	Р	V	R	
В	In Process										
1	Winding(LV and HV)										
1.1	Check for Visual, physical and dimensional Parameters and no. of parallel conductors.										
1.1.1	Measurement of axial height, OD & ID& current density calculation.	Major	Measurement	100%	MFR. Data/Drg/BSES approved document	MFR. Data/Drg/BSE S approved document	QC report/Test report		Р	W	
1.1.2	Copper Conductor size (Bare & covered)	Major	Measurement	100%	-DO-	-DO-	-DO-		Р	W	
1.1.3	No. of Turns / Disc	Major	Measurement	100%	-DO-	-DO-	-DO-		Р	R	
1.2	Winding height	Major	Measurement	100%	-DO-	-DO-	-DO-		Р	W	





SL NO	CHARACTRISTICS	CLASS	TYPE OF	QUANTUM	REFERENCE	ACCEPTANC	FORMAT OF	-	AGEN	ICY	REMARKS
			CHECK	OF CHECK	DOCUMENT	E NORMS	RECORD	S	M	0	
1	2	3	4	5	6	7	8		9		10
1.3	Visual inspection of Brazed joints as applicable	Major	Visual	100%	-DO-	-DO-	-DO-		Р	R	
1.4	Tap Leads termination in case of tap winding	Major	Visual	100%	-DO-	-DO-	-DO-		Р	R	
1.5	Current density calculation								Р	W	
1.6	Weight	Major	Visual	100%	-DO-	-DO-	-DO-		Р	W	
2.0	Core Assembly										
2.1	Visual & Key Dimensional check										
2.1.1	Diagonal distance	Major	Measurement	100%	MFR.Drg/BSES approved document	MFR.Drg/BSE S approved document	QC report/Test report		Р	W	
2.1.2	Window centre distance	Major	Measurement	100%	-DO-	-DO-	-DO-		Р	W	
2.1.3	Window height	Major	Measurement	100%	-DO-	-DO-	-DO-		Р	W	
2.2	Stack Thickness	Major	Measurement	100%	-DO-	-DO-	-DO-		Р	W	
2.3	High Voltage test at 2 KV AC for I min between core & core clamp, Yoke	Major	Electrical	100%	-DO-	-DO-	-DO-		Р	W	





SL NO	CHARACTRISTICS	CLASS	TYPE OF	QUANTUM	REFERENCE	ACCEPTANC	FORMAT OF	AGENCY		CY	REMARKS
			CHECK	OF CHECK	DOCUMENT	E NORMS	RECORD	S	М	0	
1	2	3	4	5	6	7	8		9	1.	10
	bolt										
2.4	Pre-Core loss measurement	Major	Electrical	100%	-DO-	-DO-	-DO-		Р	W	
2.5	Weight	Major	Visual	100%	-DO-	-DO-	-DO-		Р	W	
3.0	Core-Coil Assembly										
3.1	Top & Bottom insulation arrangement	Major	Visual	100%	MFR.Data /DRG/BSES approved document	MFR.Data /DRG/BSES approved document	QC report		Р	R	
3.2	Lead arrangement	Critical	Visual	100%	-DO-	-DO-	-DO-		Р	R	
3.3	Tap & Lead End Brazing & Insulation	Critical	Visual	100%	-DO-	-DO-	-DO-		Р	R	
3.4	Dimension of Coil After Shrinkage	Major	Measurement	100%	-DO-	-DO-	-DO-		Р	R	
3.5	Verification of Major electrical clearances	Major	Visual & Measurement	100%	-DO-	-DO-	-DO-		Р	R	
3.6	HV/LV Connection	Major	Visual	100%	-DO-	-DO-	-DO-		Р	R	
3.7	Cleanliness	Major	Visual	100%	-DO-	-DO-	-DO-	-	Р	R	
4.0	Core-Coil Assembly										





SL NO	CHARACTRISTICS	CLASS	TYPE OF	QUANTUM	REFERENCE	ACCEPTANC	FORMAT OF	AGENCY		CY	REMARKS
			CHECK	OF CHECK	DOCUMENT	E NORMS	RECORD	S	M	0	
1	2	3	4	5	6	7	8		9	1	10
	Before Ovening										
4.1	Initial Ratio test	Major	Measurement	100%	-DO-	-DO-	-DO-		Р	R	
5.0	Core-coil assembly during drying										
5.1	Measurement & recording of temperature & drying time during vacuum treatment.	Major	Visual	100%	MFR.Data /DRG	MFR.Data /DRG	QC report		Р	R	
5.2	Check for completeness of drying	Major	Visual	100%	MFR.Data /DRG	MFR.Data /DRG	QC report		Р	R	
5.3	Certification of all test	Major	Visual	100%	MFR.Data /DRG	MFR.Data /DRG	QC report		Р	R	
6.0	Core-Coil Assembly After Ovening										
6.1	Ratio Test, Vector Group & Magnetic Balance test	Major	Electrical	100%	-DO-	-DO-	QC report /Test report		Р	W	
6.2	Recording of time/Temp, Vacuum	Major	Measurement	100%	-DO-	-DO-	-DO-		Р	R	
6.3	Record of Moisture extract	Major	Measurement	100%	MFR. STD	MFR. STD	QC report		Р	R	






SL NO	CHARACTRISTICS	CLASS	TYPE OF	QUANTUM	REFERENCE	ACCEPTANC	FORMAT OF	AGENCY		ICY	REMARKS
			CHECK	OF CHECK	DOCUMENT	E NORMS	RECORD	S	M	0	
1	2	3	4	5	6	7	8		9		10
6.4	Verification of completeness & Drying	Major	Verify	100%	MFR. STD	MFR. STD	QC report		Р	R	
6.5	Insulation resistance measurement by Megger	Major	Electrical	100%	MFR. STD	MFR. STD	Test report		Р	R	
6.6	Earthing connection	Major	Visual	-DO-	MFR. STD	MFR. STD	QC Report		Р	R	
7.0	Tanking										
7.1	Electrical clearance arrangement	Major	Measurement	100%	MFR. DRG	MFR. DRG	QC report		Р	R	
7.2	Verification of Core- Frame Clamping arrangement	Major	Visual	100%	-DO-	-DO-	-DO-		Р	R	
7.3	Core to frame insulation resistance test & HV test at 2 KV for min	Major	Electrical	100%	-DO-	-DO-	-DO-		Р	R	
8.0	Final Assembly for testing										
8.1	Fittings of external accessories	Major	Visual	100%	MFR. STD /DRG	MFR. STD /DRG	Job Card		Р	R	
8.2	Internal Oil leakage test on main unit	Major	Visual	100%	CBIP	CBIP	QC report		Р	R	






SL NO	CHARACTRISTICS	CLASS	TYPE OF	QUANTUM	REFERENCE	ACCEPTANC	FORMAT	AGENCY		AGENCY		To be repeated after type test.
			CHECK	OF CHECK	DOCUMENT	E NORMS	RECORD	S	М	0		
1	2	3	4	5	6	7	8		9		10	
8.3	Oil filtration & pressure test	Major	Visual	-DO-	IS 1180	IS 1180	-DO-	-	Р	R		
С	Final testing											
1	Routine Test											
1.1	Voltage Ratio test and check of phase displacement	Major	Electrical	100%	IS 2026/IS 1180	IS 2026/IS 1180	Test Report		Р	W		
1.2	Winding Resistance at all tap corrected to 75°C	Major	Electrical	100%	IS 2026/IS 1180	IS 2026/IS 1180	Test report		Р	W		
1.3	No Load Loss & Current @90%,100%&112.5% of rated voltage	Major	Electrical	100%	IS 2026/IS 1180	IS 2026/IS 1180	Test report		Р	W	repeated after type	
1.4	Impedance Voltage/Short Circuit Impedance(Principal Tap)	Major	Electrical	100%	IS 2026/IS 1180	IS 2026/IS 1180	Test report		Р	W		
1.5	Load Loss measurement at 50% and 100% of load @Principal, Max, MinTap	Major	Electrical	100%	IS 2026/IS 1180	IS 2026/IS 1180	Test report		Р	W		






SL NO	CHARACTRISTICS	CLASS	TYPE OF	QUANTUM	REFERENCE	ACCEPTANC	FORMAT OF	-	AGEN	CY	To be repeated after type test  IR shall be more than 2000 MΩ PI Shall be more than 1.5
			CHECK	OF CHECK	DOCUMENT	E NORMS	RECORD	S	М	0	
1	2	3	4	5	6	7	8		9		10
1.6	Induced over voltage	Major	Electrical	100%	IS 2026/IS 1180	IS 2026/IS 1180	Test report		Р	W	repeated after type
1.7	Separate Source Voltage Test	Major	Electrical	100%	IS 2026/IS 1180	IS 2026/IS 1180	Test report		Р	W	
1.8	Insulation Resistance &PI(10 min / 1 min)	Major	Electrical	100%			Test report		Р	W	more than 2000 MΩ PI Shall be more
1.9	Voltage Vector Relationship & Polarity	Major	Electrical	100%	IS 2026/IS 1180	IS 2026/IS 1180	Test report		Р	W	
1.10	Magnetic Balance Test	Major	Electrical	100%	IS 2026/IS 1180	IS 2026/IS 1180	Test report		Р	W	
1.11	Oil leakage test on transformer with complete fitting and accessories	Major	Visual	100%	CBIP	CBIP	Test report		Р	W	
1.12	Polarity check & Ratio Test of LVWTI CT/	Major	Electrical	100%	IS 2026/IS 1180	IS 2026/IS 1180	Test report		Р	W	





SL NO	CHARACTRISTICS	CLASS	TYPE OF	QUANTUM	REFERENCE	ACCEPTANC	FORMAT OF	AGENCY		ICY	REMARKS
		CHECK	OF CHECK	DOCUMENT	E NORMS	RECORD	S	M	0		
1	2	3	4	5	6	7	8		9	•	10
	Metering CT										
1.13	BDV test on Transformer Oil	Major	Electrical	100%	IS 2026/IS 1180	IS 2026/IS 1180	Test report		Р	W	
1.14	Power frequency withstand on auxiliary circuit	Major	Electrical	100%	IS 2026/IS 1180	IS 2026/IS 1180	Test report		Р	W	
1.15	Heat Run Test (Temp. Rise Test)	Major	Testing	One Unit (each lot)	IS 2026/IS 1180	IS 2026/IS 1180	Test Report		Р	W	
1.16	Pressure relief device test	Major	Testing	One Unit (each lot)	MFR. STD	MFR. STD	Test Report		Р	W	
1.17	Visual and dimensional check	Major	Visual	100%	Approved drawings	Approved drawings	Test Report		Р	W	
1.18	Measurement of Cap & tandelta of Wdg, Oil and HV bushing	Major	Electrical	One unit			Test report		Р	W	
1.19											
2.0	Type test (One unit of each type and rating of Transformer at CPRI/ERDA)										
2.1	Heat Run Test (Temp. Rise Test)	Major	Testing	One Unit	IS 2026	IS 2026	Test Report	CF	PRI/E	RDA	





SL NO	CHARACTRISTICS	CLASS	TYPE OF	QUANTUM	REFERENCE	ACCEPTANC	FORMAT OF	A	AGEN	NCY	REMARKS
	CHECK	OF CHECK	DOCUMENT	E NORMS	RECORD	S	М	0			
1	2	3	4	5	6	7	8		9		10
2.2	Dynamic & Thermal (3 sec) Short Circuit Test	Major	Testing	One Unit	IS 2026	IS 2026	Test Report	CI	PRI/E	RDA	
2.3	Impulse withstand Test on all HV & LV Limb for Chopped wave.	Major	Testing	One Unit	IS 2026	IS 2026	Test Report	CI	PRI/E	RDA	
2.4	DGA Test Before & After temperature rise	Major	Testing	One Unit	Relevant std.	Relevant std.	Test Report	CI	PRI/E	RDA	Test shall be conducted once per PO
3.0	Special Test (One unit of	each type a	and rating of Tra	nsformer)							
3.1	Zero Phase Sequence Test	Major	Testing	One Unit	IS 2026	IS 2026	Test Report		Р	W	
3.2	Noise Level Test	Major	Testing	One Unit	NEMA TR-1	NEMA TR-1	Test Report		Р	W	
3.3	No Load Harmonic Test	Major	Testing	One Unit	IS 2026	IS 2026	Test Report		Р	W	
3.4	HV Test on all auxiliary equipment and wiring after complete assembly	Major	Testing	One Unit			Test Report		Р	W	
D	Dispatch & Packing										
1.1	Identification & packing	Major	Visual	100%	As per packing list	As per packing list	Packing List		Р		



#### TECHNICAL SPECIFICATION OF CONVENTIONAL OIL FILLED DISTRIBUTION TRANSFORMER

SL NO	CHARACTRISTICS	CLASS	TYPE OF	QUANTUM	REFERENCE	ACCEPTANC	FORMAT OF	<b>A</b>	GEN	ICY	REMARKS
			CHECK	OF CHECK	DOCUMENT	E NORMS	RECORD	S	М	0	
1	2	3	4	5	6	7	8		9		10
1.2	Check for proper Packing	Major	Visual	100%	As per packing list	As per packing list	Packing List		Р		
1.3	Visual check before dispatch	Major	Visual	100%	As per packing list	As per packing list	Packing List		Р		

#### Note:

- Transformer from each lot may be opened for core and winding verification. BSES approval is be taken prior to opening the transformer.
- Type Test shall be valid for 10 years.

All IS and IEC standards with their latest revisions/amendments shall be applicable


#### LEGEND:

S: Supplier P - Perform

M: Main Contractor (Manufacturer) V - Verify

O: Owner (BSES) R – Review


W- Witness





#### Schedule A Guaranteed Technical Particulars (Data by Seller)

Sr.	Particulars	Specified / Required	Offered
1.0	General		
1.1	Make		
1.2	Туре	Oil immersed, core type, step down	
		located generally outdoor but may be	
		located indoor also with poor	
		ventilation. Bidder shall confirm full	
		rating available in indoor location also	
2.0	Nominal Continuous Rating,		
	KVA		
2.1	HV winding	250/400/630/1000/1600/2000/2500kVA	
2.2	LV winding	250/400/630/1000/1600/2000/2500kVA	
3.0	Rated voltage ( kV )		
3.1	HV Winding	11 kV	
3.2	LV Winding	415 volt	
4.0	Rated current ( Amps )	250/400/630/1000/1600/2000/2500kVA	
4.1	HV Winding		
4.2	LV Winding		
5.0	Connections		
5.1	HV Winding	Delta	
5.2	LV Winding	Star with neutral	
5.3	Vector Group reference	Dyn11	
6.0	Impedance at principal tap		
	rated current and frequency,		
	ohm @75 deg C		
6.1	Impedance	4.5%/4.5% / 4.5%/ 5.0/6.25/6.25 %	
		with IS tolerance	
6.2	Reactance		
6.3	Resistance		
6.4	X/R ratio		
6.5	Impedance at lowest tap at		






	rated current and frequency		1
0.0	. ,		
6.6	Impedance at highest tap at		
	rated current and frequency		
7.0	Resistance of the winding at		
	75° C in ohm		
7.1	a) HV		
7.2	b) LV		
8.0	Zero sequence impedance in		
	ohm		
8.1	a) HV		
8.2	b) LV		
9.0	Guaranteed maximum Total		
	losses at principal tap at		
	75°C, kW		
9.1	50 % of Load	as per Spec Cl 3.25	
9.2	100% of Load	as per Spec Cl 3.26	
9.3	No Load Loss (Max)		
9.4	Total I <sup>2</sup> R losses of windings		
	@ 75 deg C, KW		
9.5	Total stray loses @ 75 deg C,		
	KW		
9.6	Total Load losses (Max.), KW		
9.7	No load loss at maximum		
	permissible voltage and		
	frequency (approx.),kW		
10.0	Temperature rise over		
	reference ambient of 40 °C		
10.1	Top oil by thermometer <sup>0</sup> C	40 °C	
10.2	Winding by resistance <sup>0</sup> C	45 °C	
11.0	Efficiency		
11.1	Efficiency at 75°C and unity		
	power factor %		
11.1.1	at 110% load		
11.1.2	at 100% load		





11.1.4 at 60% load 11.1.5 at 40% load 11.1.6 at 20% load 11.2. Efficiency at 75°C and 0.8 power factor lag % 11.2.1 at 110% load 11.2.2 at 100% load 11.2.3 at 80% load 11.2.4 at 60% load 11.2.5 at 40% load 11.2.6 at 20% load 11.2.7 at 40% load 11.2.8 at 20% load 11.3 Maximum efficiency at 75°C % 11.4 Load and power factor at which it occurs 12.0 Regulation , (%) 12.1 Regulation at full load at 75° C 12.1.1 at unity power factor 12.1.2 at 0.8 power factor lagging 12.2 Regulation at 110% load at 75° C 12.2.1 at unity power factor 12.2.2 at 0.8 power factor lagging 13.0 Tappings 13.1 Type 13.2 Capacity 13.3 Range-steps x % variation 13.4 Taps provided on HV winding (Yes / No) 13.5 Rated current of rotary switch 14.0 Cooling system 14.1 Type of cooling ONAN	11.1.3	at 80% load	Not Less than 99.5%	
11.1.6 at 20% load 11.2 Efficiency at 75°C and 0.8 power factor lag % 11.2.1 at 110% load 11.2.2 at 100% load 11.2.3 at 80% load 11.2.4 at 60% load 11.2.5 at 40% load 11.2.6 at 20% load 11.3 Maximum efficiency at 75°C % 11.4 Load and power factor at which it occurs 12.0 Regulation , (%) 12.1 Regulation at full load at 75° C C 12.1.1 at unity power factor 12.1.2 at 0.8 power factor lagging 12.2 Regulation at 110% load at 75° C 12.2.1 at unity power factor 12.2.2 at 0.8 power factor lagging 13.0 Tappings 13.1 Type 13.2 Capacity 13.3 Range-steps x % variation 13.4 Taps provided on HV winding (Yes / No) 13.5 Rated current of rotary switch 14.0 Cooling system	11.1.4	at 60% load		
11.2 Efficiency at 75°C and 0.8 power factor lag %  11.2.1 at 110% load  11.2.2 at 100% load  11.2.3 at 80% load  11.2.4 at 60% load  11.2.5 at 40% load  11.2.6 at 20% load  11.3 Maximum efficiency at 75°C %  11.4 Load and power factor at which it occurs  12.0 Regulation , (%)  12.1 Regulation at full load at 75°C C  12.1.1 at unity power factor  12.1.2 at 0.8 power factor lagging  12.2 Regulation at 110% load at 75°C C  12.2.1 at unity power factor  12.2.2 at 0.8 power factor  12.2.2 at 0.8 power factor lagging  13.0 Tappings  13.1 Type  13.2 Capacity  13.3 Range-steps x % variation  13.4 Taps provided on HV winding (Yes / No)  13.5 Rated current of rotary switch  14.0 Cooling system	11.1.5	at 40% load		
power factor lag	11.1.6	at 20% load		
11.2.1 at 110% load 11.2.2 at 100% load 11.2.3 at 80% load 11.2.4 at 60% load 11.2.5 at 40% load 11.2.6 at 20% load 11.3 Maximum efficiency at 75°C % 11.4 Load and power factor at which it occurs 12.0 Regulation (%) 12.1 Regulation at full load at 75° C C 12.1.1 at unity power factor 12.1.2 at 0.8 power factor lagging 12.2 Regulation at 110% load at 75° C 12.2.1 at unity power factor 12.2.2 at 0.8 power factor 12.2.2 at 0.8 power factor lagging 13.0 Tappings 13.1 Type 13.2 Capacity 13.3 Range-steps x % variation 13.4 Taps provided on HV winding (Yes / No) 13.5 Rated current of rotary switch 14.0 Cooling system	11.2	Efficiency at 75°C and 0.8		
11.2.2 at 100% load  11.2.3 at 80% load  11.2.4 at 60% load  11.2.5 at 40% load  11.2.6 at 20% load  11.3 Maximum efficiency at 75°C %  11.4 Load and power factor at which it occurs  12.0 Regulation , (%)  12.1 Regulation at full load at 75°C C  12.1.1 at unity power factor  12.1.2 at 0.8 power factor lagging  12.2 Regulation at 110% load at 75°C  12.2.1 at unity power factor  12.2.2 at 0.8 power factor  12.3.0 Tappings  13.1 Type  13.2 Capacity  13.3 Range-steps x % variation  13.4 Taps provided on HV winding (Yes / No)  13.5 Rated current of rotary switch  14.0 Cooling system		power factor lag %		
11.2.3 at 80% load  11.2.4 at 60% load  11.2.5 at 40% load  11.2.6 at 20% load  11.3 Maximum efficiency at 75°C %  11.4 Load and power factor at which it occurs  12.0 Regulation , (%)  12.1 Regulation at full load at 75°C C  12.1.1 at unity power factor  12.1.2 at 0.8 power factor lagging  12.2 Regulation at 110% load at 75°C  12.2.1 at unity power factor  12.2.2 at 0.8 power factor lagging  13.0 Tappings  13.1 Type  13.2 Capacity  13.3 Range-steps x % variation  13.4 Taps provided on HV winding (Yes / No)  13.5 Rated current of rotary switch  14.0 Cooling system	11.2.1	at 110% load		
11.2.4 at 60% load  11.2.5 at 40% load  11.2.6 at 20% load  11.3 Maximum efficiency at 75°C %  11.4 Load and power factor at which it occurs  12.0 Regulation , (%)  12.1 Regulation at full load at 75°C C  12.1.1 at unity power factor 12.1.2 at 0.8 power factor lagging  12.2 Regulation at 110% load at 75°C C  12.2.1 at unity power factor 12.2.2 at 0.8 power factor 12.2.2 at o.8 power factor 12.3.0 Tappings  13.1 Type 13.2 Capacity 13.3 Range-steps x % variation 13.4 Taps provided on HV winding (Yes / No)  13.5 Rated current of rotary switch 14.0 Cooling system	11.2.2	at 100% load		
11.2.5 at 40% load 11.2.6 at 20% load 11.3 Maximum efficiency at 75°C % 11.4 Load and power factor at which it occurs 12.0 Regulation , (%) 12.1 Regulation at full load at 75° C 12.1.1 at unity power factor 12.1.2 at 0.8 power factor lagging 12.2 Regulation at 110% load at 75° C 12.2.1 at unity power factor 12.2.2 at o.8 power factor 12.2.2 at 0.8 power factor lagging 13.0 Tappings 13.1 Type 13.2 Capacity 13.3 Range-steps x % variation 13.4 Taps provided on HV winding (Yes / No) 13.5 Rated current of rotary switch 14.0 Cooling system	11.2.3	at 80% load		
11.2.6 at 20% load  11.3 Maximum efficiency at 75°C %  11.4 Load and power factor at which it occurs  12.0 Regulation , (%)  12.1 Regulation at full load at 75° C C  12.1.1 at unity power factor  12.1.2 at 0.8 power factor lagging  12.2 Regulation at 110% load at 75° C  12.2.1 at unity power factor  12.2.2 at 0.8 power factor lagging  13.0 Tappings  13.1 Type  13.2 Capacity  13.3 Range-steps x % variation  13.4 Taps provided on HV winding (Yes / No)  13.5 Rated current of rotary switch  14.0 Cooling system	11.2.4	at 60% load		
11.3 Maximum efficiency at 75°C %  11.4 Load and power factor at which it occurs  12.0 Regulation , (%)  12.1 Regulation at full load at 75° C  12.1.1 at unity power factor  12.1.2 at 0.8 power factor lagging  12.2 Regulation at 110% load at 75° C  12.2.1 at unity power factor  12.2.2 at 0.8 power factor  12.2.2 at 0.8 power factor  12.3.1 Type  13.2 Capacity  13.3 Range-steps x % variation  13.4 Taps provided on HV winding (Yes / No)  13.5 Rated current of rotary switch  14.0 Cooling system	11.2.5	at 40% load		
%  11.4 Load and power factor at which it occurs  12.0 Regulation , (%)  12.1 Regulation at full load at 75° C  12.1.1 at unity power factor  12.1.2 at 0.8 power factor lagging  12.2 Regulation at 110% load at 75° C  12.2.1 at unity power factor  12.2.2 at 0.8 power factor  12.2.2 at 0.8 power factor  13.0 Tappings  13.1 Type  13.2 Capacity  13.3 Range-steps x % variation  13.4 Taps provided on HV winding (Yes / No)  13.5 Rated current of rotary switch  14.0 Cooling system	11.2.6	at 20% load		
11.4 Load and power factor at which it occurs  12.0 Regulation , (%)  12.1 Regulation at full load at 75° C  12.1.1 at unity power factor  12.1.2 at 0.8 power factor lagging  12.2 Regulation at 110% load at 75° C  12.2.1 at unity power factor  12.2.2 at 0.8 power factor  12.2.2 at 0.8 power factor  12.2.2 at 0.8 power factor lagging  13.0 Tappings  13.1 Type  13.2 Capacity  13.3 Range-steps x % variation  13.4 Taps provided on HV winding (Yes / No)  13.5 Rated current of rotary switch  14.0 Cooling system	11.3	Maximum efficiency at 75°C		
which it occurs  12.0 Regulation , (%)  12.1 Regulation at full load at 75° C  12.1.1 at unity power factor  12.1.2 at 0.8 power factor lagging  12.2 Regulation at 110% load at 75° C  12.2.1 at unity power factor  12.2.2 at 0.8 power factor  12.2.2 at 0.8 power factor lagging  13.0 Tappings  13.1 Type  13.2 Capacity  13.3 Range-steps x % variation  13.4 Taps provided on HV winding (Yes / No)  13.5 Rated current of rotary switch  14.0 Cooling system		%		
12.0 Regulation , (%)  12.1 Regulation at full load at 75° C  12.1.1 at unity power factor  12.1.2 at 0.8 power factor lagging  12.2 Regulation at 110% load at 75° C  12.2.1 at unity power factor  12.2.2 at 0.8 power factor lagging  13.0 Tappings  13.1 Type  13.2 Capacity  13.3 Range-steps x % variation  13.4 Taps provided on HV winding (Yes / No)  13.5 Rated current of rotary switch  14.0 Cooling system	11.4	Load and power factor at		
12.1 Regulation at full load at 75° C  12.1.1 at unity power factor  12.1.2 at 0.8 power factor lagging  12.2 Regulation at 110% load at 75° C  12.2.1 at unity power factor  12.2.2 at 0.8 power factor lagging  13.0 Tappings  13.1 Type  13.2 Capacity  13.3 Range-steps x % variation  13.4 Taps provided on HV winding (Yes / No)  13.5 Rated current of rotary switch  14.0 Cooling system		which it occurs		
C  12.1.1 at unity power factor  12.1.2 at 0.8 power factor lagging  12.2 Regulation at 110% load at 75° C  12.2.1 at unity power factor  12.2.2 at 0.8 power factor lagging  13.0 Tappings  13.1 Type  13.2 Capacity  13.3 Range-steps x % variation  13.4 Taps provided on HV winding (Yes / No)  13.5 Rated current of rotary switch  14.0 Cooling system	12.0	Regulation , (%)		
12.1.1 at unity power factor  12.1.2 at 0.8 power factor lagging  12.2 Regulation at 110% load at 75° C  12.2.1 at unity power factor  12.2.2 at 0.8 power factor lagging  13.0 Tappings  13.1 Type  13.2 Capacity  13.3 Range-steps x % variation  13.4 Taps provided on HV winding (Yes / No)  13.5 Rated current of rotary switch  14.0 Cooling system	12.1	Regulation at full load at 75 <sup>o</sup>		
12.1.2 at 0.8 power factor lagging  12.2 Regulation at 110% load at 75° C  12.2.1 at unity power factor  12.2.2 at 0.8 power factor lagging  13.0 Tappings  13.1 Type  13.2 Capacity  13.3 Range-steps x % variation  13.4 Taps provided on HV winding (Yes / No)  13.5 Rated current of rotary switch  14.0 Cooling system		С		
12.2 Regulation at 110% load at 75° C  12.2.1 at unity power factor  12.2.2 at 0.8 power factor lagging  13.0 Tappings  13.1 Type  13.2 Capacity  13.3 Range-steps x % variation  13.4 Taps provided on HV winding (Yes / No)  13.5 Rated current of rotary switch  14.0 Cooling system	12.1.1	at unity power factor		
75° C  12.2.1 at unity power factor  12.2.2 at 0.8 power factor lagging  13.0 Tappings  13.1 Type  13.2 Capacity  13.3 Range-steps x % variation  13.4 Taps provided on HV winding (Yes / No)  13.5 Rated current of rotary switch  14.0 Cooling system	12.1.2	at 0.8 power factor lagging		
12.2.1 at unity power factor  12.2.2 at 0.8 power factor lagging  13.0 Tappings  13.1 Type  13.2 Capacity  13.3 Range-steps x % variation  13.4 Taps provided on HV winding (Yes / No)  13.5 Rated current of rotary switch  14.0 Cooling system	12.2			
12.2.2 at 0.8 power factor lagging  13.0 Tappings  13.1 Type  13.2 Capacity  13.3 Range-steps x % variation  13.4 Taps provided on HV winding (Yes / No)  13.5 Rated current of rotary switch  14.0 Cooling system		75 <sup>0</sup> C		
13.0 Tappings  13.1 Type  13.2 Capacity  13.3 Range-steps x % variation  13.4 Taps provided on HV winding (Yes / No)  13.5 Rated current of rotary switch  14.0 Cooling system	12.2.1			
13.1 Type  13.2 Capacity  13.3 Range-steps x % variation  13.4 Taps provided on HV winding (Yes / No)  13.5 Rated current of rotary switch  14.0 Cooling system	12.2.2	at 0.8 power factor lagging		
13.2 Capacity  13.3 Range-steps x % variation  13.4 Taps provided on HV winding (Yes / No)  13.5 Rated current of rotary switch  14.0 Cooling system	13.0	Tappings		
13.3 Range-steps x % variation  13.4 Taps provided on HV winding (Yes / No)  13.5 Rated current of rotary switch  14.0 Cooling system	13.1	Туре		
13.4 Taps provided on HV winding (Yes / No)  13.5 Rated current of rotary switch  14.0 Cooling system		Capacity		
(Yes / No)  13.5 Rated current of rotary switch  14.0 Cooling system				
13.5 Rated current of rotary switch 14.0 Cooling system	13.4			
14.0 Cooling system		, ,		
14.1 Type of cooling ONAN				
	14.1	Type of cooling	ONAN	





14.2	No. of cooling unit Groups		
14.3	Capacity of cooling units		
14.4	Mounting of radiators		
14.5	Number of Radiators		
14.8	Total radiating surface ,		
	sqmm		
14.9	Thickness of radiator tubes,	Minimum 1.2 mm	
	mm		
15.0	Details of Tank		
15.1	Material	Robust mild steel plate without pitting	
		and low carbon content	
15.2	Thickness of sides mm		
15.3	Thickness of bottom mm		
15.4	Thickness of cover mm		
15.5	Confirmation of Tank		
	designed and tested for		
	Vacuum, Pressure (Ref:		
	CBIP Manual ) , (Yes/ No)		
15.5.1	Vacuum mm of Hg. /	As per IS	
	(kN/m²)		
15.5.2	Pressure mm of Hg.		
15.6	Is the tank lid sloped?	Yes	
15.7	Inspection cover provided	as per spec	
	(Yes / No)		
15.8	Location of inspection cover		
	(Yes / No)		
15.9	Min. dimensions of inspection		
	cover ( provide list of all		
	inspection cover with		
	dimension), mm x mm		
16.0	Core		
16.1	Type:	Core	
16.2	Core material grade	Premium grade minimum M3 or better	
16.3	Core lamination thickness in		






	mm		
16.4	Insulation of lamination	With insulation coating on both sides	
16.5	Design flux density at rated		
	condition at principal tap,		
	Tesla		
16.6	Maximum flux density at 12.5	1.9 Tesla Max allowed	
	% overexcitation /overfluxing,		
	Tesla		
16.7	Equivalent cross section area		
	mm²		
16.8	Guaranteed No Load current		
	at 100% rated voltage , Amps		
16.8.1	HV		
16.8.2	LV		
16.9	Guaranteed No Load current		
	At 110% rated voltage, Amps		
16.9.1	HV		
16.9.2	LV		
17.0	Type of Winding		
17.1	HV		
17.2	LV		
17.3	Conductor material	Electrolytic Copper	
17.4	Current density (HV/LV)	Maximum allowed 3.0 A per sq mm at	
		all taps	
17.5	Gauge/area of cross section		
	of conductor		
17.5.1	a) HV		
17.5.1	b) LV		
17.6	Insulating material		
17.6.1	HV Turn		
17.6.2	LV Turn		
17.6.3	LV Core		
17.6.4	HV - LV		
17.7	Insulating material thickness,		





	mm		
17.7.1	HV Turn		
17.7.2	LV Turn	-	
17.7.3	LV to Core		
17.7.4	HV to LV		
18.0	Minimum design clearance,		
	mm		
18.1	HV to earth in Air		
18.2	HV to earth in oil		
18.3	LV to earth in Air		
18.4	LV to earth in oil		
18.5	Between HV & LV in Air		
18.6	Between HV & LV in oil		
18.7	Top winding and yoke		
18.8	Bottom winding and yoke		
19.0	Insulating oil		
19.1	Quantity of oil Ltrs		
19.1.1	In the Transformer tank		
19.1.2	In each radiator		
19.1.4	Total quantity		
19.2	10% excess oil furnished?	Yes in separate non returnable drums	
		with each transformer	
19.3	Type of Oil	As per cl 4.2.7	
20.0	Bushing / Support Insulator		
20.1	Make	-	
20.2	Туре		
20.2.1	HV side	As per Cl. 4.2.8.1 of the spec	
20.2.2	LV side	As per Cl. 4.2.8.2 of the spec	
20.3	Reference Standard		
20.4	Voltage class, kV		
20.4.1	HV side Bushing/ Support	12 kV	
	Insulator		
20.4.2	LV side line and neutral	1.1 kV	
	bushing/ Support Insulator		
<u></u>			Dago 75 of 9





20.5	Creepage factor for all	31 mm / kV	
	bushing / Support Insulator		
	mm/KV		
20.6	Rated thermal short time		
	current		
20.6.1	HV bushing	25 times rated current for 2 secs.	
20.6.2	LV line and neutral bushing	25 times rated current for 2 secs.	
20.7	Weight, Kg		
20.7.1	HV bushing		
20.7.2	LV line and neutral bushing		
20.8	Free space required for		
	bushing removal, mm		
20.8.1	HV bushing		
20.8.2	LV line and neutral bushing		
21.0	Terminal connections		
21.1	HV	Cable size as per Cl no 3.28	
21.2	LV	Cable size as per Cl no 3.30	
21.3	LV Neutral	Cable size as per Cl no 3.30	
22.0	HV cable box	Required	
22.1	Suitable for cable type,size	Cable size as per Cl no 3.28	
22.2	Termination height	750 mm min.	
22.3	Gland plate dimension, mm x		
	mm		
22.4	Gland plate Material	MS	
22.5	Gland plate thickness	3 mm min.	
22.6	Phase to phase clearance	180 mm	
	inside box,mm		
22.7	Phase to earth inside box,mm	120 mm	
23.0	LV Cable box	Required	
23.1	Suitable for cable type , size	Cable size as per Cl no 3.30	
23.2	Termination height	1000 mm, min.	
23.3	Gland plate dimension,		
	mmxmm		
		<u>,                                      </u>	






23.5 Gland plate thickness 5 mm min.  23.6 Phase to phase 25 mm  24.0 L.V neutral Cable termination arrangement to be provided in LV cable box.)  25.0 Current Transformer on LV phases  25.1 Type  25.2 Make  25.3 Reference Standard  25.4 CT Ratio  25.5 Burden, VA  25.6 Class of Accuracy  25.7 CT terminal box size  26.0 Pressure release device  26.1 Minimum pressure the device is set to rupture  26.1.1 For Main Tank  26.1.2 Alarm and trip contact ratings of protective devices  27.0 Fittings Accessories Each Transformer furnished as per Clause No 5. (Bidder shall attach separate sheet giving details, make and bill of materials)  27.1 OTI/WTI Scanner  27.1.1 Make  27.1.2 Model no  27.1.3 Auxiliary supply  27.1.4 Manual submitted (Yes/No)	23.4	Gland plate material	Aluminium	
23.7 Phase to earth 24.0 L.V neutral Cable termination arrangement 25.0 Current Transformer on LV phases 25.1 Type 25.2 Make 25.3 Reference Standard 25.4 CT Ratio 25.5 Burden, VA 25.6 Class of Accuracy 25.7 CT terminal box size 26.0 Pressure release device 26.1 Minimum pressure the device is set to rupture 26.1.1 For Main Tank 26.1.2 Alarm and trip contact ratings of protective devices 27.0 Fittings Accessories Each Transformer furnished as per Clause No 5. (Bidder shall attach separate sheet giving details, make and bill of materials) 27.1 OTIWTI Scanner 27.1.1 Make 27.1.2 Model no 27.1.3 Auxiliary supply	23.5	Gland plate thickness	5 mm min.	
24.0 L.V neutral Cable termination arrangement to be provided in LV cable box.)  25.0 Current Transformer on LV phases  25.1 Type  25.2 Make  25.3 Reference Standard  25.4 CT Ratio  25.5 Burden, VA  25.6 Class of Accuracy  25.7 CT terminal box size  26.0 Pressure release device  26.1 Minimum pressure the device is set to rupture  26.1.1 For Main Tank  26.1.2 Alarm and trip contact ratings of protective devices  27.0 Fittings Accessories Each Transformer furnished as per Clause No 5. (Bidder shall attach separate sheet giving details, make and bill of materials)  27.1 OTI/WTI Scanner  27.1.1 Make  27.1.2 Model no  27.1.3 Auxiliary supply	23.6 I	Phase to phase	25 mm	
arrangement to be provided in LV cable box.)  25.0 Current Transformer on LV phases  25.1 Type  25.2 Make  25.3 Reference Standard  25.4 CT Ratio  25.5 Burden, VA  25.6 Class of Accuracy  25.7 CT terminal box size  26.0 Pressure release device  26.1 Minimum pressure the device is set to rupture  26.1.1 For Main Tank  26.1.2 Alarm and trip contact ratings of protective devices  27.0 Fittings Accessories Each Transformer furnished as per Clause No 5. (Bidder shall attach separate sheet giving details, make and bill of materials)  27.1 OTI/WTI Scanner  27.1.1 Make  27.1.2 Model no  27.1.3 Auxiliary supply	23.7 I	Phase to earth	25 mm	
25.0 Current Transformer on LV phases  25.1 Type  25.2 Make  25.3 Reference Standard  25.4 CT Ratio  25.5 Burden, VA  25.6 Class of Accuracy  25.7 CT terminal box size  26.0 Pressure release device  26.1 Minimum pressure the device is set to rupture  26.1.1 For Main Tank  26.1.2 Alarm and trip contact ratings of protective devices  27.0 Fittings Accessories Each Transformer furnished as per Clause No 5. (Bidder shall attach separate sheet giving details, make and bill of materials)  27.1 OTI/WTI Scanner  27.1.1 Make  27.1.2 Model no  27.1.3 Auxiliary supply	24.0 I	L.V neutral Cable termination	Separate cable box not required (LV-N	
phases  25.1 Type  25.2 Make  25.3 Reference Standard  25.4 CT Ratio  25.5 Burden, VA  25.6 Class of Accuracy  25.7 CT terminal box size  26.0 Pressure release device  26.1 Minimum pressure the device is set to rupture  26.1.1 For Main Tank  26.1.2 Alarm and trip contact ratings of protective devices  27.0 Fittings Accessories Each Transformer furnished as per Clause No 5. (Bidder shall attach separate sheet giving details, make and bill of materials)  27.1 OTI/WTI Scanner  27.1.1 Make  27.1.2 Model no  27.1.3 Auxiliary supply	6	arrangement	to be provided in LV cable box.)	
25.1 Type 25.2 Make 25.3 Reference Standard 25.4 CT Ratio 25.5 Burden, VA 25.6 Class of Accuracy 25.7 CT terminal box size 26.0 Pressure release device 26.1 Minimum pressure the device is set to rupture 26.1.1 For Main Tank 26.1.2 Alarm and trip contact ratings of protective devices 27.0 Fittings Accessories Each Transformer furnished as per Clause No 5. (Bidder shall attach separate sheet giving details, make and bill of materials) 27.1 OTI/WTI Scanner 27.1.1 Make 27.1.2 Model no 27.1.3 Auxiliary supply	25.0	Current Transformer on LV		
25.2 Make 25.3 Reference Standard 25.4 CT Ratio 25.5 Burden, VA 25.6 Class of Accuracy 25.7 CT terminal box size 26.0 Pressure release device 26.1 Minimum pressure the device is set to rupture 26.1.1 For Main Tank 26.1.2 Alarm and trip contact ratings of protective devices 27.0 Fittings Accessories Each Transformer furnished as per Clause No 5. (Bidder shall attach separate sheet giving details, make and bill of materials) 27.1 OTI/WTI Scanner 27.1.1 Make 27.1.2 Model no 27.1.3 Auxiliary supply	ı	phases		
25.4 CT Ratio 25.5 Burden, VA 25.6 Class of Accuracy 25.7 CT terminal box size 26.0 Pressure release device 26.1 Minimum pressure the device is set to rupture 26.1.1 For Main Tank 26.1.2 Alarm and trip contact ratings of protective devices 27.0 Fittings Accessories Each Transformer furnished as per Clause No 5. (Bidder shall attach separate sheet giving details, make and bill of materials) 27.1 OTI/WTI Scanner 27.1.1 Make 27.1.2 Model no 27.1.3 Auxiliary supply	25.1	Туре		
25.4 CT Ratio 25.5 Burden, VA 25.6 Class of Accuracy 25.7 CT terminal box size 26.0 Pressure release device 26.1 Minimum pressure the device is set to rupture 26.1.1 For Main Tank 26.1.2 Alarm and trip contact ratings of protective devices 27.0 Fittings Accessories Each Transformer furnished as per Clause No 5. (Bidder shall attach separate sheet giving details, make and bill of materials) 27.1 OTI/WTI Scanner 27.1.1 Make 27.1.2 Model no 27.1.3 Auxiliary supply	25.2 I	Make		
25.5 Burden, VA 25.6 Class of Accuracy 25.7 CT terminal box size 26.0 Pressure release device 26.1 Minimum pressure the device is set to rupture 26.1.1 For Main Tank 26.1.2 Alarm and trip contact ratings of protective devices 27.0 Fittings Accessories Each Transformer furnished as per Clause No 5. (Bidder shall attach separate sheet giving details, make and bill of materials) 27.1 OTI/WTI Scanner 27.1.1 Make 27.1.2 Model no 27.1.3 Auxiliary supply	25.3 I	Reference Standard		
25.6 Class of Accuracy 25.7 CT terminal box size 26.0 Pressure release device 26.1 Minimum pressure the device is set to rupture 26.1.1 For Main Tank 26.1.2 Alarm and trip contact ratings of protective devices 27.0 Fittings Accessories Each Transformer furnished as per Clause No 5. (Bidder shall attach separate sheet giving details, make and bill of materials) 27.1 OTI/WTI Scanner 27.1.1 Make 27.1.2 Model no 27.1.3 Auxiliary supply	25.4	CT Ratio		
25.7 CT terminal box size 26.0 Pressure release device 26.1 Minimum pressure the device is set to rupture 26.1.1 For Main Tank 26.1.2 Alarm and trip contact ratings of protective devices 27.0 Fittings Accessories Each Transformer furnished as per Clause No 5. (Bidder shall attach separate sheet giving details, make and bill of materials) 27.1 OTI/WTI Scanner 27.1.1 Make 27.1.2 Model no 27.1.3 Auxiliary supply	25.5 I	Burden, VA		
26.0 Pressure release device  26.1 Minimum pressure the device is set to rupture  26.1.1 For Main Tank  26.1.2 Alarm and trip contact ratings of protective devices  27.0 Fittings Accessories Each Transformer furnished as per Clause No 5. (Bidder shall attach separate sheet giving details, make and bill of materials)  27.1 OTI/WTI Scanner  27.1.1 Make  27.1.2 Model no  27.1.3 Auxiliary supply	25.6	Class of Accuracy		
26.1 Minimum pressure the device is set to rupture  26.1.1 For Main Tank  26.1.2 Alarm and trip contact ratings of protective devices  27.0 Fittings Accessories Each Transformer furnished as per Clause No 5. (Bidder shall attach separate sheet giving details, make and bill of materials)  27.1 OTI/WTI Scanner  27.1.1 Make  27.1.2 Model no  27.1.3 Auxiliary supply	25.7	CT terminal box size		
is set to rupture  26.1.1 For Main Tank  26.1.2 Alarm and trip contact ratings of protective devices  27.0 Fittings Accessories Each Transformer furnished as per Clause No 5. (Bidder shall attach separate sheet giving details, make and bill of materials)  27.1 OTI/WTI Scanner  27.1.1 Make  27.1.2 Model no  27.1.3 Auxiliary supply	26.0 I	Pressure release device		
26.1.1 For Main Tank  26.1.2 Alarm and trip contact ratings of protective devices  27.0 Fittings Accessories Each Transformer furnished as per Clause No 5. (Bidder shall attach separate sheet giving details, make and bill of materials)  27.1 OTI/WTI Scanner  27.1.1 Make  27.1.2 Model no  27.1.3 Auxiliary supply	26.1 I	Minimum pressure the device		
26.1.2 Alarm and trip contact ratings of protective devices  27.0 Fittings Accessories Each Transformer furnished as per Clause No 5. (Bidder shall attach separate sheet giving details, make and bill of materials)  27.1 OTI/WTI Scanner  27.1.1 Make  27.1.2 Model no  27.1.3 Auxiliary supply	ļi	is set to rupture		
of protective devices  27.0 Fittings Accessories Each Transformer furnished as per Clause No 5. (Bidder shall attach separate sheet giving details, make and bill of materials)  27.1 OTI/WTI Scanner  27.1.1 Make  27.1.2 Model no  27.1.3 Auxiliary supply	26.1.1 I	For Main Tank		
27.0 Fittings Accessories Each Transformer furnished as per Clause No 5. (Bidder shall attach separate sheet giving details, make and bill of materials)  27.1 OTI/WTI Scanner  27.1.1 Make  27.1.2 Model no  27.1.3 Auxiliary supply	26.1.2	Alarm and trip contact ratings		
Transformer furnished as per Clause No 5. (Bidder shall attach separate sheet giving details, make and bill of materials)  27.1 OTI/WTI Scanner  27.1.1 Make  27.1.2 Model no  27.1.3 Auxiliary supply		of protective devices		
Clause No 5. (Bidder shall attach separate sheet giving details, make and bill of materials)  27.1 OTI/WTI Scanner  27.1.1 Make  27.1.2 Model no  27.1.3 Auxiliary supply	27.0 I	Fittings Accessories Each		
attach separate sheet giving details, make and bill of materials)  27.1 OTI/WTI Scanner  27.1.1 Make  27.1.2 Model no  27.1.3 Auxiliary supply	-	Transformer furnished as per		
details, make and bill of materials)  27.1 OTI/WTI Scanner  27.1.1 Make  27.1.2 Model no  27.1.3 Auxiliary supply		Clause No 5. (Bidder shall		
materials)  27.1 OTI/WTI Scanner  27.1.1 Make  27.1.2 Model no  27.1.3 Auxiliary supply	6	attach separate sheet giving		
27.1 OTI/WTI Scanner  27.1.1 Make  27.1.2 Model no  27.1.3 Auxiliary supply		details, make and bill of		
27.1.1 Make 27.1.2 Model no 27.1.3 Auxiliary supply		•		
27.1.2 Model no 27.1.3 Auxiliary supply	27.1	OTI/WTI Scanner		
27.1.3 Auxiliary supply				
27.1.4 Manual submitted (Yes/No)				
<u> </u>				
27.2 Buchholz Relay	27.2 I	Buchholz Relay		
27.2.1 Make	27.2.1 I	Make		



27.2.2	Model no		
27.2.3	Auxiliary supply		
27.2.4	Manual submitted (Yes/No)		
27.3	Auxiliary relays for		
	Fault/indication identification		
	(PRV, Buchholz relay, MOG)		
27.3.1	Make		
27.3.2	Model no		
27.3.3	Auxiliary supply		
27.3.4	Potential free contacts		
27.3.5	Manual submitted (Yes/No)		
28.0	Painting: as per clause for the		
	transformer, cable boxes,		
	radiator, Marshalling box		
	(Yes/No)		
29.0	Max over all transformer	As per Clause 3.32	
	dimensions		
29.1	Length, mm		
29.2	Breadth, mm		
29.3	Height, mm		
30.0	Transformer Tank		
	Dimensions		
30.1	Length, mm		
30.2	Breadth, mm		
30.3	Height, mm		
31.0	Weight data		
31.1	Core, kG		
31.2	Frame parts, kG		
31.3	Core and frame, kG		
31.4	Total Winding, kG		
31.5	Core , Frame, Winding, kG		
31.6	Tank, kG		
31.7	Tank lid, kG		
31.8	Empty conservator tank, kG		
	<u> </u>	1	





31.10 Total weight of all radiators empty, kG  31.11 Weight of oil in Tank, kG  31.12 Weight of oil in Conservator, kG  41.13 Weight of oil in each Radiators, kG  31.14 Total weight of oil in Radiators, kG  31.16 Total Transport weight of the transformer, kG  32.0 Volume Data  32.1 Volume of oil in main tank, litres  32.2 Volume of oil between highest and lowest levels of main conservator, litres  32.4 Volume of oil in each radiator, litres  32.5 Total volume of oil in radiators, litres  32.7 Transformer total oil volume, litres  33.0 Shipping Data  33.1 Weight of heaviest package, kG  33.2 Dimensions of the largest package (L x B x H) mm  34.3 Tests	31.9	Each radiator empty, kG	
31.11 Weight of oil in Tank, kG 31.12 Weight of oil in Conservator, kG 41.13 Weight of oil in each Radiators, kG 31.14 Total weight of oil in Radiators, kG 31.16 Total Transport weight of the transformer, kG 32.0 Volume Data 32.1 Volume of oil in main tank, litres 32.2 Volume of oil between highest and lowest levels of main conservator, litres 32.4 Volume of oil in each radiator, litres 32.5 Total volume of oil in radiators, litres 32.7 Transformer total oil volume, litres 33.0 Shipping Data 33.1 Weight of heaviest package, kG 33.2 Dimensions of the largest package (L x B x H) mm	31.10	Total weight of all radiators	
31.12 Weight of oil in Conservator, kG  41.13 Weight of oil in each Radiators, kG  31.14 Total weight of oil in Radiators, kG  31.16 Total Transport weight of the transformer, kG  32.0 Volume Data  32.1 Volume of oil in main tank, litres  32.2 Volume of oil between highest and lowest levels of main conservator, litres  32.4 Volume of oil in each radiator, litres  32.5 Total volume of oil in radiators, litres  32.7 Transformer total oil volume, litres  33.0 Shipping Data  33.1 Weight of heaviest package, kG  33.2 Dimensions of the largest package (L x B x H) mm		empty, kG	
kG  41.13 Weight of oil in each Radiators, kG  31.14 Total weight of oil in Radiators, kG  31.16 Total Transport weight of the transformer, kG  32.0 Volume Data  32.1 Volume of oil in main tank, litres  32.2 Volume of oil between highest and lowest levels of main conservator, litres  32.4 Volume of oil in each radiator, litres  32.5 Total volume of oil in radiators, litres  32.7 Transformer total oil volume, litres  33.0 Shipping Data  33.1 Weight of heaviest package, kG  33.2 Dimensions of the largest package (L x B x H) mm	31.11	Weight of oil in Tank, kG	
41.13 Weight of oil in each Radiators, kG  31.14 Total weight of oil in Radiators, kG  31.16 Total Transport weight of the transformer, kG  32.0 Volume Data  32.1 Volume of oil in main tank, litres  32.2 Volume of oil between highest and lowest levels of main conservator, litres  32.4 Volume of oil in each radiator, litres  32.5 Total volume of oil in radiators, litres  32.7 Transformer total oil volume, litres  33.0 Shipping Data  33.1 Weight of heaviest package, kG  33.2 Dimensions of the largest package (L x B x H) mm	31.12	Weight of oil in Conservator,	
Radiators, kG  31.14 Total weight of oil in Radiators, kG  31.16 Total Transport weight of the transformer, kG  32.0 Volume Data  32.1 Volume of oil in main tank, litres  32.2 Volume of oil between highest and lowest levels of main conservator, litres  32.4 Volume of oil in each radiator, litres  32.5 Total volume of oil in radiators, litres  32.7 Transformer total oil volume, litres  33.0 Shipping Data  33.1 Weight of heaviest package, kG  33.2 Dimensions of the largest package (L x B x H) mm		kG	
31.14 Total weight of oil in Radiators, kG  31.16 Total Transport weight of the transformer, kG  32.0 Volume Data  32.1 Volume of oil in main tank, litres  32.2 Volume of oil between highest and lowest levels of main conservator, litres  32.4 Volume of oil in each radiator, litres  32.5 Total volume of oil in radiators, litres  32.7 Transformer total oil volume, litres  33.0 Shipping Data  33.1 Weight of heaviest package, kG  33.2 Dimensions of the largest package (L x B x H) mm	41.13	Weight of oil in each	
Radiators, kG  31.16 Total Transport weight of the transformer, kG  32.0 Volume Data  32.1 Volume of oil in main tank, litres  32.2 Volume of oil between highest and lowest levels of main conservator, litres  32.4 Volume of oil in each radiator, litres  32.5 Total volume of oil in radiators, litres  32.7 Transformer total oil volume, litres  33.0 Shipping Data  33.1 Weight of heaviest package, kG  33.2 Dimensions of the largest package (L x B x H) mm		Radiators, kG	
31.16 Total Transport weight of the transformer, kG  32.0 Volume Data  32.1 Volume of oil in main tank, litres  32.2 Volume of oil between highest and lowest levels of main conservator, litres  32.4 Volume of oil in each radiator, litres  32.5 Total volume of oil in radiators, litres  32.7 Transformer total oil volume, litres  33.0 Shipping Data  33.1 Weight of heaviest package, kG  33.2 Dimensions of the largest package (L x B x H) mm	31.14	Total weight of oil in	
transformer, kG  32.0 Volume Data  32.1 Volume of oil in main tank, litres  32.2 Volume of oil between highest and lowest levels of main conservator, litres  32.4 Volume of oil in each radiator, litres  32.5 Total volume of oil in radiators, litres  32.7 Transformer total oil volume, litres  33.0 Shipping Data  33.1 Weight of heaviest package, kG  33.2 Dimensions of the largest package (L x B x H) mm		Radiators, kG	
32.0 Volume Data 32.1 Volume of oil in main tank, litres 32.2 Volume of oil between highest and lowest levels of main conservator, litres 32.4 Volume of oil in each radiator, litres 32.5 Total volume of oil in radiators, litres 32.7 Transformer total oil volume, litres 33.0 Shipping Data 33.1 Weight of heaviest package, kG 33.2 Dimensions of the largest package (L x B x H) mm	31.16	Total Transport weight of the	
32.1 Volume of oil in main tank, litres  32.2 Volume of oil between highest and lowest levels of main conservator, litres  32.4 Volume of oil in each radiator, litres  32.5 Total volume of oil in radiators, litres  32.7 Transformer total oil volume, litres  33.0 Shipping Data  33.1 Weight of heaviest package, kG  33.2 Dimensions of the largest package (L x B x H) mm		transformer, kG	
litres  32.2 Volume of oil between highest and lowest levels of main conservator, litres  32.4 Volume of oil in each radiator, litres  32.5 Total volume of oil in radiators, litres  32.7 Transformer total oil volume, litres  33.0 Shipping Data  33.1 Weight of heaviest package, kG  33.2 Dimensions of the largest package (L x B x H) mm	32.0	Volume Data	
32.2 Volume of oil between highest and lowest levels of main conservator, litres  32.4 Volume of oil in each radiator, litres  32.5 Total volume of oil in radiators, litres  32.7 Transformer total oil volume, litres  33.0 Shipping Data  33.1 Weight of heaviest package, kG  33.2 Dimensions of the largest package (L x B x H) mm	32.1	Volume of oil in main tank,	
highest and lowest levels of main conservator, litres  32.4 Volume of oil in each radiator, litres  32.5 Total volume of oil in radiators, litres  32.7 Transformer total oil volume, litres  33.0 Shipping Data  33.1 Weight of heaviest package, kG  33.2 Dimensions of the largest package (L x B x H) mm		litres	
main conservator, litres  32.4 Volume of oil in each radiator, litres  32.5 Total volume of oil in radiators, litres  32.7 Transformer total oil volume, litres  33.0 Shipping Data  33.1 Weight of heaviest package, kG  33.2 Dimensions of the largest package (L x B x H) mm	32.2	Volume of oil between	
32.4 Volume of oil in each radiator, litres  32.5 Total volume of oil in radiators, litres  32.7 Transformer total oil volume, litres  33.0 Shipping Data  33.1 Weight of heaviest package, kG  33.2 Dimensions of the largest package (L x B x H) mm		highest and lowest levels of	
litres  32.5 Total volume of oil in radiators, litres  32.7 Transformer total oil volume, litres  33.0 Shipping Data  33.1 Weight of heaviest package, kG  33.2 Dimensions of the largest package (L x B x H) mm		main conservator, litres	
32.5 Total volume of oil in radiators, litres  32.7 Transformer total oil volume, litres  33.0 Shipping Data  33.1 Weight of heaviest package, kG  33.2 Dimensions of the largest package (L x B x H) mm	32.4	Volume of oil in each radiator,	
radiators, litres  32.7 Transformer total oil volume, litres  33.0 Shipping Data  33.1 Weight of heaviest package, kG  33.2 Dimensions of the largest package (L x B x H) mm		litres	
32.7 Transformer total oil volume, litres  33.0 Shipping Data  33.1 Weight of heaviest package, kG  33.2 Dimensions of the largest package (L x B x H) mm	32.5	Total volume of oil in	
litres  33.0 Shipping Data  33.1 Weight of heaviest package, kG  33.2 Dimensions of the largest package (L x B x H) mm		radiators, litres	
33.0 Shipping Data  33.1 Weight of heaviest package, kG  33.2 Dimensions of the largest package (L x B x H) mm	32.7	Transformer total oil volume,	
33.1 Weight of heaviest package, kG  33.2 Dimensions of the largest package (L x B x H) mm		litres	
kG  33.2 Dimensions of the largest package (L x B x H) mm	33.0	Shipping Data	
33.2 Dimensions of the largest package (L x B x H) mm	33.1	Weight of heaviest package,	
package (L x B x H) mm		kG	
	33.2	Dimensions of the largest	
34.3 Tests		package (L x B x H) mm	
	34.3	Tests	
34.1 All in process tests confirmed	34.1	All in process tests confirmed	
as per Cl. (Yes/ No)		as per Cl. (Yes/ No)	
34.2 All Type Tests confirmed as	34.2	All Type Tests confirmed as	
per Cl. (Yes / No)		per Cl. (Yes / No)	



# TECHNICAL SPECIFICATION OF CONVENTIONAL OIL FILLED DISTRIBUTION TRANSFORMER

34.3	All Routine Tests confirmed	
	as per Cl. (Yes/ No)	
34.4	All Special Tests confirmed	
	as per Cl. (Yes/ No)	

#### Schedule B Guaranteed Technical Particulars of Transformer Oil

Bidder to submit hard copy duly filled & signed along with techno commercial offer. Bidder to submit separate GTP for each type of insulating oil –

Sr No	Item description	Specification requirement Data by V			
1.0	Manufacturer Name				
1.1		Address			
1.2		Contact person			
1.3		Contact telephone no			
2.0	Function				
2.1	Viscosity				
2.1.1	Viscosity at 40 <sup>o</sup> C	15 mm²/s, Max			
2.1.2	Viscosity at 0°C	1800 mm <sup>2</sup> /s, Max			
2.2	Pour Point	- 10 <sup>0</sup> C, Max			
2.3	Water content	30 mg/Kg, Max			
2.4	Breakdown voltage				





Sr No	Item description	Specification requirement Data by Vendor	
2.4.1	New unfiltered oil	30 kV, Min	
2.4.2	After filtration	70 kV, Min	
2.5	Density at 20°C	0.895 g/ml, Max	
2.6	Dielectric dissipation factor at 90°C	0.005, Max	
2.7	Particle Content	Manufacturer to specify the data	
3.0	Refining/Stability		
3.1	Appearance of oil	Clear, free from sediment and suspended matter	
3.2	Acidity	0.01 mg KOH/g, Max	
3.3	Interfacial tension at 27°C	0.04 N/m, Min	
3.4	Total sulphur content	Manufacturer to specify the data	
3.5	Corrosive sulfur	Not-corrosive	
3.6	Potentially Corrosive sulfur	Not-corrosive	
3.7	DBDS	Not detectable (<5 mg/kg)	
3.8	Inhibitor	Not detectable (<0.01%)	
3.9	Metal Passivator	Not detectable (<5 mg/kg)	
3.10	Other additives	Manufacturer to specify the data	
3.11	2-furfural and related Compounds content	Not detectable (<0.05 mg/kg) for each individual compound	
4.0	Performance		
4.1	Oxidation stability, test duration 164 h		
4.1.1	Total acidity	1.2 mg KOH/g, Max	
4.1.2	Sludge	0.8%, Max	
4.1.3	DDF at 90°C	0.5, Max	
4.2	Gassing Tendency	Manufacturer to specify the data	
4.3	ECT	Manufacturer to specify the data	
5.0	Health,safety and Environment		
5.1	Flash point	135°C, Min	
5.2	PCA content Max	3%, Max	
5.3	PCB content	Not detectable (<2 mg/Kg)	





#### Schedule C Recommended Spares (Data by Seller)

List of recommended spares as following -

Sr No	Description of spare part	Unit	Quantity
1		No	
2		No	
3		No	
4		No	



5	No	
6	No	